

277L

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00011059-1

Salesperson: JASON NG
Purchase Date: 1/06/16
Invoice Finished Date:
Delivery/Pickup Date: Jun 08, 2016
Invoice Type: VBL
Date Printed: Feb 21, 2016
Page: 1

Tell us how we did at
www.goemanscustomersurvey.com for a chance to
win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 6472955777
MARINUCCI & DELLINO, ALANA & LORENZO
89 ALGEO WAY
LOT 277L
BRADFORD, ON TBD
TEL# (647) 295-5777 BUS#

SHIP TO: 6472955777
MARINUCCI & DELLINO, ALANA & LORENZO
89 ALGEO WAY
LOT 277L
BRADFORD, ON TBD
TEL# (647) 295-5777 BUS#

Directions: 6TH LINE & SIMCOE ROAD


QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		KRSF505ESS		STAINLES	KIT, RESF: REFRIGERATOR, SIDE-BY-SIDE, FR
1		EMD530S2		STAINLES	24.8 CU FT,LED LT,EXT I&W,CLEAR DR BNS
		This special order or clearance product requires a 50% deposit & is considered FINAL SALE.			

1		P-FRIDGE -BUILDER INCLUSION			
1		P-OTR -BUILDER INCLUSION			
1		ME21H706MQS/AC		STAINLES	SAM, MIOR: MICROWAVE, OVER-THE-RANGE
-1		ME21H706MQS/AC		STAINLES	2.1CUFT,CER CVTY.400 CFM,SNRS
		Payment			SAM, MIOR: MICROWAVE, OVER-THE-RANGE
					2.1CUFT,CER CVTY.400 CFM,SNRS
					MASTER CARD


- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

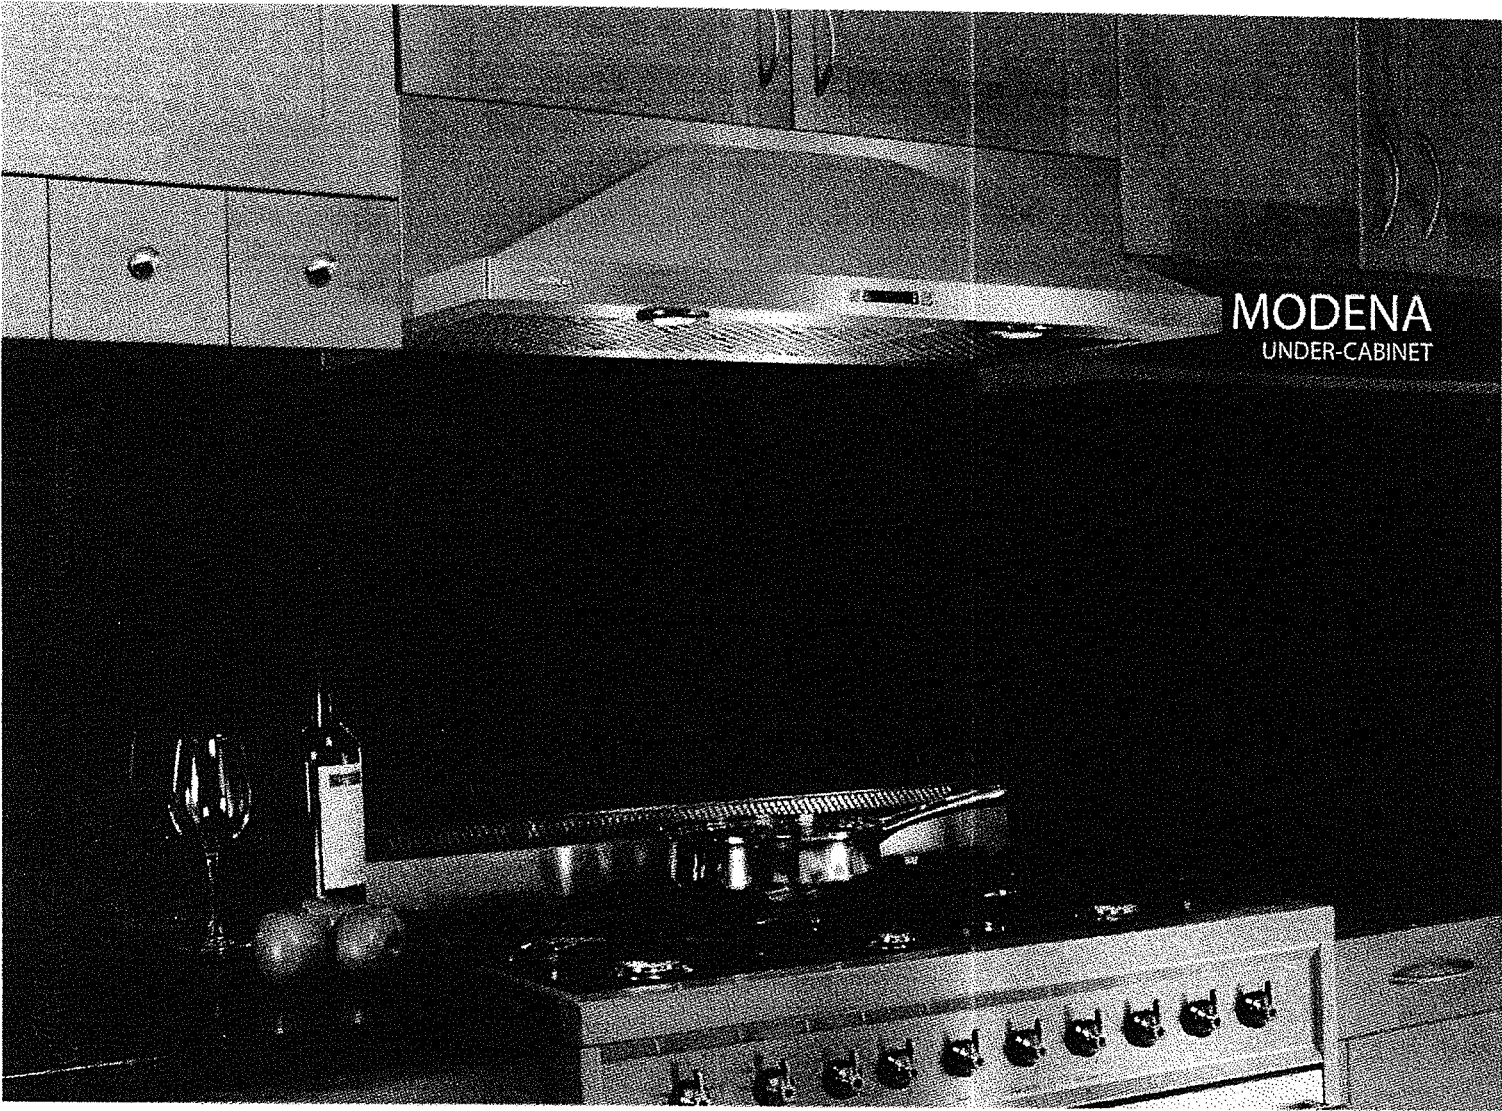

MODENA
UNDER-CABINET

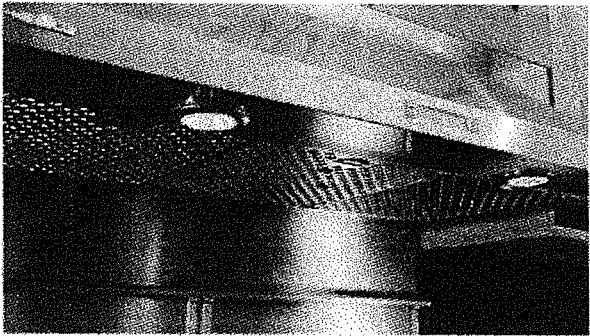


Modena offers a classic designer chimney appearance for under-cabinet installations, with a striking 9" high pyramid shape. Modena includes a 520 CFM blower, which provides sufficient ventilating power for most kitchens. Also included are halogen lighting with 2 intensities, stainless steel micro hole filters and easy to use multi-function electronic controls with LCD display.


Available in 30" or 36" width, and designed for standard ducted installation, Modena can also be installed as a recirculating system using the Recirculating Kit, available as an accessory. For design versatility to suit almost any kitchen.

- MODELS**
- | | |
|----------|----------------------|
| EMDS30S2 | Modena 30" Stainless |
| EMDS36S2 | Modena 36" Stainless |


- DIMENSIONS**
- | |
|---------------------|
| (30"W x 20"D x 9"H) |
| (36"W x 20"D x 9"H) |



Halogen Lamps



Multi-function electronic controls with LCD display



Stainless Steel Micro Hole Filters


MODENA
UNDER-CABINET
ELICA DESIGN CENTER

Size (in) & Type Finish	30" or 36" Wide Under-Cabinet Stainless Steel
Controls	Multi-function electronic controls with LCD display
Illumination	2, 40 Watt Halogen Lamps, 2 Light Intensities (bulbs included)
Installation Type	Ducted or Recirculating Installation Recirculating Kit Sold Separately
Blower Type	520 CFM, 4-Speed Internal
Blower Performance	Speed 1, 170 CFM, 1.3 Sones Speed 2, 280 CFM, 2.7 Sones Speed 3, 430 CFM, 4.9 Sones Speed 4, 520 CFM, 7.3 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole (2 w/ 30" Unit, 3 w/ 36" Unit)
Duct Transition	3 1/2" x 10" with Back Draft Damper (top or rear), or 7" Round (top) sold separately
Electrical	120V-60Hz 550 Watts at 4.5 Amps
Warranty	2 Year Parts & Labor, In-Home Service



Optional Recirculating Kit for 30" and 36" Units

CODE: KIT02667
MODEL: KIT02667

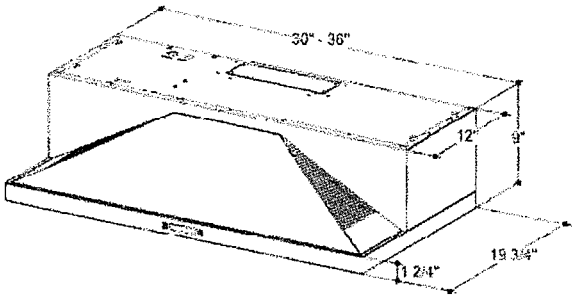

Replacement Grease Filter (1)
CODE: GF04YB

Replacement Carbon Filter (1)
CODE: FB016A

Replacement Light Bulb (1)
CODE: 2006BH

Consumable parts are sold in units of one (1). Call for exceptions.



Elica Heat Guard: A technology that protects the hood and cabinetry from excessive heat, by sensing extreme temperatures and automatically adjusting blower speeds accordingly.



Elica CRS: CFM Reduction System (CRS), is an exclusive feature to Elica hoods, which enables the installer to reduce the maximum blower CFM, to meet local code requirements.

277-L

KitchenAid®

FOR THE WAY IT'S MADE.®

PRODUCT MODEL NUMBERS

KHSC500E KHSC503E
KRSF505E

Electrical: A 115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Side by Side Refrigerator

PRODUCT DIMENSIONS

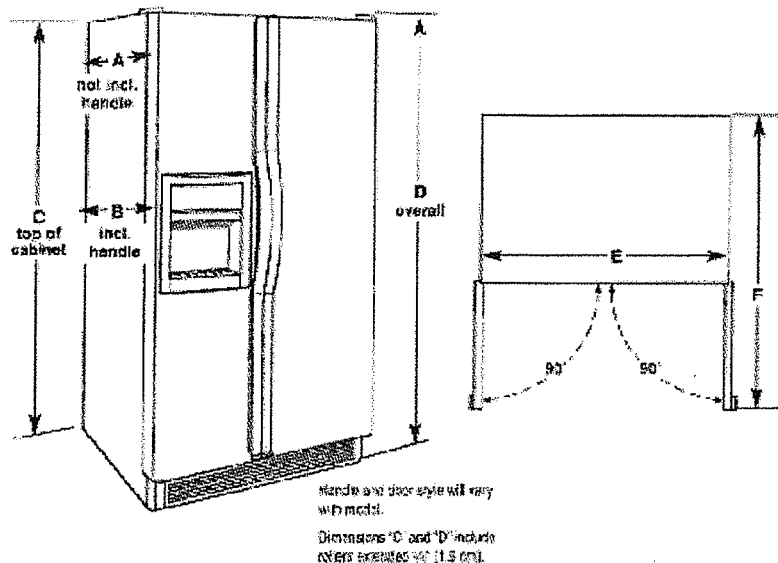

Model	Model Size	Depth without Handle "A"	Depth with Handle "B"	Cabinet Weight "C"	Overall Height "D"	Cabinet Width "E"	Depth "F" with Doors Open 90°
KHSC500E	22.5	37 1/4" (94.6 cm)	29 1/2" (75.6 cm)	83 1/2" (174.9 cm)	68" (173.3 cm)	35 1/2" (90.2 cm)	45 1/4" (115.5 cm)
KHSC503E	22.5	37 1/4" (94.6 cm)	30" (76.2 cm)	87" (180.3 cm)	72" (182.9 cm)	35 1/2" (90.2 cm)	45 1/4" (115.5 cm)
KRSF505E	25.0	32 1/4" (81.6 cm)	34" (86.4 cm)	69 1/4" (176.7 cm)	69" (175.3 cm)	35 1/2" (90.2 cm)	50 1/4" (128.3 cm)

LOCATION REQUIREMENTS

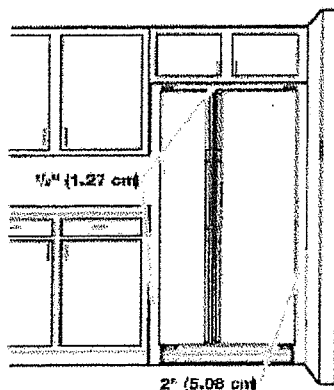

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.