

56R

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00011023-2

Salesperson: JASON NG
Purchase Date: 3/06/16
Invoice Finished Date:
Delivery/Pickup Date: Jun 15, 2016
Invoice Type: VBL
Date Printed: Mar 06, 2016
Page: 1

ONLINE BANKING ACCOUNT

BILL TO: 6479682656

NATHOO, YUSUF & SUKAINA
56 BARROW AVE
LOT 56R
BRADFORD, ON TBD

TEL# (647) 968-2656 BUS#

SHIP TO: 6479682656

NATHOO, YUSUF & SUKAINA
56 BARROW AVE
LOT 56R
BRADFORD, ON TBD

TEL# (647) 968-2656 BUS#

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		KRFF507ESS		STAINLES	KIT, REBF3: REFRIGERATOR, FRENCH 3-DOOR, F 26.8 CU FT, LED LT, ELEC CTRL, EXT I&W, 2-TIER FRZR DR
-1		P-CKIT-1602-20P			
1		KSGG700ESS		STAINLES	KIT, RAGF: RANGE, GAS, FREE-STANDING FNT CTRL RANGE, GAS, 5.8 CU. FT, AQUALIFT S/C, TRU CNV
-1		P-CKIT-1602-20P			
1		KDFE204ESS		STAINLES	KIT, DIS: DISHWASHER CONSOLE, 6 OPTNS, 6 CYCLES, PROSCRUB®, THIRD LEVEL RAC
-1		P-CKIT-1602-20P			
1		WF42H5200AP/A2		STAINLES	SAM, WAFL: WASHER, FRONT LOAD, LARGE CAPA 4.8 CU FT FRONT LOAD WASHER, 9 CYC. STEAM
		STANDARD HOSES SHIP WITH THIS UNIT			
1		DV42H5200EP/AC		STAINLES	SAM, DREFL: DRYER, ELECTRIC - TO MATCH LAR 7.5 CU FT ELE DRYER, FRONT LOAD, STEAM, 11 CYCLES
1		GXW6530DXS		STAINLES	WHI, HOWC: HOOD, WALL MOUNT 30W, WALL MOUNT, 400CFM, 3SPD PUSH BUTTON CNTRL
This special order or clearance product requires a 50% deposit & is considered FINAL SALE.					
x _____ Payment					VISA

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

KitchenAid®
FOR THE WAY IT'S MADE®

PRODUCT MODEL NUMBERS

KRFFS07E KRFFB07E
KRFF707E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

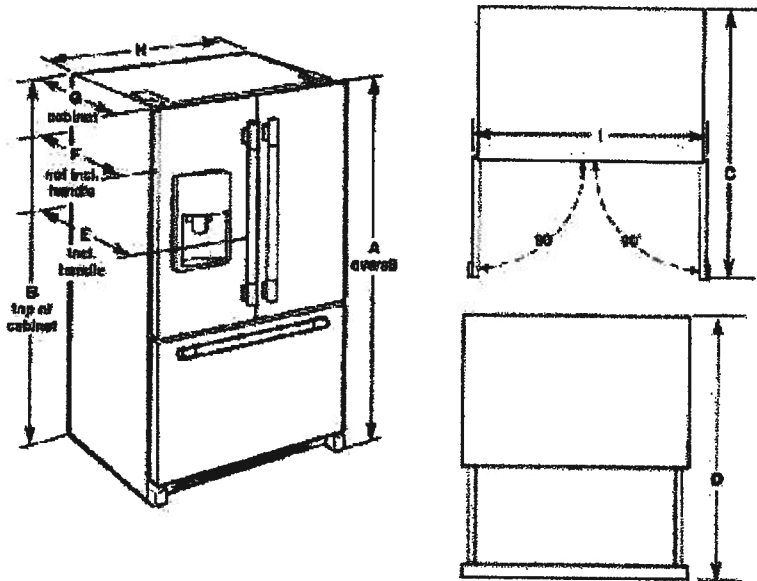

Model	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 36" "C"	Depth - Door Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
26.6	70 1/4"	68 1/4"	49"	54 1/4"	35 1/4"	34"	29 1/4"	35 1/4"	39 1/4"

LOCATION REQUIREMENTS

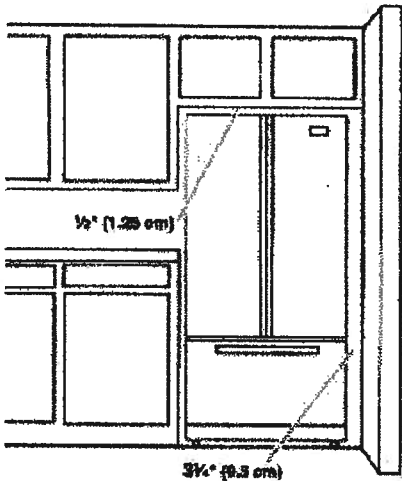

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3 1/4" (8.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 65°F (15°C) and 80°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

KitchenAid® 30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

KSGD900E KSGG700E

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON™ tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{4}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve. The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



A. Gas supply line
B. Shutoff valve "open" position
C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

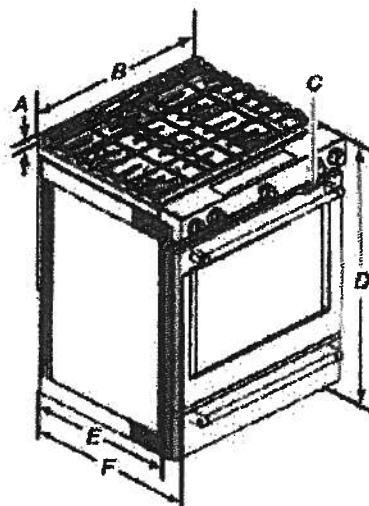

A. 1 $\frac{3}{4}$ " (3.0 cm) height from cooktop to top of vent

B. 25 $\frac{1}{2}$ " (75.9 cm)

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. 38" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*

E. 28 $\frac{1}{4}$ " (71.9 cm) max. depth from front of console to back of range

F. 28 $\frac{1}{2}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of E.I. Du Pont de Nemours and Company.

ELECTRICAL REQUIREMENTS

IMPORTANT: The range must be electrically grounded in accordance with local codes and ordinances, or in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.

- A 120 volt, 60 Hz., AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this range be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.


Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. In U.S.A.: 30" (76.2 cm) min. opening width;
In Canada: 31" (78.7 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material.
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/4" (33.8 cm)
- I. 7 1/4" (18.5 cm)
- J. 4 1/4" (11.2 cm)
- K. 3 1/4" (8.4 cm) or measurement of N, whichever is greater
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining counter depth should not exceed 2 1/4" (5.7 cm)

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than 30 2B MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

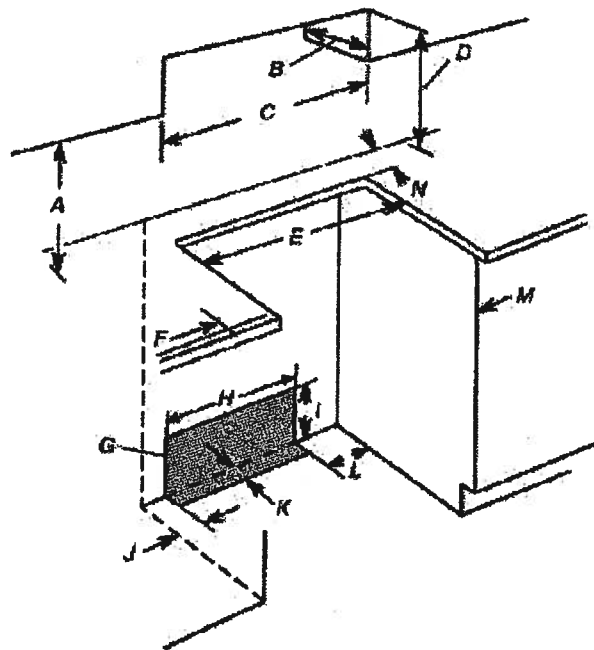

FOR THE WAY IT'S MADE.

Undercounter Dishwasher

PRODUCT MODEL NUMBERS

KJFE204E, KDTE104E, KDTE204E, KDTE254E, KDTM354E,
KDTM384E, KDTM404E, KDTM4504E, KDTM704E, KDTM804E

Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded three-prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (136 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use ½" O.D. copper tubing with compression fitting or flexible braided water supply line.

Note: 1/4" minimum plastic tubing is not recommended.

Use a 90° elbow with 1/2" hose connection with rubber washer (part number W10273450). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AIAA/IAPOC test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended



that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or

There

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

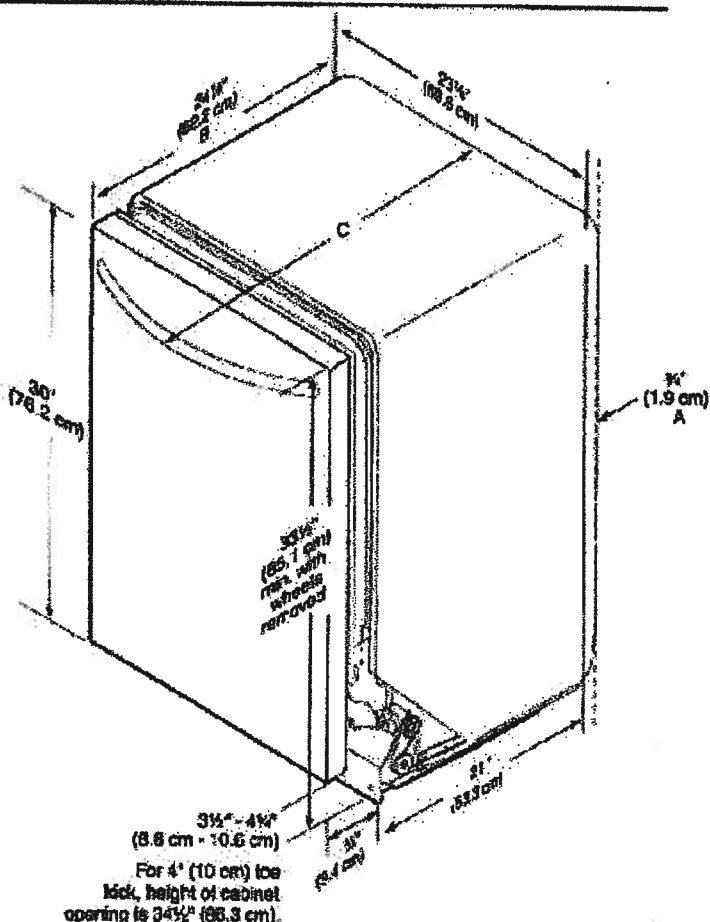

A. Insulation may be compressed (not used on all models).


B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 1 1/2" (1.9 cm) custom door panel.

C. Door handles may protrude forward of the face of the dishwasher; varies by model.

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 23½" (60.1 cm) by removing the rear leveling legs from dishwasher.

* Minimum, measured from narrowest point of opening.

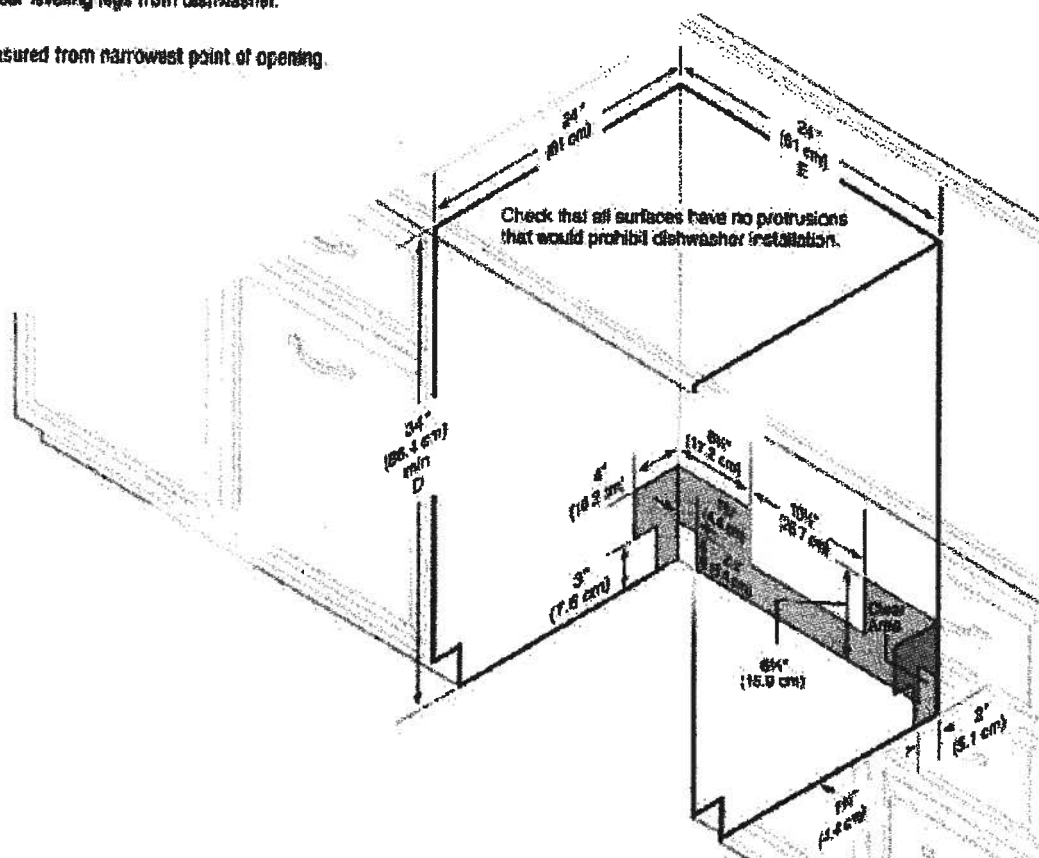



30" and 36" (76.2 cm and 91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

*GXW6530DX GXW6536DX

ELECTRICAL REQUIREMENTS

- A 120 Volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

VENTING REQUIREMENTS

This canopy hood is factory set for venting through the roof or wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (recirculating) installations


If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, fitting a charcoal filter and the deflector. Fumes and vapors are recycled through the top grille.

Roof Venting

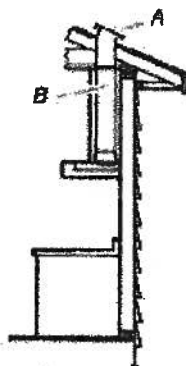


A. Roof cap
B. 6" (15.2 cm) round vent

Wall Venting

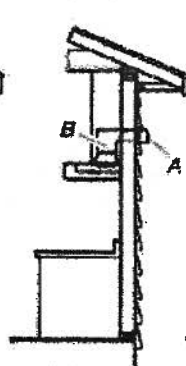


A. Wall cap
B. 6" (15.2 cm) round vent

Non-vented (recirculating)

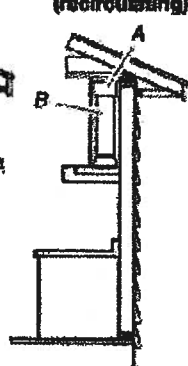

A. Deflector
B. 6" (15.2 cm) round vent

PRODUCT DIMENSIONS

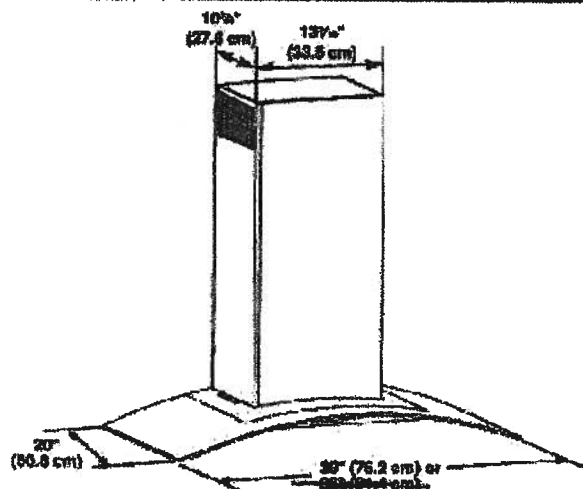


Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent Piece	Feet
45° elbow	2.5 ft (0.8 m)
90° elbow	5.0 ft (1.5 m)


Maximum equivalent vent length is 35 ft (10.7 m).

Example vent system

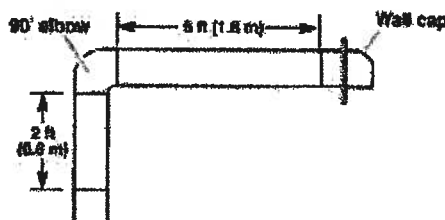

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow	= 5.0 ft (1.5 m)
1 - wall cap	= 0.0 ft (0.0 m)
8 ft (2.4 m) straight	= 8.0 ft (2.4 m)
Length of system	= 13.0 ft (3.9 m)

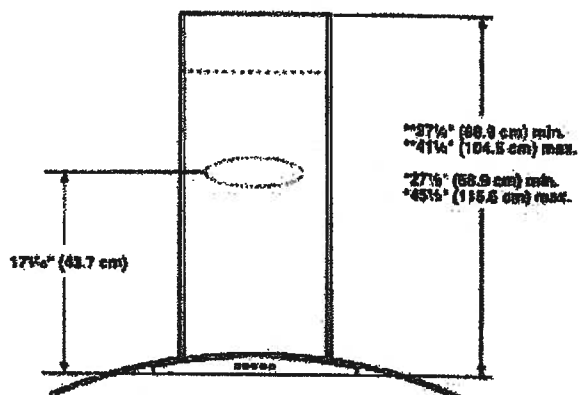

*For non-vented (recirculating) installations


**For vented installations

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Page 1 of 2
Ref. W10297157C
10/26/03

CABINET DIMENSIONS

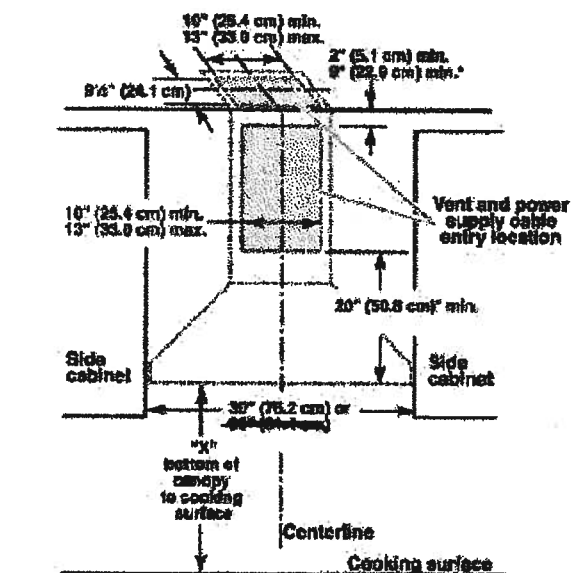

*For non-vented (recirculating) installations

IMPORTANT:

Minimum distance "X": 24" (61.0 cm) from electric cooking surface

Minimum distance "X": 27" (68.6 cm) from gas cooking surface

Suggested maximum distance "X": 36" (91.4 cm)

For vented installations, the chimneys can be adjusted for ceilings between 7' 4" (2.25 m) and 8' 5" (2.57 m) with vent slots not showing and between 7' 4" (2.25 m) and 8' 8" (2.67 m) with the vent slots showing.

For non-vented (recirculating) installations, the chimneys can be adjusted for ceilings between 7' 4" (2.24 m) and 8' 8" (2.67 m).

For Non-Vented (recirculating) installations:

* NOTE: The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Stainless Steel Chimney Extension Kit Part Number W10294735 is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the range hood.

DV42H5200EP

Samsung Front-Load Electric Dryer


7.5 cu. ft. Capacity DOE

Features

- Steam Drying Technology:
 - Steam Refresh
 - Steam Wrinkle Away
- Smart Care
- 11 Preset Drying Cycles
- 10 Options
- 4 Temperature Settings
- 4-Way Venting
- Sensor Dry -- Detects Moisture and Adjusts Drying Time
- Dryer Drum Light
- Reversible See-Through Door

Convenience

- Child Lock
- My Cycle Option
- Lint Filter Indicator

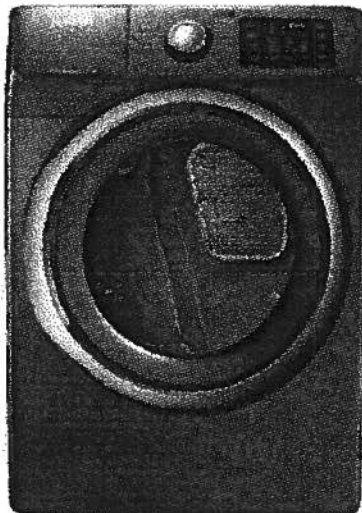

Steam Dry



Smart Care

Available Colors:



Platinum



White

Signature Features

STEAM DRY

- Steam away wrinkles
- Helps remove odors and freshen clothes
- Spend less time ironing
- Fewer trips to the dry cleaner

SMART CARE

- Troubleshoot with your smartphone
- Perform a quick diagnosis of your washer and dryer right from your smartphone*

*Available for iPhone & Android. See Samsung.com for details.

SENSOR DRY

- Automatically adjusts drying time by sensing moisture so your clothes don't over or under dry

NSF




Ranked "Highest in Customer Satisfaction with Clothes Dryers"
by J.D. Power and Associates
(5 Consecutive Years)

SAMSUNG

DV42H5200EP

Samsung Front-Load Electric Dryer

Installing Options

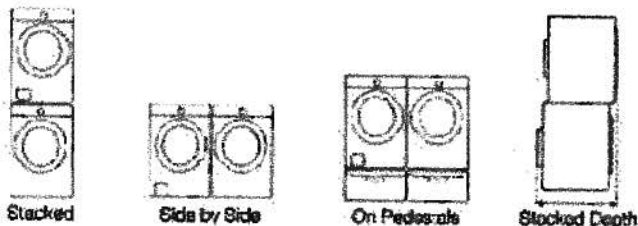


Installing Your Dryer

1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

Sides - 1"
Rear - 5 1/2"
Top - 17"
Closet Front - 2"


If the washer and dryer are installed together, the closet front must have at least a 72" unobstructed air opening. Your washer alone does not require a specific air opening.

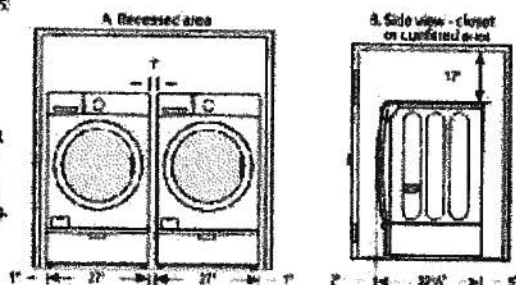




Dimensions

2. With optional pedestal base or stacking kit

Required Dimensions for installation with Pedestal



Required Dimensions for installation with Stacking Kit

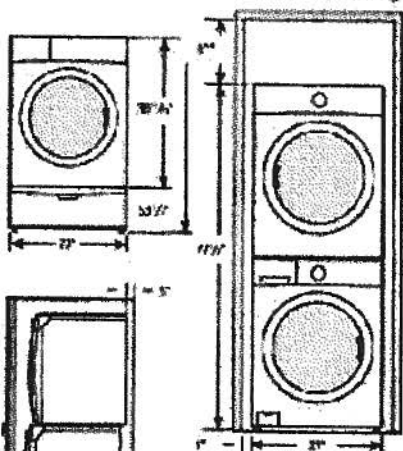

*Required spacing.
**External exhaust elbow requires additional space.

7.5 cu. ft. Capacity DOE

4-Way Venting

11 Preset Dry Cycles:

Steam Refresh, Steam Wrinkle Away, Normal, Heavy Duty, Permanent Press, Bedding, Delicates, Sanitize, Time Dry, Air Fluff, Quick Dry

10 Options:

Mixed Load Bell, Wrinkle Prevent, Anti-Static, Small Load Care, My Cycle, Adjust Time, Sound, Child Lock, Smart Care, Drum Light

4 Temperature Settings:

High, Medium, Low, Extra Low

4 Dry Levels:

Very Dry, More Dry, Normal Dry, Damp Dry

2 Signal Level Settings:

On/Off

Warranty

One (1) Year Parts and Labor
Two (2) Years Control Board
Three (3) Years Stainless Steel Drum
Ten (10) Years Direct Drive Motor

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 1/16" x 32 1/8"
Weight: 126 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 1/4" x 42 1/4" x 33 1/2"
Weight: 134 lbs.

Electric	Model #	UPC Code
Platinum	DV42H5200EP	987276963204
White	DV42H5200EW	987276963211

Gas	Model #	UPC Code
Platinum	DV42H5200GP	987276963235
White	DV42H5200GW	987276963242

Matching Washer

Platinum	WF42H5200AP	987276963082
White	WF42H5200AW	987276962953

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Measurements are approximate. Samsung received the highest overall score for customer satisfaction (2012 and 2013) in the appliance category (U.S. Power and Business Weekly Appliance Satisfaction Study) based on 1,000 total responses measuring 13 brands. This measure is one of the most important factors in determining the overall satisfaction score. Samsung's proprietary study results are based on independent and objective data collected from January to February 2012. Your experience may vary. Visit samsung.com. ©2013 Samsung Electronics America, Inc. 4525 Central Express Road, Richardson, TX 75082. Tel: 800-645-6888. samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.

WF42H5200AP

Samsung Front-Load Washer

4.2 cu. ft. Capacity DOE


Features

- Steam Washing
- Smart Care
- Self Clean+
- VRT™ – Vibration Reduction Technology
- Diamond Drum Design
- Direct Drive Motor
- 1200 rpm Maximum Spin Speed
- Internal Water Heater
- 9 Preset Wash Cycles
- 10 Options
- Garment+

Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Main Wash, Softener, Bleach

10 ENERGY STAR® rated:
CEE Tier 3
MEF=3.20
WCF=2.90
95 kWh/yr

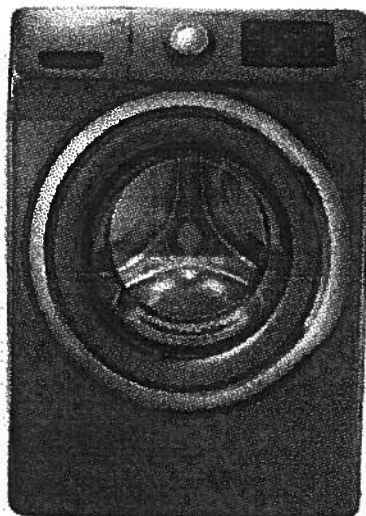

Smart Care



Self Clean+

Available Colors:



Platinum
(shown)



White

Signature Features

STEAM WASHING

- Powerful steam removes stains.
- No pre-treatment needed.

SMART CARE

- Troubleshoot with your smartphone.
- Perform a quick diagnosis of your washer and dryer right from your smartphone!

Smart Care (App) is available on the App Store and Google Play.

SELF CLEAN+

- New self-cleaning technology.
- Keeps your front load washer fresh without the use of harsh chemicals.
- Reminds you to run Self Clean+ every 40 cycles.
- Additional cleaning of the gasket.



Ranked "Highest in Customer Satisfaction with Front-Load Clothes Washers"™
— J.D. Power

This is the sixth consecutive year Samsung has received a Customer Satisfaction Award for Clothes Washers.



Achieves the U.S. Environmental Protection Agency's 2014 ENERGY STAR® "Most Efficient" designation.

SAMSUNG


WF42H5200AP

Samsung Front-Load Washer


Installing Options



Stacked



Side by Side



On Pedestal



Stacked Depth



Installing Your Washer

1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

Sides - 1"
Rear - 5 1/4"
Top - 1"
Closet Front - 2"



If the washer and dryer are installed together, the closet front must have at least a 72" unobstructed air opening. Your washer alone does not require a specific air opening.






Dimensions

2. With optional pedestal base or stacking kit

Required Dimensions for Installation with Pedestal



Required Dimensions for Installation with Stacking Kit

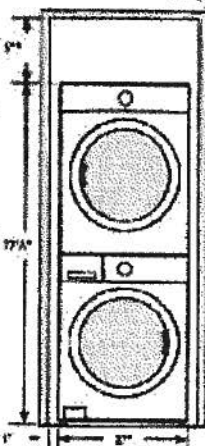

* Required spacing.
** Exterior wall must allow required additional space.

4.2 cu. ft. Capacity DOE

9 Preset Wash Cycles:

Normal, Heavy Duty, Permanent Press, Sanitize, Allergen, Bedding, Delicates, Quick Wash, Rinse and Spin

10 Options:

Steam, Self Clean+, Delay End, My Cycle, Extra Rinse, Extra Spin, Sound, Spin Only, Child Lock, Smart Care

4 Temperature Settings:

Hot, Warm, Eco Warm, Cold

4 Spin Settings:

High, Medium, Low, No Spin

3 Soil Settings:

Heavy, Normal, Light

Dispenser Trays:

Main Wash, Softener, Bleach

Warranty

One (1) Year Parts and Labor
Two (2) Years Control Board
Three (3) Years Stainless Steel Drum
Ten (10) Years Direct Drive Motor

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 1/8" x 33"

Weight: 194 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 1/4" x 41 1/16" x 34 1/8"

Weight: 203 lbs

Color

Platinum

White

Model

WF42H5200AP

WF42H5200AW

UPC Code

887276963082

887276963993

Matching Dryer (Electric/Gas)

Platinum

White

Platinum

White

DV42H5200EP

DV42H5200EW

DV42H5200GP

DV42H5200GW

887276963204

887276963211

887276963275

887276963242

SAMSUNG

*Samsung received the highest performance score for Front Load Washers in the proprietary U.S. Power 2014 Laundry Appliance Study. Study based on 8,448 total responses received by 10 Front Load Washer brands and measures opinions of consumers about their own appliances and the best 34 brands. Most statistically significant results are based on experiences and perceptions of consumers surveyed in January-March 2014. Such experiences may vary. Visit www.samsung.com

Always read the user's manual. Design, specifications, and other availability are subject to change without notice. All weights and measurements are approximate.

The ENERGY STAR label is a U.S. Department of Energy program that recognizes the most efficient products among those that qualify for the ENERGY STAR program. These appliances are designed with advanced features to help you save energy.

©2014 Samsung Electronics America, Inc. 800 Samsung Road, Bldg. 200, Hickory, NC 27040. Tel: 800-SAMSUNG. Samsung is a registered trademark of Samsung Electronics Co., Ltd.