

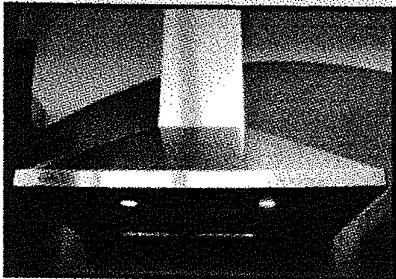


LOT 281

Classica Wall Range Hood

A value alternative in canopy wall hoods

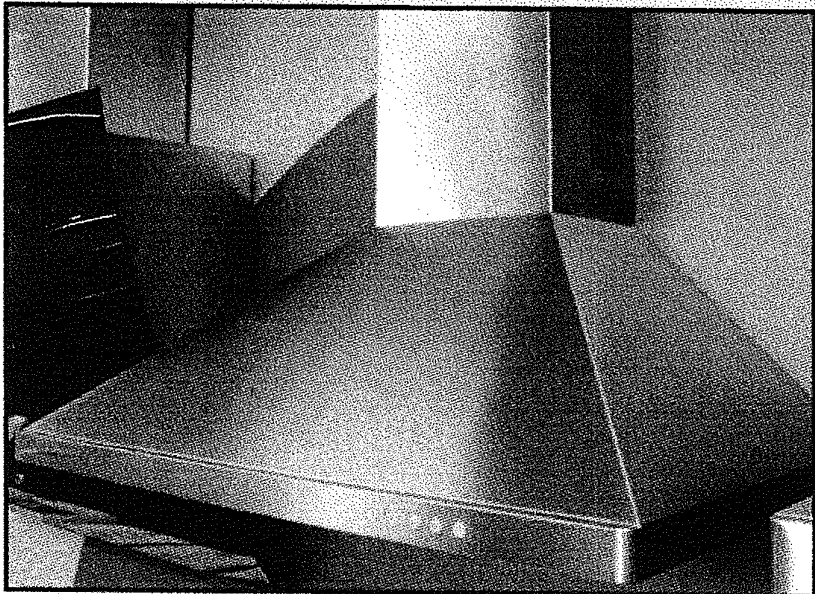

Backlit electronic controls with a blue LED light to indicate the current speed and lighting on/off

Designed to offer a high-end look without the high-end price tag, the Classica offers a chimney style range hood for the price conscious customer. Traditional styling, designer features, and solid performance make the Classica a great value in canopy range hoods.

Model #	Size Color	Performance Range	Sound Levels
CLAS30SS	30 Stainless	160 - 600 CFM	3.5 - 6.5 sones
CLAS36SS	36 Stainless	160 - 600 CFM	3.5 - 6.5 sones




Feature Chart

Min. / Max. Ceiling Height	7' 5" - 9' 2 3/4"
Canopy Depth / Height	19" D / 10 3/4"H
High Ceiling Kit	Yes - up to 11' 1 1/2"
Convertible to Recirculating	Yes - ductless chimney included, charcoal kit needed
Controls	3 Speed Push w/ Blue LED
Lighting	2 X 20 (W) Halogen
Ducting Top	6" Round
Ducting Direct Rear	N/A
Grease Filters	dishwasher safe mesh
10 Minute Intensive Speed	Yes
AC Input	120 V - 60 hz
AC Power	Max 370 W at 3.1 A
Annual Electricty Costs	\$6.17 / Year *

* Note – ran 30 minutes a day on low speed, 365 days, using the North American average of 12.2 cents per kWh.
p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

[illegible]

(see installation instructions for more information)

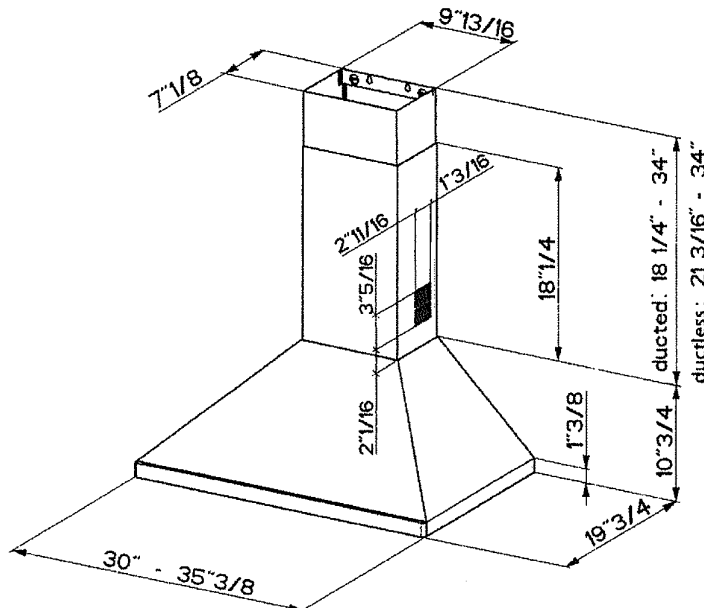

min & max ceiling height examples x = range hood height above cook top	
<u>x = 24"</u> <u>min</u> 7' 5" <u>max</u> 8' 8 3/4"	<u>x = 30"</u> <u>min</u> 7' 11" <u>max</u> 9' 2 3/4"

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceiling installations, the High Ceiling Chimney Kit includes a 39" upper chimney which would replace the 15 3/4" upper chimney that came with the hood.

ACCESSORIES

High Ceiling Chimney Kit # HIGHCLAS

One 39" upper chimney to replace 15 3/4" upper chimney that came with the hood



CFM Reducer Kit


CFM Reducer Kit #CFMRED

For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300



Ductless Conversion Kit # DUCTCLAS

- Includes: Ductless Diverter
- Two Charcoal Filters



Replacement Charcoal Filter # FILTER1

For ductless installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen.



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.

Rev. 11/12

281

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00012442

Salesperson: JASON NG
Purchase Date: 4/07/16
Invoice Finished Date:
Delivery/Pickup Date: Aug 24, 2016
Invoice Type: VBL
Date Printed: Apr 07, 2016
Page: 1

Tell us how we did at
www.goemanscustomersurvey.com for a chance to
win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 4166063175

BASILIJ, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

SHIP TO: 4166063175

BASILIJ, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		FGHN2866PF		STAINLES	FRG, REBF3: REFRIGERATOR, FRENCH 3-DOOR, F
-1		P-GPS0416-FRITX			F/D,28CUFT,NON DISP,I/M,METAL HNDLS
1		CGIS3065PF		STAINLES	FRG, RAIF: RANGE, INDUCTION, FREE-STANDIN
-1		P-GPS0416-FRITX			30,INDUCTION,6.0CUFT,TOUCH CNTRL,S/C
1		KDFE204ESS		STAINLES	KIT, DIS: DISHWASHER
-1		P-GPS0416-KIT15			CONSOLE,6 OPTNS,6 CYCLES,PROSCRUB®,THIRD LEVEL RAC
-1		P-GPS0416-KITTX			
1		NNSD797S		STAINLES	PAN, MICT: MICROWAVE, COUNTER-TOP
-1		P-GPS0416-PANTX			1.6CUFT,1200W,GENIUS PRESTIGE,INVERTER,DIAL
1		WF42H5500AF/A2		REFINED W	SAM, WAFL: WASHER, FRONT LOAD, LARGE CAPA
-1		P-GPS0416-SAMTX			4.8 CUFT, 11 CYC, STEAM, HTR, 1200RPM, SELF CLEAN
		STANDARD HOSES SHIP WITH THIS UNIT			
1		DV42H5600EF/AC		REFINED W	SAM, DREFL: DRYER, ELECTRIC - TO MATCH LAR
					7.5 CUFT, 13 CYCLES, STEAM,STAINLESS DRUM,DRY RACK

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00012442

Salesperson: JASON NG
Purchase Date: 4/07/16
Invoice Finished Date:
Delivery/Pickup Date: Aug 24, 2016
Invoice Type: VBL
Date Printed: Apr 07, 2016
Page: 2

Tell us how we did at
www.goemanscustomersurvey.com for a chance to
win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 4166063175

BASILJI, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

SHIP TO: 4166063175

BASILJI, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
-1		P-GPS0416-SAMTX			
1		P-DRIVER BASIC F/L OR T/ L H/U			
		DRIVER/BASIC STANDARD WASHER AND ELECTRIC DRYER HOOKUP TO EXISTING VENTING ONLY & IF OLD UNITS ARE DISCONNECTED PRIOR BY CUSTOMER***ANY SITUATION ARISING THAT PREVENTS A HOOKUP AT TIME OF DELIVERY SUCH AS SITE NOT BEING READY i.e. WASHER HOSES TOO SHORT, NO WASHER HOSES, NO METAL VENTING OR CLAMPS, VENTING NOT IN PLACE, OR IMPROPER DRAINING WILL NOT BE INSTALLED***			
1		P-GPS0416-S200			
1		HOSE KIT W5SSS-ST			REL, ALAU: ACCESSORY, DRYER
1		HOSE LNDRY 6FT 48			HOSE-KIT,FOR STEAM DRYER,ALSO INCLUDES 1 WSHR HOSE
					REL, AWA: ACCESSORY WASHER
					1X 6 FT WASH HOSE, 3/4,STAINLESS STEEL BRAID
1		P500RSIBNSS-1		STAINLES	NAC, BBQNF: BBQ, NATURAL GAS, FREE-STANDIN
					PRESTIGE 500 SERIES GRILL, REAR BURNER, L/R SIDE
-1		P-GPS0416-NACTX			
		THIS BBQ HAS PARTS ONLY WARRANTY COVERAGE. PLEASE CALL THE 1-800# LOCATED IN YOUR USE AND CARE MANUAL.THE MANUFACTURER WILL LOOK AFTER ALL OF YOUR WARRANTY PARTS NEEDS. ***BE ADVISED WE OFFER DELIVERY FOR A NOMINAL FEE, GOEMANS IS NOT RESPONSIBLE FOR ANY			

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00012442

Salesperson: JASON NG
Purchase Date: 4/07/16
Invoice Finished Date:
Delivery/Pickup Date: Aug 24, 2016
Invoice Type: VBL
Date Printed: Apr 07, 2016
Page: 3

Tell us how we did at
www.goemanscustomersurvey.com for a chance to
win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 4166063175

BASILIJ, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

SHIP TO: 4166063175

BASILIJ, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
		DAMAGE TO PRODUCT ONCE IT IS PICKED UP*** THIS BBQ IS EQUIPPED W 1/2" QUICK DISCONNECT AND MAY REQUIRE LARGER GASLINE*** ENSURE GASLINE IS PROPERLY SIZED TO MEET MIN. 100,000 BTU. TOTAL LENGTH OF RUN, AND MATERIAL TYPE DETERMINES GAS PIPE SIZING REQUIREMENTS. GOEMANS OFFERS INSTALLATION SERVICE - SEE SALES REPRESENTATIVE FOR PRICING			
1		68171			NAC, ABBQ: ACCESSORY, BBQ FULL LENGTH GRILL COVER
-1		P-GPS0416-NACCV			
1		P-GPS0416-BBQAS			
1		P-BBQ ASSEMBLY ONLY			
		PLEASE REMOVE PROTECTIVE COATING OFF OF BBQ IMMEDIATELY ONCE PICKED UP OR DELIVERED. ASSEMBLED BBQ'S ARE EXTREMELY LARGE AND AWKWARD. PLEASE MEASURE YOUR VEHICLE AND REFER TO THE BBQ'S ASSEMBLED SPECIFICATIONS TO AVOID PICK UP DISAPPOINTMENT.			
1		KCSS10LS		STAINLES	KITC, COUN: COUNTER-TOP APPLIANCES 10 PIECE SET (8,10,1.5,3.0, 3.5, 8.0)
		This special order product requires a 50% deposit & is considered FINAL SALE. x			
1		P-GPS0416-COOK			
		PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.			

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00012442

Salesperson: JASON NG
Purchase Date: 4/07/16
Invoice Finished Date:
Delivery/Pickup Date: Aug 24, 2016
Invoice Type: VBL
Date Printed: Apr 07, 2016
Page: 4

Tell us how we did at
www.goemanscustomersurvey.com for a chance to
win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 4166063175

BASILU, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

SHIP TO: 4166063175

BASILU, DAVID
TBD INVERNESS WAY
LOT 281
BRADFORD, ON TBD

TEL# (416) 606-3175 BUS# (416) 573-0310

Directions: 6TH LINE & SIMCOE ROAD


QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		AZF33X18DW		WHITE	AMA, FRUF: FREEZER, UPRIGHT, FROST FREE
-1		P-GPS0416-AMATX			17.7 CUFT, DFRST DRAIN, RHD, TEXT DR, WIRE SHLVs, INT
1		DISHN	UNASSIGNED INSTALLER		New home dishwasher install
					Includes hook-up of waterline, drain and power connection. Drain and water supply must be present and ready or subject to additional cost. BREAKER NOT INCLUDED
1		WATR2	UNASSIGNED INSTALLER		Water long connect
					Includes new waterline rough in up top 20 of 1/4 inch piping and shut-off valve. Open basement access needed.
1		P-DELIVERY \$5,000-9,999 Payment			TRANSFER PAYMENT

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY


FRIGIDAIRE
GALLERY

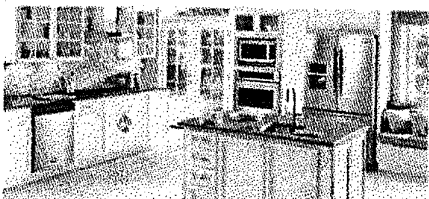

French Door Refrigerator

FGHN2866PF

28 Cu. Ft. Standard-Depth

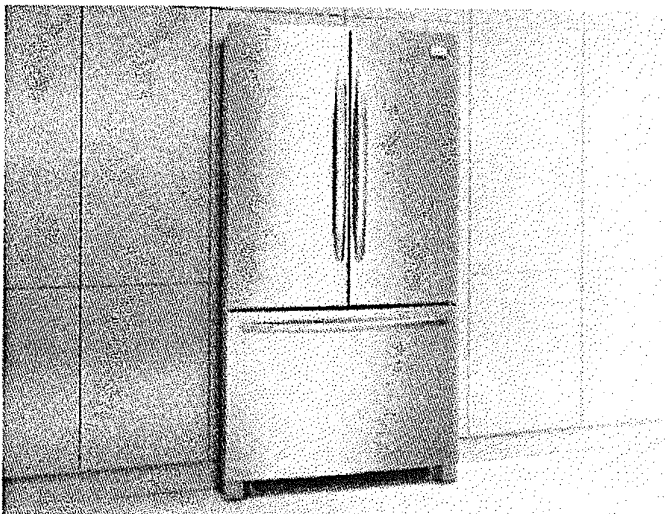


Signature Features



Adjustable Interior Storage
Over 100 ways to organize and customize your refrigerator.



SpaceWise® Slide-Under Shelf
Easily make room for tall or large items with the new Slide-Under Shelf.



Smudge-Proof™ Stainless Steel
Reduces fingerprints and smudges so it's easy to clean.



Best-In-Class Filtration¹
PureSource Ultra® Filtration is best-in-class so you get cleaner, better-tasting ice at your fingertips.

Product Dimensions

Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	33-3/8"

More Easy-To-Use Features

Ice Maker
Quick Ice delivers up to 37% more ice.*

Multi-Level LED Lighting
Corner-to-corner LED lighting throughout the refrigerator for better visibility.

Full-Width Cool Zone™ Drawer
A large capacity Cool Zone™ Drawer extends completely and provides space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

Express-Select® Controls
Easily select options with the touch of a button.

Freezer Basket with Divider
Deep freezer storage with adjustable divider keeps food organized and accessible.

Quick Freeze
Quickly freeze foods so they stay at their freshest.

Effortless™ Glide Crisper Drawers
Our humidity-controlled crisper drawers can be configured any number of ways, either side-by-side or stacked on top of each other so you can organize your refrigerator the way you want, while keeping your fruits and vegetables fresh.

Effortless™ Glide Freezer Drawers
Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

ENERGY STAR®
Sabbath Mode (Star-K® Certified)



Available In:



Stainless
(F)

¹As compared to other consumer refrigeration water filtration systems.
In a 24-hour period.

frigidaire.ca



FRIGIDAIRE
GALLERY

French Door Refrigerator

FGHN2866PF 28 Cu. Ft. Standard-Depth

Features	
Door Design	Soft-Air Doors
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Storms/Door Closers	Yes/Yes
Door Hinge Covers	Hidden
Rollers – Front/ Rear	Adjustable/Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Park
Control Features	
Controls	Express-Select®
Control Panel Location	Left Door, Inside Edge
Number of Control Buttons	7
Ice Option/ Freeze Option	Quick Ice/ Quick Freeze
Display On/Off Option	
Lock	
Temp./Door Ajar/ Power Failure Alerts	
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
Refrigerator Features	
Lighting	Multi-Level LED
Water Filter Type	PureSource Ultra®
Air Filter Type	PureAir Ultra®
Quarter-Width Fixed Shelves	
Half-Width Fixed Shelves	1 SpillSafe® Slide-Under
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	3 SpillSafe®
Can/Drawer Shelves	Yes
Store-More™ Full-Width Drawer	1 Cool Zone™
Hanging Wine Rack	1 White
Hanging Can Dispenser	
Crisper Drawer / Humidity Controls	2 Clear / 2
Dairy Compartment	2 Clear (1 per door)
Store-More™ Fixed Door Bins	2 White (1 per door)
2-Litre Fixed Door Bins	
Gallon Adjustable Door Bins	4 Clear
2-Litre Adjustable Door Bins	
Dispenser Bin	
Non-Slip Bin Liner / Bottle Retainers	
Freezer Features	
Self-Closing Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 Effortless™ Glide
Basket Dividers	1 (Bottom Basket)
Lighting	LED
Ice Maker	Yes
Certifications	
Sabbath Mode (Star-K® Certified)	Yes
ENERGY STAR®	Yes
Specifications	
Total Capacity (Cu. Ft.)	27.7
Refrigerator Capacity (Cu. Ft.)	19.0
Freezer Capacity (Cu. Ft.)	6.7
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW rating)	1.07
0-120 Volts	
Amps @ 120 Volts	9.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	365 Lbs.

*For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

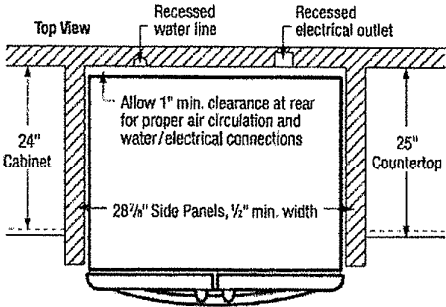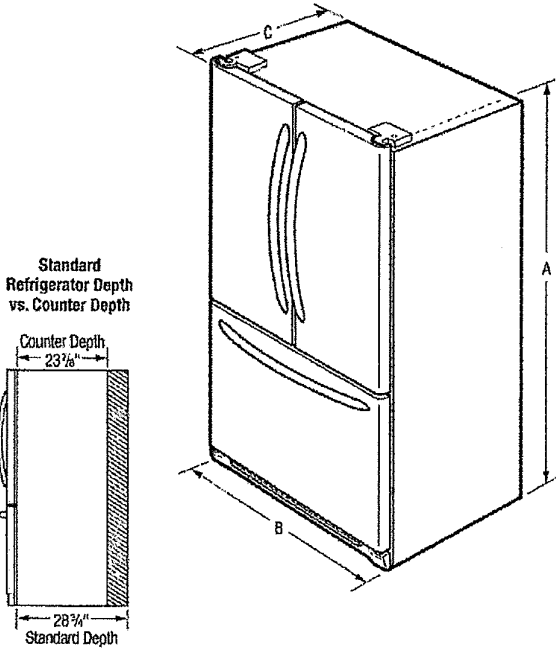

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions

A-Height (Incl. Hinges & Rollers)	69-7/8"
B-Cabinet Width/Door Width	35-7/8" / 36"
C-Depth (Incl. Door)	33-3/8"
Depth with Door Open 90°	47-3/8"
Depth with Drawer Fully Extended (Incl. Handle)	55"

Accessories information available on the web at frigidaire.ca

FRIGIDAIRE
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca
FGHN2866P 07/14

© 2014 Electrolux Major Appliances, NA

Specifications
subject to change
Printed in Canada

FRIGIDAIRE GALLERY


Slide-In Range

CGIS3065PF

30" Induction




Signature Features




Quick Preheat

Preheat in just a few minutes.*




Quick Clean

Cleans easily with a 20-minute steam clean for light soil and 2-hour self-cleaning cycle.



True Convection

A single fan and third heating element circulates heat evenly for more even, quicker multi-rack baking.



Induction Cooktop

Get cooking faster with less than 2-minute boil time.† Clean up easily with cool cooktop surface. Induction heats the pan, not the cooktop, so spills won't burn on the surface. Adjust heat with greater accuracy than electric and gas cooktops especially at lower settings.

Product Dimensions

Height (Max)	36-5/8"
Width	30"
Depth	28-5/16"

More Easy-To-Use Features

Smudge-Proof™ Stainless Steel
Resists fingerprints and is easy to clean.

Effortless™ Convection

Takes the guesswork out of convection cooking — our oven automatically adjusts standard baking temperatures to convection temperatures for consistent results.

One-Touch Options

Our ovens feature easy-to-use one touch buttons so you can keep foods warm — with the touch of a button.

One-Touch Keep Warm Setting

Just one touch of a button keeps food warm until everything — and everyone — is ready.

Sabbath Mode (Star-K® Certified)

Available In:



Stainless
(F)

Elements	Size	Watts
Right Front	10"	2,500 / 1,800
Right Rear	6"	1,200 / 1,400
Left Front	8"	2,300 / 1,200
Left Rear	7"	1,800 / 2,000
Centre	Keep Warm Zone	100


*Based on single rack cooking performance, not set temperature, using Quick Preheat.

†10" induction burner with Power Boost. 6.6 l / 10" diameter pot, 1 qt. hard water.

frigidaire.ca

Features	
Oven Control / Timing System	Express-Select®
Surface Type	Black Ceramic Glass
Window	Extra Large
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Exterior Finish (Side Panels)	Black
Convection System	True Convection
Oven Cleaning System	Self-Clean
Drawer Functionality	Storage
Oven Controls	
Bake / Broil	Yes / Variable (400 - 550 °F)
Effortless™ Convection Conversion	Yes
Convection Bake / Broil / Roast	Yes / Yes / Yes
Quick Preheat	Yes
My Favourite	
Slow Cook	
Effortless™ Temperature Probe	Yes
Chicken Nugget Button	
Pizza Button	
Keep Warm	Yes
Add-a-Minute	
Delay Start	Yes
Self Clean / Clean Options	Yes / 2, 3, 4 Hours
Steam Clean	Yes
Delay Clean	2, 3, 4 Hours
Kitchen Timer / Timed Cool-Down	Yes / Yes
Auto Oven Shut-Off	6 Hours
Lower Drawer Control	
Cooktop Features	
Right Front Element (Watts)	10" - 2,500 / 3,900
Right Rear Element (Watts)	6" - 1,700 / 1,400
Left Front Element (Watts)	8" - 2,500 / 3,200
Left Rear Element (Watts)	7" - 1,800 / 2,000
Centre Element (Watts)	Keep Warm Zone - 100
Hot Surface Indicator Lights	
Oven Features	
Capacity (Cu. Ft.)	4.6
Oven Light	2
Hidden Bake Element	Yes
Rack Configuration	1 Heavy Duty 1 Offset 1 Effortless™
Baking System	Even Baking Technology
Broiling System	Vari-Broil™
Bake Element / Broil Element / Convection Element (Watts)	2,500 / 3,400 / 2,500
Drawer Rack	
Certifications	
Sabbath Mode (Stac-K® Certified)	Yes
Specifications	
Oven Interior (H x W x D)	17-1/2" x 24-1/8" x 18-3/4"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V / 208V / 60 Hz
Connected Load (kW Rating) @ 240 / 208 Volts*	14.5 / 10.9 kW
Amps @ 240 / 208 Volts	60.4 / 52.4
Minimum Circuit Required (Amps)	40A
Shipping Weight (Approx.)	240 Lbs.

*Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

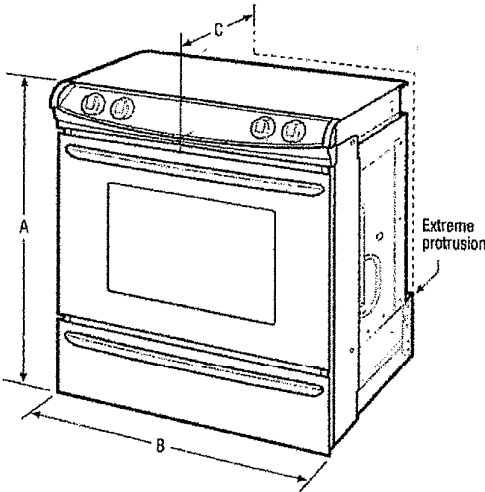

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions		Cutout Dimensions	
A-Height (Min./Max.)	35-3/4" / 36-3/8"	Height (Min./Max.)	35-7/8" / 36-5/8"
B-Width	30"	Width (Min./Max.)	29-15/16" / 30-1/16"
Width of Cooktop Surface	31-1/2"	Depth (Min./Max.)**	21-3/4" / 22-1/8"
C-Depth	29-5/16"	*Cutout and countertop cutout width should match.	
Depth with Door Open 90°	47-9/16"	**24" with optional backguard installed.	

Accessories information available on the web at frigidaire.ca

KitchenAid®

FOR THE WAY IT'S MADE®

Undercounter Dishwasher

PRODUCT MODEL NUMBERS

KDFE204E, KDTE104E, KDTE204E, KDTE254E, KDTM354E, KDTM384E, KDTM404E, KDTM504E, KDTM704E, KDTM804E

Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord: Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord. Power supply cord must plug into a grounded three-prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line

Note: 1/2" minimum plastic tubing is not recommended. Use a 90° elbow with 3/4" hose connection with rubber washer (part number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.


Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap. Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

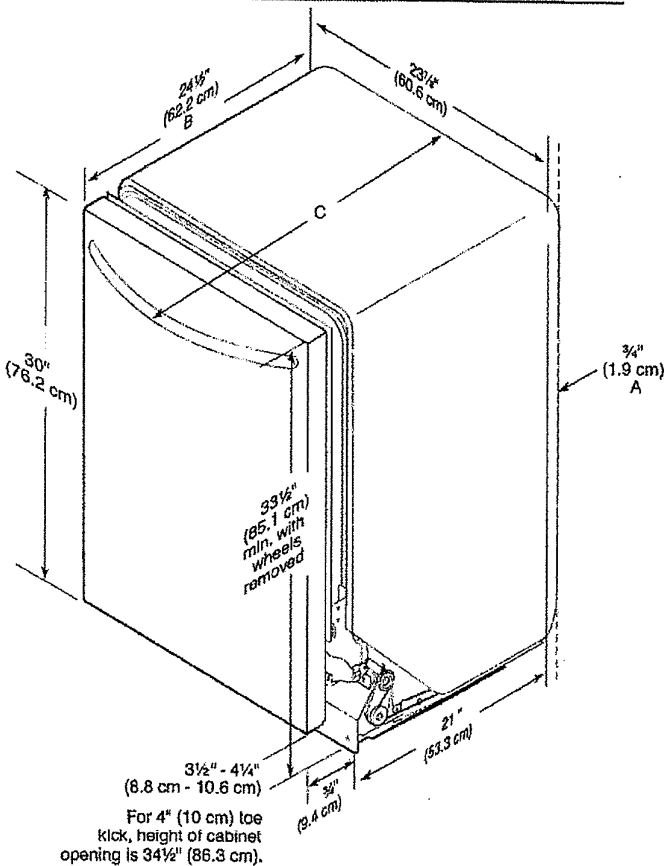


- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 3/4" (1.9 cm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher; varies by model.

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.



*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

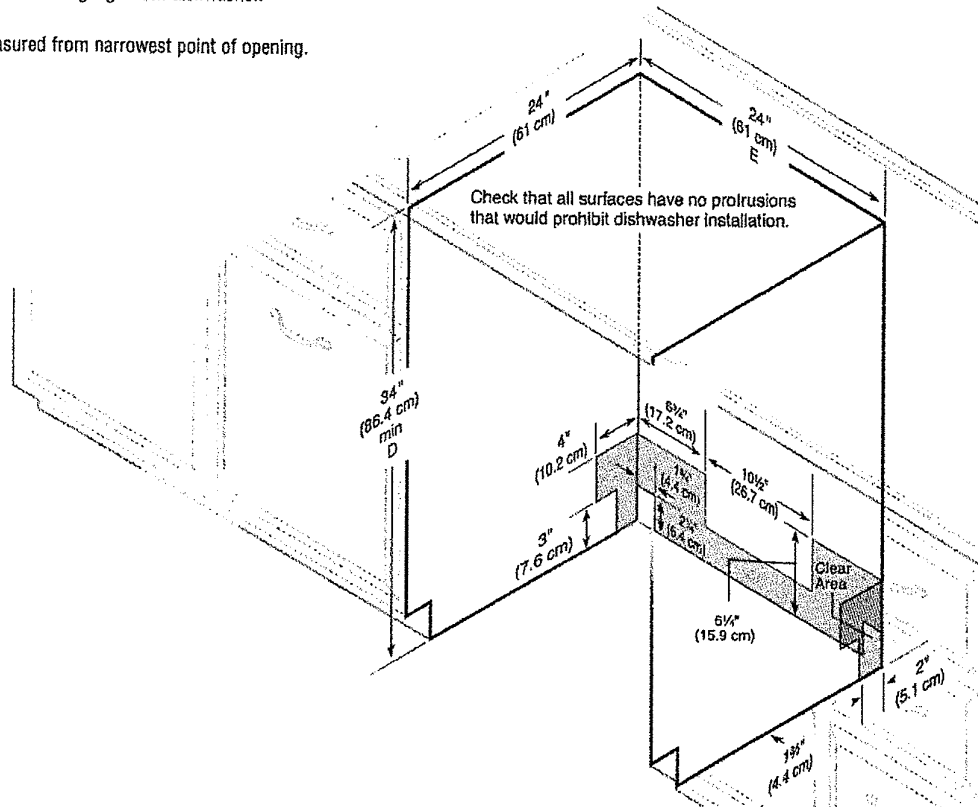

Classica Wall Range Hood

A value alternative in canopy wall hoods

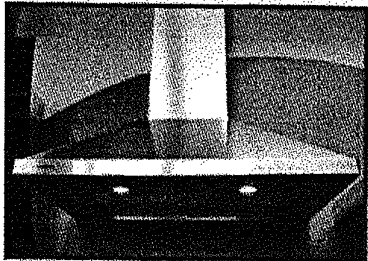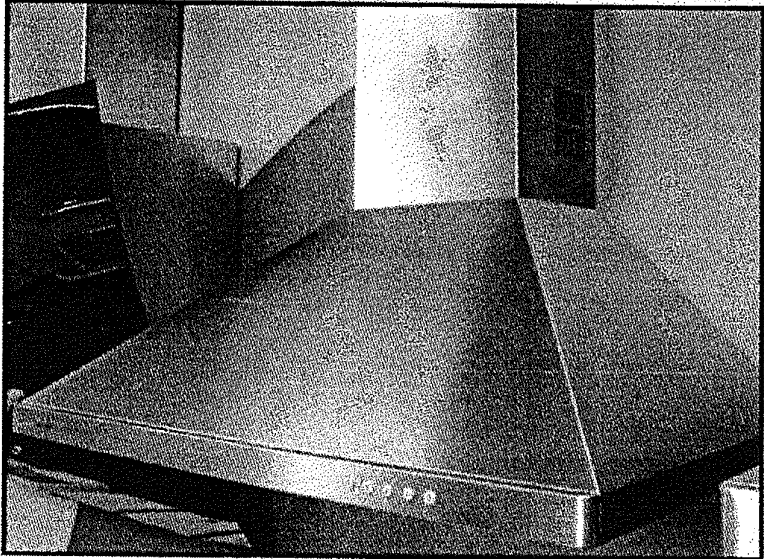

Backlit electronic controls with a blue LED light to indicate the current speed and lighting on/off

Designed to offer a high-end look without the high-end price tag, the Classica offers a chimney style range hood for the price conscious customer. Traditional styling, designer features, and solid performance make the Classica a great value in canopy range hoods.

Model #	Size Color	Performance Range	Sound Levels
CLAS30SS	30 Stainless	160 - 600 CFM	3.5 - 6.5 sones
CLAS36SS	36 Stainless	160 - 600 CFM	3.5 - 6.5 sones




Feature Chart

Min. / Max. Ceiling Height	7' 5" - 9' 2 3/4"
Canopy Depth / Height	19" D / 10 3/4" H
High Ceiling Kit	Yes - up to 11' 1 1/2"
Convertible to Recirculating	Yes - ductless chimney included, charcoal kit needed
Controls	3 Speed Push w/ Blue LED
Lighting	2 X 20 (W) Halogen
Ducting Top	6" Round
Ducting Direct Rear	N/A
Grease Filters	dishwasher safe mesh
10 Minute Intensive Speed	Yes
AC Input	120 V - 60 hz
AC Power	Max 370 W at 3.1 A
Annual Electricity Costs	\$6.17 / Year *

* Note — ran 30 minutes a day on low speed, 365 days, using the North American average of 12.2 cents per kWh.
p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com



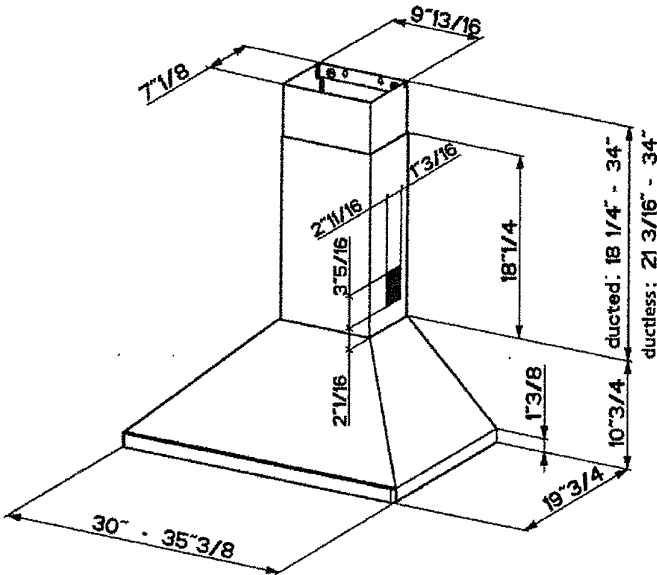

Dimensional Diagrams
(see installation instructions for more information)



min & max ceiling height examples x = range hood height above cook top	
x = 24"	x = 30"
min	min
7' 5"	7' 11"
max	max
8' 8 3/4"	9' 2 3/4"

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceiling installations, the High Ceiling Chimney Kit includes a 39" upper chimney which would replace the 15 3/4" upper chimney that came with the hood.

ACCESSORIES

High Ceiling Chimney Kit # HIGHCLAS One 39" upper chimney to replace 15 3/4" upper chimney that came with the hood		CFM Reducer Kit # CFMRED For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300	
Ductless Conversion Kit # DUCTCLAS Includes: Ductless Diverter • Two Charcoal Filters		Replacement Charcoal Filter # FILTER1 For ductless installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen.	



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.

Rev. 11/12

Amana Freezer

PRODUCT MODEL NUMBERS


AZF33X16D AZF33X18D
AZM12X17D AZB33X20D
AZB33X18D AZF33X20D

Recommended grounding method
A 115 Volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your freezer be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure
A cold water supply with water pressure of between 30 and 120 psi (207 to 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, see "Troubleshooting" or call a licensed, qualified plumber.


Reverse Osmosis Water Supply
If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

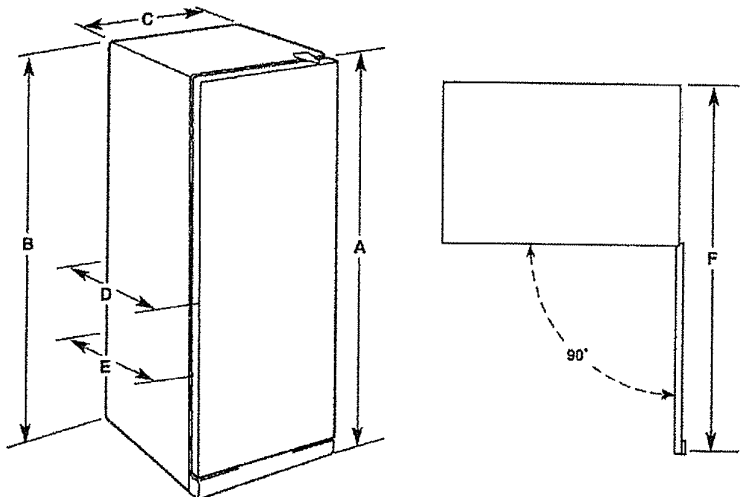

Model Number	Model Size	Reversible Door	Height (Overall) "A"	Height (Top of Cabinet) "B"	Width (Overall) "C"	Depth (Overall) "D"	Depth (Cabinet Only) "E"	Depth (Door Opens 90°) "F"
AZF33X16D	15.7 cu. ft.	Yes	60 3/4" (154.3 cm)	60 1/4" (153.0 cm)	30 1/4" (76.8 cm)	29 1/4" (74.0 cm)	24 3/8" (62.6 cm)	55 1/8" (142.0 cm)
AZM12X17D	16.6 cu. ft.	Yes	66 1/4" (169.6 cm)	66 1/4" (168.3 cm)	30 1/4" (76.8 cm)	29 1/4" (74.0 cm)	24 3/8" (62.6 cm)	55 1/8" (142.0 cm)
AZB33X18D AZF33X18D	17.7 cu. ft.	Yes	66 1/4" (169.6 cm)	66 1/4" (168.3 cm)	30 1/4" (76.8 cm)	29 1/4" (74.0 cm)	24 3/8" (62.6 cm)	55 1/8" (142.0 cm)
AZB33X20D AZF33X20D	19.6 cu. ft.	Yes	66 1/4" (169.6 cm)	66 1/4" (168.3 cm)	33 1/4" (84.5 cm)	29 1/4" (74.0 cm)	24 3/8" (62.6 cm)	58 1/8" (149.6 cm)

LOCATION REQUIREMENTS

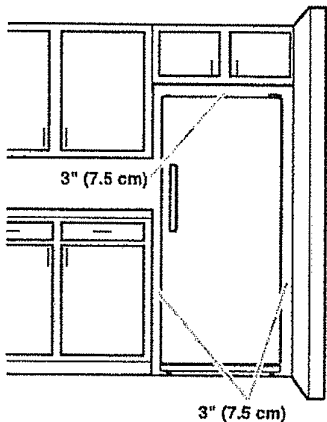

IMPORTANT: Do not install the freezer near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 40°F (5°C).

Check the strength of the floor before installing your freezer. It should hold the weight of a freezer fully loaded with food.

Allow at least 3" (7.5 cm) of air space at the top and on both sides of the freezer and 1" (2.5 cm) between the back of the freezer and the wall. If the freezer is to be against a wall, leave extra space on the hinge side so the door can open wider.

NOTE: This freezer may be installed side by side with another refrigerator or freezer. Allow for a 3" (7.5 cm) clearance at the top and sides and a 1/4" (0.64 cm) clearance between the appliances.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10668409
11/5/14

Location considerations


The dryer should be located where there is enough space at the front for loading the dryer, and enough space behind for the exhaust system. This dryer is factory-ready for the rear exhaust option. To exhaust out the bottom, right or the left, use the accessory exhaust kit. Instructions are included with the kit. Make sure the room in which the dryer is located has enough fresh air. The dryer must be located where there are no air-flow obstructions. For gas dryers, adequate clearance must be maintained as noted on the data plate to ensure adequate air for combustion and the proper dryer operation. The dryer must not be installed or stored in an area where it will be exposed to water and/or weather. The dryer area must be kept clear of combustible materials, gasoline, and other flammable vapors and liquids. A dryer produces combustible lint. The area around the dryer should be kept lint-free.

Alcove or closet installations


- ⚠ WARNING**
- The dryer must be exhausted to the outside to reduce the risk of fire when installed in an alcove or closet.
 - No other fuel-burning appliance should be installed in the same closet as the dryer.

Minimum clearances between the dryer and adjacent walls or other surfaces:


Sides	1 in (25 mm)	Rear	5.9 in (150 mm)
Top	17 in (432 mm)	Closet front	2 in (51 mm)

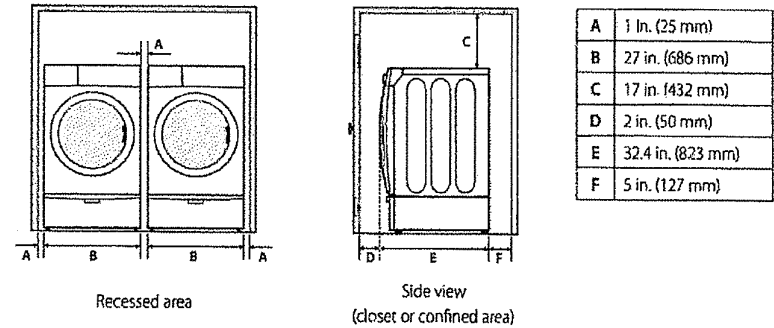

Installation with pedestal

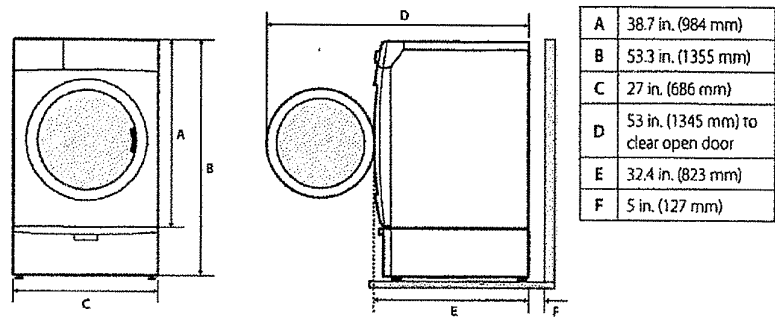

Installation with stacked washing machine and dryer

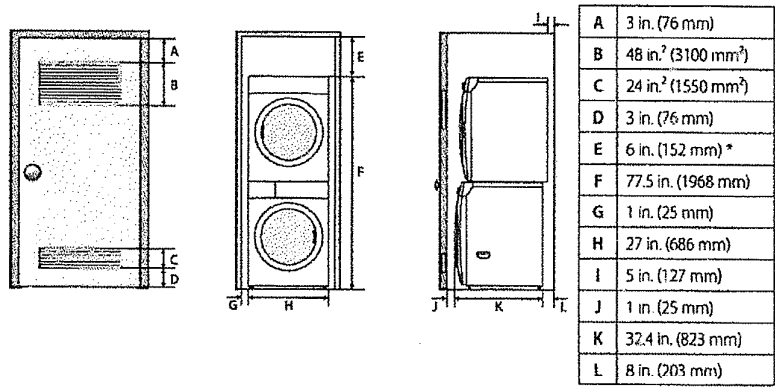

- ☒ The front of the closet must have two unobstructed air openings (B, C) for a combined minimum total area of 72 in² (465 cm²) with a minimum clearance of 3 in. (7.6 cm) at the top (A) and bottom (D). External exhaust elbow requires additional space (L).
- ☒ **Stacking (MODEL NO: SK-5A)**
Samsung's Washer and Dryer can be stacked to maximize usable space.
The dryer legs need to be removed to stack the Washer and Dryer. You can purchase an optional stacking kit from your Samsung retailer.