


W = 35 3/4  
FRENCH DOOR

287

LFXS30726

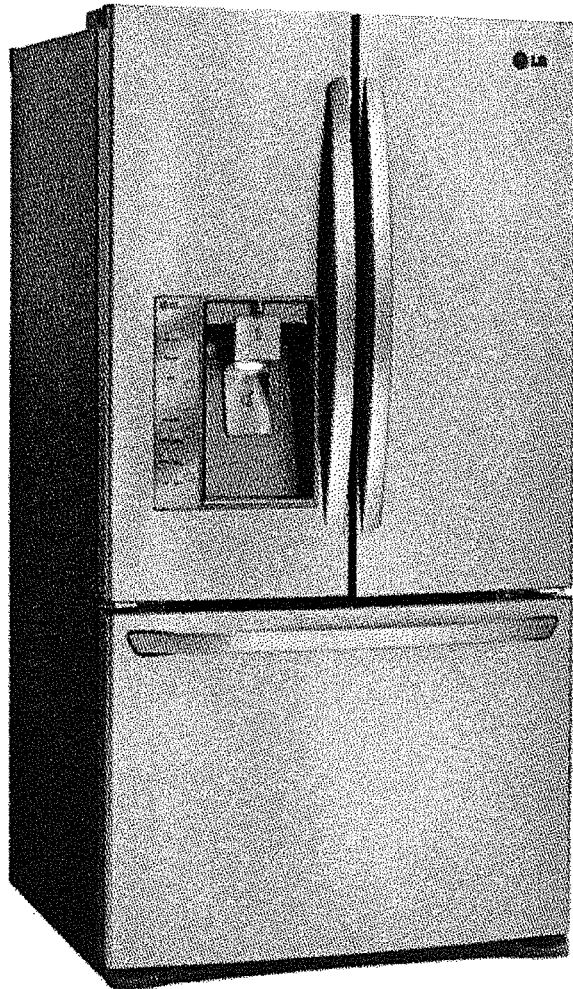

## LFXS30726

29.8 Cu.Ft. Super Capacity 3 Door Refrigerator

### Style and Design



- French Door Refrigerator with Slim SpacePlus™ Ice System and Bottom Freezer Drawers
- Premium Finish in Stainless Steel
- Contoured Doors with Matching Commercial Handles with Smart Pull™ Freezer Handle
- Hidden Hinges
- Premium LED Interior Light

### Organization

- 3 Fixed, Spill-Protector™ Tempered Glass Shelves and 1 Folding Shelf
- Glide N' Access
- Full Width, Temperature-Controlled Glide N' Serve™ Drawer
- 2 Humidity Crispers / 1 Bonus Drawer
- 6 Door Baskets (2 Adjustable Gallon Size)
- DuraBase™ Solid Drawer Base

### Performance

- Linear Compressor: 10 Year Warranty
- Smart Cooling Plus System
- Fresh Air Filter
- Dual Evaporators
- Multi-Air Flow Cooling
- Fully Integrated Tall Ice & Water Dispenser
- Premium Water Filtration System
- Electronic Temperature Controls
- SmartDiagnosis™
- LoDecibel™ Quiet Operation
- Door Alarm

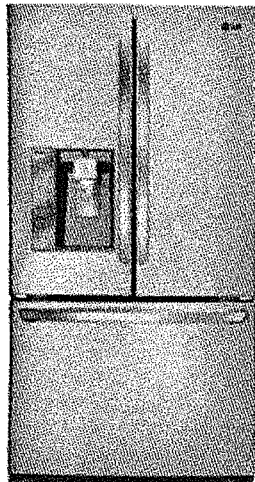

Stainless Steel



ENERGY STAR qualified models use at least 20% less energy than required by current federal standards. U.S. Energy Star refrigerators offer consumers the same energy, energy and protect the environment.



Linear  
Compressor



# FRENCH DOOR

## Fresher is Better

Our Smart Cooling Plus System maintains the optimal humidity and temperature levels in your fridge, which means your food stays fresher, longer. Meanwhile, a Fresh Air Filter removes odours and the Multi-Air Flow design means your food stays fresh no matter where you put it.

## More Shelf Space

Most ice makers take up space in the fridge. Our Slim SpacePlus™ Ice System is located on the door, so you end up with more storage space on the top shelf--and you still have storage space on the door as well.

## Quietest Operation

Enabled by LG's Exclusive Linear Compressor, this french door is whisper quiet, making this fridge the quietest french door available. Giving you peace and quiet as well as peace of mind.

## Tallest Size Fits All

The dispenser is nearly 13" tall, with an easy access water tap and slide out pitcher rest making it easy to fill most pitchers and glasses.

## Organized Freezer


The 3-Tier Organization™ Freezer System keeps food more organized and accessible. Now you can prioritize your favourite and most important items in your freezer so you can find anything fast.

## Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

## Peace Of Mind

When you buy a refrigerator, you don't want to worry that it won't last. Because the Linear Compressor motor uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a 10-year warranty.

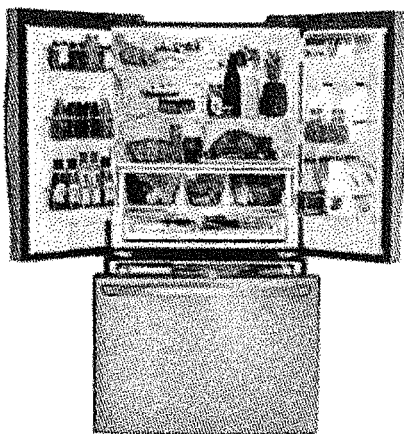

LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6

Tel: 647-253-6300 | LG.com

Customer Service & Parts

1-888-542-2525

LFXS30726

CAPACITY	
Refrigerator	19.7
Freezer	10.1
Total	29.8
FEATURES	
Freezer Door Type	SmartPull™ Handle
Energy Star	•
Energy Consumption (kWh/year)	562
Ice & Water Dispenser	Integrated Tall Ice & Water Dispenser
Tall Dispenser	•
Dispenser Light	Yes
Water Filtration System	LT700P
Cooling	Multi-Air Flow
Linear Compressor	•
Fresh Air Filter	•
Digital Temperature Controls	Electronic / Digital
Control & Display	Smooth Touch Control / White LED
Digital Temperature Sensors	9
LoDecibel Operation	•
Door Alarm	•
Door Alarm On / Off Button	•
IcePlus	•
Ice Maker	•
Smart Diagnosis	•
REFRIGERATOR	
No. of Shelves	4 Split
Shelf Style	3-Fixed, 1-Folding
Cantilevered Shelves	•
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bin	2 Humidity Crispers / 1 Bonus Drawer
Glide N Serve Pantry Drawer	Yes
Glide N Access	Yes
Refrigerator Light	Ceiling: LED (1 Bea) Side L/R: LED (12ea, 6ea*2)
REFRIGERATOR DOOR	
No. of Door Bins	R: 3ea (2 adj. Gallon) L: 3ea (Small)
Door Bin Material	3 Piece (Clear + Opaque + Spray Deco)
Dairy Bin	Yes
SpacePlus™ Ice System	Slim Indoor Ice Maker
FREEZER	
Upper Drawer	Plastic Drawer, 2-Piece
Middle Drawer	Plastic Drawer, 1-Piece
Lower Drawer	Durabase Plastic Drawer
Divider	Yes (Only Lower)
Freezer Light	Premium LED
MATERIALS / FINISHES / STYLE	
Foam Door Insulation	Cyclo Pentone (No CFC, No HCFC)
Door Style	Contour
Hidden Hinge	•
Case Back Plate	Flush & Metal cover over mechanical parts
Available Colors	Stainless Steel, White, Black
Handles	Matching Commercial Handles
DIMENSIONS / CLEARANCES / WEIGHT	
Depth with Handles	36 1/4"
Depth without Handles	33 3/4"
Depth without Door	29 1/2"
Depth (Total with Door Open)	48 1/8"
Height to Top of Case	68 3/8"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 1/4"
Door Edge Clearance without Handle	2 1/8"
Installation Clearance	Sides 1/8", Top 1", Back 1"
Weight (lbs): Unit / Carton	331 lbs / 364 lbs
Carton Dimensions (WxHxD)	38" x 73" x 39"
UPC CODE	
LFXS30726	048231786393
WARRANTY	
	1 year Parts & Labour, 7 years on Sealed System, 10 years parts on Linear Compressor

Design, features and specifications are subject to change without notice.  
Non-metric weights and measurements are approximate.  
All trademarks are property of their respective owners.

Printed in July 2014

## KITCHENAID® 30-INCH 5-BURNER GAS CONVECTION FRONT CONTROL RANGE

W = 29 7/8




## KSGG700ESS

KitchenAid® 30-Inch 5-Burner Gas Convection Front Control Range

[Email these product details...](#) | [Print product details](#)
[Specifications](#)[Product Literature](#)[Electrical Requirements](#)

## Available Colors

 **Stainless Steel**  
Model: KSGG700ESS

[Larger View](#)AVAILABLE IMAGES 

## Related Products



**W10655450**  
67 Slide-in Range Backsplash,  
Stainless

## Dimensions

Height 36  
Inches

Width 29 7/8  
Inches

Gross  
Weight 235 LB

Dimensions shown are for planning  
purposes only. For complete  
information, see Installation Instructions  
packed with product.

## Specifications

## Configuration and Overview

Range Type Slide-in

Capacity 5.8

## Cooktop Features

Cooktop Element Style Gas Burner

Cooktop Surface Color Black

Cooktop Surface Material Porcelain Coated Steel

## Key Features

Even-Heat™ True Convection [more](#)

Steam Rack [more](#)

5.8 Cu Ft. Oven Capacity [more](#)

5 Burners (5k, 8k, 9.2k, 15k and 17k) [more](#)

EasyConvect™ Conversion System [more](#)

FIT Guarantee [more](#)

Aqualift® [more](#)

Storage Drawer [more](#)

Glass Touch Controls [more](#)

Continuous Interlocking Grates [more](#)

Side Trim Accessory Kit [more](#)

## Product Literature

[Owners Manual](#) (4088.11 KB)


[Dimension Guide](#) (365.46 KB)

[Installation Instructions](#) (2999.63 KB)

Number of Cooking Element-Burners	5
Center Rear Element-Burner Power	8000 BTU
Center Rear Element-Burner Type	Sealed Burner
Left Front Element-Burner Power	17,000 BTU
Left Front Element-Burner Type	Sealed Burner
Left Rear Element-Burner Power	5000 BTU
Left Rear Element-Burner Type	Sealed Burner
Right Front Element-Burner Power	15,000 BTU
Right Front Element-Burner Type	Sealed Burner
Right Rear Element-Burner Power	9200 BTU
Right Rear Element-Burner Type	Sealed Burner
Dishwasher Safe	Yes
Grate Finish	Matte
Grate Material	Cast Iron
Grate Type	Continuous
Number of Grates	2
<b>Oven Features</b>	
Automatic Convection Conversion Temperature Adjust	Yes
Heating Element On Indicator Light	No
Hot Surface Indicator Light	No
Power On Indicator Light	Yes
Bake Element Power 240/208v	18000 BTU
Broiler Element Power 240/208v	13000 BTU
Broiler Location	Top of Oven
Convection Element Power	900
Convection Element Type	Single-Fan
Convection Functions	Bake; Broil; Roast
Hidden Bake Element	Yes
Light Type	Incandescent
Number of Oven Lights	2
Number of Oven Racks	3
Number of Rack Guides	7
Oven Rack Type	Max Capacity; Heavy Duty; Steam Rack

**Warranty (47.14 KB)**

Email these product details...

You may need to install Adobe Acrobat Reader  to view these documents.**Electrical Requirements**

15Amps, 120V.

**UPC Listing**

Model "KSGG700ESS" UPC: 883049329963

**Controls**

<b>Drawer Type</b>	Storage Drawer
<b>Handle Material</b>	Metal
<b>Handle Type</b>	Towel Bar
<b>Selections</b>	Steam Bake; Proofing; Keep Warm Setting; Cook Time Indicator; Delay Start; Warm Zone; Clock
<b>ADA Compliant</b>	ADA Height and Operation Compliant

**Dimensions**

<b>Height</b>	36 Inches
<b>Width</b>	29 7/8 Inches

**General**

<b>ADA Compliant</b>	ADA Height and Operation Compliant
----------------------	------------------------------------

# KitchenAid® 30" (76.2 cm) Slide-in Gas Range

## PRODUCT MODEL NUMBERS

KSGB900E

KSGG700E

## GAS SUPPLY REQUIREMENTS

### Gas supply line:

- Provide a gas supply line of  $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be  $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


**NOTE:** Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

### Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long,  $\frac{1}{2}$ " (1.3 cm) or  $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A  $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:  
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



A. Gas supply line  
B. Shutoff valve "open" position  
C. To range

## Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

### Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

### LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

## PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

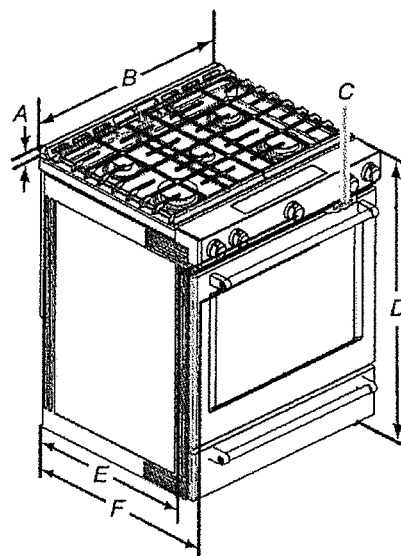

A. 1  $\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent  
B. 29  $\frac{7}{8}$ " (75.9 cm)

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*

E. 28  $\frac{1}{8}$ " (71.9 cm) max. depth from front of console to back of range.

F. 28  $\frac{7}{8}$ " (73.3 cm) max. depth from handle to back of range.

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

## Type of Gas

### Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

### LP gas conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

\*TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.

## ELECTRICAL REQUIREMENTS

**IMPORTANT:** The range must be electrically grounded in accordance with local codes and ordinances, or in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.

- A 120 volt, 60 Hz., AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this range be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

## CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.


Range may be installed next to combustible walls with zero clearance.

**NOTE:** When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE\*.
- E. In U.S.A.: 30" (76.2 cm) min. opening width  
In Canada: 31" (78.7 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material.
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/16" (19.5 cm)
- J. 4 1/8" (12.2 cm)
- K. 3 1/8" (9.4 cm) or measurement of N, whichever is greater
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining counter depth should not exceed 2 1/4" (5.7 cm)


\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

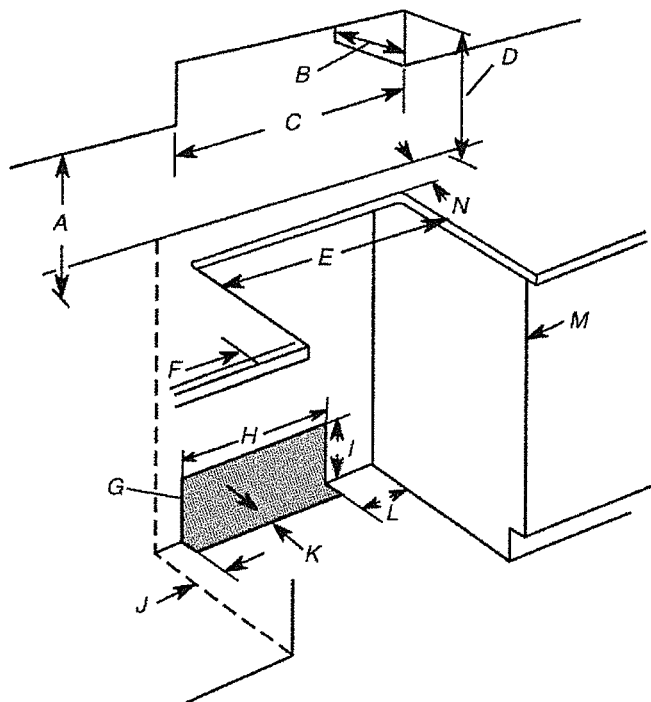

## KITCHENAID® 30" WALL-MOUNT, 3-SPEED CANOPY HOOD

W=30

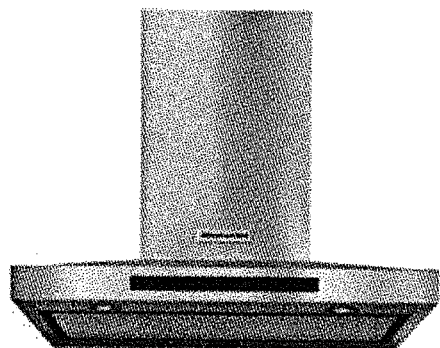



## KVWB600DSS

KitchenAid® 30" Wall-Mount, 3-Speed Canopy Hood

[Email these product details...](#) | [Print product details](#)
[Specifications](#)[Product Literature](#)[Electrical Requirements](#)

## Available Colors

 **Black Stainless**  
Model: KVWB600DBS

 **Stainless Steel**  
Model: KVWB600DSS
[Larger View](#)

AVAILABLE IMAGES



## Dimensions

Height	24 5/8 Inches
--------	---------------

Depth	19 11/16 Inches
-------	-----------------

Width	30 Inches
-------	-----------

Gross Weight	57 LB
--------------	-------

Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packed with product.

## Specifications

## Configuration and Overview

Hood Type	Wall Mount
Venting Type	Exterior or Recirculating
Fan CFM	600

## Dimensions

Width	30 Inches
Depth	19 11/16 Inches
Height	24 5/8 Inches

## Controls


Number of Fan Speeds	3
----------------------	---

## Key Features

600 CFM/65K BTU Threshold [more](#)Perimeter Ventilation [more](#)Auto Speed Setting [more](#)LED Task Lights [more](#)Halogen Night Lights [more](#)3-Speed Electronic Glass Touch Control with Boost Function (10 Min.) [more](#)Whisper Quiet® System @ 49 dBA (1.5 sones) at Low Speed [more](#)Dishwasher Safe Grease Filters [more](#)Easy In-line Conversion [more](#)

## Product Literature

[Owners Manual](#) (1547.40 KB)[Dimension Guide](#) (132.73 KB)[Installation Instructions](#) (1547.37 KB)[Warranty](#) (51.58 KB)[Email these product details...](#)

You may need to install Adobe Acrobat Reader  to view these documents.

## UPC Listing



25/06/2016

Under Cabinet Canopy Hood KQWB600DBS KitchenAid® 30" Wall-Mount, 3-Speed Canopy Hood from Whirlpool Web World

Night Light	Halogen
Task Light	LED

Model "KQWB600DBS" UPC: 883049364957  
Model "KQWB600DSS" UPC: 883049328195

**KitchenAid®**

FOR THE WAY IT'S MADE.®

**30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood****PRODUCT MODEL NUMBERS**

KVWB600D

KVWB606D

**Electrical:** A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

**VENTING METHODS**

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

**NOTE:** Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.


Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.

**Rear Discharge**


A 90° elbow may be installed immediately above the hood.

**For Non-Vented (Recirculating) Installations**


If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

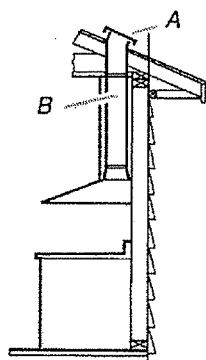**Roof Venting**

A. Roof cap  
B. 6" (15.2 cm) round vent

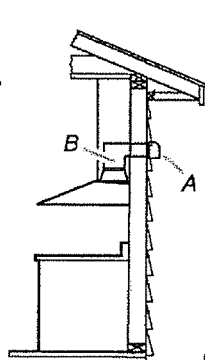**Wall Venting**

A. Wall cap  
B. 6" (15.2 cm) round vent

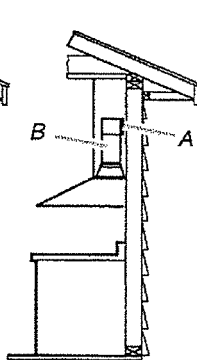**Non-Vented (Recirculating)**

A. Diverter  
B. 6" (15.2 cm) round vent

**Calculating Vent System Length**

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

**Vent System****Vent Piece**


45° elbow

**6" (15.2 cm) Round**2.5 ft  
(0.8 m)

90° elbow

5.0 ft  
(1.5 m)

Maximum equivalent vent length is 35 ft (10.7 m).

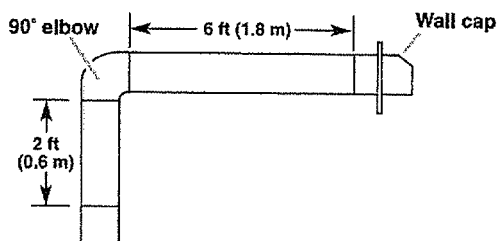**Example Vent System**


The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow = 5.0 ft (1.5 m)

1 - wall cap = 0.0 ft (0.0 m)

8 ft (2.4 m) straight = 8.0 ft (2.4 m)


Length of system = 13.0 ft (3.9 m)

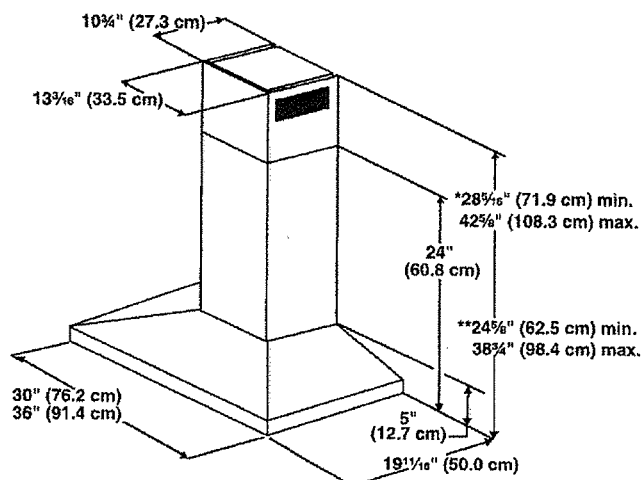**PRODUCT DIMENSIONS**

\*For non-vented (recirculating) installations

\*\*For vented installations

## CABINET DIMENSIONS

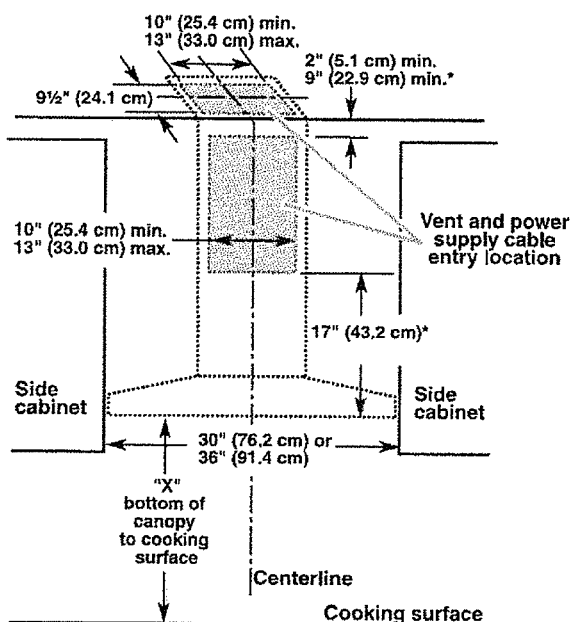

\*For non-vented (recirculating) installations

### IMPORTANT:

Minimum distance "X": 24" (61.0 cm) from electric cooking surface.

Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.

Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

### Vented Installations

	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)


### Non-vented (recirculating) Installations

	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)

**\*NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

## KITCHENAID® 44 DBA DISHWASHER WITH CLEAN WATER WASH SYSTEM

W = 23 7/8

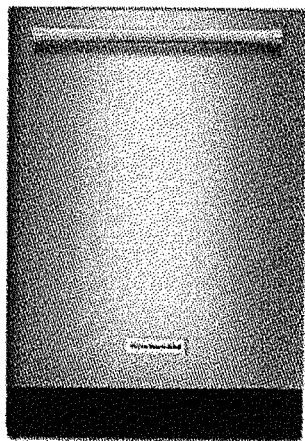

## KDTM354ESS

KitchenAid® 44 dBA Dishwasher with Clean Water Wash System


[Email these product details...](#) | [Print product details](#)
[Specifications](#)[Product Literature](#)[Electrical Requirements](#)

## Available Colors

Stainless Steel  
Model: KDTM354ESS

[Larger View](#)

AVAILABLE IMAGES



## Related Products



W10685193  
3/4" X 3/8" Elbow Hose Fitting

## Dimensions

Height	34 1/2 Inches	Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packed with product.
Depth	24 3/4 Inches	
Width	23 7/8 Inches	
Gross Weight	113 LB	

## Specifications


## Configuration and Overview

Tub Material	Stainless Steel
Rack Material	Nylon

## Key Features

- Clean Water Wash System [more](#)
- ProScrub® Option [more](#)
- Professionally-Inspired Design [more](#)
- Advanced ProDry™ System [more](#)
- ProWash™ Cycle [more](#)
- SatinGlide® Max Rails (Upper Rack) [more](#)
- Sliding Tines in the Lower Rack [more](#)
- 2 Rows Fold-Down Tines in Upper Rack [more](#)
- Fold-Down Tines in the Lower Rack [more](#)
- 2 Fold-Down Cup Shelves with Integrated Stemware Holders [more](#)
- Utility Basket (Upper Rack) [more](#)
- Express Wash [more](#)

Number of Racks	2
Upper Adjustable Rack	2 Position
Water Filtration System	Maintenance Free Microfilter
ADA Compliant	No
Control Type	Tap Touch
CEE Tier	Tier I
<b>Cycle and Options</b>	
Cycle Selections	ProWash™; Tough; Normal; Express Wash; Rinse Only; Light/China
Option Selections	1-24 Hour Delay; ProDry™; ProScrub®; Hi Temp Wash; Sani Rinse®; Control Lock; Heated Dry
Delay Wash	Yes
<b>Controls</b>	
Tub Material	Stainless Steel
Rack Material	Nylon
Upper Rack Extras	2-Plastic Cup Shelves; 8-Stemware Holders; 4-Light Item Clips
Lower Rack Extras	No
Silverware Basket Type	Full Length Splitable
Decibel Level	44
<b>Dimensions</b>	
Maximum Height	34 1/2 Inches
Minimum Height	33 1/2 Inches
Depth With Door Open 90 Degree	49 1/2 Inches
<b>General</b>	
ADA Compliant	No

**Product Literature**[Owners Manual](#) (13367.94 KB)[Dimension Guide](#) (256.35 KB)[Installation Instructions](#) (21178.27 KB)[Energy Guide](#) (309.93 KB)[Warranty](#) (61.48 KB)**Email these product details...**You may need to install Adobe Acrobat Reader  to view these documents.**Electrical Requirements**

15Amps, 120V.

**UPC Listing**

Model "KDTM354ESS" UPC: 883049363653

# KitchenAid®

FOR THE WAY IT'S MADE®

## Undercounter Dishwasher

### PRODUCT MODEL NUMBERS

KDFE204E, KDFE454C, KDTE104E, KDTE204E,  
KDTE254E, KDTM354E, KDTM384E, KDTM404E,  
KDTM504E, KDTM704E, KDTM804E


**Electrical Requirements:** 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

**If direct wiring dishwasher:** Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL Listed or CSA Approved conduit connector.

**If connecting dishwasher with a power supply cord:**

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



**Water Supply Requirements:** A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line.

**Note:** 1/2" minimum plastic tubing is not recommended.


Use a 90° elbow with 3/4" hose connection with rubber washer (Part Number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

**Drain Requirements:** A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part Number 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

### PRODUCT DIMENSIONS

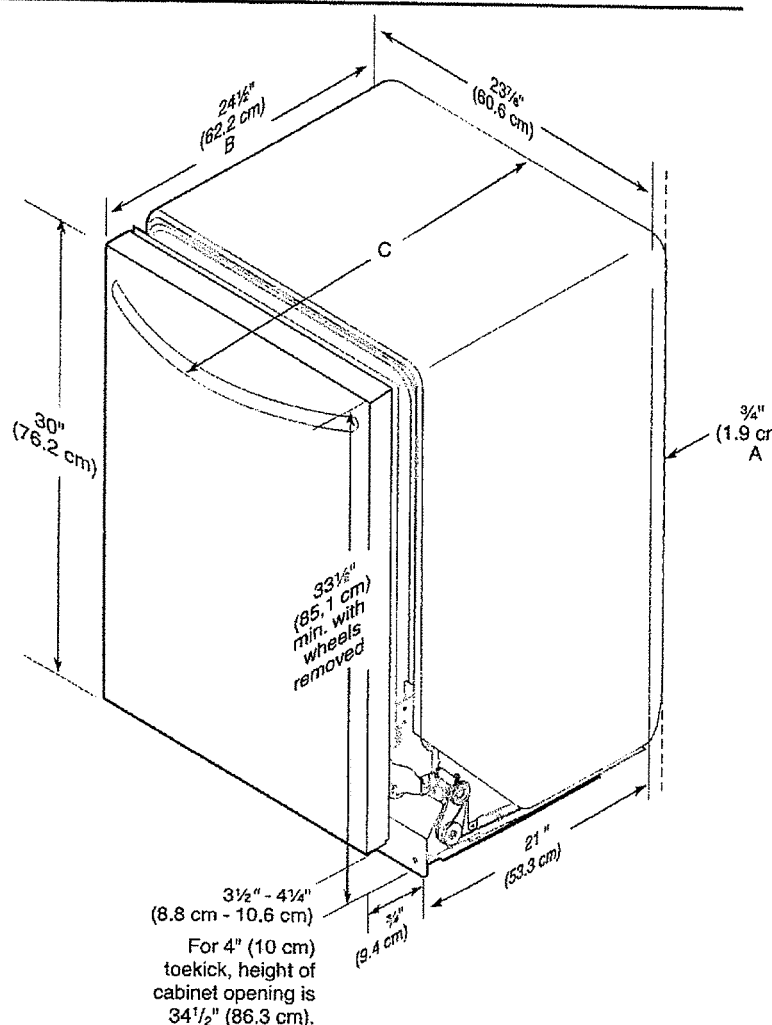

A. Insulation may be compressed (not used on all models).

B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 3/4" (1.9 cm) custom door panel.


C. Door handles may protrude forward of the face of the dishwasher; varies by model.

## CABINET CUTOUT DIMENSIONS


**NOTE:** Shaded areas of cabinet walls show where utility connections may be installed.

\*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

\*\*Minimum, measured from narrowest point of opening.

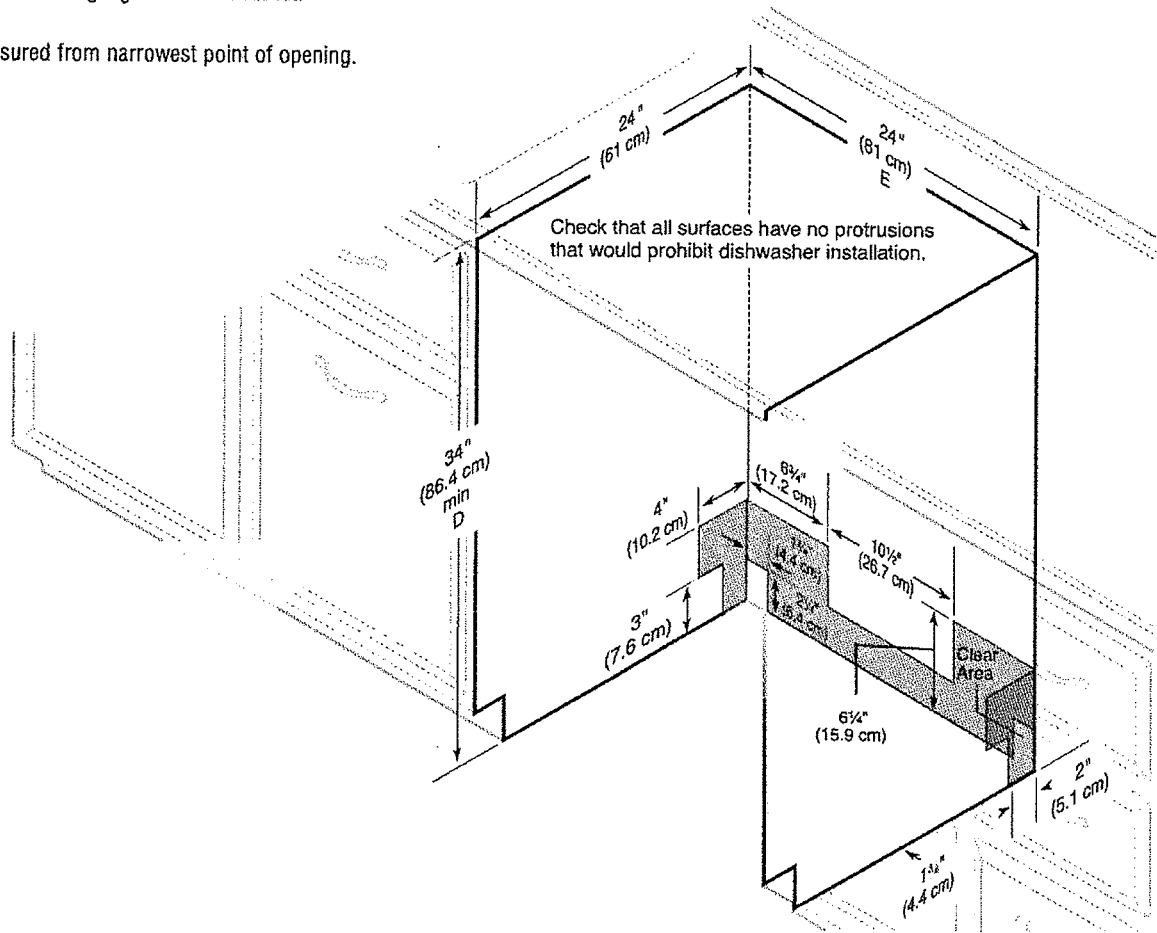

# FRONT LOAD WASHERS

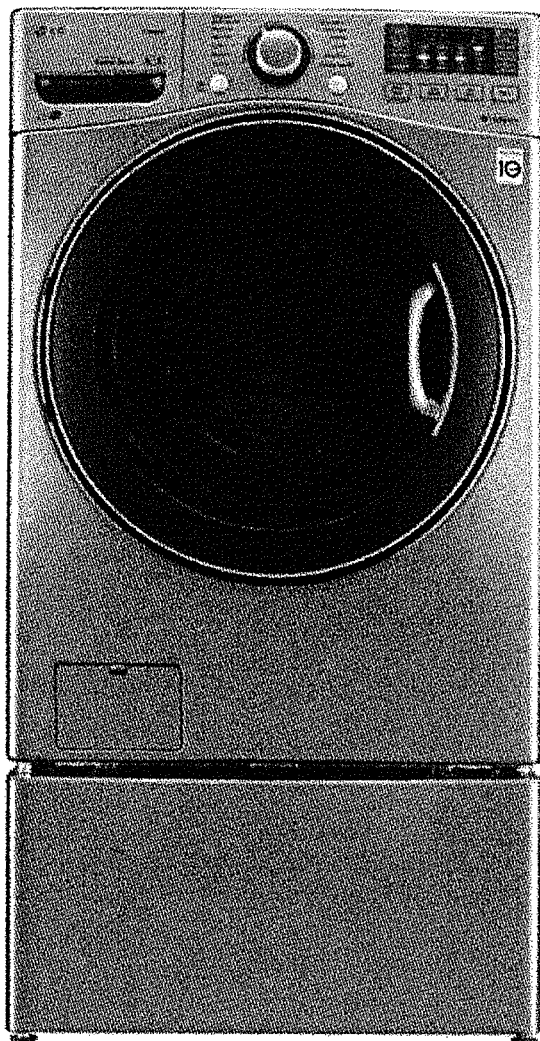

## WM3570HVA

### Performance

- 5.0 cu.ft. Ultra Large Capacity with NeveRust™ Stainless Steel Drum (IEC)
- DirectDrive™ Motor for the Ultimate in Durability and Reliability with 10 Year Warranty
- 10" TiTub™ for Easy Reach into the Rear of the Drum
- 1300 RPM Powerful Spin for Efficient Water Extraction

### Intelligent Fabric Care

- TurboWash™ Technology
- Steam Technology
- ASC Certified Allergiene™ Cycle
- NSF Certified Sanitary Cycle
- ColdWash™ Technology
- 6Motion™ Technology
- NFC Tag On
- SmartDiagnosis™
- TrueBalance™ Anti-Vibration System
- Magnet Ventilation
- SenseClean™ System for Intelligent Fabric Care
- 12 Washing Programs and 5 Temperature Settings
- Delay Wash up to 19 hours for Washing Convenience

### Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

### Technology Benefits

- LoDecibel™ Quiet Operation
- Highly Energy and Water Efficient



NSF certifies the SANITARY cycle which is intended for reducing 99.9% of bacteria and other harmful microscopic organisms on laundry




Most Efficient  
**2014**  
Les plus éconergétiques  
energystar.nrcan.gc.ca




INVERTER  
DirectDrive



Life's Good



Graphite Steel

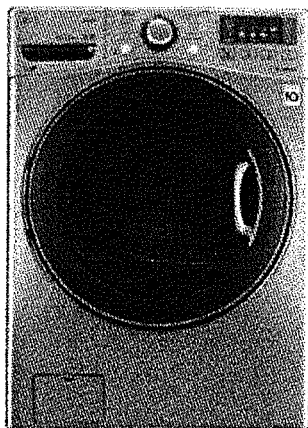



# FRONT LOAD WASHERS

## Fast Forward your Laundry

Tired of spending hours on end finishing your family's laundry? Now, those days are gone. LG's revolutionary **TurboWash™ Technology** allows you to save 20 minutes on larger loads, with outstanding cleaning performance! It's like pressing the fast forward button on your laundry.

## Deep Clean with Steam

LG **Steam Technology** penetrate fabric to remove soil and enhance cleaning results, it also removes common household allergens. The **Allergiene™** cycle gently removes over 95% of common household allergens, like dust mites and pet dander from even the most delicate fabrics. It's so effective it's certified by the Asthma Society of Canada (ASC).

## More Free Time

Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The **ultra large capacity (5.0 cu.ft.)** washer lets you do more laundry in fewer loads. That's time well saved.

## Count On It

When you buy a washer, you don't want to worry that it won't last. Because the **DirectDrive™ Motor** uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a **10-year warranty**.

## NFC Tag On


Easily change and customize cycles with a **simple tap of a smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

## Call, Connect, Resolve

**SmartDiagnosis™** uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

## All the Right Moves

With **6Motion™ Technology**, each wash cycle combines up to 6 different wash motions to provide a revolutionary cleaning experience and ultimate fabric care.

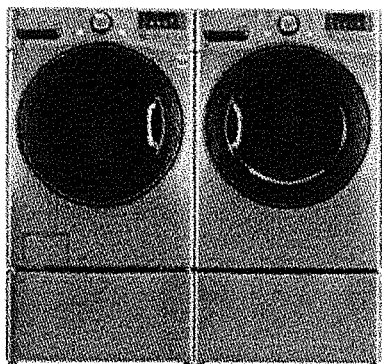


LG ELECTRONICS CANADA INC.  
20 Norelco Drive, North York, Ontario, M9L 2X6  
Tel: 647.253.6300 | LG.com  
Customer Service & Parts  
1-888-542-2623

WM3570HVA	
<b>TYPE</b>	
Front Loader	*
Design Lock	Front Control
Intelligent Electronic Controls with Dual LED Display	*
Dial-A-Cycle™	*
Capacity	IEC 5.0 cu.ft.
<b>ENERGY</b>	
Energy Star	*
2014 ENERGY STAR MOST EFFICIENT	*
<b>WASH PROGRAMS</b>	
12 Programs	Cotton/Normal, Bulky/Large, Perm. Press, Delicates, Download, Speed Wash, Sanitary, Heavy Duty, BrightWashes™, Towels, Allergiene™, Tub Clean
11 Options	Prewash, Rinse+Spin, Custom Program, Extra Rinse, Child Lock, Signal On/Off, ColdWash™, FreshCare™, Steam, TurboWash™, Delay Wash (up to 19 hours)
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)
Spin Speeds	Extra High (1300 max.), High, Medium, Low, No Spin
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	5
<b>FABRIC CARE FEATURES</b>	
TurboWash™	*
Steam	*
Allergiene™ Cycle	*
ColdWash™	*
6Motion™	*
SenseClean™ System	*
<b>CONVENIENCE FEATURES</b>	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	*
NFC Tag On	*
SmartDiagnosis™	*
Load Sense	*
Status Indicator(s)	*
End of Cycle Signal	*
Child Lock	*
Auto Suds Removal	*
Forced Drain System	*
Internal Water Heater	*
Easy Loading 16Tub™	*
Leveling Legs	4 Adjustable Legs
LoDecibel™ Quiet Operation	*
<b>MOTOR AND AGITATOR</b>	
Motor Type / Motor Speed / Axis	Direct Drive / Variable / Horizontal
<b>MATERIALS AND FINISHES</b>	
NeverRust™ Stainless Steel Drum	*
Cabinet	Painted Steel
Control Panel	Plastic
Top Panel	Painted
Transparent Glass Door	*
Door Rim	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
Available Colours	Graphite Steel (V)
<b>POWER SOURCE</b>	
Rating / Electrical Requirements / Type	UL Listed / 120V, 10 Amps / Electric
<b>OPTIONS</b>	
Pedestal	WBP4V
Pedestal (WxHxD)	27" x 13 3/4" x 28 2/5"
Stacking Kit	KSTK1
<b>DIMENSIONS</b>	
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (x1" O with door open)
Carton (WxHxD)	29 1/2" x 43 5/16" x 31 5/16"
Weight (Product/Carton)	207.8 lbs/218.3 lbs
<b>UPC CODES</b>	
WM3570HVA	772454 063251
WBP4V	772454 052866
KSTK1	772454 059896
<b>WARRANTY</b>	
	1 year: parts and labour, 5 years: part on Drum, 10 years: part on DirectDrive™ Motor

Design, features and specifications are subject to change without notice.  
Non-metric weights and measurements are approximate.  
All trademarks are property of their respective owners.

## GAS DRYERS

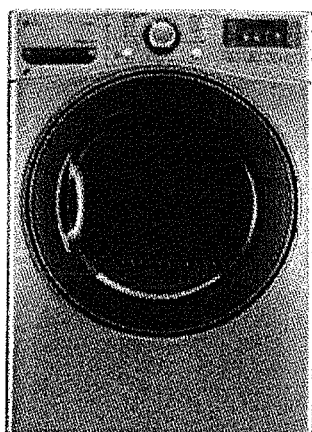

Graphite Steel

## DLGX3571V

### Performance

- 7.4 cu.ft. Ultra Large Capacity with Aluminized Alloy Steel Drum (Alcosta)

### Intelligent Fabric Care

- TrueSteam™ Technology
- SteamFresh™ Cycle
- SteamSanitary™ Cycle
- ReduceStatic™ Option
- EasyIron™ Option
- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- NFC Tag On
- SmartDiagnosis™
- 12 Drying Programs
- 5 Temperature Settings
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Drying Rack
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Custom Program
- Damp Dry Signal

### Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

### Technology Benefits

- LoDecibel™ Quiet Operation

# GAS DRYERS

## Harness the Power of Steam

LG's TrueSteam™ Technology uses a steam generator to produce real steam right into the dryer giving you unique cycle options that remove wrinkles, odours, static and allergens.

## The Quick Fix

Late for the party and no time to iron your favourite outfit? The SteamFresh™ Cycle refreshes and reduces wrinkles in up to five garments at a time with one 20-minute dryer cycle.

## Refresh and Sanitize

SteamSanitary™ Cycle refreshes and sanitizes dry items in the steam dryer. The SteamSanitary™ Cycle kills bacteria on your clothes and is great for decorative pillows and other non-washable items.

## Dry Big Loads

Accurately dry big and bulky loads with 7.4 cu.ft. ultra large capacity. Less time in laundry room, more time for life.

## NFC Tag On


Easily change and customize cycles with a simple tap of a smart phone app. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

## Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

## Accurate Drying

LG's Sensor Dry System measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.

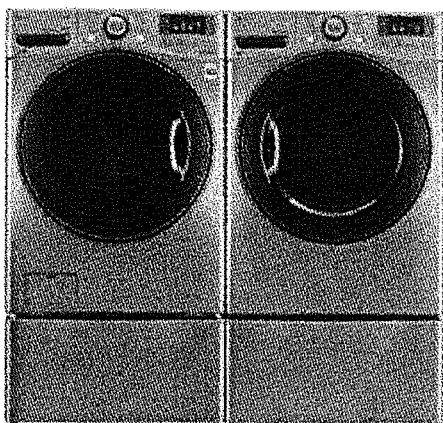

LG ELECTRONICS CANADA INC.  
20 Norcote Drive, North York, Ontario, M9L 2X6  
Tel: 647.253.6300 | LG.com  
Customer Service & Parts  
1-888-542-2623

DLGX3571V	
TYPE	
Front Loader	*
Design Look	Front Control
Intelligent Electronic Controls with Dual LED Display	*
Dial-A-Cycle™	*
Capacity	7.4 cu.ft.
Dry Linen Capacity	>10.2 kg
DRYING PROGRAMS	
12 Programs	Sensor Dry, SteamFresh™, SteamSanitary™, Towels Perm Press, Cotton/Normal, Heavy Duty, Delicates, Small Load, Bulky/Large, Anti-Bacterial, Manual Dry, Speed Dry, Air Dry
10 Options	More Time, Less Time, Reduce Static™, EasyIron™, Custom Program, Wrinkle Care, Rack Dry, Child Lock, Damp Dry Signal, Signal ON/OFF
5 Temperature Settings	High, Medium-High, Medium, Low, Ultra-Low
5 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
SteamFresh™ Cycle	*
SteamSanitary™ Cycle	*
ReduceStatic™ Option	*
EasyIron™ Option	*
Sensor Dry	*
Precise Temperature Control and Variable Heater	*
CONVENIENCE FEATURES	
NFC Tag On	*
SmartDiagnosis™	*
FlowSense™ Duct Clogging Indicator	*
Wrinkle Care Option	*
Remaining Time Display/Status Indicator(s)	*
End of Cycle Signal	*
Child Lock	*
Drying Rack	*
Drum Light	*
Reversible Door	*
Leveling Legs	4 Adjustable Legs
Venting Option	3 Way Venting
3 Minute Installation Check	*
LGInverter™ Quiet Operation	*
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum (Alkoxal)	*
Cabinet	Painted Steel
Control Panel	Plastic
Top Plate	Painted
Transparent Glass Door	*
Door Ram	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
Available Colours	Graphite Steel (V)
POWER SOURCE	
Rating	UL Listed
Electrical Requirements	120V, 15 Amps
Type	Gas
OPTIONS	
Pedestal	WSP4V
Pedestal (VxHxD)	27" x 13 5/8" x 28 2/5"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product/Carton)	134.1 lb/144 lbs
UPC CODES	
DLGX3571V	772454 063275
WSP4V	772454 052856
KSTK1	772454 059896
WARRANTY	
1 year parts and labour	

Design, features and specifications are subject to change without notice.  
Metric weights and measurements are approximate.  
All trademarks are property of their respective owners.