

Electrolux


Model # EI24MO45IB | Store SKU # 1000798765

2.0 cu. ft. Built-in Microwave in Black

Sold online & in-store through special order

\$478.20 / each*
~~\$598.00~~
Save 20%

* Delivery charges apply.

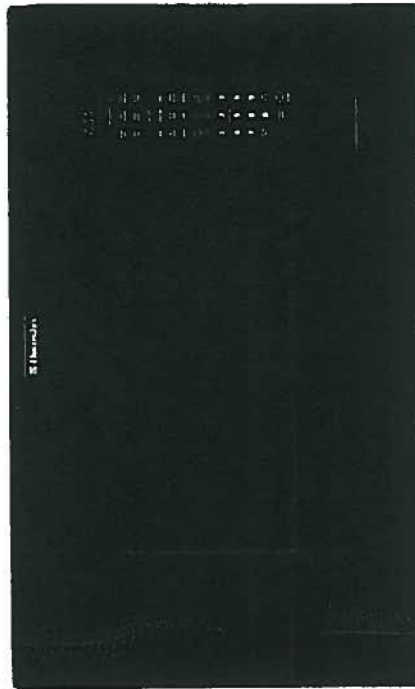

lot #25 e.V.V.
V.V. Sent this
to Jennifer eFrendell^{1/5}
via email on
April 27, 2016.

Overview Model # EI24MO451B Store SKU # 1000798765

The 24-inch built-in microwave from Electrolux features a 2.0 cu. ft. capacity that provides plenty of room for heating your favourite foods. It also includes a Multi-Stage Cooking option that allows you to adjust power levels in advance, so you can program the microwave to defrost, cook and keep your meal warm all at once. Nuking those leftovers has never been so easy!

- 10 sensor-cook options automatically adjust the amount of time needed to complete cooking; 11 Auto-Cook options, three Auto-Reheat options and six Auto-Defrost options for amazing flexibility
- 11 power levels and 1,200 W - this microwave is capable of handling even the biggest cooking jobs
- 2.0 cu. ft. capacity offers plenty of space for heating your food
- Multi-Stage Cooking Option allows you to program power levels and cooking times in advance, so you can program it to defrost, cook and keep a meal warm all at once; Six Shortcuts Options for Popcorn, Reheat, Soften, Melt, Warm and Defrost
- Easy-to-clean enamel interior with bright lighting
- IQ-Touch electronic controls with blue LED read out display makes it easy to see and select options; includes control panel lockout

Specifications

Dimensions

Assembled Depth (in inches)	20.06	Assembled Height (in inches)	18.06
Assembled Weight (in LBS)	46	Assembled Width (in inches)	24
Item Depth	20.06	Item Height	18.06
Item Weight	46	Item Width	24

Details

Appliance Series	EI24MO45IB	Colour / Finish	Black
Microwave Door Release	Push	Microwave Features	2.0 cu.ft Built-In Microwave Module with Black Face - 24" - MUST BE INSTALLED WITH ONE OF THE OPTIONAL TRIM KITS. IQ-Touch Controls
Microwave Size	30	Microwave Type	Built-in
Quick Cook	No	Sensor Cook	Yes
Total (cu. Ft.)	2	Turntable	Yes
Vent Type	Convertible	Wattage (Watts)	1100

Warranty / Certifications

1 Year Limited Parts and Labour

Customer Reviews

★★★★★

Be the first to review this product

MICROWAVE OVEN INSTALLATION INSTRUCTIONS

1. Provide an opening in the wall or cabinet as indicated in Illustration 1. The depth should be a minimum of 20" (50.8 cm). The floor of the opening should be constructed of plywood strong enough to support the weight of the microwave oven (about 100 lbs.) and should be level for proper operation of the oven.

NOTE: While the proper functioning of the microwave oven does not require that the opening be enclosed (with sides, ceiling and rear partition), this may be

required by local code, and it is suggested that the local code be checked for any such requirement.

2. Outlet should NOT be in the shaded area as indicated on Illustration 1. At the rear of the opening, provide a 3-pronged, polarized, electrical outlet, 115-120 volt AC, 15 amp or larger.
3. Minimum required distance between the microwave oven and the wall oven should be 2-inches of visible cabinet showing after installation.

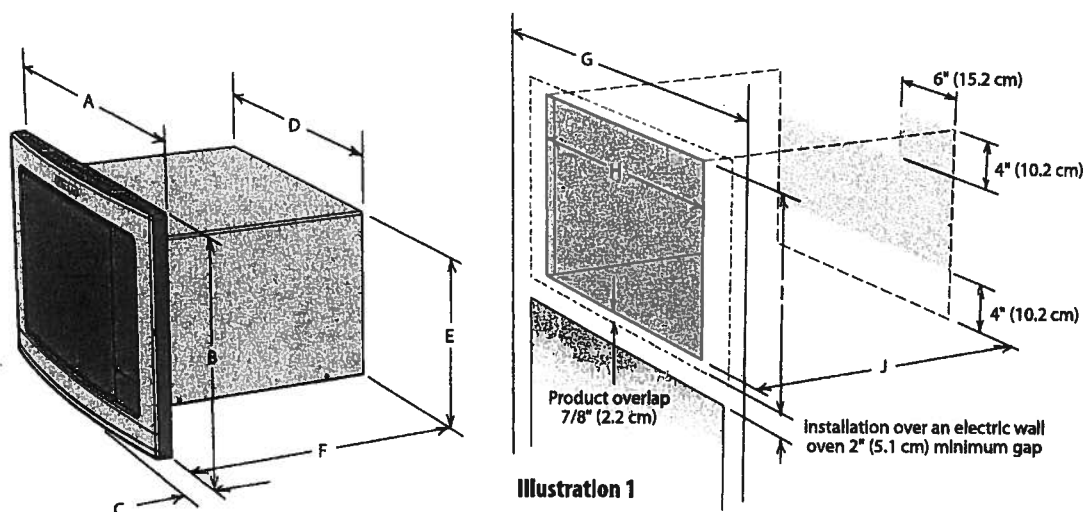


Illustration 1

PRODUCT DIMENSIONS						
EI30M045T TRIM KIT						
A	B	C	D	E	F	G
30" (76.2 cm)	18 1/8" (45.9 cm)	2 3/8" (5.9 cm)	24" (60.96 cm)	13 3/8" (33.9 cm)	17 3/4" (45.1 cm)	min. 30" (76.2 cm)
EI27M045T TRIM KIT						
A	B	C	D	E	F	G
27" (68.6 cm)	18 1/8" (45.9 cm)	2 3/8" (5.9 cm)	24" (60.96 cm)	13 3/8" (33.9 cm)	17 3/4" (45.1 cm)	min. 27" (68.6 cm)
CUTOUT DIMENSIONS						
min.	H	max.	min.	I	max.	J
25 1/4" (64.14 cm)		25 3/4" (64.5 cm)	16 1/4" (41.3 cm)		16 3/4" (41.6 cm)	min. 20" (50.8 cm)
BASIC SPECIFICATIONS						
OVEN INTERIOR				ELECTRICAL REQUIREMENTS	APPROXIMATE SHIPPING WT.	MAX AMP. USAGE
WIDTH	HEIGHT	DEPTH	OVERALL			
17 3/8" (44.1 cm)	10 1/2" (26.6 cm)	18 5/8" (47.3 cm)	2.0 cu. ft.	120VAC/60 Hz (UL) 120VAC/60 Hz (CSA)	46 lbs. (20.9 kg)	1.5 KW 13.0 amps (UL) 1.50 KW 13 (CSA)

Refer to Illustration 1. All dimensions are in Inches (cm).