RF261BEAESR

26 cu. ft. French Door Refrigerator with Internal Filtered Water Dispenser

Features

- · Large Capacity 26 cu. ft.
- Internal Filtered Water Dispenser
- Additional Filtered Ice Maker in the Freezer
- High-Efficiency LED Lighting
- Twin Cooling Plus™
- ENERGY STAR® Compliant
- CoolSelect Pantry[™] with Temperature Control
- Power Freeze and Power Cool Options
- Two Humidity-Controlled Crispers
- Tempered Glass Spill-Proof Shelves
- Gallon Door Bins
- EZ-Open Handle™ on Freezer Door
- Auto Pull-Out Upper Freezer Drawer

Convenience

- Cool Tight Door
- Door Alarm
- Water Filter Indicator
- · Removable Ice Caddy




ENERGY STAR® rated: CEE Tier 1 (10% more efficient than Federal Standard) 620 kWh/yr




Ranked "Highest in customer satisfaction with French Door refrigerators, in a tie."* -J.D. Power





French Door Design



CoolSelect Pantry™ with Temperature Control

Available Colors



Stainless Steel (shown)



White

Black

Stainless Platinum

Signature Features

FILTERED WATER

 Get great-tasting, filtered water directly from your refrigerator. Spend less time and money buying bottled water.

TWIN COOLING PLUS™

- Refrigerator air is kept at higher, near-commercial grade humidity levels to keep perishable fruits and vegetables fresher longer.
- Drier freezer air means less freezer burn for better-tasting frozen foods.

HIGH-EFFICIENCY LED LIGHTING

- High-efficiency design beautifully lights up the interior so you're able to quickly spot what you want.
- Sleek design saves more space than traditional incandescent light bulbs.


RF261BEAESR

26 cu. ft. French Door Refrigerator with Internal Filtered Water Dispenser


Installing Your Refrigerator

- Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions.
- 3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
- 4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
- Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual on-line at samsung.com.



Dimensions

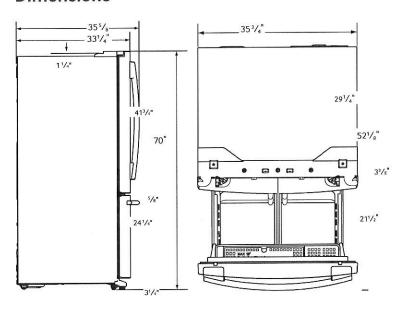

Total Capacity: 25.5 cu. ft.

Refrigerator: 17.5 cu. ft.

- Internal Filtered Water Dispenser
- CoolSelect Pantry™ with Temperature Control
- 2 Humidity-Controlled Crispers
- 5 Tempered Glass Spill-Proof Shelves
- 6 Clear Door Bins
 - Right Door: 3 Gallon Bins
- Left Door: 3 Gallon Bins
- High-Efficiency LED Lighting

Freezer: 8.0 cu. ft.

- EZ-Open Handle™
- 1 Large Opaque Bin with Divider
- Auto Pull-Out Upper Drawer
- Filtered Ice Maker (Cubed)
- · High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labor on Refrigerator Five (5) Years Parts and Labor on Sealed Refrigeration System Only* Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors): $35^3/_4$ " x 70" x $35^5/_8$ "

Dimensions (WxHxD without hinges and door): $35^3/4$ " x $68^5/8$ " x $29^1/4$ "

Dimensions (WxHxD with hinge and door, no handle): $35^3/_4$ " x 70" x $33^1/_4$ "

Weight: 306.4 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 385/8" x 753/4" x 361/4"

Weight: 332.9 lbs.

Model#	UPC Code
RF261BEAESR	036725590137
RF261BEAEWW	036725590168
RF261BEAEBC	036725590151
RF261BEAESP	036725590144
	RF261BEAESR RF261BEAEWW RF261BEAEBC



*Samsung received the highest numerical score for French door refrigerators in a tie in the proprietary J.D. Power 2014 Kitchen Appliance Study⁵⁴. Study based on 15,380 total responses measuring 10 French door refrigerators brands and measures opinions of consumers about their new appliance purchased in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.

^{*}Compressor, evaporator, condenser, drier, connecting tubing

NX58H5650WS

5.8 cu. ft. Freestanding Gas Range with True Convection

Features

- 5 Gas Burners
 - Right Front: Dual 18K BTU
 - Left Front: 15K BTU
 - Right Rear: 5K BTU
 - Left Rear: 9.5K BTU
 - Center: 9.5K BTU (Oval)
- Large Oven Capacity 5.8 cu. ft.
- Cast Iron 3 Piece Grates
- Griddle and Wok Grate
- True Convection Oven
- Warming Drawer (3 Levels)
- Grate Indicator Marks

Convenience

- Auto Oven Light
- Proofing
- Sabbath Mode
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock
- Self Clean
- 4 Easy Cook Presets
- 3 Chrome Oven Racks, including 1 Gliding Rack



Ranked "Highest in Customer Satisfaction with Ranges, Cooktops and Ovens."* — J.D. Power





Five Burners



True Convection

Available Color



Stainless Steel

Signature Features

FLEXIBLE COOKTOP WITH TRUE DUAL POWER BURNER

 Whether you're boiling water, melting chocolate, or simmering sauce. there's a burner for your needs: a dual power burner with 18.000 BTU. plus simmer, oval, and regular burners.

TRUE CONVECTION

 Heated fan system is great for baking and broiling because temperature is distributed thoroughly and food cooks evenly.

GRIDDLE AND WOK GRATE

- Cook a variety of breakfast foods or grilled sandwiches at once on the removable stovetop griddle.
- Accommodates a round-bottom wok on the custom-made wok grate.

LARGE CAPACITY

 Our extra-spacious 5.8 cu. ft. large-capacity oven easily handles turkey roasters and large baking sheets.

GRATE INDICATOR MARKS

• Indicator marks located on the grates allow cookware to be ideally placed for precise cooking.


NX58H5650WS

5.8 cu. ft. Freestanding Gas Range with True Convection

Installing Your Range

*30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.


**15" minimum between the countertop and the adjacent cabinet bottom.



IMPORTANT: To eliminate the risk of burns or fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

Dimensions

SAMSUNG

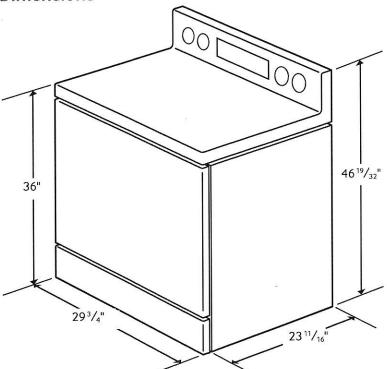

Total Power (BTU)

57,000 BTU

Power Source

120 V/60 Hz

Black Enamel 5 Burner Cooktop

• Right Front: 18000 BTU - Dual

• Left Front: 15000 BTU

Right Rear: 5000 BTU

• Left Rear: 9500 BTU

Center Rear: 9500 BTU – Oval

Oven

Bake: 150°F - 550°F

Convection Bake: 150°F - 550°F

Bake Burner: 18000 BTU

Broil Burner: 13500 BTU

Variable Broil: Low/Hi (375°F - 480°F)

Convection Roast: 150°F - 550°F

Proofing

Sabbath Mode

Warming Drawer

· Capacity: 0.7 cu. ft.

Heating Performance: 600 W (4 pass)

• Temperature Settings: High, Medium, Low

Warranty

One (1) Year All Parts and Labor Five (5) Years Gas Cooktop

Product Dimensions & Weight (WxHxD)

Actual Oven Dimensions: $25" \times 19" \times 21^{1}/_{8}"$

Outside Net Dimensions: $29^{3}/_{4}$ " x $46^{19}/_{32}$ " x $23^{11}/_{16}$ "

Weight: 207 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions:

 $32^{7}/_{8}$ " x $50^{9}/_{16}$ " x $30^{1}/_{8}$ "

Weight: 233 lbs.

Color

Model#

UPC Code

Stainless Steel

NX58H5650WS

887276674360

*Samsung received the highest numerical score for ranges, cooktops and ovens in the proprietary J.D. Power 2014 Kitchen Appliance Study™. Study based on 15,380 total responses measuring 17 ranges, cooktops and oven brands and measures opinions of consumers about their new appliance purchased in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit|dpower.com.

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2014 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

ME18H704SFS


1.8 cu. ft. Over-the-Range Microwave


Features

- 1.8 cu. ft. Oven Capacity
- 1000 Watts Cooking Power
- 400 CFM Ventilation System
- Simple Clean Filter
- · Ceramic Enamel Interior
- 10 Power Levels
- Sensor Cook
- Two-Stage Programmable Cooking
- Auto Defrost/Sensor Reheat
- Auto Cook
- · Chrome Rack
- LED Display

Convenience

- Clock (12hr/24hr) with Daylight Savings Time Adjustment
- Kitchen Timer
- End Signal
- Interior Light: Halogen (1)
- · Cooktop Lighting (Halogen): High/Low/Off
- Vent Fan Control: On/Off/Delay Off
- · Child Safety Lock
- Sound On/Off
- Eco Mode (Reduces Standby Power)







Ceramic Enamel Interior

Simple Clean Filter

Available Colors



Stainless Steel (shown)



Black Stainless



Black

Signature Features

CERAMIC ENAMEL INTERIOR

- Scratch-resistant and easy-to-clean interior.
- Effortlessly remove grease or oil from surfaces and protect against scratches that occur from daily use.

SENSOR COOK

Whether it's the soup you just bought, last night's leftover pasta or a frozen dinner.
 Sensor Cook does the thinking for you so that you get optimally heated results every time.

LED DISPLAY

• Features a digital, blue LED Display, complementing any kitchen décor.

SIMPLE CLEAN FILTER

 Convenient, easy-to-access location is simple to eject with one touch and helps you remember when to clean the filter.




Ranked "Highest in Customer Satisfaction with Over the Range Microwaves."* -1.D. Power

ME18H704SFS

1.8 cu. ft. Over-the-Range Microwave

Dimensions

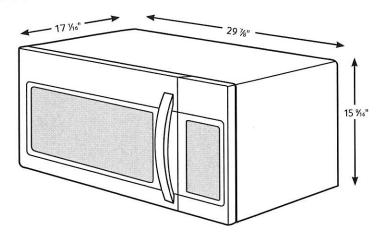


Installing your Microwave

- This microwave oven is designed for adaptation to the following three types of ventilation:
- A. Outside Top Exhaust (Vertical Duct)
- B. Recirculating (Non-Vented Ductless)
- C. Outside Back Exhaust

(Horizontal Duct)

- The space between the cabinets must be 30" wide and free of obstructions.
- This microwave oven is for installation over ranges up to 36" wide.
- The microwave must be level. Use a level to make sure the cabinet bottom is level. If the cabinets have a front overhang only, with no back or side frame, install the mounting plate down the same distance as the front overhang depth. This will keep the microwave level.



FOR EASIER INSTALLATION AND PERSONAL SAFETY, WE RECOMMEND THAT TWO PEOPLE INSTALL THIS MICROWAVE OVEN, IMPORTANT: Do not grip or use handle during installation.

NOTE: If your cabinet is metal, use the nylon grommet around the power cord hole to prevent cutting of the cord.

NOTE: We recommend using filler blocks if the cabinet front hangs below the cabinet bottom shelf.

IMPORTANT: If filler blocks are not used, case damage may occur from over tightening screws.

NOTE: When mounting the microwave oven, thread power cord through hole in bottom of top cabinet. Do not pinch cord or lift oven by pulling cord.

Specifications

- Oven Cavity: 1.8 cu. ft.
- Power Output: 1000 W
- Power Consumption: 1700 W/14.5 A
- Power Source: 120 V/60 Hz
- Control Method: Digital (Membrane Touch)
- · Display: LED
- Cooking Control: 10 Power Levels Including Defrost and Sensor Cook
- Cooking Timer: Digital, up to 99 Minutes, 99 Seconds
- Microwave Distribution System: Rotating Turntable + Stirrer
- Glass Turntable Diameter: 14 3/16"
- Chrome Rack (1)
- Vent Fan: 400 CFM
- Vent Fan Control: On/Off/Delay Off
- Cooktop Lighting: High/Low/Off
- Halogen Interior Light

Warranty

One (1) Year All Parts and Labor Ten (10) Years Parts on Magnetron

Product Dimensions & Weight (WxHxD)

Cavity Dimensions:

 $20^{13}/_{16}$ " x $10^{13}/_{16}$ " x $14^{9}/_{16}$ "

Outside Net Dimensions: $29^{7}/_{8}$ " x $15^{9}/_{16}$ " x $17^{1}/_{16}$ "

Weight: 56.0 lbs. (Stainless) 54.9 lbs. (White, Black)

Shipping Dimensions & Weight (WxHxD)

Dimensions:

 $33^{3}/_{8}$ " x $19^{13}/_{32}$ " x $20^{5}/_{32}$ "

Weight: 63.6 lbs. (Stainless) 62.4 lbs. (White, Black)

Color	Model#	UPC Code
Stainless Steel	ME18H704SFS	887276689197
Black Stainless	ME18H704SFG	887276118215
White	ME18H704SFW	887276673974
Black	ME18H704SFB	887276690179



*Samsung received the highest numerical score for over the range microwaves in the proprietary J.D. Power 2014 Kitchen Appliance Study³⁴. Study based on 15,380 total responses measuring 15 over the range microwave brands and measures opinions of consumers about their new appliance purchased in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.

Non-metric weights also in easther literals are approximate.

©2015 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com.

Samsung is a registered trademark of Samsung Electronics Co. Ltd.

Drain facility

The recommended height of the standpipe is 18 in/46 cm. The drain hose must be routed through the drain hose clip to the standpipe. The standpipe must be large enough to accept the outside diameter of the drain hose. The drain hose is attached at the factory.

Flooring

For best performance, you must install your washer on a solidly constructed floor. Wood floors may need to be reinforced to minimize vibration and/or unbalanced load situations. Carpeting and soft tile surfaces are contributing factors to vibration which can cause your washer to move slightly during the spin cycle.

Never install your washer on a platform or weakly supported structure.

Location considerations

Do not install your washer in areas where water may freeze, since your washer will always retain some water in its water valve, pump, and hose areas. Freezing water can damage the belts,the pump, hoses and other components.

Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

Sides - 1 in / 25 mm


Rear - 5.9 in / 150 mm


Top – 17 in / 432 mm

Closet Front - 2 in / 51 mm

If the washer and dryer are installed together, the closet front must have at least a 72 in² (465 cm²) unobstructed air opening. Your washer alone does not require a specific air opening.


A. Recessed area





B. Side view - closet or confined area

Undercounter installation (washer only)




English_13




installing your washer

With optional pedestal base or stacking kit

Required Dimensions for Installation With Pedestal (Model No : WE357*)

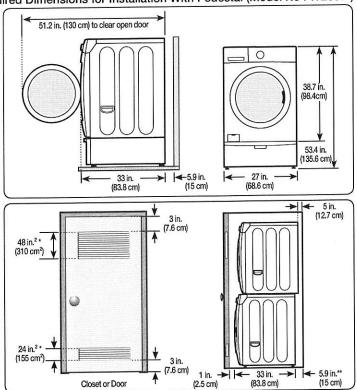

Required Dimensions for Installation With Stacking Kit (Model No : SK-5A)



- * Required spacing
- ** External exhaust elbow requires additional space.

14_English