



REFRIGERATOR

LFC25776



CAPACITY – LFC25776	
Refrigerator	17.7 cu ft
Freezer	7.3 cu ft
Total	25.0 cu ft
CAPACITY – LFC21776 (Counter Depth)	
Refrigerator	14.7 cu ft
Freezer	6.0 cu ft
Total	20.7 cu ft
FEATURES	
Energy Rating	Energy Star
Freezer Door Type	Drawer
Multi-Air Flow Cooling	
Digital Temperature Controls	Internal LED Touch Pad
Digital Temperature Sensors	5
LoDecibel™ Operation	
Door Alarm	
REFRIGERATOR	
No. of Shelves	4 Split
Slide-Out Shelves	4
Canilevered Shelves	
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers/1 Bonus Drawer
Glide N' Serve™ Drawer	
Utility Bin	2 Piece Bin (with cover)
Refrigerator Light	Premium LED
REFRIGERATOR DOOR	
No. of Shelves/Bin	6 (5 Adjustable Gallon Size)
Dairy Corner	
FREEZER	
Drawer	1 Full Width Wire Basket
DuraBase™ Solid Drawer Base	
Divider	
Freezer Door Bin	1, Tilting
IcePlus™	
Ice Bin	
Freezer Light	60W

MATERIALS AND FINISHES	
Foam Door Insulation	
Contour Doors	
Hidden Hinges	
Toe Grille	
Surface	Coated Metal, Stainless Steel
Back	Flush & Metal cover over mechanical parts
Available Colors (LFC25776)	Smooth White (SW), Smooth Black (SB), Stainless Steel (ST)
Available Colors (LFC21776)	Stainless Steel (ST)
Handles	Matching Commercial Handles
DIMENSIONS/CLEARANCES/WEIGHT – LFC25776	
Depth with Handles	34 1/4"
Depth without Handles	31 3/4"
Depth without Door	27 7/8"
Depth (Total with Door Open)	46 1/2"
Height to Top of Case	68 3/8"
Height to Top of Door Hinge	69 3/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"
Door Edge Clearance without Handle	1 3/4"
Installation Clearance	Sides 1/8", Top 1", Back 1"
Weight (Unit/Cartron)	302 lbs./355 lbs.
Cartron Dimensions (WxHxD)	38" x 73" x 37"
DIMENSIONS/CLEARANCES/WEIGHT – LFC21776	
Depth with Handles	30"
Depth without Handles	27 1/2"
Depth without Door	23 5/8"
Depth (Total with Door Open)	42 1/4"
Height to Top of Case	68 3/8"
Height to Top of Door Hinge	69 3/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"
Door Edge Clearance without Handle	1 3/4"
Installation Clearance	Sides 1/8", Top 1", Back 1"
Weight (Unit/Cartron)	278 lbs./333 lbs.
Cartron Dimensions (WxHxD)	38" x 73" x 33"
WARRANTY	
	1 Year Parts and Labor, 7 Years on the Sealed System, 10 Years on Linear Compressor
UPC CODES	
LFC25776SW	Smooth White 048231 783569
LFC25776SB	Smooth Black 048231 783576
LFC25776ST	Stainless Steel 048231 783583
LFC21776ST	Counter Depth – Stainless Steel 048231 783811

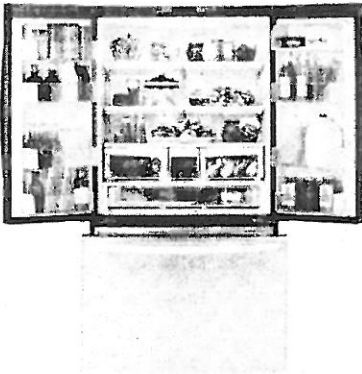

www.LG.com

LG Electronics U.S.A., Inc.
1000 Silicon Avenue Englewood Cliffs, NJ 07632
Customer Service and Technical Support: (800) 243-0000

Dimensions and weights are approximate. Design, features, and specifications subject to change without notice.

© 2010 LG Electronics U.S.A., Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies.

Model: LFC25776-01 05/10

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local codes.


Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.
- Four-wire power supply cord or cable must be used in a mobile home installation. The appliance wiring will need to be revised. See "Electrical Connection - U.S.A. Only" section.

Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

Model KSEB900

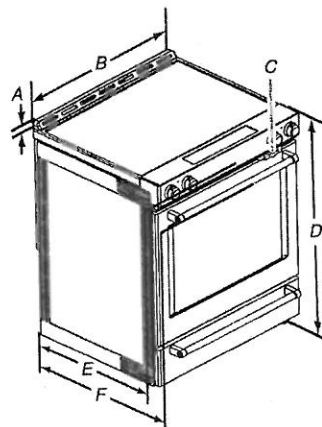

A. 1 $\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent

B. 29 $\frac{1}{2}$ " (75.9 cm)

C. Model/serial number rating plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*

E. 28 $\frac{1}{2}$ " (71.9 cm) max. depth from front of console to back of range

F. 28 $\frac{1}{8}$ " (73.3 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.