


PARTIAL LOWER LEVEL FOR 3R-8R CONDTIONS

NOTE J1: PROVIDE SOLID BLOCKING @ 24" O.C. WHERE FLOOR JOISTS ARE PARALLEL TO FOUNDATION WALL (TYP.)



t is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

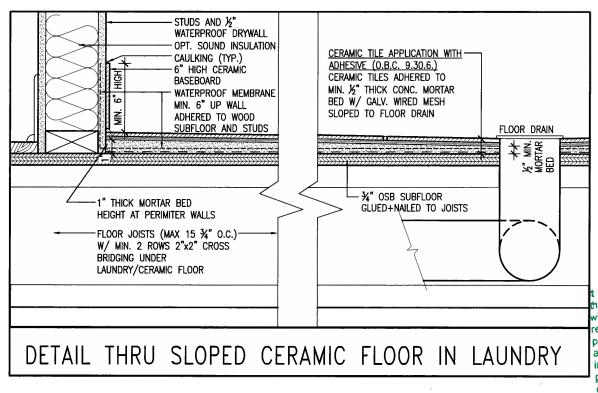






OCT 8, 2015


9 . 8 . 7 . 6 .			The undersigned has reviewed ond has the qualifications and Ontorio Building Code to be a qualification information Wellington Jno—Baptiste	<i>*</i>			BAYV	/IEW	WELLINGT	ON	S38-	9
5 .			name registration information VA3 Design Inc.	signature BCIN 42658	DEGLON	project nome GREEN	VALLEY	ESTATES		BRADFORD		project no. 13045
3 . 2 REVISED AS PER ENG'S COM	MENTS SEPT 25-15	RC	Contractor must verify all dime	risions on the job and report any fore proceeding with the work. All	300A Wilson Avenue Toronto ON M3H 1S8	MARCH 20	15	checked by	scale	PARTIAL	FLOOR PLANS	drawing no.
1 ISSUED FOR CLIENT REVIEW no. description	2015-03- date	JM	drawings and specifications are	instruments of service and the property returned at the completion of the work.	t 416.630.2255 f 416.630.4782	JM	H:\ARCHIVE\W		3/16" = 1'-0"	-S38-9.dwg - Wed -	file name 13045-S38-9 Oct 7 2015 - 12:24 PM	/


date by Drawings are not to be scaled.

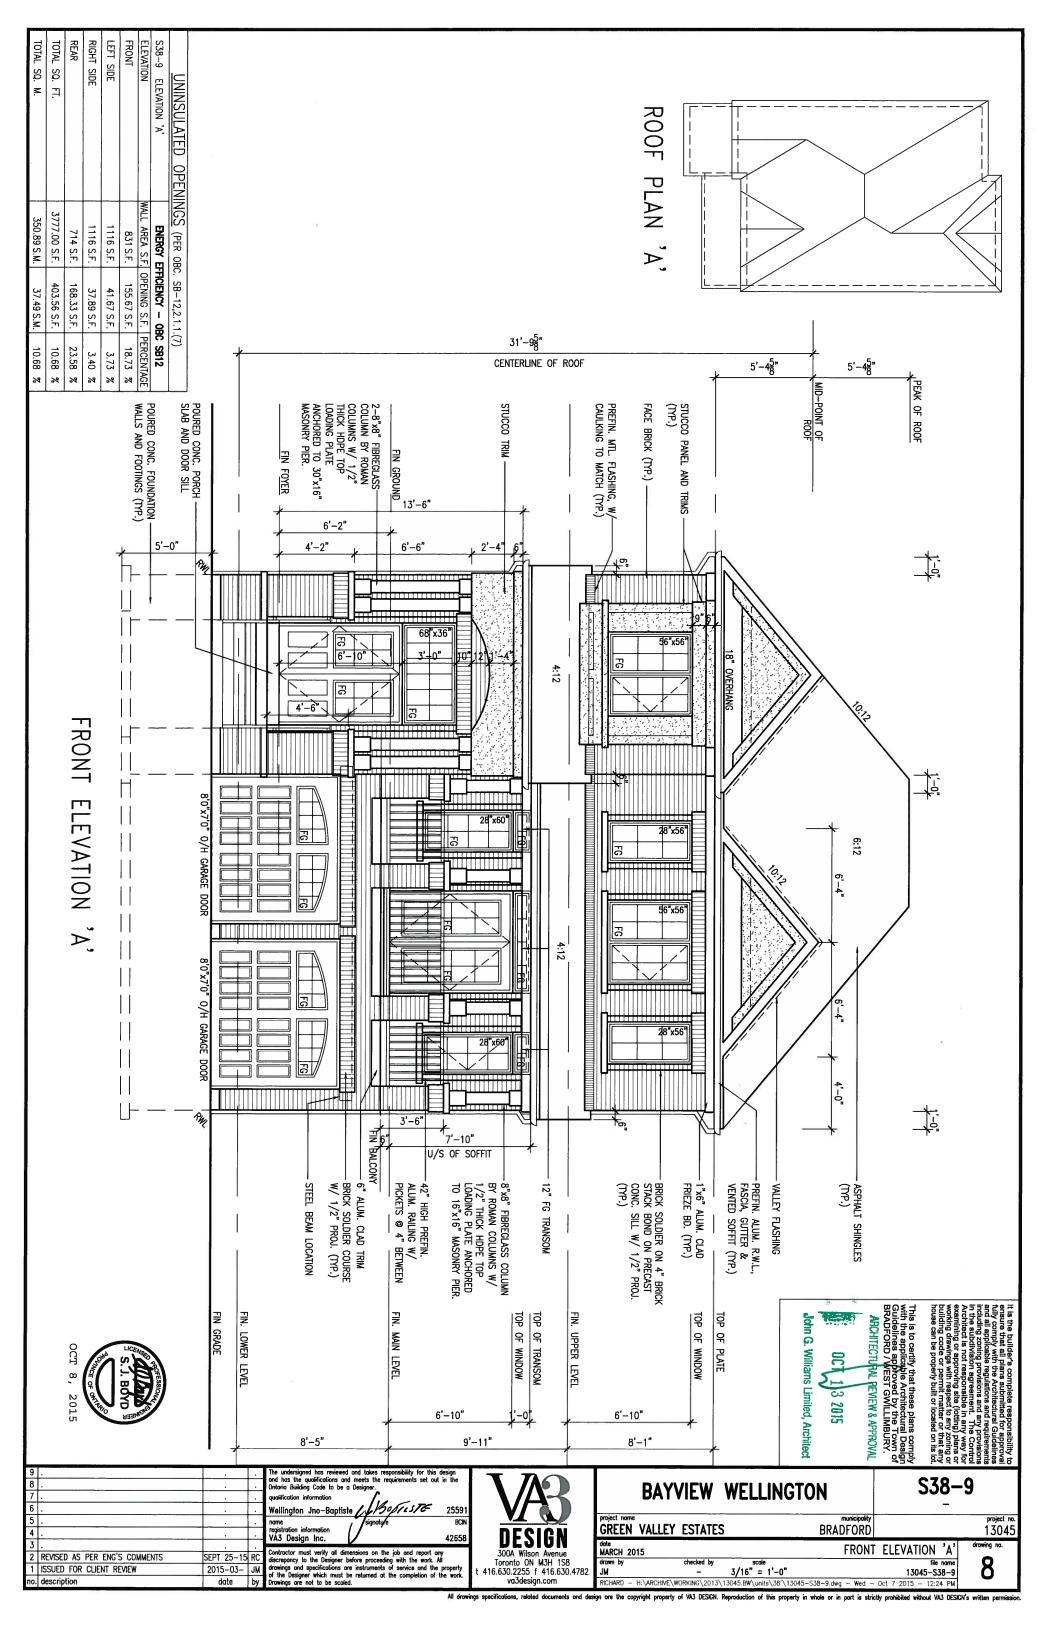


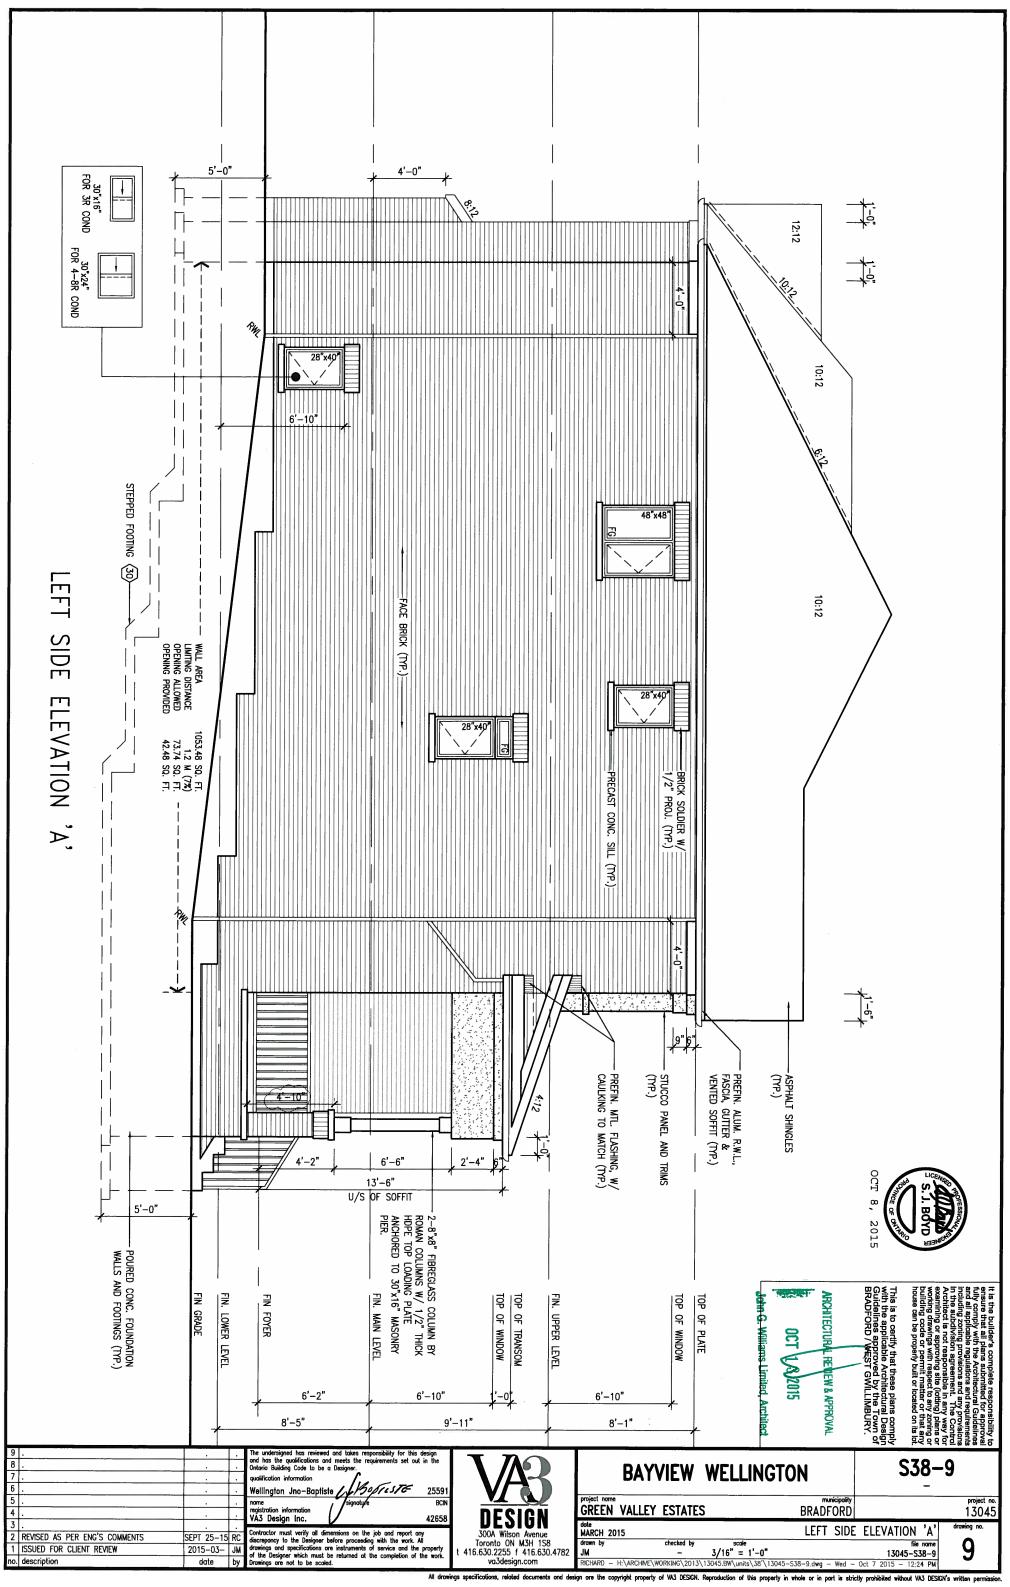


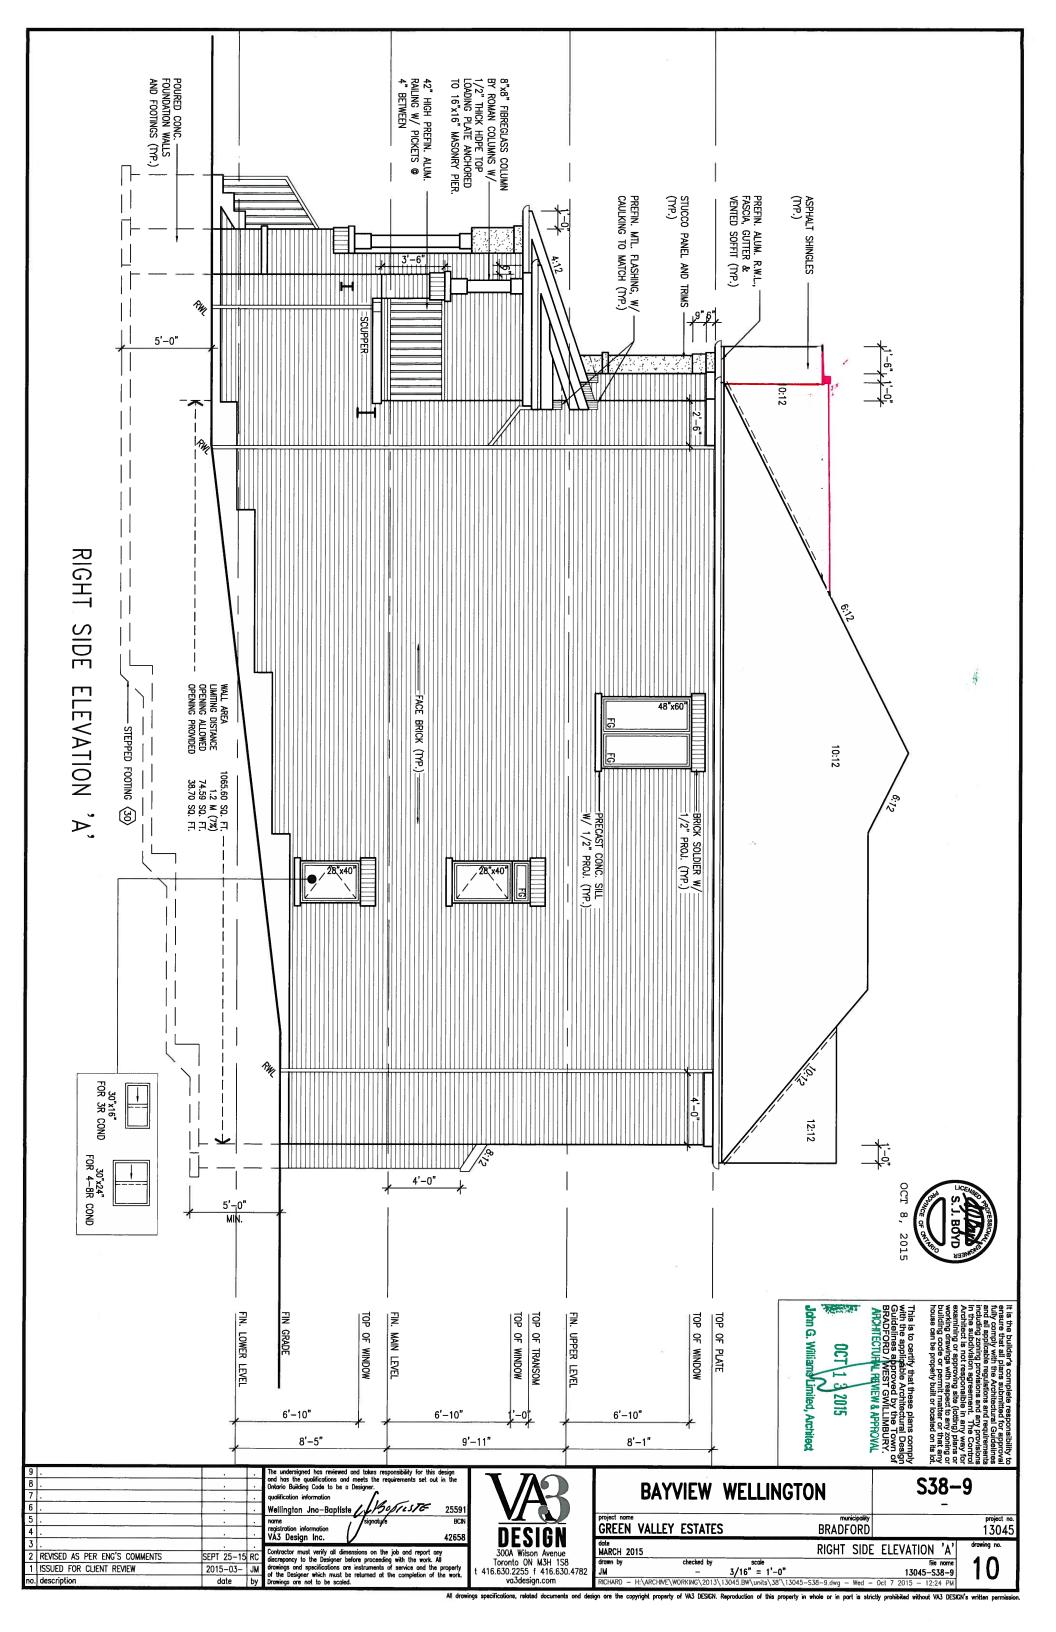


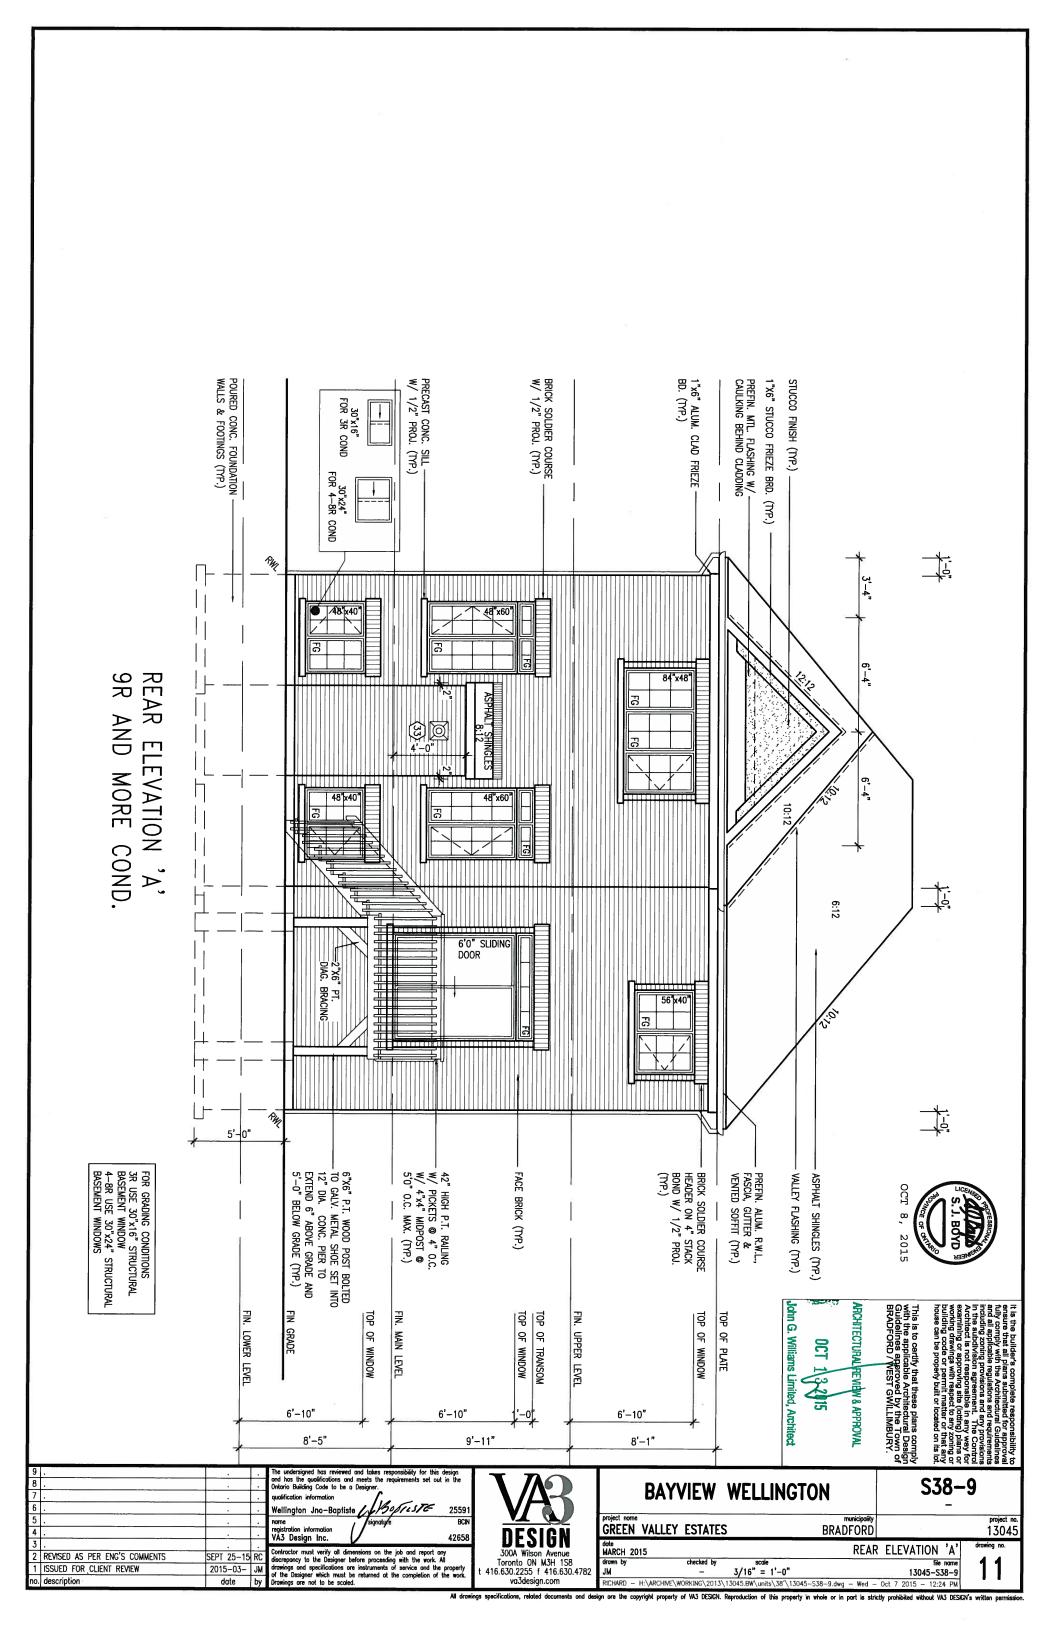


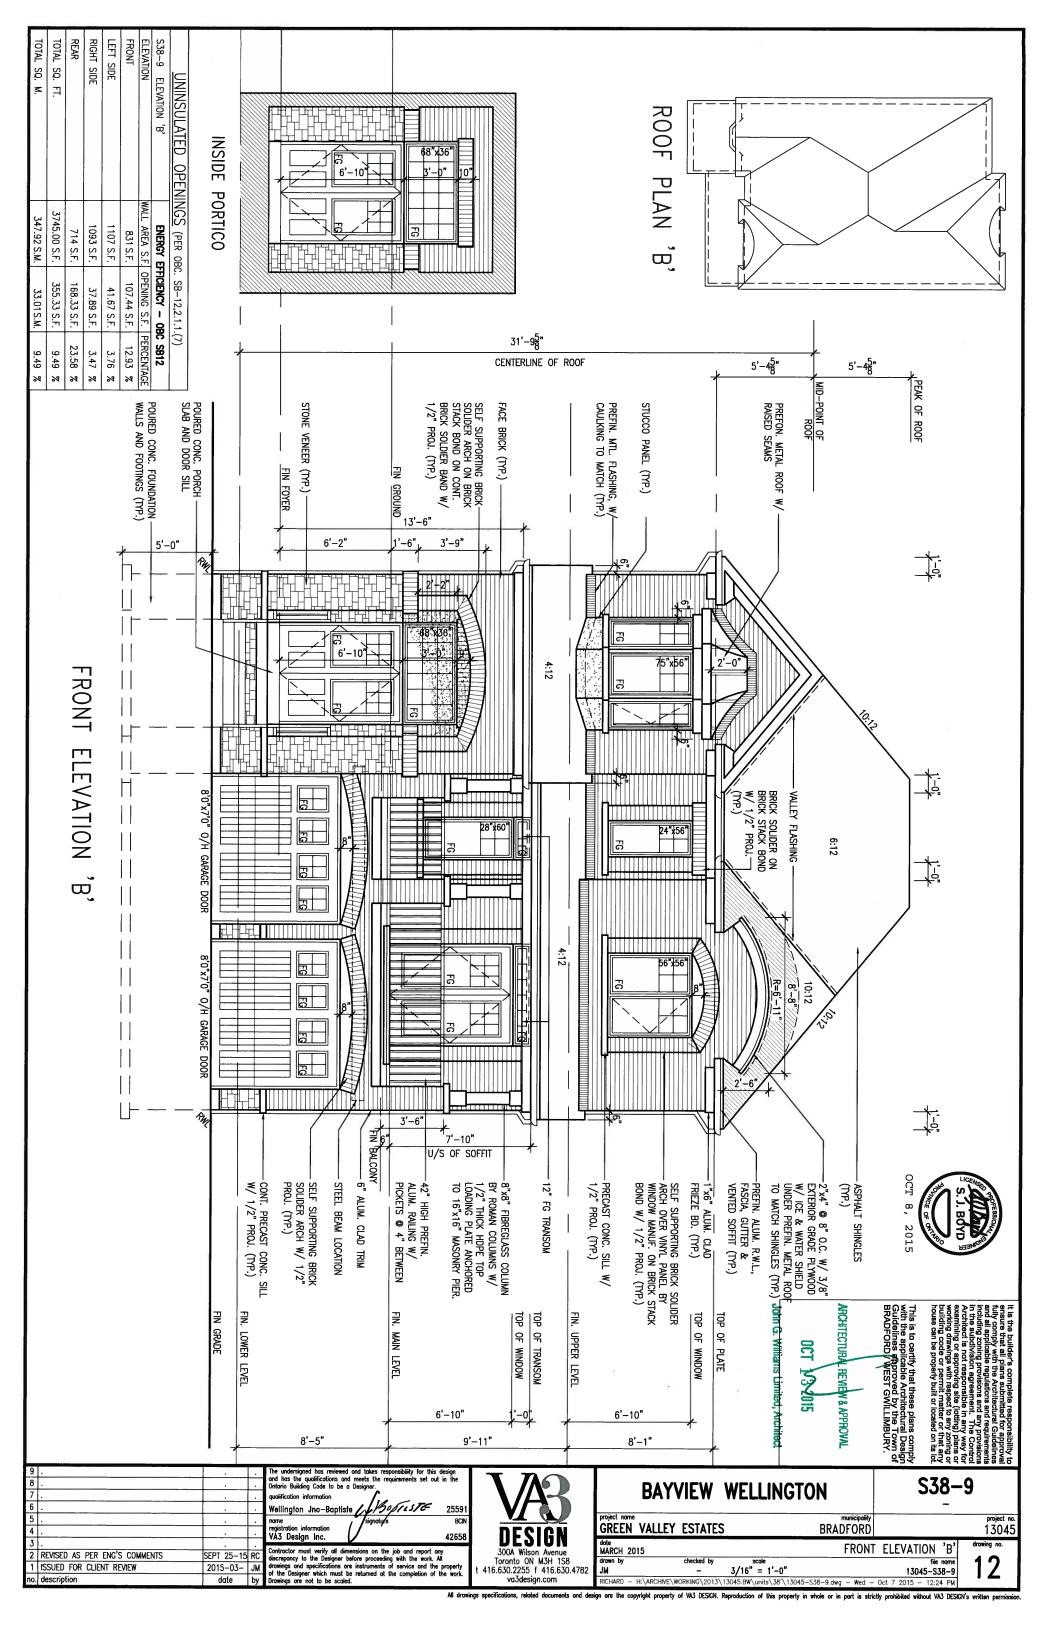


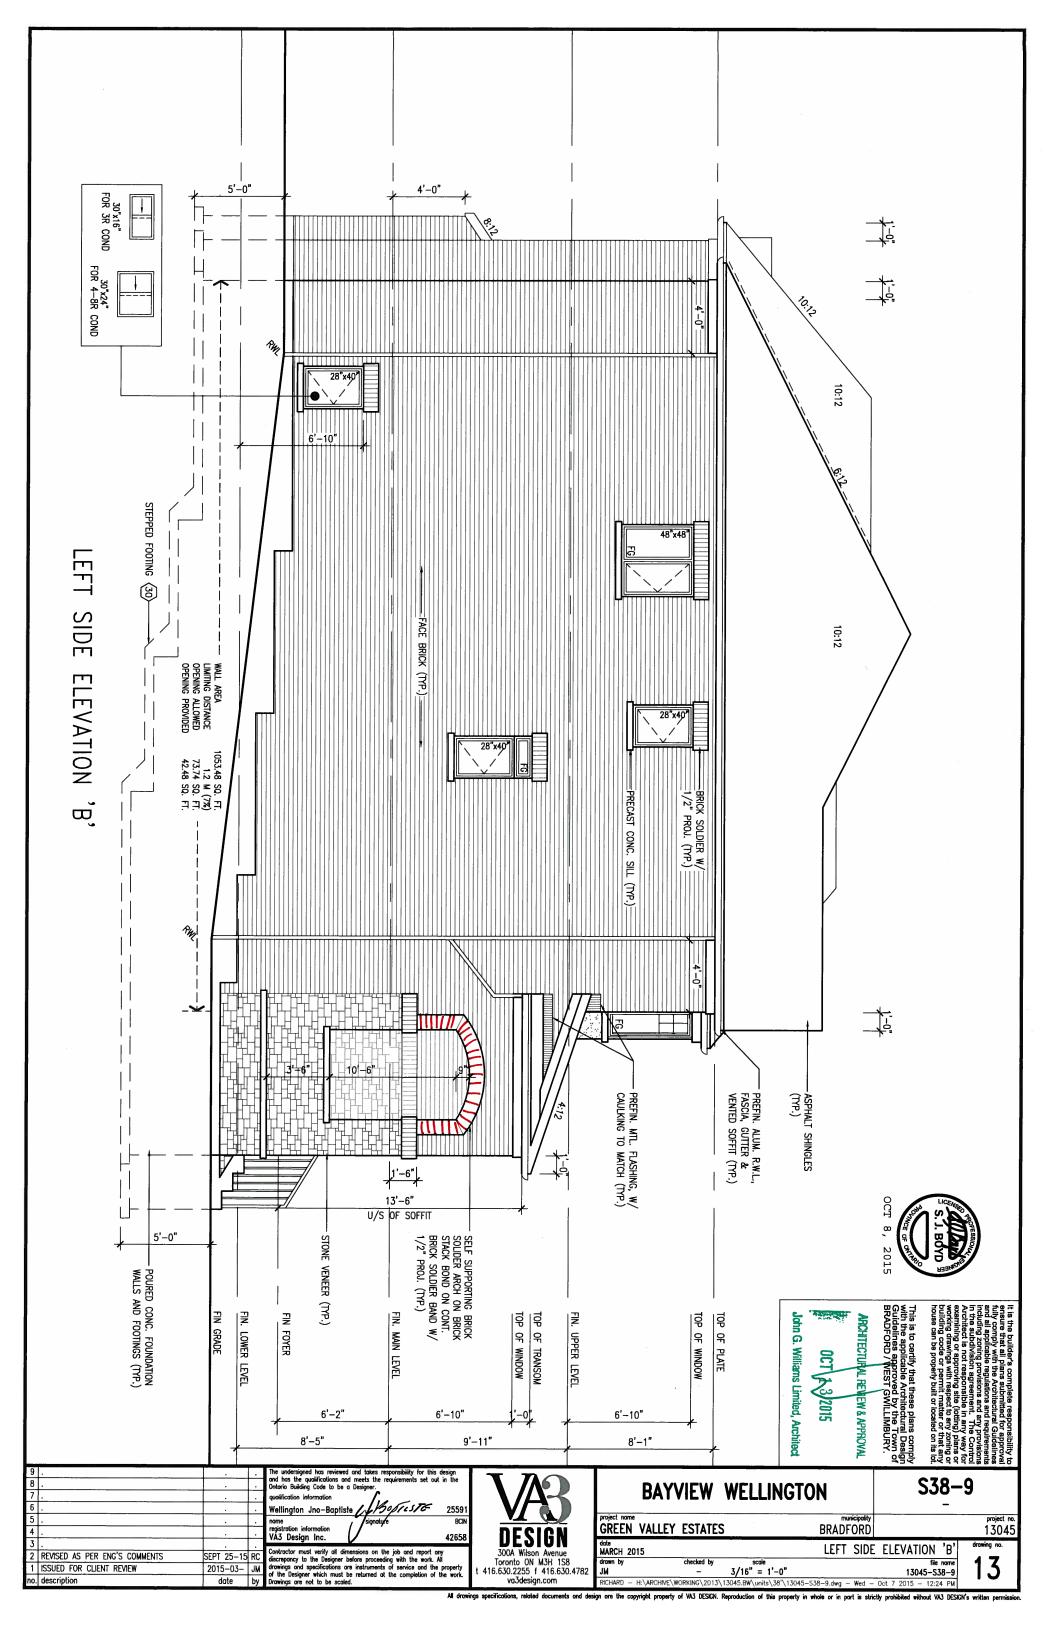


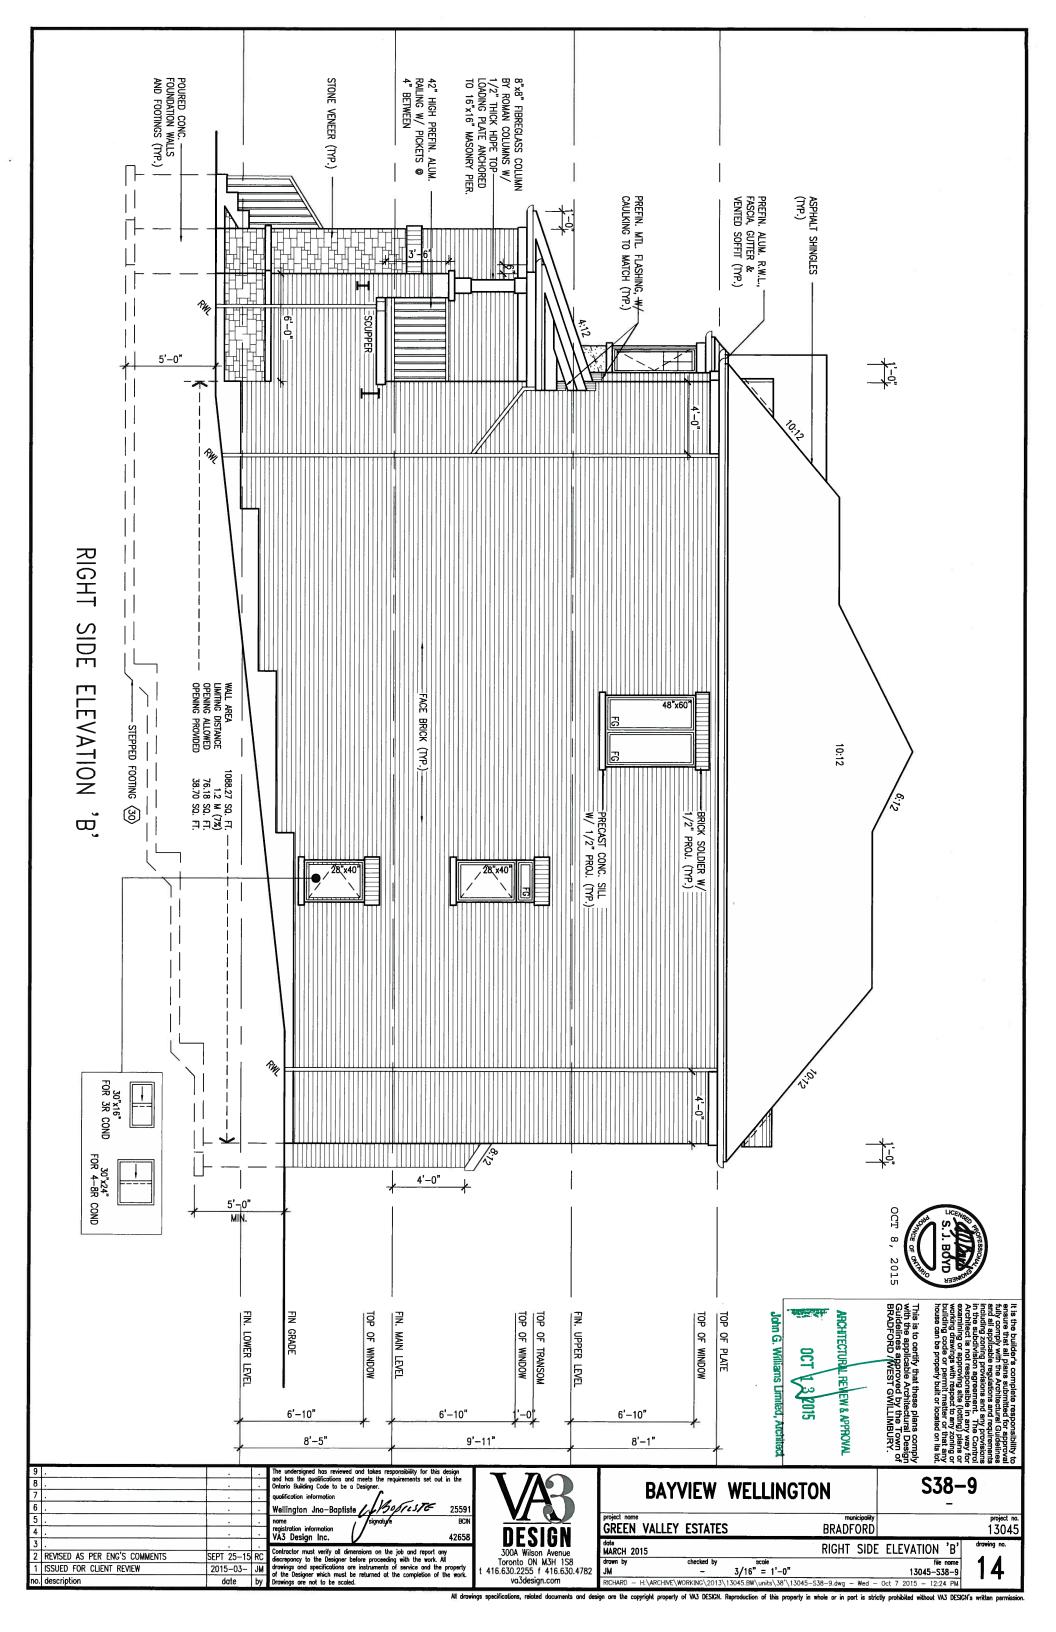

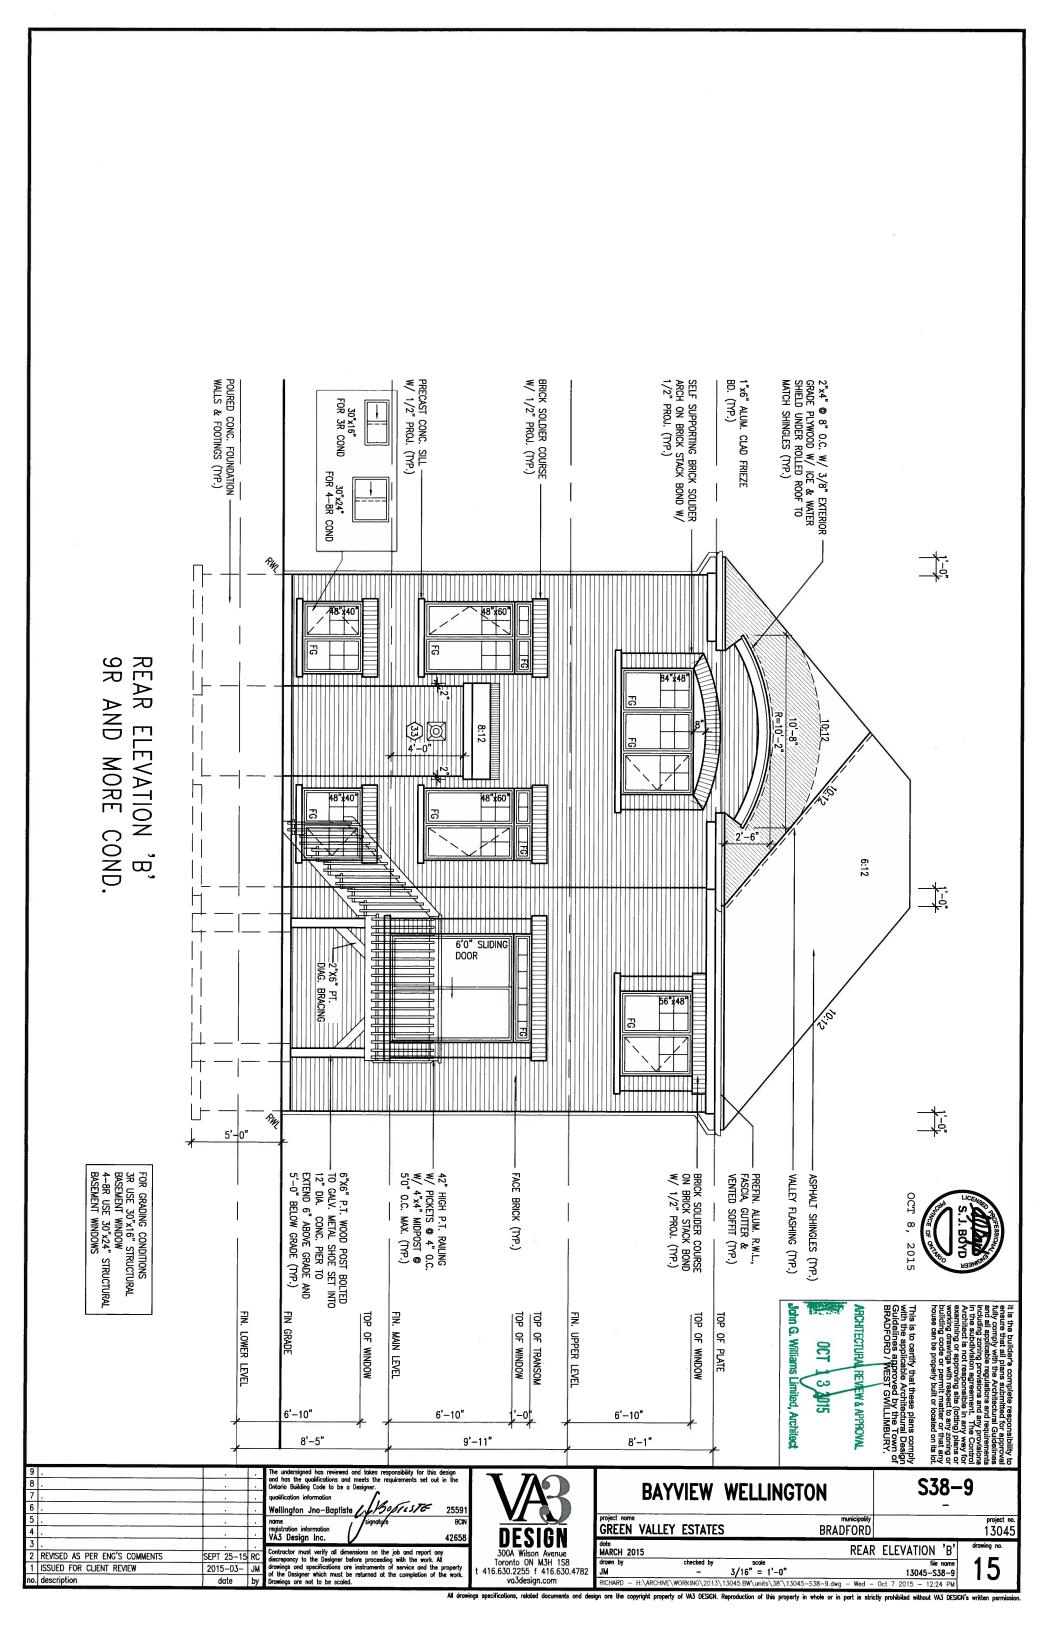


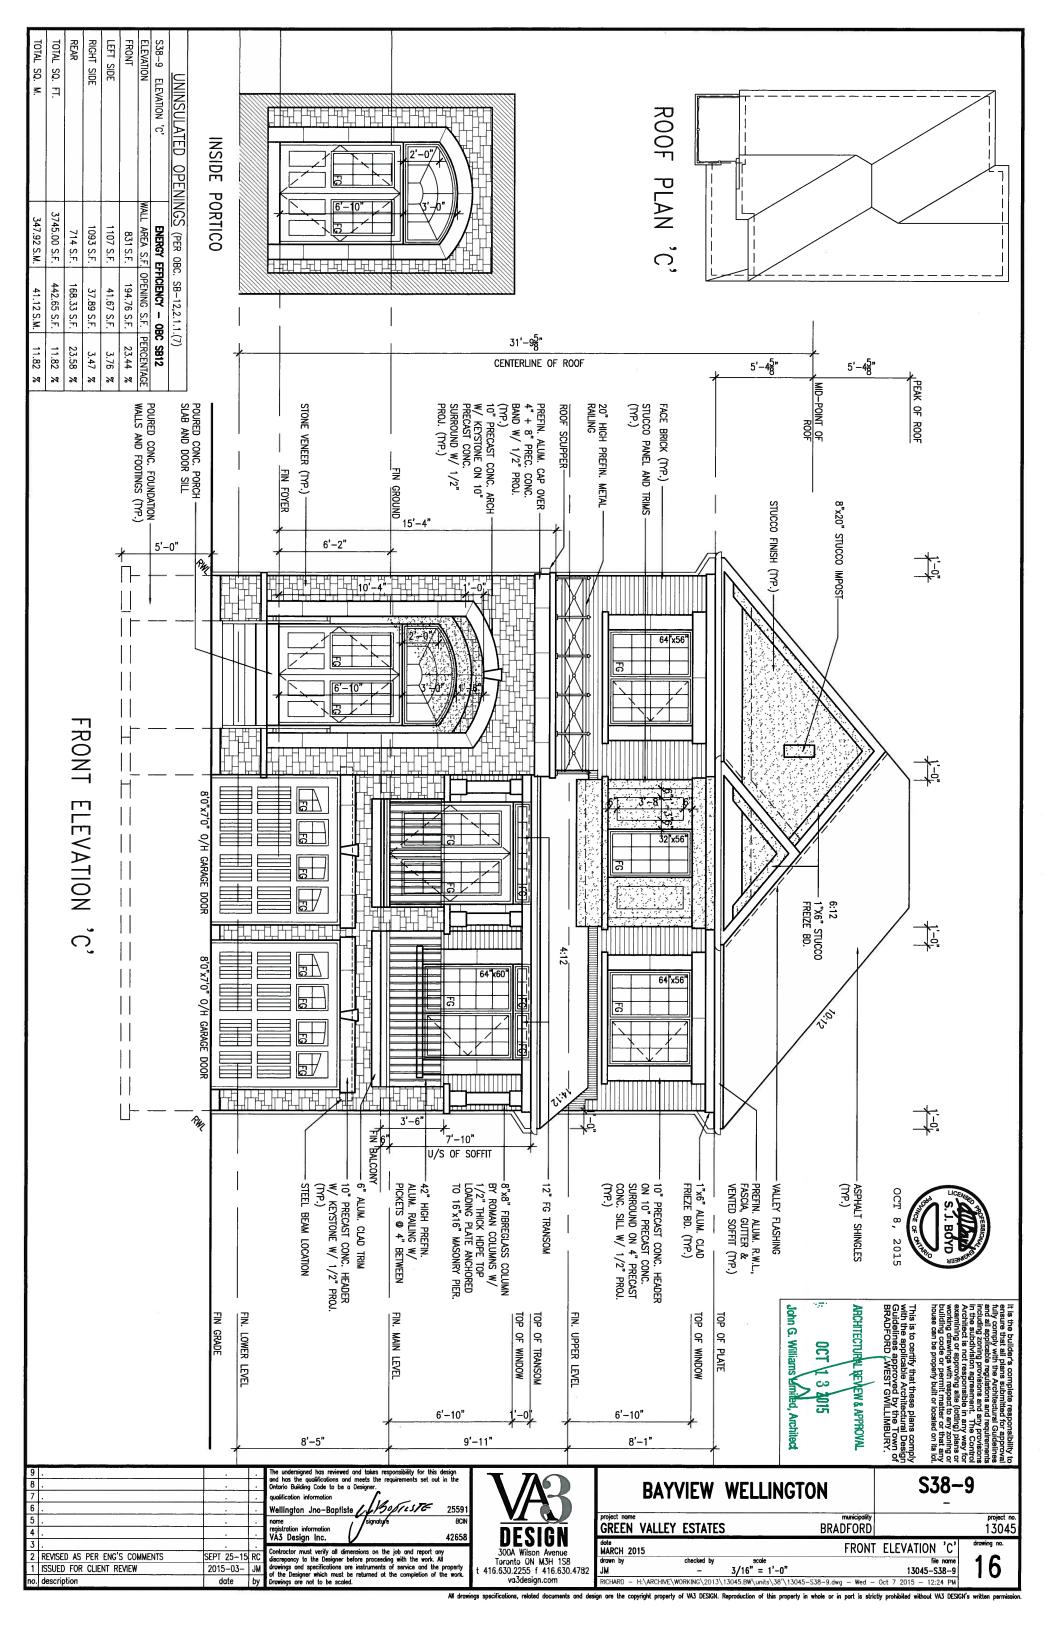

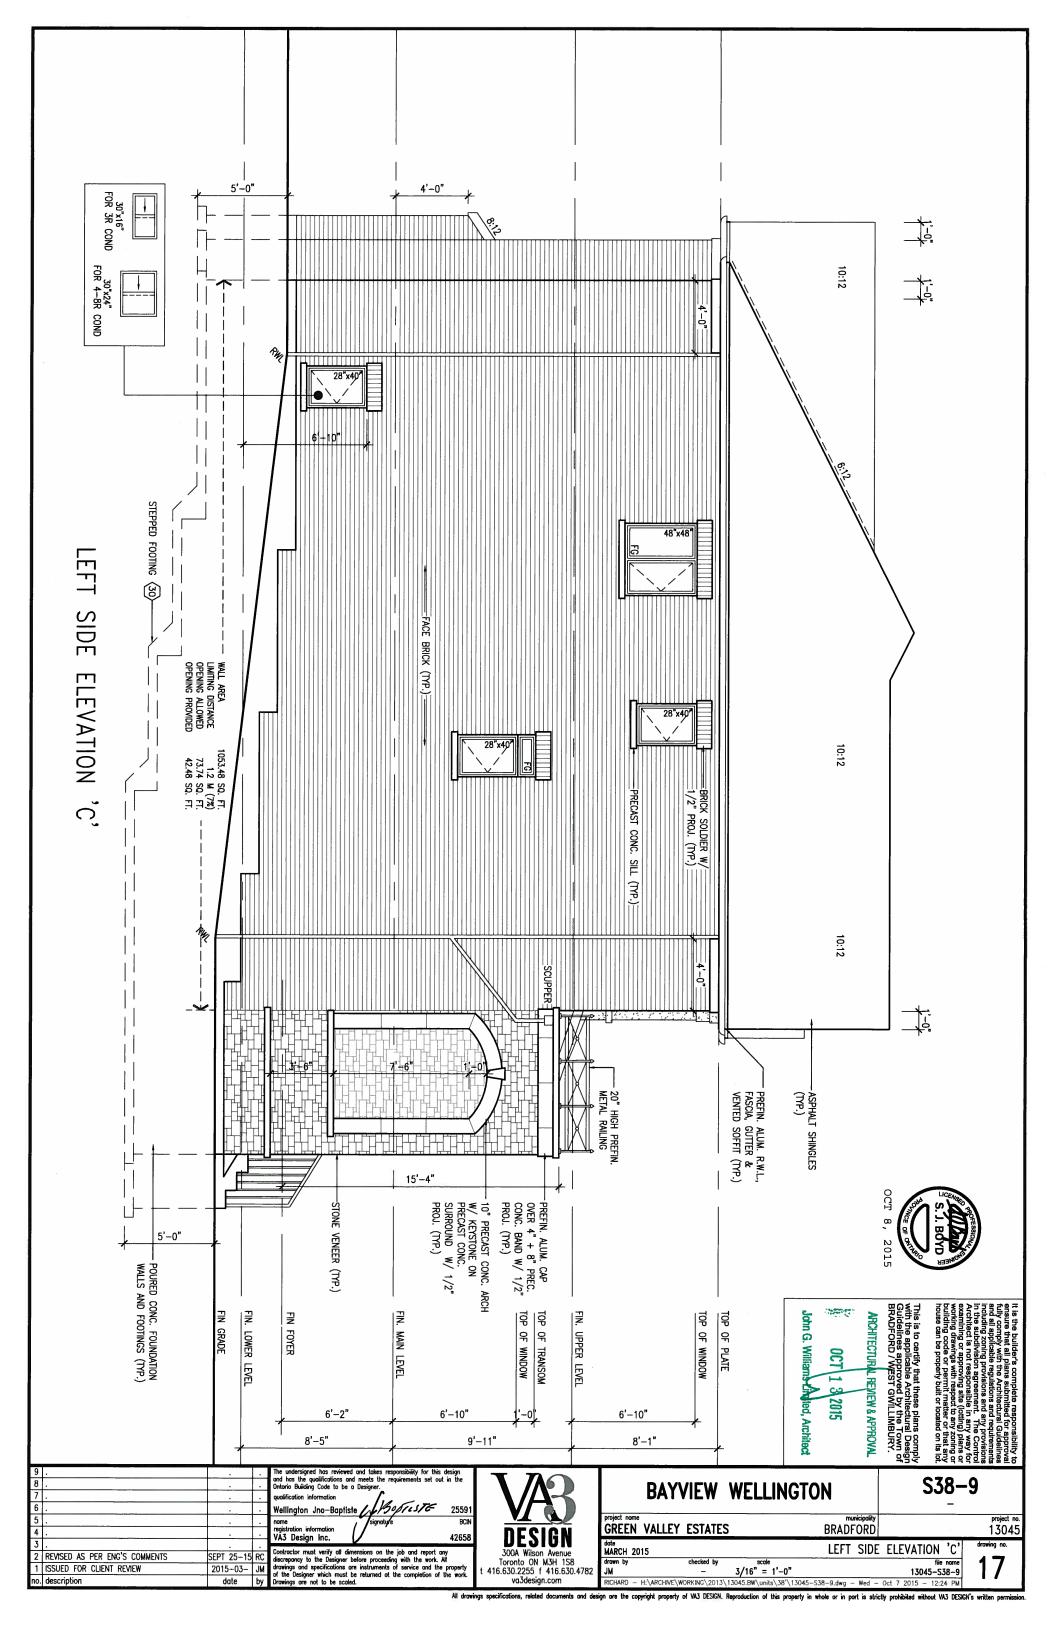

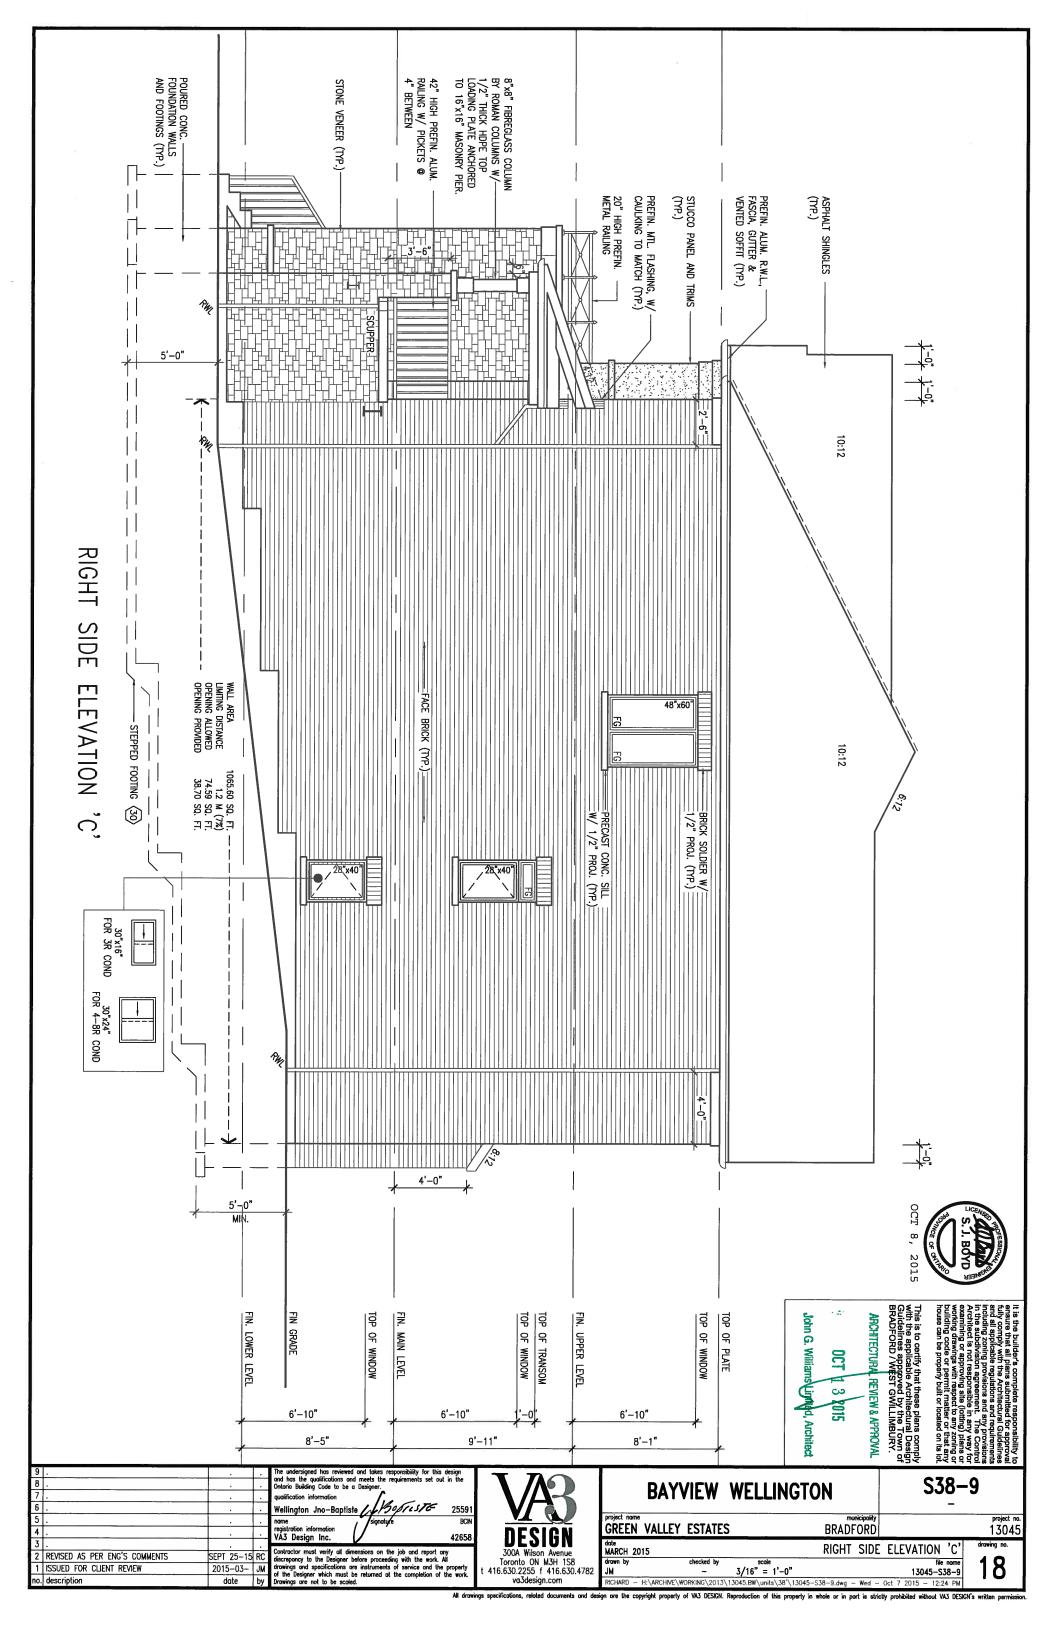



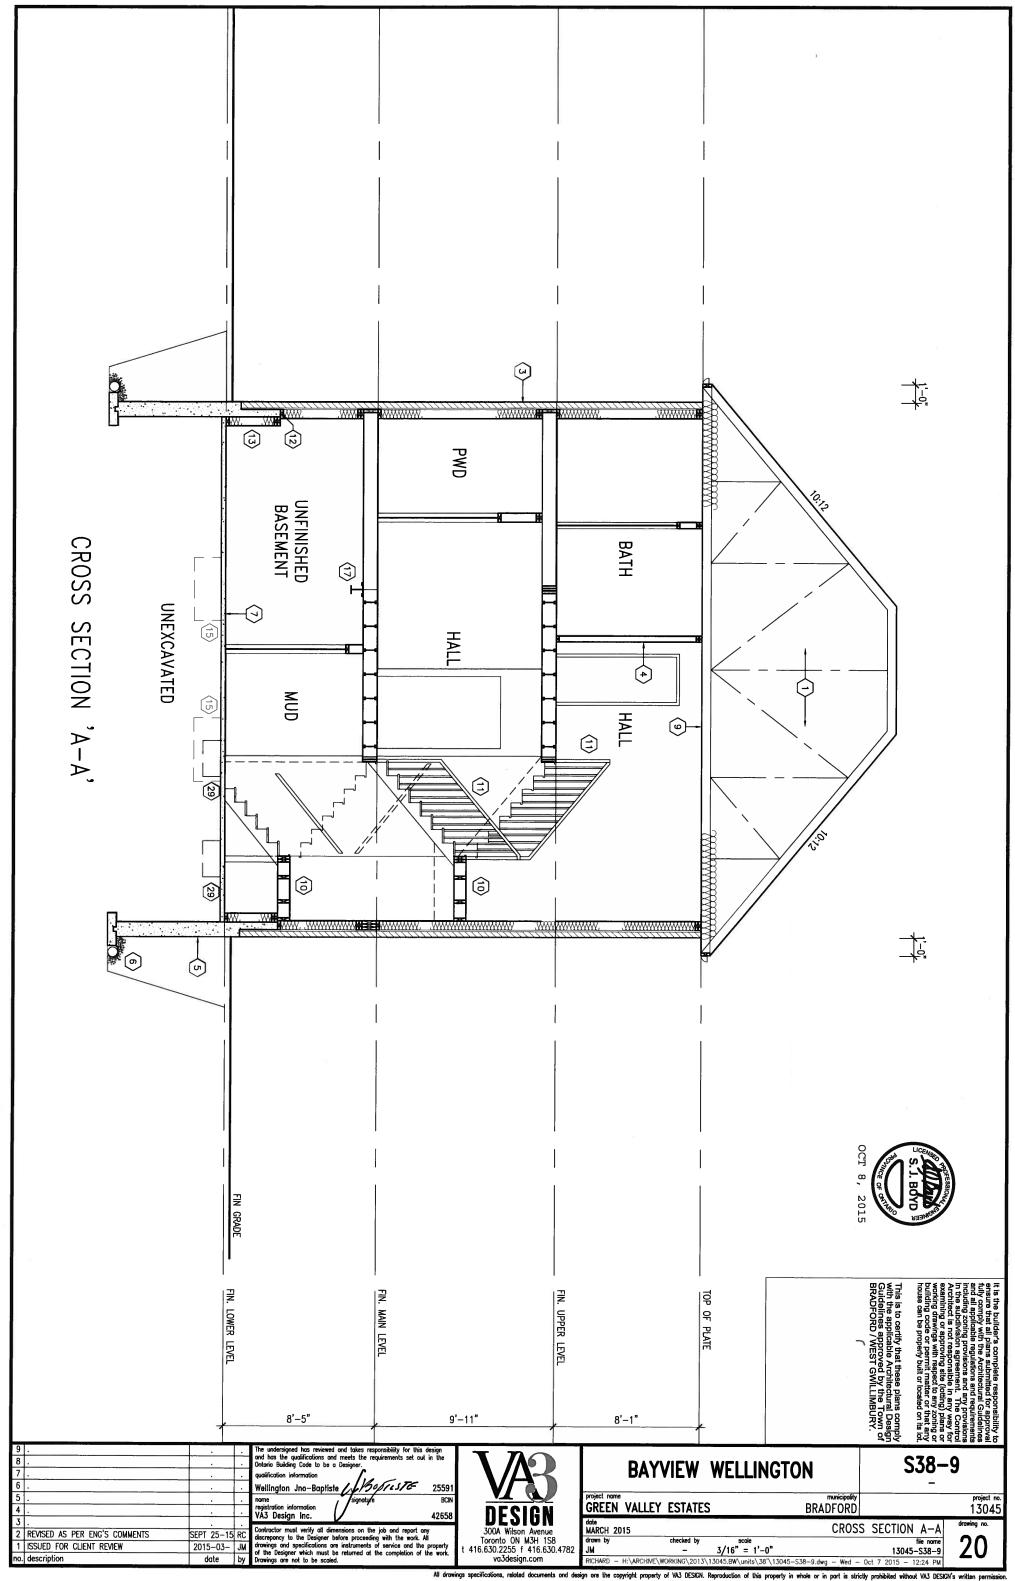

10) ALL STAIRS/EXTERIOR STAIRS -OBC. 9.8.-UNIFORM RISE -5mm (1/4") MAX BETWEEN ADJACENT CONSTRUCTION NOTES (Unless otherwise noted) EXPOSED BUILDING FACE 08C. 9.10.15. & SB-2-2.3.5.(2) TWO STOREY VOLUME SPACES
-FOR A MAXIMUM 5490 mm (18°-0") HEIGHT AND MAXIMUM
SUPPORTED ROOF TRUSS LENGTH OF 6.0m, PROVIDE EXTERIOR WALLS TO HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 45 min. WHERE LIMITING DISTANCE (LD) IS LESS THAN 1.2M (3-1-1)", WHERE THE LD IS LESS THAN 600mm (1-1-1") THE EXPOSING FACE SHALL BE CLAD IN NON-COMBUSTIBLE ALL CONSTRUCTION TO ADHERE TO THESE PLANS AND SPEC'S TREADS OR LANDINGS
-10mm (1/2") MAX BETWEEN ADJACENT
TREADS OR LANDINGS
-10mm (1/2") MAX BETWEEN TALLEST &
SHORTEST RISE IN FLIGHT AND TO CONFORM TO THE ONTARIO BUILDING CODE AND ALL OTHER APPLICABLE CODES AND AUTHORITIES HAVING 2-38x140 (2-2'x6") SPR.#2 CONTIN. STUDS @ 300mm (12")
O.C. (TRIPLE UP AT EVERY THIRD DOUBLE STUD FOR BRICK WALLS) C.W. 94, 6(3/8") THICK EXT. PLYWOOD SHEATHING. PROVIDE SOLID WOOD BLOCKING BETWEEN WOOD STUDS JURISDICTION, THESE REQUIREMENTS ARE TO BE TAKEN AS = 200 (7-7/8") = 210 (8-1/4") = 235 (9-1/4") MAX. RISE MATERIAL. SEE ELEVATIONS FOR ADDITIONAL NOTES. MIN. RUN MIN. TREAD MINIMUM SPECIFICATIONS. ONT. REG. 332/12-2012 OBC OFFENDING GARAGE WALLS INCLUDED COLD CELLAR PORCH SLAB (OBC 9,40.)
FOR MAX. 2500mm (8"-2") PORCH DEPTH (SHORTEST DIM.),
150mm (4") 32MPa (4640psi) CONC. SLAB WITH 5-8% AIR
ENTRAINMENT. REINF. WITH 10M BARS @ 200mm (7 7/8") O.C.
EACH WAY IN BOTTOM THIRD OF SLAB, MIN. 30mm (1 1/4") MAX. NOSING MIN. HEADROOM RAIL @ LANDING @ 1220 mm (4'-0") O.C. VERTICALLY, -FOR WALLS WITH HORIZ. DISTANCES NOT EXCEEDING 2900 mm (9'-6"), PROVIDE 381 40 (2'-2") STUDS @ 400 (14") O.C. WITH CONTINUOUS 2-38x140 (2-2"x6")TOP PLATES + 1-38x140 ROOF CONSTRUCTION NO.210 (10.25kg/m²2) ASPHALT SHINGLES, 10mm (3/6") PLYWOOD SHEATHING WITH "I" CLIPS. APPROVED WOOD TRUSSES @ 600mm (2/4") O.C., MAX. APPROVED EAVES PROTECTION TO EXTEND 900mm (3'-0") FROM EDGE OF ROOF AND MIN. 300mm (1/2") BEYOND INNER = 900 (2'-11") = 865 (2'-10") to 965 (3'-2") RAIL @ STAIR (1-2"x6") BOTTOM PLATE & MINIMUM OF 3-38x184 (3-2"x8") MIN. STAIR WIDTH = 860 (2'-10") COVER, 600x600 (23 5/8"x23 5/8") 10M DOWELS @ 600mm (23 5/8") 0.C., ANCHORED IN PERIMETER FDTN, WALLS, SLOPE SLAB MIN. 1.0% FROM HOUSE WALL, SLAB TO HAVE MIN. 75mm (3") BEARING ON FDTN, WALLS, PROVIDE (L7) LINTEL OVER CELLAR CONT. HEADER AT GRND. CEILING LEVEL TOE-NAILED & FACE OF EXTERIOR WALL, JEAVES PROTECTION NOT REQ'D FOR FOR CURVED STAIRS GLUED AT TOP, BOTTOM PLATES AND HEADERS. ROOF SLOPES 8:12 OR GREATER) 38x89 (2"x4") TRUSS BRACING @ 1830mm (6"-0") O.C. AT BOTTOM CHORD, PREFIN, ALUM. EAVESTROUGH, FASCIA, RWL & VENTED SOFFIT, PROVIDE ICE & WATER SHIELD TO ALL ROOF/WALL SURFACES SUSCEPTIBLE TO ICE = 150 (6") 40. TYPICAL 1 HOUR RATED PARTYWALL. MIN. AVG. RUN = 200 (8") HANDRAILS — OBC. 9.8.7.—
HISHED RAILING ON PICKETS SPACED MAXIMUM 100mm (4")
BETWEEN PICKETS. CLEARANCE BETWEEN HANDRAIL AND SURFACE
TO BE 50 (20") ANN HANDRAILS TO BE CONTINUOUS

37. REFER TO DETAILS FOR TYPE AND SPECIFICATIONS DOOR WITH 100mm (4") END BEARING.

THE FOTN, WALL SHALL NOT BE REDUCED TO LESS THAN 90mm
(3-1/2") THICK TO A MAX. DEPTH OF 600mm (24") AND SHALL BE
TIED TO THE FACING MATERIAL WITH METAL TIES SPACED 200mm DAMMING, ROOF SHEATHING TO BE FASTENED 150 (6") c/c ALONG EDGES & INTERMEDIATE SUPPORTS WHEN TRUSSES SPACED GREATER THAN 406 (13"), ATTIC VENTILATION 1:300 OF INSULATED CEILLING AREA WITH MIN. 25% AT EAVES & MIN. 25% AT RIDGE (OBC 9.19.1.2.). FOUNDATION WALL (W.O.D./W.O.B.) BEHIND IT TO BE 50 (2") MIN. HANDRAILS TO BE CONTINUOUS EXCEPT FOR NEWEL POST AT CHANGES OF DIRECTION . FOR LATERAL SUPPORT WHERE GRADE TO T/O BASEMENT SLAB EXCEEDS 1200mm (3'-11") (8") O.C. VERTICALLY AND 900mm (36") O.C. HORIZONTALLY.
FILL SPACE BETWEEN WALL AND FACING SOLID WITH MORTAR. FOR 200mm (8") POURED CONC. FOUNDATION WALL PROVIDE VERTICAL 38x140 (2"x6") WOOD STUDS @ 400 (16") o.c. MATCH FLOOR JOIST SPACING WHEN PARALLEL WITH INTERIOR GUARDS -OBC. 9.8.8.-FILL S**ACLE BELYMEEN WALL AND FACLING SOLID WITH MORTAK.

CONYENTIONAL ROOF FRAMING (2.0Kpg. SNOW LOAD)

38x140 (2*x6*) RAFTERS ® 400mm (16*O.C.) FOR MAX 11¹-7*

SPAN, 38x184 (2*x6*) RIDGE BOARD. 38x89 (2*x4*) © LULAR TIES

AT MIDSPANS. CEILING JOISTS TO BE \$38x89 (2*x4*) © 400mm (16*)

O.C. FOR MAX. 2830mm (9*-3*) SPAN & 38x140 (2*x6*) © 400

(16*) O.C. FOR MAX. 4450mm (14*-7*) SPAN (2*x6*) © 400

(16*) O.C. FOR BUILT-UP ROOF TO BE 38x89 (2*x4*) © 600mm (24**)

O.C. WITH A 38x89 (2*x4*) CENTRE POST TO THE TRUSS BELOW,

ATERNALIY BRACETS. (3 1000mm (16**) O.C. VERTICALLY. FRAME WALL CONSTRUCTION (2"x6") (SB-12-TABLE 2.1.1.2.A) SIDING AS PER ELEV., 19x38 (1"x2") VERTICAL WOOD FURRING, INTERIOR GUARDS: 900mm (2'-11") MIN. HIGH EXTERIOR GUARDS — OBC. 9.8.8.

900mm (36") HIGH GUARD WHERE DISTANCE FROM PORCH TO FIN.

GRADE IS LESS THAN 1800mm (71"). 1070mm (42") HIGH GUARD IS
REQUIRED WHERE DISTANCE EXCEEDS 1800mm (71"). SIDING AS PER ELEV., 19330 (1 XZ.) VERICAL WOOD PURRING, CONTIN. SHEATHING MEMBRANE, 9.5mm (3/8") EXT. TYPE SHEATHING, 38x140 (2"x6") STUDS © 400mm (1/6") O.C., INSULATION AND APPR. VAPOUR BARRIER AND APPR. CONTIN. AIR BARRIER, 13mm (1/2") INT. FLOOR JOISTS, IRAMSET BOTTOM PLATE TO SLAB & FASTEN TOP OF WALL TO FLOOR JOIST AND ALSO TIED TO 38x84 (2"x4") @ 300 (12") o.c. KNEE WALL]. REFER TO DETAIL. SILL PLATE — OBC. 9.23.7,

38x89 (2'x4") SILL PLATE WITH 13mm [1/2") DIA, ANCHOR BOLTS

200mm (8") LONG, EMBEDDED MIN, 10mmm (4") INTO CONC. @

2400mm (7-10") C.C., CAULKING OR 25 [1") MIN, MINERAL WOOL

BETWEEN PLATE AND TOP OF FDTN, WALL. DRYWALL FINISH, SIDING TO BE MIN, 200mm (8") ABOVE FINISH GRADE. REFER TO OBC SB-12, TABLE 2.1.1.2.A. FOR REQUIRED MINIMUM THERMAL INSULATION. EXTERIOR WALLS FOR WALK-OUT CONDITIONS MINMUM THERMAL INSULATION.

FRAME WALL CONSTRUCTION (2"x6") (R28)

SIDING AS PER ELEV., 19x38 (1"x2") VERTICAL WOOD FURRING,

CONTIN. SHEATHING MEMBRANE, 28mm (1/k") EXTERIOR STRUCTURAL

INSULATED SHEATHING RSI 0.7 (R4) BY "BP" OR EQUAL, 38x140 (2"x6")

STUDS @ 400mm (16") O.C., RSI 4.23 (R24) INSUL. AND APPR. VAPOUR

(13.) THE EXTERIOR BASEMENT STUD WALL TO BE 38x140 (2"x6") STUDS @ 400mm (16") o.c. OR 38x89 (2"x4") STUDS @ 300mm LATERALLY BRACED @ 1800mm (6'-0") O.C. VERTICALLY. USE NON-SHRINK GROUT TO LEVEL SILL PLATE WHEN REQUIRED. **GENERAL NOTES** BASEMENT INSULATION (SB-12-2.1.1.6), 9.25.2.3, 9.13.2.6) FOUNDATION WALLS ENCLOSING HEATED SPACE SHALL BE ONT. REG. 332/12-2012 OBC WINDOWS:1) MINIMUM BEDROOM WINDOW -OBC. 9.9.10.1.-Amendment 0. Reg. 368/13 NOV. 13, 2014 INSULATED FROM THE UNDERSIDE OF THE SUBFLOOR TO NOT MORE THAN 200mm (8") ABOVE THE FINISHED FLOOR & NO CLOSER THAN 50mm (2") OF THE BASEMENT SLAB, INSULATION TO HAVE REVISED BARRIER AND APPR. CONTIN. AIR BARRIER, 13mm (1/2") INT. AT LEAST ONE BEDROOM WINDOW ON A GIVEN FLOOR IS I HAVE MIN. 0.35m2 UNOBSTRUCTED GLAZED OR OPENABLE AREA WITH MIN. CLEAR WIDTH OF 380 mm (11-3"). WOOD LINTELS AND BUILT-UP WOOD BEAMS SIDING TO BE MIN. 200mm (8") ABOVE FINISH GRADE. 2/38 x 184 (2/2" x 8") SPR.#2 3/38 x 184 (3/2" x 8") SPR.#2 4/38 x 184 (4/2" x 8") SPR.#2 5/38 x 184 (5/2" x 8") SPR.#2 (2E) FRAME WALL CONSTRUCTION (2"x4") — GARAGE WALLS SIDING AS PER ELEV., 19x38 (1"x2") VERTICAL WOOD FURRING, CONTIN. SHEATHING MEMBRANE, 9.5mm (3/8") EXT. YPPE SHEATHING, 38x89 (2"x4") STUDS @ 400mm (16") O.C. (MAX. HEIGHT 3000mm (9:10"), WITH APPR. DIAGONAL WALL BRACING. SIDING TO BE MIN. 2) WINDOW GLIARDS —OBC. 9.8.8.1.1(6).
A GUARD IS REQUIRED WHERE THE TOP OF THE WINDOW SILL IS LOCATED LESS THAN 480mm (1'-7") ABOVE FIN, FLOOR AND THE DISTANCE FROM THE FIN, FLOOR TO THE ADJACENT GRADE IS GREATER THAN 1800mm (5'-11") APPROVED VAPOUR BARRIER, DAMPPROOF WITH BUILDING PAPER BETWEEN THE FOUNDATION WALL AND INSULATION UP TO GRADE LEVEL. NOTE: FULL HEIGHT INSULATION AT COLD CELLAR WALLS. REFER TO OBC SB-12, TABLE 2.1.1.2.4. FOR REQUIRED MINIMUM THERMAL INSULATION. AIR BARRIER TO BE SEALED TO FDTN. WALL **B7** 2/38 x 235 (2/2" x 10") SPR.#2 3/38 x 235 (3/2" x 10") SPR.#2 4/38 x 235 (4/2" x 10") SPR.#2 L3 3) EXTERIOR WINDOWS SHALL COMPLY WITH OBC DIV.-B 9.7.3. & \$812-2.1,1.8 200mm (8") ABOVE FINISH GRADE. WITH CAULKING. BEARING STUD PARTITION

38x89 (2"x4") STUDS @ 400mm (16") O.C. 38x89 (2"x4") SILL PLATE ON DAMPPROOFING MATERIAL, 13mm (1/2") DIA. ANCHOR BOLTS 200mm (8") LONG, EMBEDDED MIN. 100mm (4") INTO CONC. @ 2400mm (7"-10") O.C. 100mm (4") HIGH CONC. CURB ON 350x155 (14"x6") CONC. FOOTING, ADD HORIZ, BLOCKING AT MID-HEIGHT IF MALL IS LINEWINGHED. 2C) RESERVED **GENERAL: 1)** MECHANICAL VENTILATION IS REQUIRED TO COMPLY WITH OBC-DIV. B, 6.2.2. SEE MECHANICAL DRAWINGS. 2/38 x 286 (2/2" x 12") SPR.#2 3/38 x 286 (3/2" x 12") SPR.#2 4/38 x 286 (4/2" x 12") SPR.#2 STUCCO WALL CONSTRUCTION (2"x4") —GARAGE WALLS
STUCCO CLADDING SYSTEM CONFORMING TO 0.B.C. 9.27.1.1.[2] &
9.28 THAT EMPLOY A MINIMUM 10mm AIR SPACE BEHIND THE
CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLIED L5 ALL DOWNSPOUTS TO DRAIN AWAY FROM THE BUILDING AS PEI OBC 9.26.18.2, & 5.6.22,(3) AND MUNICIPAL STANDARDS, ALL WINDOW WELLS TO DRAIN TO FOOTING LEVEL PER OBC 9.14.6.3. CHECK WITH THE LOCAL AUTHORITY. LOOSE STEEL LINTELS CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLI PER MANUFACTURERS SPECIFICATIONS OVER 25mm [1"] MIN. EXPANDED OR EXTRUDED RIGID POLYSTYRENE ON APPROVED AIR/MOISTURE BARRIER ON 13mm [1/2"] EXT. TYPE SHEATHING ON 38x89 [2"x4"] STUDS @ 400 [16"] O.C., STUCCO TO BE MIN, 200 [8"] ABOVE FINISH GRADE 89 x 89 x 6.4L (3-1/2" x 3-1/2" x 1/4"L) 89 x 89 x 7.9L (3-1/2" x 3-1/2" x 5/16"L) 102 x 89 x 7.9L (4" x 3-1/2" x 5/16"L) 127 x 89 x 7.9L (5" x 3-1/2" x 5/16"L) 127 x 89 x 11.0L (5" x 3-1/2" x 7/16"L) 152 x 102 x 11.0L (6"x 4" x 7/16"L) 178 x 102 x 11.0L (7"x 4" x 7/16"L) WALL IS UNFINISHED. 9.14.4.3. CHECK WITH THE LOCAL AUTHORITY.
STILD WALL REINFORCEMENT FOR FUTURE GRAB BARS IN MAIN
BATHROOM.
REINFORCEMENT OF STUD WALLS SHALL BE INSTALLED
ADJACENT TO WATER CLOSETS AND SHOWER OR BATHTUB IN
MAIN BATHROOM. REFER TO OBC. 9.5.2.3, 3.8.3.8.(1)(d) &
3.8.3.13.(1)(f). SEE DETAIL.
ALL EXTERIOR DOORS TO COMPLY WITH THERMAL RESISTANCE
AS STATED IN O.B.C. SB-12-2.1.1.9.
ALL ARE BARRIER SYSTEMS ARE REQUIRED TO COMPLY WITH
O.B.C. DIV-8 9.25.3. STEEL BASEMENT COLUMN (SEE 0.B.C. 9.15.3.3)
B9mm(3-1/2") DIA x 3.0mm(0.118) SINGLE WALL TUBE TYPE 2
ADJUSTABLE STL. COL. W/ MIN. CAPACITY OF 71.2kN (16,000lbs.) AT 4) A MAX. EXTENSION OF 2318mm [7-7 1/27] CONFORMING TO CAN/CGS8-7.2-94, AND WITH 150x150x9.5 (6"x6"x3/8") STL. PLATE TOP & BOTTOM. 870x870x410 (34"x34"x16") CONC. FOOTING ON UNDISTURBED SOIL OR ENGINEERED FILL CAPABLE OF SUSTAINING A ABOVÉ FINISH GRADE. WALLS ADJACENT TO ATTIC SPACE - NO CLADDING 9.5mm (3/8") EXT. TYPE SHEATHING, 38x140 (2"x6") STUDS @ 400mm (16") O.C., INSULATION AND APPR. VAPOUR BARRIER AND APPR.
CONTIN. AIR BARRIER, 13mm (1/2") INTERIOR DRYWALL FINISH.
MID-HEIGHT BLOCKING REQ*D. IF NO SHEATHING APPLED. REFER PRESSURE OF 150 Kpg, MINIMUM AND AS PER SOILS REPORT. LAMINATED VENEER LUMBER (LVL) BEAMS PRESSURE OF 130 Kpd. MINIMUM AND AS PER SOILS REPORT.

STEEL BASEMENT COLUMN (SEE O.B.C. 9.15.3.3)

89mm(3-1/2") DIA x 4.78mm(.188) FIXED STL. COL. WITH 150x150x9.5

(5'x6'x3/8") STL. TOP & BOTTOM PLATE ON 1070x1070x460

(42'x42"x18"), CONC. FOOTING ON UNDISTURBED SOIL OR
ENGINEERED FILL CAPABLE OF SUSTAINING A PRESSURE OF 150 Kpd.

MIN. AND AS PER SOILS REPORT. LVL1A 1-1 3/4"x7 1/4" (1-45x184) LUMBER: 1) ALL LUMBER SHALL BE SPRUCE NO.2 GRADE, UNLESS NOTED OBC SB-12, TABLE 2.1.1.2.A. FOR REQUIRED MINIMUM THERMAL LVL1 2-1 3/4*x7 1/4" (1-45x184) LVL1 2-1 3/4*x7 1/4" (2-45x184) LVL2 3-1 3/4*x7 1/4" (3-45x184) LVL3 4-1 3/4*x7 1/4" (4-45x184) LVL4A 1-1 3/4*x9 1/2" (1-45x240) LVL4 2-1 3/4*x9 1/2" (2-45x240) LVL5 3-1 3/4*x9 1/2" (3-45x240) LVL5 3-1 3/4*x9 1/2" (3-45x240) INSULATION. 2) STUDS SHALL BE STUD GRADE SPRUCE, UNLESS NOTED BRICK VENEER CONSTRUCTION (2"x6") (SB-12-TABLE 2.1.1.2.A)
90mm (4") FACE BRICK, 25mm (1") AIR SPACE, 22x180x0.76mm
(7/8"x7"x0.03") GALV. METAL TIES @ 400mm (16") O.C. HORIZONTAL
600mm (24") O.C. VERTICAL. APPROVED SHEATHING PAPER, 9.5mm
(3/8") EXT. TYPE SHEATHING, 38x140 (2"x6") STUDS @ 400mm (16")
O.C., INSULATION & APPR. VAPOUR BARRIER WITH APPR. CONTIN. LUMBER EXPOSED TO THE EXTERIOR TO BE SPRUCE No.2 GRADE PRESSURE TREATED OR CEDAR, UNLESS NOTED OTHERWISE. STEEL COLUMN ALL LAMINATED VENEER LUMBER (L.V.L.) BEAMS, GRDER TRUSSES, AND METAL HANGER CONNECTIONS SUPPORT ROOF FRAMING TO BE DESIGNED & CERTIFIED BY TRUSS MANUFACTURER. 90mm(3-1/2") DIA x 4.78mm(.188) NON-ADJUSTABLE STL, COL. TO BE ON 150x150x9.5 (6"x6"x3/8") STEEL TOP PLATE, & BOTTOM PLATE. 4-1 3/4"x9 1/2" (4-45x240) AIR BARRIER. 13mm (1/2") INTERIOR DRYWALL FINISH. PROVIDE WEEP HOLES @ 80mm (32") O.C. BOTTOM COURSE AND OVER OPENINGS PROVIDE BASE FLASHING UP MIN. 150mm (6") BEHIND BUILDING PAPER. REFER TO OBC SB-12, TABLE 2.1.1.2.A. FOR REQUIRED BASE PLATE 120x250x12.5 [4 1/2"x10"x1/2"] WITH 2-12mm DIA. x 300mm LONG x50mm HOOK ANCHORS (2-1/2"x12"x2") FIELD WELD COL. TO BASE PLATE, MANUFACTURER.

LYL BEAMS SHALL BE 2.0E - 2950FD MIN.. NAIL EACH PLY OF LYL
WITH BYMM [3 1/27] LONG COMMON WIRE NAILS @ 300mm
[127] O.C. STAGGERED IN 2 ROWS FOR 184, 240 & 300mm [7
1/47-9] 1/27, 11 7/87] DEPTINS AND STAGGERED IN 3 ROWS FOR
GREATER DEPTIHS AND FOR 4 PLY MEMBERS ADD 13mm [1/27]
DIA. GALVANIZED BOLTS BOLTED AT MID-DEPTIH OF BEAM @
915mm [3-7] O.C.
PROVIDE FACE MOUNT BEAM HANGERS TYPE "SCL"
MANUFACTURED BY SIMPSON STRONG-TIE OR EQUAL
FOR ALL LYL BEAM TO BEAM CONNECTIONS UNLESS
OTHERWISE NOTED. REFER TO ENG. FLOOR LAYOUTS.
LOST HANGERS PROVIDE METAL HANGERS FOR ALL LOSTS. LVL6A 1-1 3/4"x11 7/8" (1-45x300) LVL6 2-1 3/4"x11 7/8" (2-45x300) LVL7 3-1 3/4"x11 7/8" (3-45x300) BEAM POCKET OR 300x150 (12"x6") POURED CONC. NIB WALLS. MIN. BEARING 90mm (3-1/2") 4-1 3/4"x11 7/8" (4-45x300) LVL8 MINIMUM THERMAL INSULATION BRICK TO BE MIN. 150mm (6") ABOVE FINISH GRADE. DOOR SCHEDULE 19x64 (1"x3") CONTINUOUS WOOD STRAPPING BOTH SIDES OF STEEL BRICK VENEER CONSTRUCTION (2"x6") (R28)
90mm (4") FACE BRICK, 25mm (1") AIR SPACE, 22x180x0.76mm
(7/8"x7"x0.03") GALV. METAL TIES @ 400mm (16") O.C. HORIZONTAL 815 x 2030 x 45 (2'-8" x 6'-8" x 1-3/4") INSULATED MIN. RSI 0.7 (R4) EXTERIOR DOOR (1) GARAGE SLAB 600mm (24") O.C. VERTICAL. APPR. SHEATHING PAPER, 28mm (1/4") EXT. STRUCT. INSULATED SHEATHING RSI 0.7 (R4) BY "BP" OR EQUAL, 88X140 (27x4") STUDS @ 400mm (16") O.C., RSI 4.23 (R24) INSUL. & APPR. VAPOUR BARRIER WITH APPR. CONTIN. AIR BARRIER, 13mm 100mm (4") 32MPa (4640ps) CONC. SLAB WITH 5-8% AIR ENTRAINMENT ON OPT. 100 (4") COARSE GRANULAR FILL WITH COMPACTED SUB-BASE OR COMPACTED NATIVE FILL. SLOPE TO FRONT. 865 x 2030 x 45 (2"-10" x 6"-8" x 1-3/4") INSULATED MIN. RSI 0.7 (R4) **EXTERIOR** (1A) JOIST HANGERS: PROVIDE METAL HANGERS FOR ALL JOISTS AND BUILT-UP WOOD MEMBERS INTERSECTING FLUSH BUILT-UP WOOD MEMBERS. WOOD MEMBERS.

WOOD FRAMING NOT TREATED WITH A WOOD PRESERVATIVE, IN CONTACT WITH CONCRETE, SHALL BE SEPARATED FROM THE CONCRETE BY AT LEAST 2 IM. POLYETHYLENE FILM, NO. 50 (45lbs.), ROLL ROOFING OR OTHER DAMPPROOFING MATERIAL, EXCEPT WHERE THE WOOD MEMBER IS AT LEAST I SOmm (6") ABOVE THE GROUND. 915 x 2030 x 45 (3'-0" x 6'-8" x 1-3/4") NSJLATED MIN. RSI 0.7 (R4) 915 x 2335 x 45 (3'-0" x 7'-8" x 1-3/4") NSJLATED MIN. RSI 0.7 (R4) GARAGE CEILINGS/INTERIOR WALLS
13mm [1/27] GYPSUM BOARD ON WALL AND CEILING BETWEEN
HOUSE AND GARAGE. TAPE AND SEAL ALL JOINTS AIRTIGHT PER
O.B.C. 9, 10.9, 16. REFER TO SB-12, TABLE 2.1.1.2.A. FOR REQUIRED
THERMAL INSULATION. 18) EXTERIOR (1/2") INT. DRYWALL FINISH. PROVIDE WEEP HOLES @ 800mm (32") O.C. BOTTOM COURSE AND OVER OPENINGS. PROVIDE BASE FLASHING UP MIN. 150mm (6") BHIND BUILDING PAPER. BRICK TO BE MIN. 150mm (6") ABOVE FINISH GRADE. DOOR **EXTERIOR** (1C) DOOR BRICK VENEER CONSTRUCTION (2"x4")— GARAGE WALLS 90mm (4") FACE BRICK, 25mm (1") AIR SPACE, 22x180x0,76mm (7/8"x7x0.03") GALV. METAL TIES @ 400mm (16") O.C. HORIZONTAL 600mm (24") O.C. VERTICAL. APPR. SHEATHING PAPER, 9.5mm (3/8") EXT. TYPE SHEATHING, 38x89 (2"x4") STUDS @ 400mm (16") O.C. (MAX. HEIGHT 3000mm 9"-10") WITH APPR. DIAGONAL WALL BRACING. ABOVE THE GROUND.

STRUCTURAL STEEL SHALL CONFORM TO CAN/CSA-G40-21
GRADE 300W. HOLLOW STRUCTURAL SECTIONS SHALL
CONFORM TO CSA-G40.21 GRADE 350W "STRUCTURAL
QUALITY STEEL". OBC. B-9.23.4.3.
REINFORCING STEEL SHALL CONFORM TO CSA-G30-18M
CBADE 4009. DOOR AND FRAME GASPROOFED, DOOR EQUIPPED WITH SELF CLOSING DEVICE AND WEATHERSTRIPPING PER OBC 9.10,13,15. EXTERIOR DOOR 815 x 2335 x 45 (2'-8" x 7'-8" x 1-3/4") INSULATED MIN. RSI 0.7 (R4) (1D) EXTERIOR STEP
PRECAST CONCRETE STEP OR WOOD STEP WHERE NOT EXPOSED (2.) INTERIOR 815 x 2030 x 35 (2'-8" x 6'-8" x 1-3/8") TO WEATHER. MAX. RISE 200mm (7-7/8") MIN. TREAD 250mm DOOR [9-1/2"], SEE OBC, 9.8.9.2., 9.8.9.3. & 9.8.10.

DRYER EXHAUST (OBC-8.2.3.8.(7) & 8.2.4.11.)

CAPPED DRYER EXHAUST VENTED TO EXTEROR.

(USE 100mm (4") DIA. SMOOTH WALL VENT PIPE) GRADE 400R.

STUCCO: 1) ALL STUCCO WALLS TO HAVE A MINIMUM TORM AIR SPACE BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BE GYPSUM BASED. ALL STUCCO TO BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS. 815 x 2030 x 45 (2'-8" x 6'-8" x 1-3/4") 20 MM. RATED DOOR AND FRAME, WITH APPROVED SELF CLOSING DEVICE. PROVIDE WEEP HOLES @ 800mm (32") O.C. BOTTOM COURSE AND **EXTERIOR** (2A) OVER OPENINGS, PROVIDE BASE FLASHING UP MIN. 150mm (6") BEHIND BUILDING PAPER. BRICK TO BE MIN. 150mm (6") ABOVE FINISH GRADE. DOOR INSULATED ATTIC ACCESS (OBC-9.19.2.1. & SB12-2.1.1.7)
ATTIC ACCESS HATCH WITH MIN. DIMENSION OF 545x610mm (21 STUCCO WALL CONSTRUCTION (2"X6")
STUCCO CLADDING SYSTEM CONFORMING TO 0.B.C. 9.27.1.1.(2) &
9.28 THAT EMPLOYS A MINIMUM 10mm AIR SPACE BEHIND THE
CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLIED INSULATED MIN. RSI 0.7 (R4) **LEGEND** EXTERIOR DOOR (2B) EXHAUST FAN TO EXTERIOR 1/2"x24") & A MIN. AREA OF 0.32 SQ.M. (3.44 SQ.FT.) WITH Ø • CLASS 'B' VENT WEATHERSTRIPPING. RSI 3.52 (R20) RIGID INSUL. BACKING. CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLIE PER MANUFACTURERS SPECIFICATIONS OVER 25mm (1") MIN. EXTRUDED OR EXPANDED RIGID POLYSTYRENE ON APPR. CONTIN. AIR/MOISTURE BARRIER ON 13mm (1/2") EXT. TYPE SHEATHING ON 38k140 (2","5" STUDS & 400mm (16") O.C., INSULATION, APPROVED VAPOUR BARRIER, 13mm (1/2") GYPSUM WALLBOARD INTERIOR FINISH. REFER TO OBC SB-12, TABLE 2.1.1.2.A. FOR REQUIRED MINIMUM THERMAL INSULATION.
STUCCO TO BE MIN. 200 (8") ABOVE FINISH GRADE. DUPLEX OUTLET (HEIGHT A.F.F) FIREPLACE CHIMNEYS

OBC. 9.21.

TOP OF FIREPLACE CHIMNEY SHALL BE 915mm (3'-0") ABOVE THE HIGHEST POINT AT WHICH IT COMES IN CONTACT WITH THE ROOF AND 610mm (2'-0") ABOVE THE ROOF SURFACE WITHIN A HORIZ. DISTANCE OF 3050mm (10'-0") FROM THE CHIMNEY. INTERIOR DOOR 760 x 2030 x 35 (2'-6" x 6'-8" x 1-3/8") 0 (3.) DUPLEX OUTLET (12" ABOVE SURFACE) GFI DUPLEX OUTLET INTERIOR DOOR ₩EATHERPROOF
DUPLEX OUTLET (3A) 710 x 2030 x 35 (2'-4" x 6'-8" x 1-3/8") HEAVY DUTY OUTLET (220 volt) POT LIGHT • INTERIOR 610 x 2030 x 35 (2'-0" x 6'-8" x 1-3/8") LINEN CLOSET, 4 SHELVES MIN. 350mm (14") DEEP. 4.) DOOR LIGHT FIXTURE (CEILING MOUNTED) MECHANICAL EXHAUST FAN, VENTED TO EXTERIOR AS REQUIRED BY χç INTERIOR DOOR 660 x 2030 x 35 (2'-2" x 6'-8" x 1-3/8") INTERIOR STUD PARTITIONS
FOR BEARING PARTITIONS 38x89 (2"x4") @ 400mm (16") O.C. FOR 2
STOREYS AND 300mm (12") O.C. FOR 3 STOREYS, NON-BEARING
PARTITIONS 38x89 (2"x4") @ 400mm (24") O.C. PROVIDE 38x89 (2"x4")
BOTTOM PLATE AND 2/38x89 (2"/2"x4") TOP PLATE, 13mm (1/2") INT.
DRYWALL BOTH SIDES OF STUDS, PROVIDE 38x140 (2"x6") STUDS/PLATES
WHEPE ANTOPIE (4A)OBC. 9.32.3.5. & 9.32.3.10. STEEL BEARING PLATE FOR MASONRY WALLS
280x280x16 (11"x11"x5/8") STL. PLATE FOR STL BEAMS AND
280x280x12 (11"x11"x1/2") STL. PLATE FOR WOOD BEAMS BEARING
ON CONC. BLOCK PARTYWALL, ANCHORED WITH 2-19mm (3/4") x
200mm (8") LONG GALV. ANCHORS WITHIN SOLID BLOCK COURSE.
LEVEL WITH NON-SHRINK GROUT. SWITCH LIGHT FIXTURE (WALL MOUNTED) φ-INTERIOR (5.) 460 x 2030 x 35 (1'-6" x 6'-8" x 1-3/8") HOSE BIB (NON-FREEZE) 8 **₹**FLOOR DRAIN MECHANICAL SYMBOLS SINGLE JOIST SJ LEVEL WITH NOW-SHRINK GROUT.

OR

SOLID BEARING FOR WOOD STUD WALLS

SOLID BEARING FOR WOOD AS THE SUPPORTED

MEMBER, SOLID WOOD BEARING COMPRISED OF BUILT-UP WOOD

STUDS TO BE CONSTRUCTED IN ACCORDANCE WITH OBC DJ DOUBLE JOIST FOUNDATION WALL/FOOTINGS: (9.15.3. 9.15.4. 9.13.2. 9.14.2.1.(2))
200mm (8") POURED CONC. FDTN. WALL 15MPa (2200psl) WITH
BITUMENOUS DAMPPROOFING AND DRAINAGE LAYER. RAINAGE
LAYER REQ"D. WHEN BASEMENT INSUL. EXTENDS 900 [2-11") BELOW HEAT PIPE allback _8^ TRIPLE JOIST PLUMBING (TOILET) S. J. BOYD LVL LAMINATED VENEER LUMBER PLUMBING (BATH, FIN. GRADE. DRAINAGE LAYER IS NOT REQ'D. WHEN FDTN. WALL IS WATERPROOFED. MAXIMUM POUR HEIGHT 2390 (7-10") ON 500x155 (20%)" (20MINUOUS KEYED CONC. FIG. BRACE FDTN. WALL PRIOR TO BACKFILLING. ALL FOOTINGS SHALL REST ON NATURAL SINK,SHOWER) ×6~ 44 9.17.4.2(2). POINT LOAD FROM ABOVE WARM AIR RESERVED ><: RETURN AIR DUCT BEARING WOOD POST (BASEMENT) (OBC 9.17.4.)
3-38x140 (3-2"x6") BUILT-UP-POST ON METAL BASE SHOE ANCHORED
TO CONC. WITH 12.7 DIA. BOLT. 610x610x300 (24"x24"x12") CONC. PRESSURE TREATED LUMBER UNDISTURBED SOIL OR COMPACTED ENGINEERED FILL, WITH MIN. OCT 8, 2015 BEARING CAPACITY OF 150kPa OR GREATER. IF SOIL BEARING DOES NOT MEET MINIMUM CAPACITY, ENGINEERED FOOTINGS ARE SMOKE ALARM (REFER TO OBC 9.10.19) G.T. GIRDER TRUSS BY ROOF TRUSS MANUF. **■** 43 PROVIDE 1 PER FLOOR, NEAR THE STAIRS CONNECTING THE FLOOR LEVEL AND ALSO 1 IN EACH BEDROOM NEAR HALL DOOR, ALARMS TO BE CONNECTED TO AN ELECTRICAL CIRCUIT AND REQUIRED.
STOREYS SUPPORTED | W/ MASONRY VENEER | W/ SIDING ONLY

1 | 16" WIDE x 6" DEEP | 16" WIDE x 6" DEEP STEPPED FOOTINGS OBC 9.15.3.9.
MIN. HORIZ. STEP = 600mm (24").
MAX. VERT. STEP = 600mm (24") F.A. FLAT ARCH 1 ≃ 600mm (24") INTERCONNECTED TO ACTIVATE ALL ALARMS IF 1 SOUNDS.

BATTERY BACK-UP REQUIRED, SMOKE ALARMS TO INCORPORATE SLAB ON GRADE

MIN. 100mm (4") CONCRETE SLAB ON GRADE ON 100mm (4")

COARSE GRANULAR FILL REINFORCED WITH 6x6-W2.9xW2.9 MESH
PLACED NEAR MID-DEPTH OF SLAB. CONC. STRENGTH 32 MPa
(4640 psj) WITH 5-8% AIR ENTRAINMENT ON COMPACTED
SUB-GRADE. REFER TO OBC SB-12, TABLE 2.1.1.2.A. FOR REQUIRED
MINIMUM THERMAL INSULATION UNDER SLAB. 20" WIDE x 6" DEEP 20" WIDE x 6" DEEP 20" WIDE x 6" DEEP CURVED ARCH M.C. VISUAL SIGNALLING COMPONENT (9.10.19.3.(3)). -SEE OBC 9.15.3 CARBON MONOXIDE ALARMS (OBC 9.33.4.)
WHERE A FUEL-BURNING APPLIANCE IS INSTALLED IN A DWELLING
UNIT, A CARBON MONOXIDE ALARM CONFORMING TO
CANJCSA-6.19 OR ULO234 SHALL BE INSTALLED AD ADJACENT TO
EACH SLEEPING AREA. CARBON MONOXIDE DETECTOR(S) SHALL BE
PERMANENTLY WIRED SO THAT ITS ACTIVATION WILL ACTIVATE ALL
CARBON MONOXIDE DETECTORS AND BE EQUIPPED WITH AN
ALARM THAT IS AUDIBLE WITHIN BEDROOMS WHEN THE MEDICINE CABINET (RECESSED) -MAXIMUM FLOOR LIVE LOAD OF 2.4kPa. (50psf.) PER FLOOR, AND MAX. LENGTH OF SUPPORTED FLOOR JOISTS IS 4.9m (16'-1"). CONC. BLOCK WALL -REFER TO SOILS REPORT FOR SOIL CONDITIONS AND REARING CAPACITY.

STRIP FOOTING SUPPORTING EXTERIOR WALLS (FOR W.O.B.)

-ASSUMING MASONRY VENEER CONSTRUCTION, MAX. FLOOR LIVE
LOAD OF 2.4kPa. (50psf.) PER FLOOR, AND MAX. LENGTH OF
SUPPORTED FLOOR JOISTS IS 4.9m (16-1"), THE STRIP FOOTING SIZE IS XXXXX DOUBLE VOLUME WALL DIRECT VENTING SAS FURNACE / H.W.T VENT
DIRECT VENT FURNACE TERMINAL MIN. 900mm (36") FROM A GAS
REGULATOR. MIN. 300mm (12") ABOVE FIN. GRADE, FROM ALL SEE NOTE (39.) SOLIO WOOD BEARING (SPRUCE No. 2). SOLIO BEARING TO BE AS WIDE AS SUPPORTED MEMBER OR AS DIRECTED BY STRUCTURAL ENGINEER. OPENINGS, EXHAUST AND INTAKE VENTS, HRV INTAKE TO BE A MIN. INTERVENING DOORS ARE CLOSED, REFER TO MANUFACTURER FOR OF 1830mm (6-0") FROM ALL EXHAUST TERMINALS. REFER TO GAS UTILIZATION CODE. 2 STOREY WITH WALK-OUT BASEMENT 545x175 (22"x7") ADDDITIONAL REQUIREMENTS. FOUNDATION DRAINAGE OBC. 9.14.2. & 9.14.3.
100mm (4") DIA. FOUNDATION DRAINAGETILE 150mm (6") CRUSHED STONE OVER AND AROUND DRAINAGETILES. SOIL GAS/ RADON CONTROL (OBC 9.1.1.7. & 9.13.4.)
PROVIDE CONSTRUCTION TO PREVENT LEAKAGE OF SOIL GAS INTO THE BUILDING IF REQUIRED. DIRECT VENTING GAS FIREPLACE VENT
DIRECT VENT GAS FIREPLACE. VENT TO BE A MINIMUM 300mm (12")
FROM ANY OPENING AND ABOVE FIN. GRADE. REFER TO GAS
UTILIZATION CODE. SOLID BEARING TO BE MINIMUM 2 PIECES. STONE OVER AND AROUND DIMAINAGE: ILLES.

BASEMENT SLAB OBC. 9.3.1.6.(1)(b), 9.16.4.5.(1), 9.25.3.3.(15)

BOMM (3")MIN. 25MPa (3600ps) CONC. SLAB ON 100mm (4")

COARSE GRANULAR FILL, OR 20MPa. (3000ps) CONC. WITH

DAMPFROOFING BELOW SLAB, UNDER SLAB, INSULATION PER SB-12. SOLID WOOD BEARING TO MATCH FROM ABOVE SUBFLOOR, JOIST STRAPPING AND BRIDGING
16mm [5/8] T & G SUBFLOOR ON WOOD FLOOR JOISTS, FOR
CERAMIC TILE APPLICATION (* SEE DOE 9.30.6. *) 6mm [1/4"] PANEL
TYPE UNDERLAY UNDER RESILIENT & PARQUET FLOORING. (* SEE REFER TO UNIT DRAWINGS OR PAGE CN-2 FOR SB-12 COMPLIANCE PACKAGE TO BE USED FOR CONTRACTOR MUST VERIFY ALL DIMENSIONS ON THE JOB AND REPORT ANY DISCREPANCY TO VA3 DESIGN BEFORE PROCEEDING WITH THE WORK, ALL DRAWINGS AND SPECIFICATIONS ARE INSTRUMENTS OF SERVICE AND THIS MODEL ALL SLAB JOINTS & PENETRATIONS TO BE CAULKED. EXPOSED FLOOR TO EXTERIOR (SB-12-TABLE 2.1.1.2.A) PROVIDE RSI 5.46 (R31) INSULATION, APPROVED VAPOUR BARRIER AND CONTINUOUS AIR BARRIER, FINISHED SOFFIT. The minimum thermal performance of building OBC 9.30,2.*) OBC 9.301.2.*)
FLOOR JOISTS WITH SPANS OVER 2100mm (6'-11") TO BE BRIDGED
WITH 38x38 (2"x2") CROSS BRACING OR SOLID BLOCKING @
2100mm (6'-11") O.C. MAX. AND WHERE SPECIFIED BY JOIST TABLES
A-1 OR A-2 STRAPPING SHALL BE 19x44 (1"x3") @ 2100mm (6'-11")
O.C. LINIES & A BANET TYPE CELLING EMBEL IS A BRIDGED envelope and equipment shall conform to the selected package unless otherwise noted. THE PROPERTY OF VA3 DESIGN WHICH IF REQUESTED MUST BE RETURNED AT THE COMPLETION OF THE WORK. ALL DRAWINGS TO BE USED FOR CONSTRUCTION ONLY AFTER BUILDING PERMIT HAS BEEN ISSUED. ATTIC_INSULATION (SB-12-TABLE_2.1.1.2.A) (SB-12-2.1.1.7)
RSI 8.B1 (R50) BLOWN IN ROOF INSULATION AND APPROVED VAPOUR
BARRIER, 16mm [5/8"] INT. DRYWALL HINSH OR APPROVED EQUAL, RSI
3.52 (R20) MIN. ABOVE INNER SURFACE OF EXTERIOR WALL 2014 VA3 REFERENCE NUMBER O.C. UNLESS A PANEL TYPE CEILING FINISH IS APPLIED. (* SEE OBC 9.23.9.4. *) The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer. CONST NOTE **BAYVIEW WELLINGTON** BostesTE 25591 **GREEN VALLEY ESTATES** BRADFORD VÁ3 Design Inc. 42658

3/16" = 1'-0"

APR 2014

RC

300A Wile

Toronto ON M3H 1S8 t 416.630.2255 f 416.630.4782

2 UPDATE TO CODE

no. description

1 ISSUE FOR CLIENT REVIEW

APR 16-15 RC


MAY 07-14 RC


date

13045


CONSTRUCTION NOTES


13045-CONST-OBC 2015

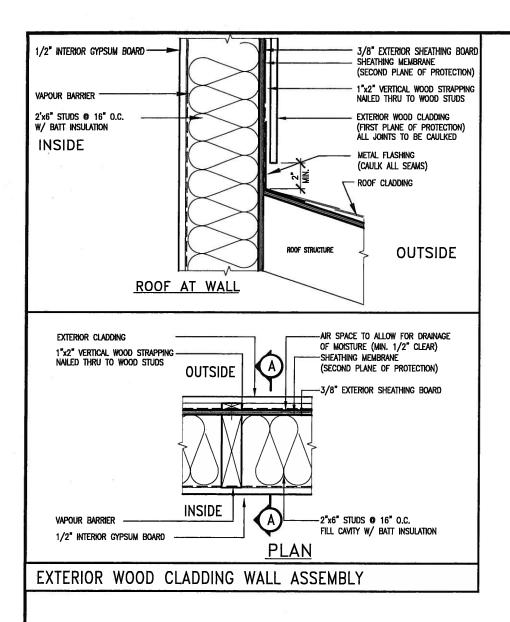








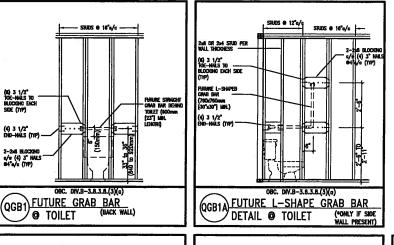









MAX. HEIGHT FOR 2"x4" GARAGE WALL IS AS FOLLOW: 2"x4" ⊕ 16" O.C. — 9-10" 2-2"x4" ⊕ 12" O.C. — 10'-9" 3-2"x4" ⊕ 16" O.C. — 11'-2"

3-2"x4" @ 12" 0.C. - 12'-4'

NOTES:

1. FOR ROOF DESIGN SNOW LOAD OF 2.5 KPa.
SUPPORTED ROOF TRUSS LENGTH OF 6.0m AND FLOOR
JOIST LENGTH OF 2.5m OF ONE FLOOR.

DOCUMENTAL SOLID BLOCKING 1200 O.C. (4)**

PROVIDE HORIZONTAL SOLID BLOCKING @ 1200 O.C. (4'-0")
PROVIDE A MINIMUN OF 9.5mm (3/8") PLYWOOD OR OSB
EXTERIOR SHEATHING ON THE EXTERIOR FACE.
FOR A 1/50 YEAR REFERENCE WIND PRESSURE OF 0.6 KPa.
STUDS GREATER THAN 9'-10" HIGH TO BE No. 2 SPF
STUD SPECIFICATION IS SUITABLE FOR BRICK VENEER OR
SIDING.

** MAX. HEIGHT FOR 2"x6" EXTERIOR WALL IS AS FOLLOW: 2"x6" © 16" O.C. — 12'-6" 2'x6" © 12" O.C. — 13'-10" 2-2"x6" © 16" O.C. — 15'-0" 2-2"x6" © 12" O.C. — 17'-4"

2-2"x8" @ 12" O.C. - 22'-4"

NOTES: FOR ROOF DESIGN SNOW LOAD OF 2.5 KPa SUPPORTED ROOF TRUSS LENGTH OF 6.0m ONLY.

PROVIDE HORIZONTAL SOLID BLOCKING © 1200 O.C. (4'-0")

PROVIDE A MINIMUM OF 9.5mm (3/8") PLYWOOD OR OSB

EXTERIOR SHEATHING ON THE EXTERIOR FACE AND 12.5mm (1/2") GYPSUM BOARD ON THE INTERIOR FACE.
WALL FRAMING SHALL CONFORM TO OBC 9.23.10.1.(2)

FOR A 1/50 YEAR REFERENCE WIND PRESSURE OF 0.6 KPa STUDS GREATER THAN 9'-10" HIGH TO BE No. 2 SPF. STUD SPECIFICATION IS SUITABLE FOR BRICK VENEER OR


** STUD INFORMATION TAKEN FROM OBC TABLE A-30

CRIPPLE" DETAIL

	X 2			L
9				The undersigned has reviewed and takes responsibility for this design
8		•		and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.
7				audification information
6	•	•		Wellington Jno-Baptiste WBOFILSTE 2559
5				E matte / Salatastate DCI
4				registration information VA3 Design Inc. 4265
3				
2	UPDATE TO CODE	APR 16-15	RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All
1	ISSUE FOR CLIENT REVIEW	MAY 07-14	RC	drowings and specifications are instruments of service and the property
no.	description	date	by	of the Designer which must be returned at the completion of the work. Drawings are not to be scaled.



BA	YVIEW	CONST_NOTE			
project name GREEN VALL	EY ESTATES		municipality BRADFORD		project no. 13045
data APR 2014	8	*******	CONSTR	UCTION NOTES	drawing no.
drawn by RC RICHARO - H:\ARCHN	checked by	3/16" = 1'-0" 045 RW\unite\ 13045_CONST_	1304	file name 45-CONST-OBC 2015	CN2

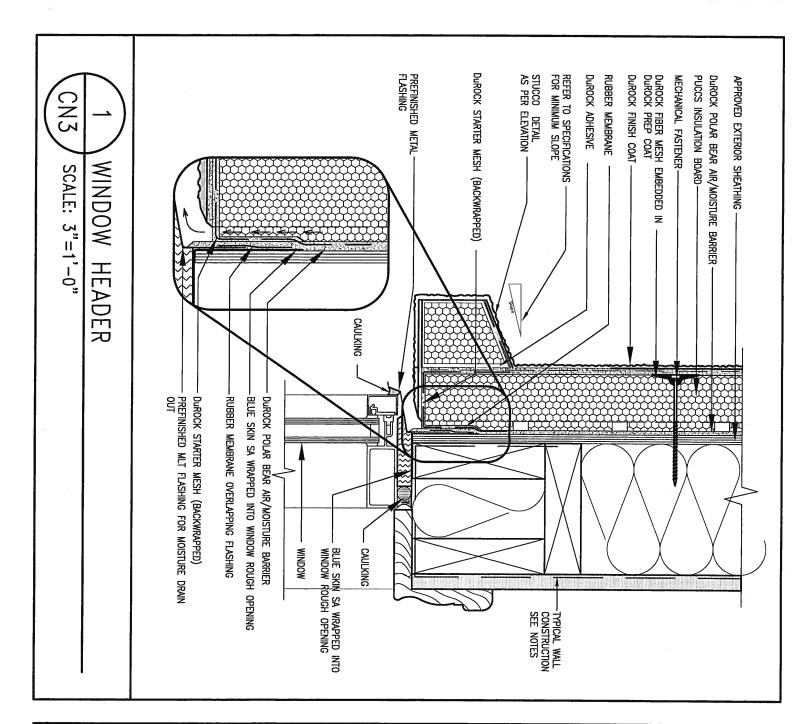

BLUE SKIN SA WRAPPED— INTO WINDOW ROUGH OPENING STUCCO DETAIL AS PER ELEVATION Durock Polar Bear Air/Moisture Barrier and Adhesive PUCCS INSULATION BOARD Durock fiber mesh embedded In Durock prep coat Durock Finish Coat Durock Starter Mesh (Backwrapped) REFER TO SPECIFICATIONS FOR MINIMUM SLOPE WINDOW APPROVED EXTERIOR SHEATHING BACKER ROD AND SEALANT (VENTED) MECHANICAL FASTENER-Durock adhesive WINDOW SILL SCALE: 3"=1'-0"

BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BE GYPSUM BASED. ALL STUCCO TO BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS. ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

2 UPDATE TO CODE


no. description


1 ISSUE FOR CLIENT REVIEW

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontaria Building Code to be a Designer. **CONST NOTE BAYVIEW WELLINGTON** 25591 BCW **GREEN VALLEY ESTATES** BRADFORD VA3 Design Inc. 42658 date APR 2014 Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be scaled. **CONSTRUCTION NOTES** 300A Wilson Avenue Toronto ON M3H 1S8 APR 16-15 RC drawn by 3/16" = 1'-0" MAY 07-14 RC t 416.630.2255 f 416.630.4782 13045-CONST-OBC 2015 RICHARD - H:\ARCHIVE\WORKING\2013\13045.BW\units\13045-CONST-OBC 2015.dwg - Thu - Apr 16 2015 - 6:57 AM

All drowings specifications, related documents and design are the copyright property of VAJ DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VAJ DESIGN's written permission

13045

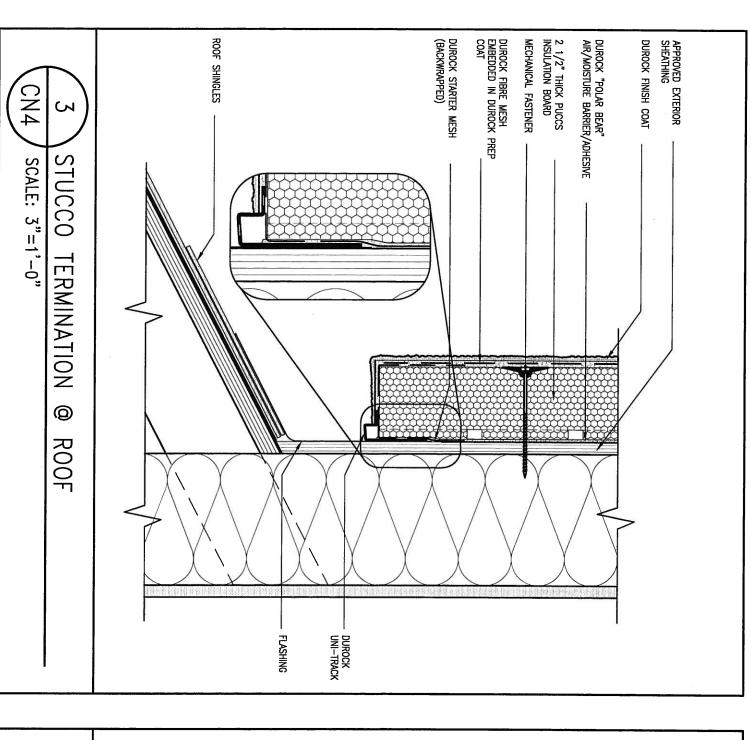

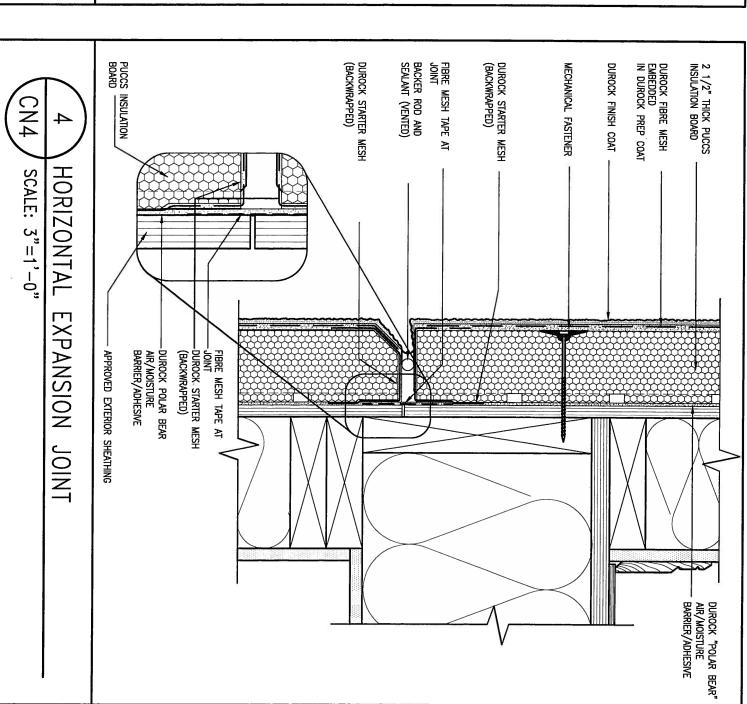

BEHIND THE CLADDING WITH POSITIVE DRAINAGE EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BASED. ALL STUCCO TO BE INSTALLED AS PER

DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

MANUFACTURERS SPECIFICATIONS.

ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE

he undersigned has reviewed and takes responsibility for this desi nd has the qualifications and meets the requirements set out in ntario Building Code to be a Designer.

and has the quolifications and meets the requirements set out in the Ontario Building Code to be a Designer, quolification information

Wellington Jno-Baptiste JJJ 25591

nome registration information

VA3 Design inc.

Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work.

DESIGN
300A Wilson Avenue
Toronto 0N M3H 1S8
t 416.630.2255 f 416.630.4782
va3design.com

BAYVIEW WELLINGTON

3/16" = 1'-0"

CONST_NOTE

file non

13045-CONST-OBC 2015

project norme
GREEN VALLEY ESTATES

dots
APR 2014


drawn by RC BRADFORD CONSTRUCTION NOTES

13045 drawing no. APPROVED DOTROGOS

SECUNDOL PRETINES

LECANOCL PRET


DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

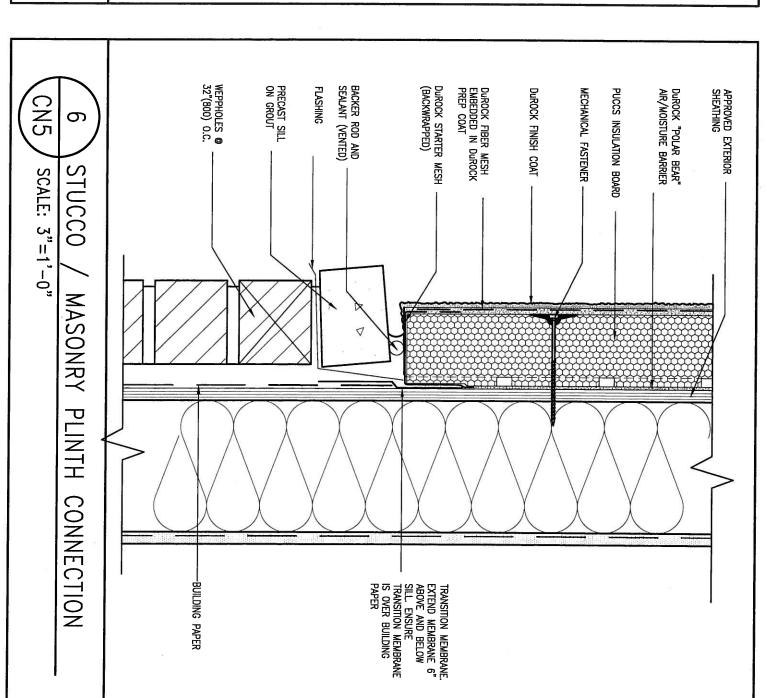

CONST NOTE BAYVIEW WELLINGTON 6 . 25591 5 BCIN BRADFORD **GREEN VALLEY ESTATES** registration information VA3 Design Inc. 13045 42658 APR 2014 drawn by RC Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the pro by Drawings are not to be scaled. CONSTRUCTION NOTES 300A Wilson Avenue Toronto ON M3H 1S8 416.630.2255 f 416.630.4782 APR 16-15 RC 2 UPDATE TO CODE
 drawn by
 checked by
 scale
 file name

 RC
 3/16" = 1'-0"
 13045-CONST-OBC
 2015


 RCHARD - H:\ARCHVE\WORKING\2013\13045.BW\units\13045-CONST-OBC
 2015.dwg - Thu - Apr 16 2015 - 6:57 AM
 1 ISSUE FOR CLIENT REVIEW MAY 07-14 RC no. description date va3design.com

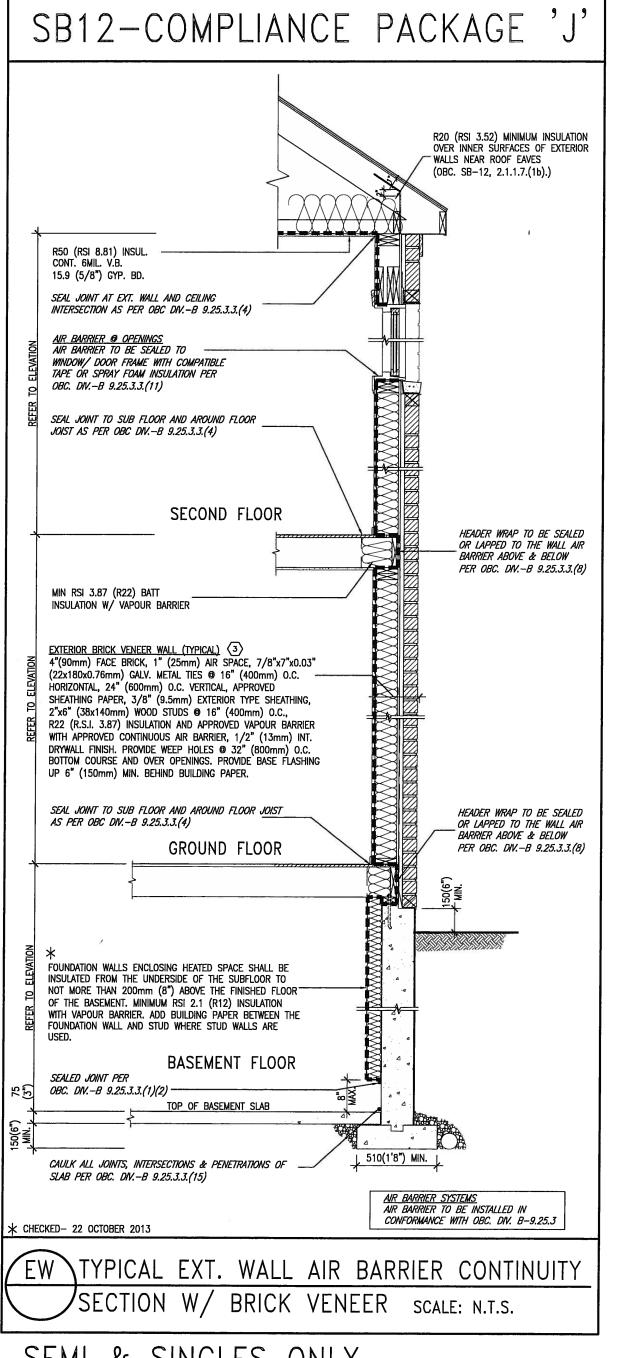

THE MINIMAL THERMAL PERFORMANCE OF BUILDING ENVELOPE AND EQUIPMENT SHALL CONFORM TO THE FOLLOWING SB-12 COMPLIANCE PACKAGE AS PER OBC SUPPLEMENTARY STANDARD SB-12, SECTION 2.1.1.1


USE SB-12 COMPLIANCE PACKAGE (J):							
COMPONENT	J	Notes:					
Ceiling with Attic Space Minimum RSI (R) value	8.81 (R50)	BLOWN -LOOSE					
Ceiling without Attic Space Minimum RSI (R) value	5.46 (R31)	BATT or SPRAY					
Exposed FLoor Minimum RSI (R) value	5.46 (R31)	BATT or SPRAY					
Walls Above Grade Minimum RSI (R) value	3.87 (R22)	6" R22 BATT					
Basement Walls Minimum RSI (R) value	2.11 (R12)	4" R12 BLANKET					
Edge of Below Grade Slab ≤600mm below grade Minimum RSI (R) value	1.76 (R10)	RIGID INSUL					
Windows & Sliding glass Doors Maximum U—value	1.8	DOUBLE PANE LOW EMISSIVITY					
Skylights Maximum U—value	2.8	DOUBLE PANE LOW EMISSIVITY					
Space Heating Equipment Minimum AFUE	94%	NATURAL GAS					
Hot Water Heater Minimum EF	0.67	NATURAL GAS					
HRV Minimum Efficiency	60%						



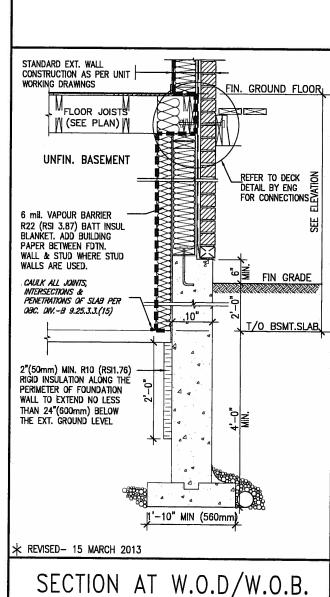


SEMI & SINGLES ONLY

<u> </u>			01121				
9 .			The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the	TAO			
8 .	<u> </u>	<u>L. </u>	Ontorio Building Code to be a Designer.	T AA	l bayview	WELLINGTON	CONST NOTE
7 .			qualification information	I \ /Δ-₹	I DAIVIEW	WELLINGIUN	OONSI NOIL
6 .		Ŀ	Wellington Jno-Baptiste 6 130 First 25591				-
5.	l •		nome , /signoture BCIN	<u> </u>	project nome	municipality	project n
4 .			registration information VA3 Design Inc. 42658	l DESIGN	GREEN VALLEY ESTATES	BRADFORD	1304
3 .					date	CONCT	DIICTION NOTES drowing no.
2 UPDATE TO CODE	APR 16-15	RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All	300A Wilson Avenue	APR 2014		RUCTION NOTES drowing no.
1 ISSUE FOR CLIENT REVIEW	MAY 07-14	RC	drawings and specifications are instruments of service and the property	Toronto ON M3H 1S8 t 416.630.2255 f 416.630.4782	drawn by checked by	3/16" = 1'-0" 13	file name CNG
no. description		T.	of the Designer which must be returned at the completion of the work. Drawings are not to be scaled.	va3design.com		3/16 = 1 -0 13 045.BW\units\13045-CONST-OBC 2015.dwg - Thu	045-CONST-08C 2015

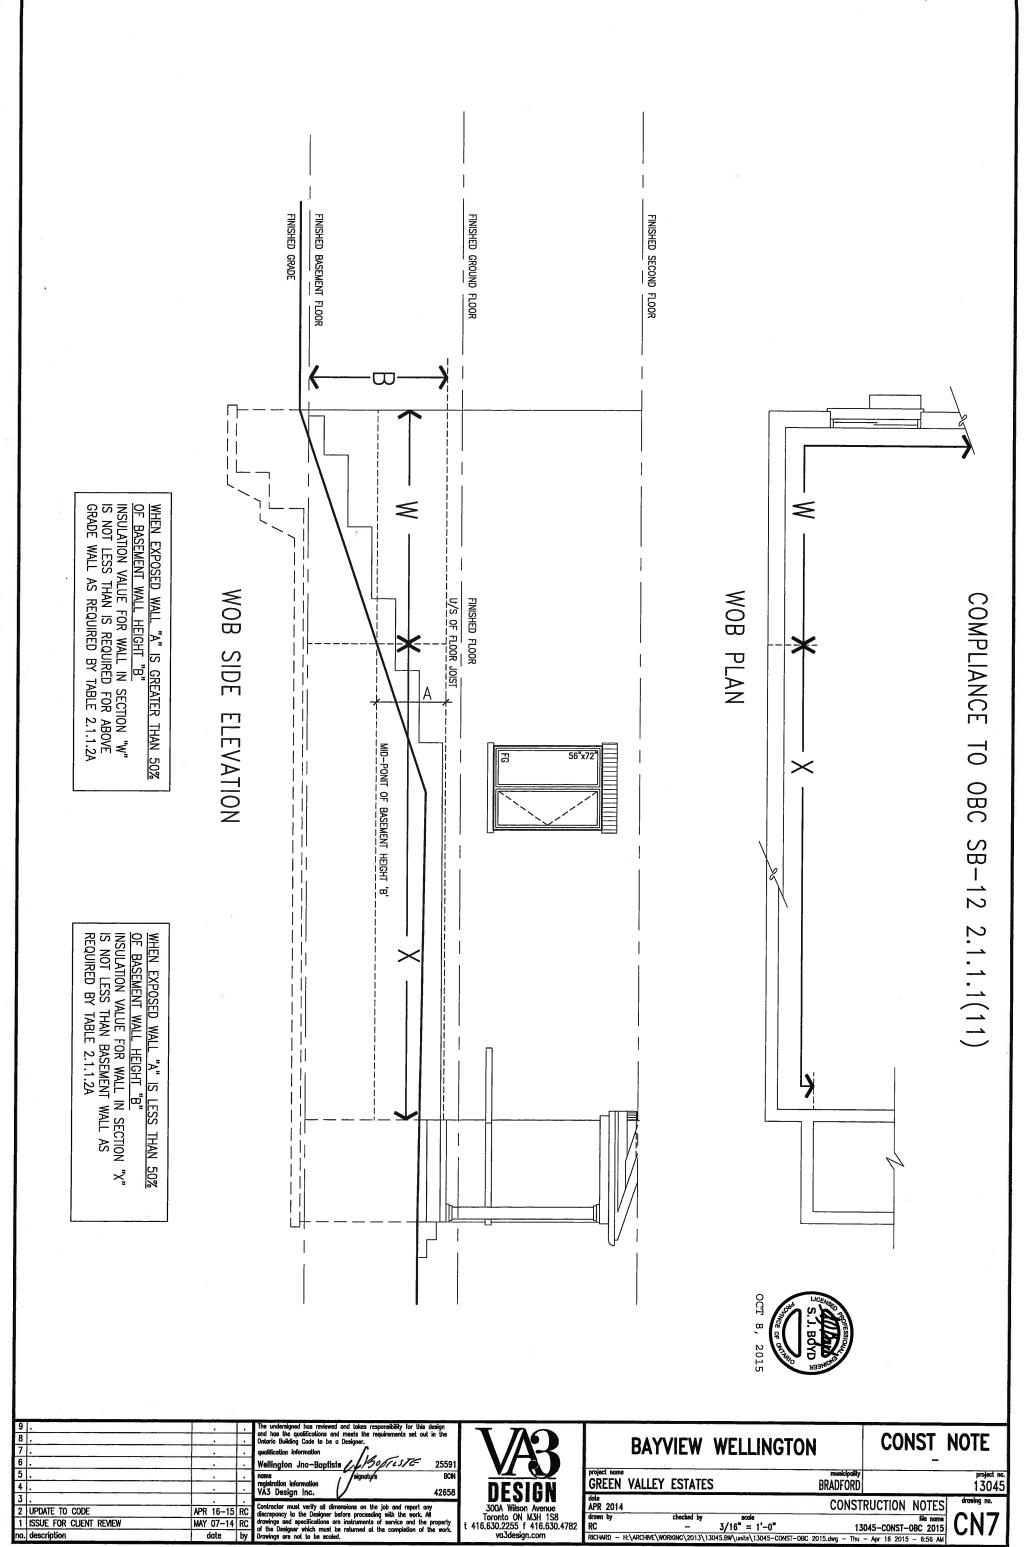



All drawings specifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN's written permission

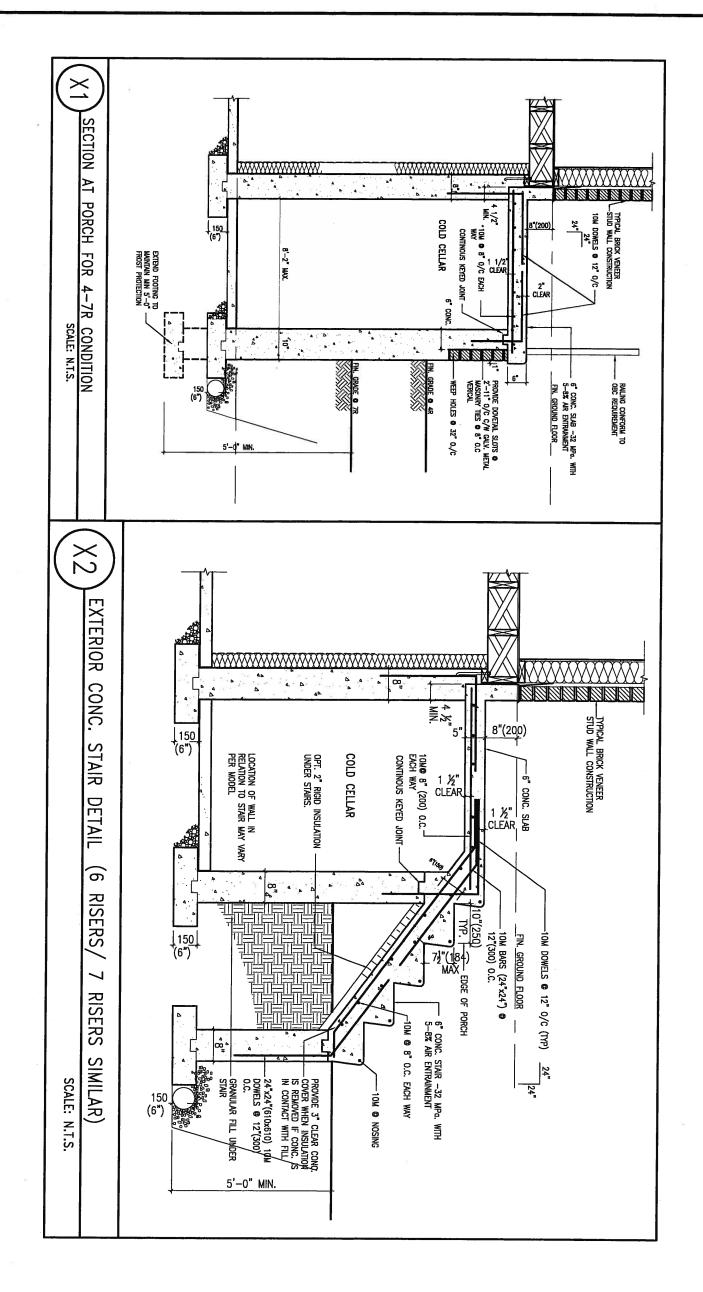




7	and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer. Qualification information Wellington Jno-Baptiste ### 25591	\mathbb{R}	BAYVIEW WELLINGTON	CONST_ NOTE
5	nome signatu/e BCN registration information /A3 Design Inc. 42658	DESIGN	Project nome GREEN VALLEY ESTATES BY dots	RADFORD 13045
1 ISSUE FOR CLIENT REVIEW MAY 07-14 RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All forewings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be scaded.	300A Wilson Avenue Toronto ON M3H 1S8 t 416.630.2255 f 416.630.4782	APR 2014 drawn by checked by scale RC - 3/16" = 1'-0" RICHARD - H:\ARCHIVE\WORKING\2013\13045.BW\units\13045-CONST-OBC 2015.	13045-CONST-OBC 2015

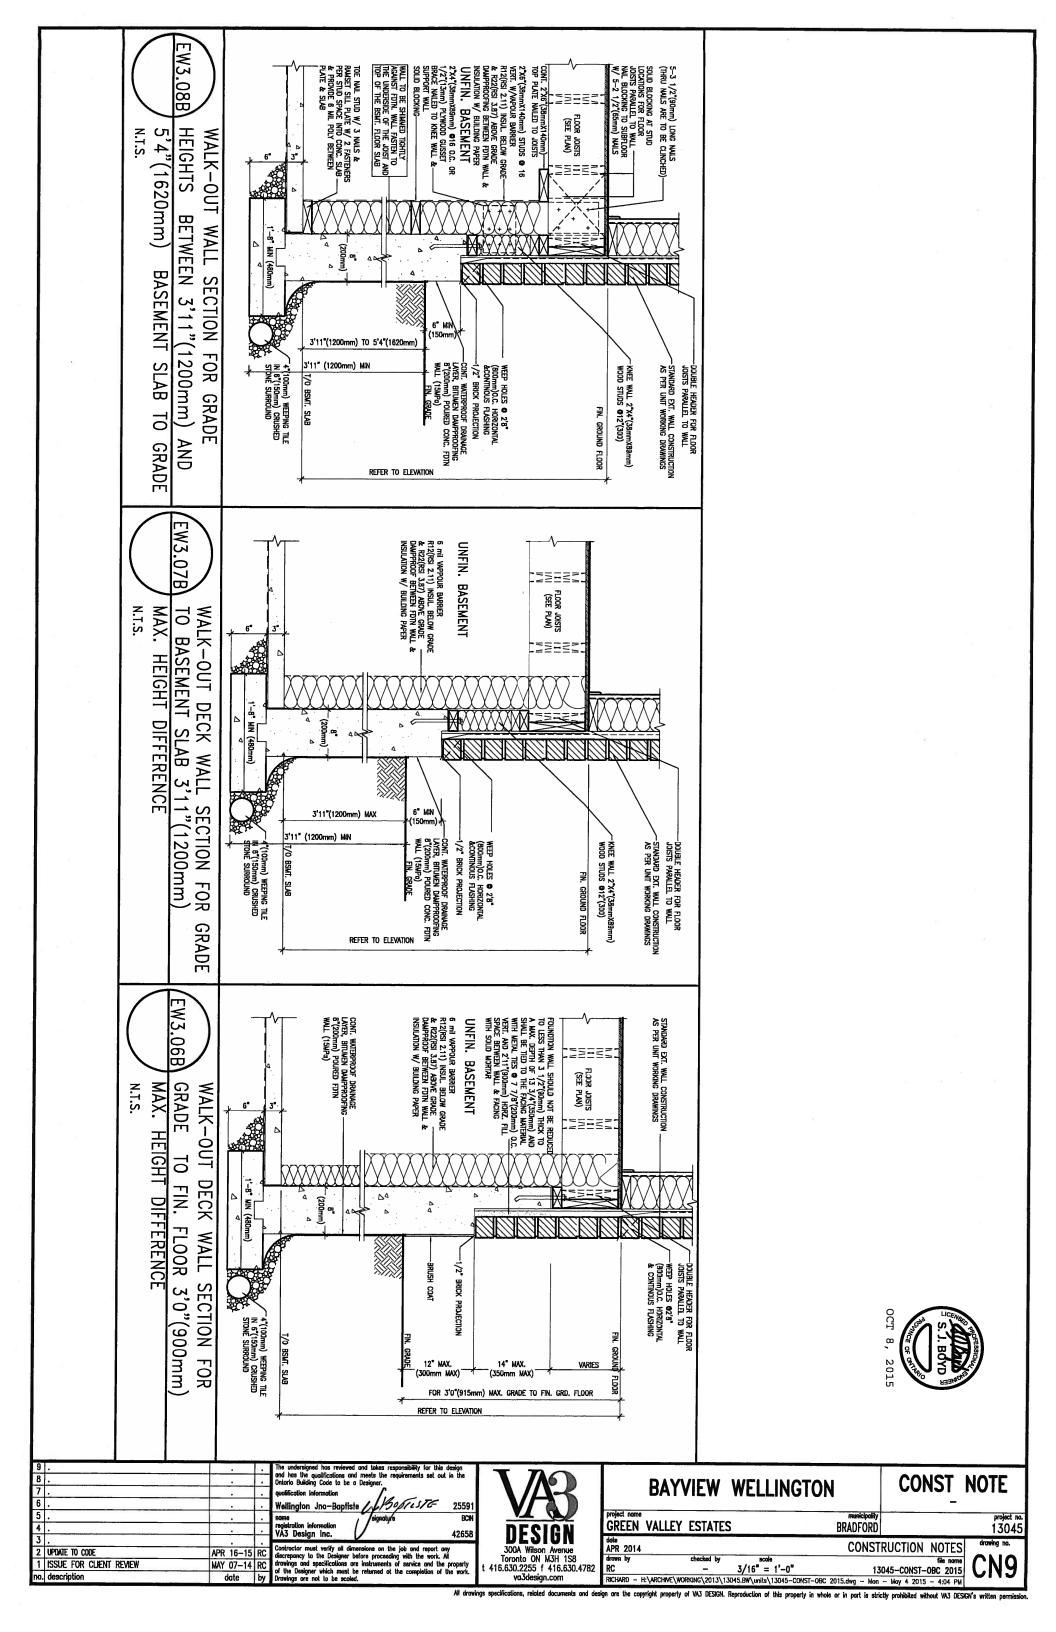

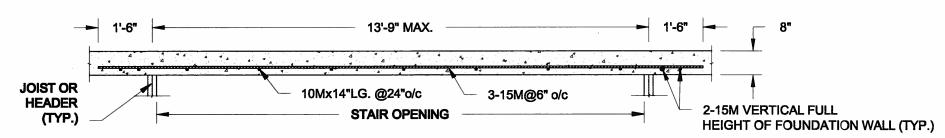


PLAN VIEW NOT TO SCALE

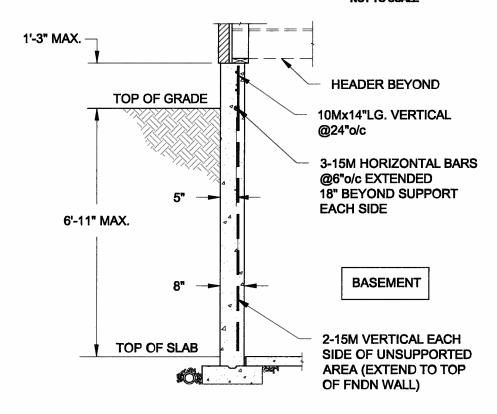

NOTE:

- 1. CONFORM TO ONTARIO BUILDING CODE, 2012.
- **CONCRETE COMPRESSIVE STRENGTH AT 28 DAYS** TO BE 15 MPa. MIN.
- 3. REINFORCING STEEL TO BE GRADE 400.



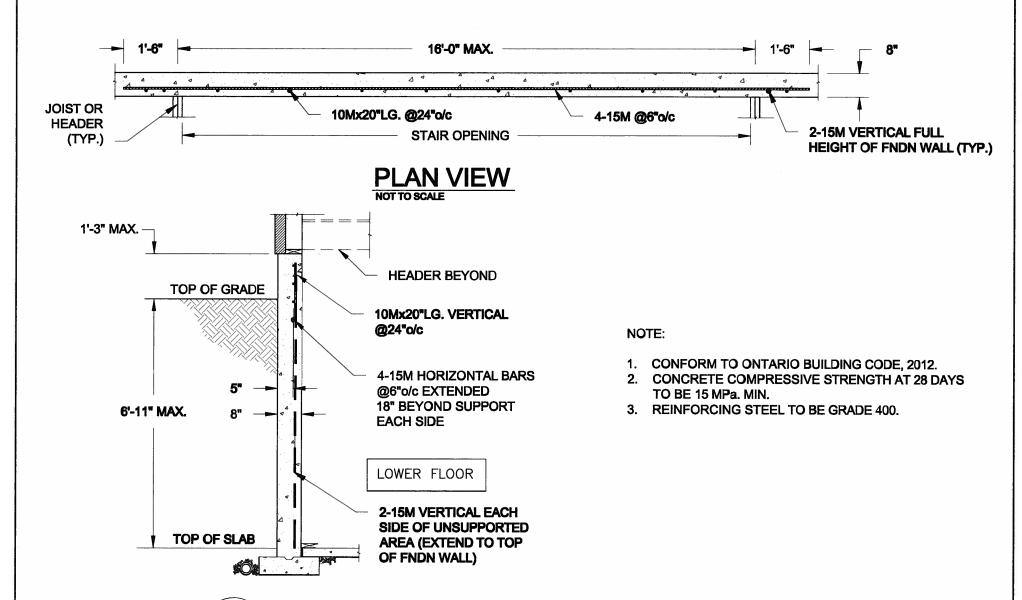


LATERALLY UNSUPPORTED WALL SCALE: 3/8" = 1'-0"

Scale: **AS NOTED** Date: FEB-26-2015 Drawn: Checked:

SJB

SC

QUAILE ENGINEERING LTD.



38 Parkside Drive, UNIT 7 Newmarket, ON L3Y 8J9 T: 905-853-8547 E: qualle.eng@rogers.com



Project:


BAYVIEW WELLINGTON HOMES - GREEN VALLEY ESTATES PROJECT BRADFORD, ONTARIO

TYPICAL STRUCTURAL DETAILS FOR SINGLES

Project No.:

Drawing No.: 14-095 **S1**


F:\SamC-08\2014\14-095 BAYVIEW WELLINGTON GREEN VALLEY SINGLES\14-095.dwg

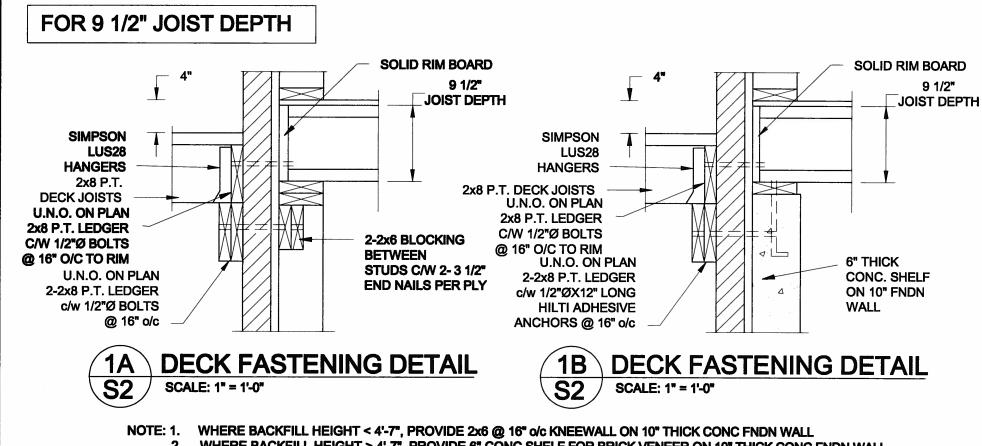

WHERE BACKFILL HEIGHT > 4'-7", PROVIDE 6" CONC SHELF FOR BRICK VENEER ON 10" THICK CONC FNDN WALL

3. FOOTING TO BE 22"x6" THICK UNLESS NOTED OTHERWISE ON PLAN.


FOR 11 7/8" JOIST DEPTH

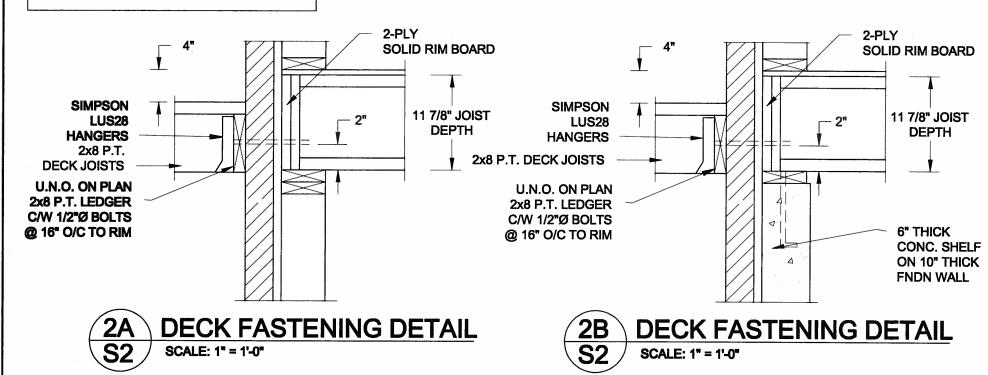


WHERE BACKFILL HEIGHT < 4'-7", PROVIDE 2x6 @ 16" o/c KNEEWALL ON 10" THICK CONC FNDN WALL

WHERE BACKFILL HEIGHT > 4'-7", PROVIDE 6" CONC SHELF FOR BRICK VENEER ON 10" THICK CONC FNDN WALL

FOOTING TO BE 22"x6" THICK UNLESS NOTED OTHERWISE ON PLAN.

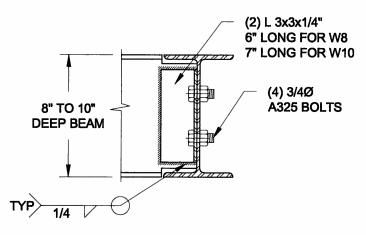

NOTE: DETAIL IS APPLICABLE TO W8x40 (W200x59) BEAM MAX AND W10x39 (W250x58) BEAM MAX.

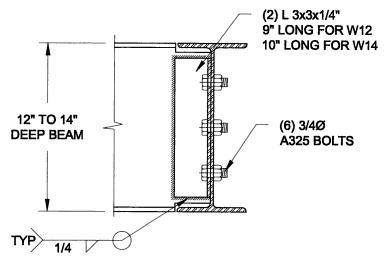

NOTE: DETAIL IS APPLICABLE TO W12x58 (W310x86) BEAM MAX AND W14x48 (W360x72) BEAM MAX.




STEEL BEAM CONNECTION DETAIL


SCALE: 1-1/2" = 1'-0"

Scale: Engineer's Seat: Project: QUAILE ENGINEERING LTD. **AS NOTED** BAYVIEW WELLINGTON HOMES - GREEN VALLEY ESTATES PROJECT **BRADFORD, ONTARIO** all bass Date: 38 Parkside Drive, UNIT 7 S. J. BOYD Newmarket, ON FEB-26-2015 TYPICAL STRUCTURAL DETAILS FOR SINGLES **L3Y 8J9** Drawn: T: 905-853-8547 Checked Project No.: Drawing No.: E: qualle.eng@rogers.com 14-095 **S2** APR 24, 2015


01414-005 BAYVIEW WELLINGTON GREEN VALLEY SINGLES(14-005-dam)

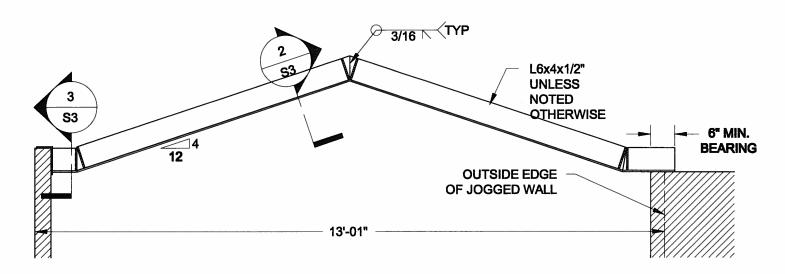






2 TYP. STIFFENER
SCALE: 1 1/2" = 1'-0"

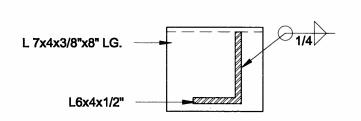

3 INVERTED ANGLE S3 SCALE: 1 1/2" = 1'-0"

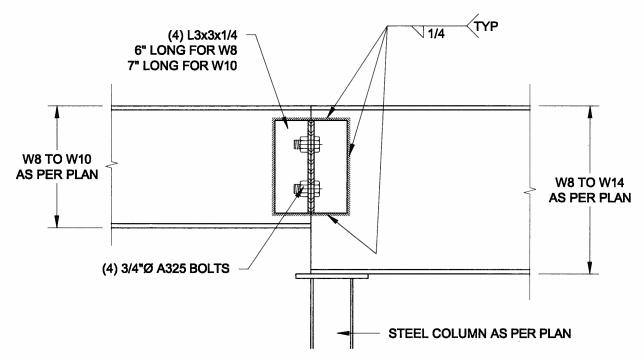

STEEL BEAM CONNECTION
SCALE: 1 1/2" = 1'-0"

Scale:
AS NOTED
Date:

PEB-28-2015

Drawn: Checked:

8.B

8C





38 Parkside Drive, UNIT 7 Newmarket, ON L3Y 8J9 T: 905-853-8547 E: qualle.eng@rogers.com



Project:


BAYVIEW WELLINGTON HOMES - GREEN VALLEY ESTATES PROJECT BRADFORD, ONTARIO


TYPICAL STRUCTURAL DETAILS FOR SINGLES

Project No.: Dro

Drawing No.: \$3

F-19amC-08201414-085 BAYVIEW WELLINGTON GREEN VALLEY SINGLES(14-085.dag

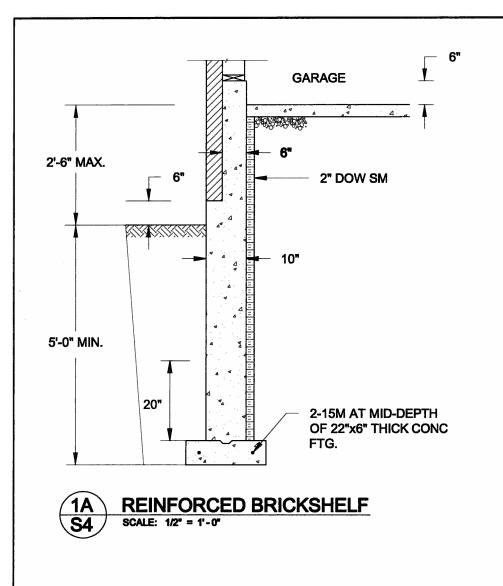

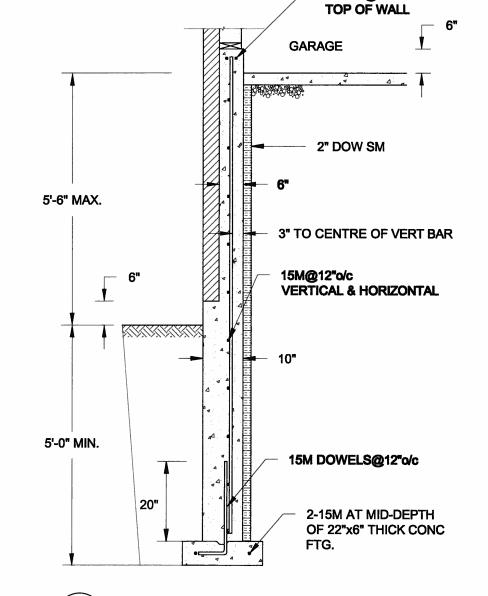

REINFORCED BRICKSHELF


2-15M @

NOTE:


- I. CONFORM TO ONTARIO BUILDING CODE, 2012.
- 2. CONCRETE TO HAVE 28-DAY COMPRESSIVE STRENGTH OF 20 MPa.
- 3. REINFORCING BARS TO BE GRADE 400 DEFORMED STEEL.
- 4. PROVIDE 3" COVER TO SOIL MINIMUM.

SCALE: 1/2" = 1'-0"

FOR 9 1/2" JOIST DEPTH

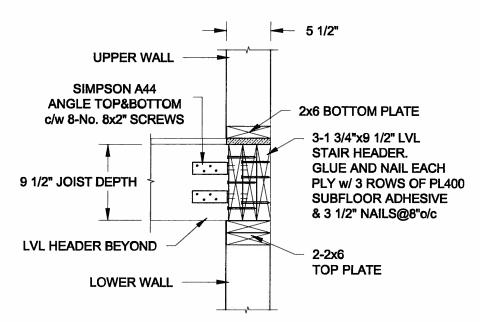


2 STAIR HEADER @ EXTERIOR WALL
S4 SCALE: 1" = 1'-0"



QUAILE ENGINEERING LTD.



38 Parkside Drive, UNIT 7 Newmarket, ON L3Y 8J9 T: 905-853-8547 E: qualle.eng@rogers.com



Project:	
BAYVIEW WELLINGTON HOMES - GREEN VALLEY ESTATES PROJEC	r
BRADFORD, ONTARIO	•
	_

TYPICAL STRUCTURAL DETAILS FOR SINGLES

Project No.: Drawing

pect No.: Drawing No.: \$4

HamiC-08/2014/14-085 BAYVIEW WELLINGTON GREEN VALLEY SINGLES: 14-085.dag