



\*Dual Fuel model shown

OR36SDBMX1


## 36" Gas Range

The Fisher & Paykel 36" Freestanding Gas Range gives you the flexibility to prepare several courses simultaneously. With a large gas oven combined with a five-burner gas cooktop, the clean lines in black reflective glass and stainless steel complement the style and elegance of any kitchen. This impressive, professional-style cooker has solid side panels, emphasizing its robustness and solidity.

35 7/8 -	35 7/8	25 7/32
36 1/2	W	D
H		

Accessories		BTU Burner Outputs		Capacity		Cleaning	
Broiling pan	1	Burners	5 incl. 2 dual	Total oven capacity	3.6 cu. ft	Acid resistant graphite enamel	
Flat wire shelf						Removable oven door	
Grill rack	1	Dual wok burner (NG)	18000 BTU/hr (2)			Removable shelf runners	
Step down wire shelf		Semi rapid burner (NG)	8000 BTU/hr (2)				
Storage drawer		Triple ring wok burner (NG)	12000 BTU/hr				
Telescopic slide runners	3 sets						
Wok stand							
Controls		Cooking Modes		Cooktop/Hob Features		Performance Features	
Electronic clock		Bake		Cast iron trivets		Broil (BTU)	11000 BTU/hr
Indicator light		Broil		LPG and Natural Gas compatible		Cast iron trivets	
Interior light	2 (Rear)	Convection Bake				Cooking modes	4
Turned stainless steel dials		Convection Broil				Oven	14000 BTU/hr
Product Dimensions		Requirements		Safety		Warranty	
Overall depth of product (without handle)	25 7/32	AMP draw	0.92A	Advanced cooling system		2 year parts & labor warranty	
		Supply frequency	60Hz	Anti-tilt bracket			
Overall height of product	35 21/32 - 36 11/32	Supply voltage	120V	Cool touch door			
				Flame failure			
Overall width of product	35 7/8			Non-tip shelves			
				Telescopic sliding runners			
Shelf positions	5			Triple glazed door			

Check with your local retailer for pricing, availability and stock of this model. The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with your retailer or Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available.

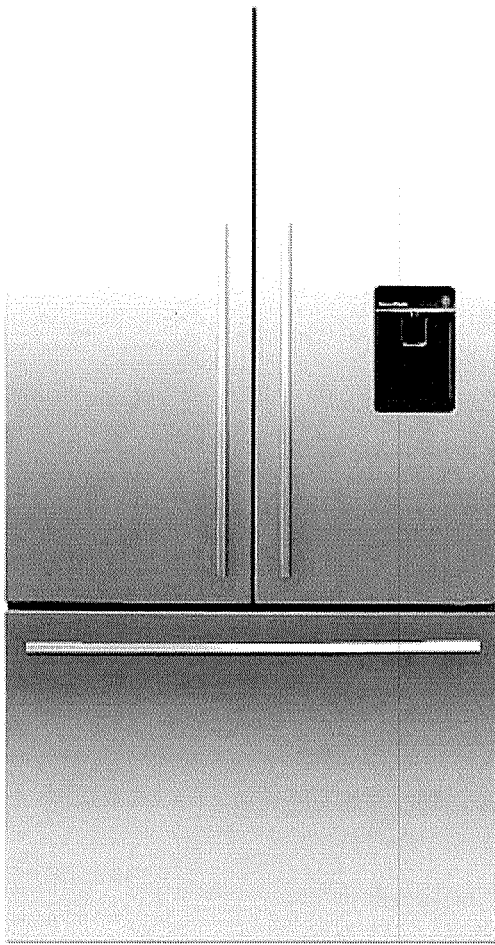

RF201ADUSX5

## ActiveSmart™ Refrigerator - 20.1 cu ft Counter Depth French Door 36"

An exciting new refrigerator that leads the market in features yet with useable refrigerator and freezer space superior to that of similar sized alternatives. Automatic ice making, chilled filtered water on demand and strong extendable storage drawers make this the complete appliance.

70 15/32	35 7/16	27 3/8
H	W	D


Specs

Configuration	Consumption Data	Design	Dimensions
Adjustable glass shelves	Energy Star Most Efficient	Bottom mount freezer	Height - incl. feet and hinge cap7015/32in
Adjustable roller feet	Energy usage (kWh/yr)532	Concealed hinges	
Bottle rack		EZKleen stainless steel	Width357/16in
Clear freezer bins3		Flat door design	Depth - including handle283/4in
Counter depth		Silver prepaint cabinet	
Covered door shelves2		Straight designer handle	Depth - door closed not including handle273/8in
Deli storage area		French Door refrigerator	
Front levelling feet			Minimum air clearance - each side1in
Full extension runners			
Full width adjustable door shelves2			Minimum air clearance - at rear (incl. compressor tray)1in
Gallon bottle storage shelves			

296

# WALL MOUNTED RANGEHOOD DIMENSIONS

## HC30DTX1/HC36DTXB1

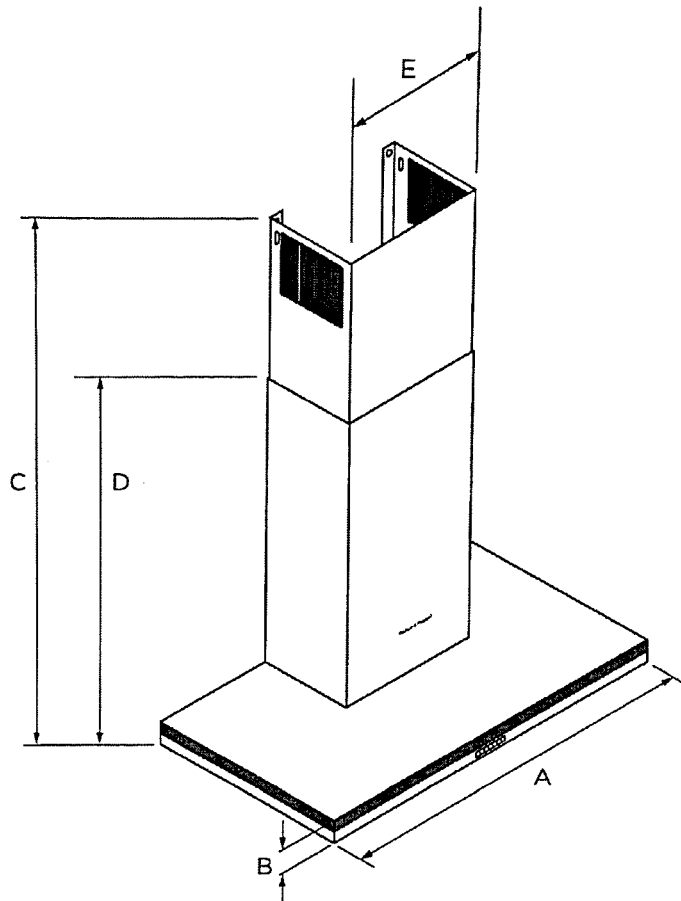


### DIMENSIONS INCHES (MM)

	HC30DTX1		HC36DTXB1	
A Overall width of product	29 1/2"	(750)	35 1/2"	(900)
B Overall height of control panel	2 3/8"	(57)	2 3/8"	(57)
C Overall height of product	min. 25"	(635)	min. 25"	(635)
	max. 40 1/4"	(1022)	max. 40 1/4"	(1022)
D Height of product	23 3/8"	(593)	23 3/8"	(593)
E Width of flue	12 5/8"	(320)	12 5/8"	(320)

# WALL MOUNTED RANGEHOOD MOUNTING TEMPLATE

## HC30DTX1/HC36DTXB1

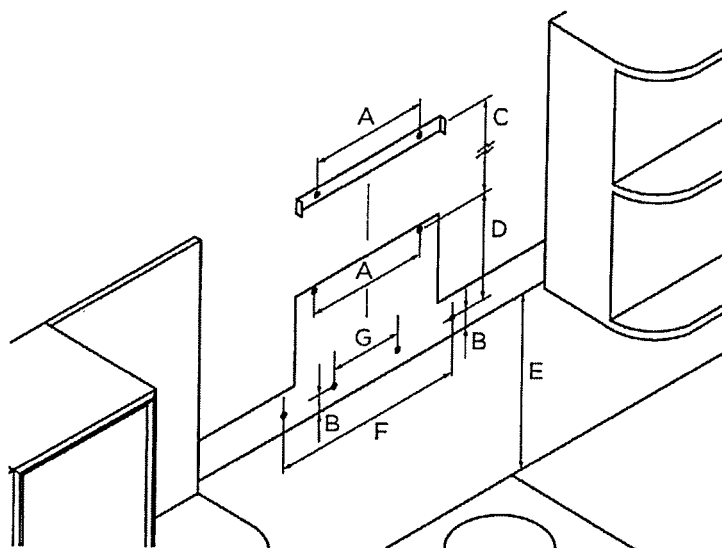

### DIMENSIONS INCHES (MM)

	HC30DTX1		HC36DTXB1	
A Horizontal distance between fixing screw holes	9 7/8"	(250)	9 7/8"	(250)
B Height from underside of rangehood to hood fixing screw holes	1 3/8"	(30)	1 5/16"	(23)
C Height from bracket fixing screw holes and lower fixing screw holes	10 3/8"	(263)	10 3/8"	(263)
D Height from lower fixing screw holes to hood fixing screw holes	10 13/16"	(273)	10 1/4"	(260)
E Minimum distance between underside of rangehood and cooktop/bench	min. 26"	(660)	min. 26"	(660)
F Distance between outer hood fixing screw holes	20 1/2"	(521)	25"	(635)
G Distance between inner hood fixing screw holes 7"	7"	(178)	11 1/8"	(302)