

# GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at [www.facebook.com/GoemansAppliances](http://www.facebook.com/GoemansAppliances)

## PACKING SLIP

# HB00016101

Salesperson: JASON NG  
Purchase Date: 5/10/17  
Invoice Finished Date:  
Delivery/Pickup Date: Jun 21, 2017  
Invoice Type: VBL  
Date Printed: May 10, 2017  
Page: 1

### ONLINE BANKING ACCOUNT

**BILL TO:** 4165604304

YARZADAH, MOHAMMAD

142 INVERNESS WAY

BRADFORD, ON L3Z 0W6

**SHIP TO:** 4165604304

YARZADAH, MOHAMMAD

142 INVERNESS WAY

BRADFORD, ON L3Z 0W6

TEL# (416) 560-4304

BUS#

TEL# (416) 560-4304

BUS#

Directions: x

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		RF23M8090SR/AA		STAINLES	SAM, REBC4: REFRIGERATOR, FRENCH 4-DOOR, C
1		NE58F9710WS/AC		STAINLES	36 23.0 CU.FT, COUNTER DEPTH, TWIN COOLING PLUS?, SAM, RAES: RANGE, ELECTRIC, SLIDE-IN
1		WF50K7500AV/A2		BLACK ST	30W,5B,5.8CUFT,DUAL CNV,GUIDE LT CTRL,FLEX DUO,W/D SAM, WAFL: WASHER, FRONT LOAD, LARGE CAPA
		MUST PURCHASE OPTIONAL HOSES			5.8 CU.FT, VRT® PLUS, POWERFOAM, STEAM, HEATER, DI
1		DV50K7500EV/AC		BLACK ST	SAM, DREFL: DRYER, ELECTRIC - TO MATCH LAR
		STANDARD HOSES SHIP WITH THIS UNIT			MATCHING ELECTRIC DRYER FOR WF50K7500AV/A2, 7.5 CU
1		ZLU-E30AS		STAINLES	ZEP, HOWC: HOOD, WALL MOUNT
		This special order product requires a 50% deposit & is considered FINAL SALE. x_____			LUCE,36W,600CFM,LED STRIP,6 SNS,CONV TO RECIRC
		PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.			
1		P-DELIVERY \$5,000-9,999			
-1		SALES DELIVERY ALLOWANCE			
1		VHOOD2CHMY	UNASSIGNED		Chimney style hood install up to 36" model
			INSTALLER		
		Mounting of hood to wall, and vent connection up to 4ft in length. No hole cutting.			
		**BAYVIEW WELLINGTON, PLEASE DELIVERY HOOD BEFORE CLOSING FOR			
		INSTALLATION FOR PDI, SITE TO SIGN FOR HOOD**			
		Payment			VISA

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

# RF23M8090SG

SAMSUNG

## Samsung Counter-Depth, 4-Door Refrigerator

23 cu. ft. Capacity



### Signature Features

#### FlexZone™

- Versatile, mid drawer fridge compartment with 4 Temperature Control Settings and Smart Divider.

#### Auto Water Fill

- Easily create delicious, refreshing flavored water right from your refrigerator.

#### Built-In Look

- Sleek, built-in design.

### Available Colors



Stainless Steel



Black Stainless Steel (shown)



FlexZone™ Drawer



Auto Water Fill

### Features

- 4-Door Counter-Depth Design
- 4-Step Metal Cooling FlexZone™ Drawer
- Large Capacity – 23 cu. ft.
- Twin Cooling Plus®
- WiFi Ready
- External Filtered Water and Ice Dispenser
- Touch Button Display
- High-Efficiency LED Lighting
- ENERGY STAR® Compliant
- Tempered Glass Shelves
- Gallon Door Bins
- Two Clear Crispers
- Take Out Box

### Convenience

- Door Alarm
- Water Filter Indicator
- Dispenser Lock
- Energy Saver
- Sabbath Mode

### Rating



ENERGY STAR®-rated:  
CEE Tier 1  
633 kWh/yr

# RF23M8090SG

# SAMSUNG

## Samsung Counter-Depth, 4-Door Refrigerator


23 cu. ft. Capacity

### Installation Specifications


1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and to be able to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at [samsung.com](http://samsung.com).

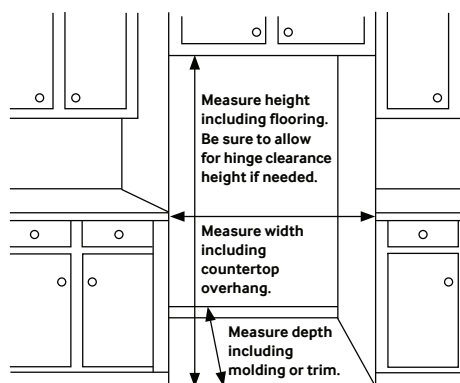

### Dimensions

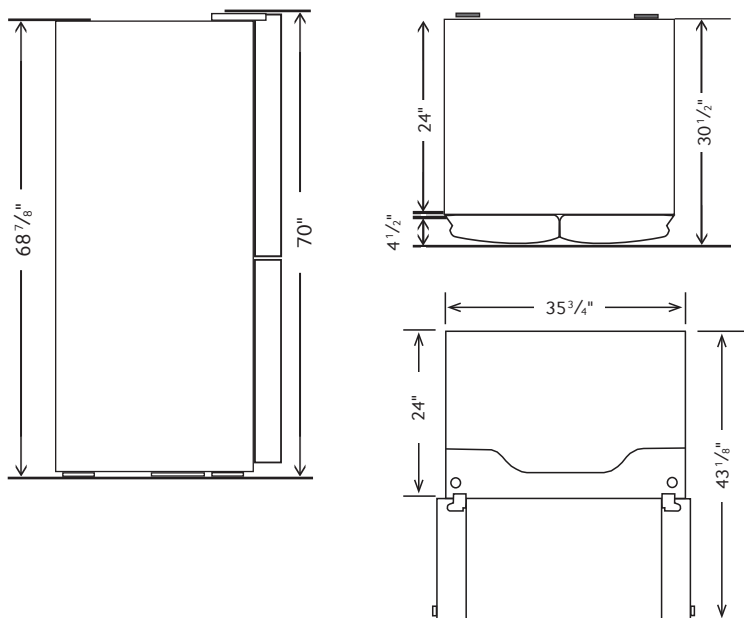

**Total Capacity: 22.60 cu. ft.**

**Refrigerator: 12.9 cu. ft.**

- Premium External Filtered Water and Ice Dispenser (Crushed or Cubed Ice)
- High-Efficiency LED Lighting
- 2 Crispers
- 5 Tempered Glass Shelves
  - 1 Slide-In
  - 1 Foldable Half
  - 2 Fixed
  - 1 Full Width Metal Shelf on Crisper
- 7 Door Bins
  - Right Door: 3 Gallon Bins
  - Left Door: 4 Regular Bins

**FlexZone™ Drawer: 3.1 cu. ft.**

- Metal Cooling Plate
- 4 Temperature Zones with Smart Divider:
  - Meat/Fish (29°F)
  - Cold Drinks (33°F)
  - Deli/Snacks (37°F)
  - Wine/Party Dishes (42°F)

**Freezer: 6.6 cu. ft.**

- EZ-Open Handle™
- Take Out Box
- 1 Drawer Divider
- High-Efficiency LED Lighting

### Warranty

One (1) Year Parts and Labor on Refrigerator  
Five (5) Years Parts and Labor on Sealed Refrigeration System Only\*  
Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor

\*Compressor, evaporator, condenser, drier and connecting tubing.

### Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):  
35 3/4" x 70" x 30 1/2"

Dimensions (WxHxD without hinges and door):  
35 3/4" x 68 7/8" x 24"

Dimensions (WxHxD with hinge and door, no handle):  
35 3/4" x 70" x 29 1/4"

Weight: 346.1 lbs.

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 1/4" x 75 3/4" x 31 1/4"

Weight: 370.4 lbs.

Color	Model #	UPC Code
Stainless Steel	RF23M8090SR	887276192628
Black Stainless Steel	RF23M8090SG	887276192611

# NE58F9710WS

## Flex Duo™ Slide-in Electric Range

### Features

- Premium Slide-in Design
- Flex Duo™ Technology – traditional single cavity range and double oven in one; unique design easily switches from single cavity to two smaller cavities
- Five Electric Cooktop Elements, including a Triple and Bridge Burner
- Glass Touch Controls with Guiding Light System
- Dual Convection for Even Cooking
- Gliding Rack for Simplest Access to Food in the Oven
- Temperature Probe Ensures Best Cooking Results
- Large Oven Capacity—5.8 cu. ft.
- Warming Drawer: High, Medium, Low
- SteamQuick™ (20 min. oven cleaning) and Self Clean

### Convenience

- Hot Surface Indicator Lights
- Auto Oven Light
- Proofing
- Sabbath Mode
- Kitchen Timer
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock
- 5 Healthy Cook Presets



Five Burner Cooktop



Guiding Light Controls

### Available Color



Stainless Steel

### Signature Features



Slide-in Design

#### GET A SLEEK, CUSTOMIZED, BUILT-IN LOOK FOR YOUR KITCHEN

- Sleek, slide-in design appears customized with cabinetry.
- Get a high-end look for your kitchen without having to remodel.
- Install easily and replace your freestanding range.



Guiding Light Controls

#### PREMIUM DESIGN WITH ILLUMINATED CONTROLS

- Intuitive controls offer simple, step-by-step instructions for choosing cooking options.
- Only illuminates cooking options that are able to be selected and goes from left to right eliminating back and forth.
- Control temperature and time settings, select cooking functions and program your favorite recipes.



Flex Duo Oven

#### SINGLE OVEN CAPACITY. DOUBLE OVEN EFFICIENCY

- Space-saving design leaves more room in the refrigerator.
- 5.8 cu. ft. oven splits into two ovens (2.6 cu. ft. and 3.1 cu. ft.) with the Smart Divider.
- Two temperature controls cook dishes at different temperatures.
- No noticeable transfer of aroma.

**SAMSUNG**


# NE58F9710WS

Flex Duo™ Slide-in Electric Range

## Installing Your Range

30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.



\*\* 18" minimum between the countertop and the adjacent cabinet bottom.

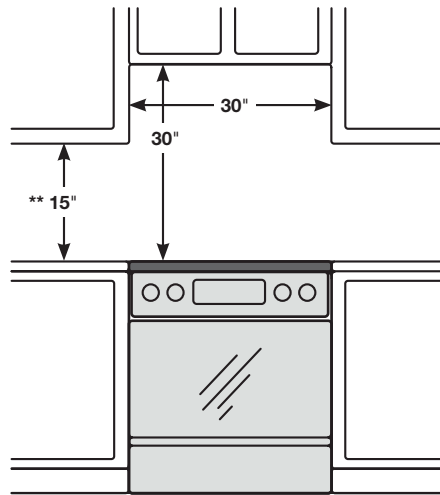


**IMPORTANT:** To eliminate the risk of burns or fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

**YOU WILL NEED  
TO USE THE  
FILLER STRIP AT  
THE BACK  
JAY**

## Dimensions

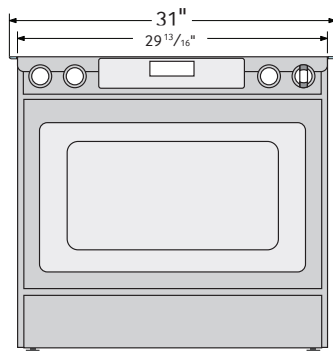

Glass cooktop overlaps and sits on top of your kitchen countertop to give a built-in look. Cut out space for the range is 29 13/16.

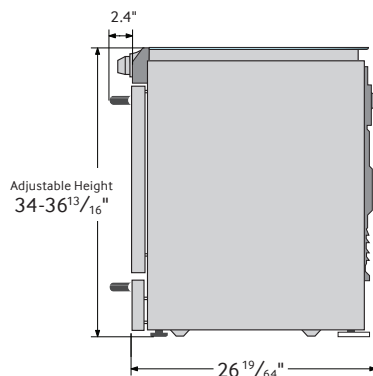

## Electric Ceramic Cooktop

- Right Front: 6/9/12", 3.0 KW
- Left Front: 7", 1.8 KW (bridge)
- Right Rear: 6", 1.2 KW
- Left Rear: 7", 1.8 KW (bridge)
- Center: 7", 100 W

## Dual Oven (with Divider)

- Hidden Bake Element: 3000 W
- Bake: 175°F - 550°F
- Convection Bake: 175°F - 480°F
- Convection Roast: 175°F - 480°F
- Variable Broil (Low - High)
- Convection Element/Heater: 1250 W
- Proofing
- Sabbath Mode

## Warming Drawer

- Capacity - 0.7 cu. ft.
- Heating Performance: 600 W (4 pass)
- Temperature Settings: High, Medium, Low

## Warranty

One (1) Year All Parts and Labor  
Five (5) Years Electric Cooktop

## Product Dimensions & Weight (WxHxD)

**Outside Dimensions:**

**31" x 34-36 13/16" (Adjustable) x 26 19/64"**

Weight: 209 lbs.

## Shipping Dimensions & Weight (WxHxD)

Dimensions:

**32 7/8" x 43 45/64" x 30 1/8"**

Weight: 234 lbs.

Color

Stainless Steel

Model #

NE58F9710WS

UPC Code

887276988153




**SAMSUNG**

# LUCÉ wall

Boasting an elegant slice of sleek stainless steel married with the subtle glamor of ambient lighting in Cloud White, Deep Blue and Amber, the Lucé is the (gorgeous) future of range hoods, here today. Featuring ACT™ technology, Bloom™ LED lighting, ICON Touch™ Controls and a versatile Recirculating Option.

	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™	
Min.-Max. CFM	200 - 600	Min.-Max. CFM	200 - 390      200 - 290
Min.-Max. Sones	1 - 6	Min.-Max. Sones	1 - 4      1 - 3


*ACT™ is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.*

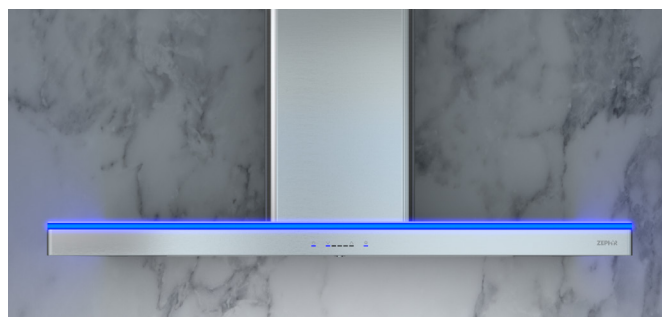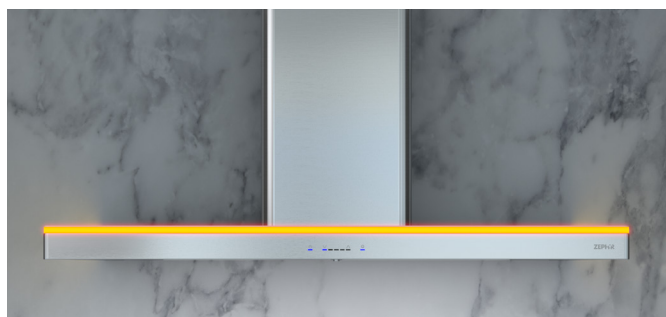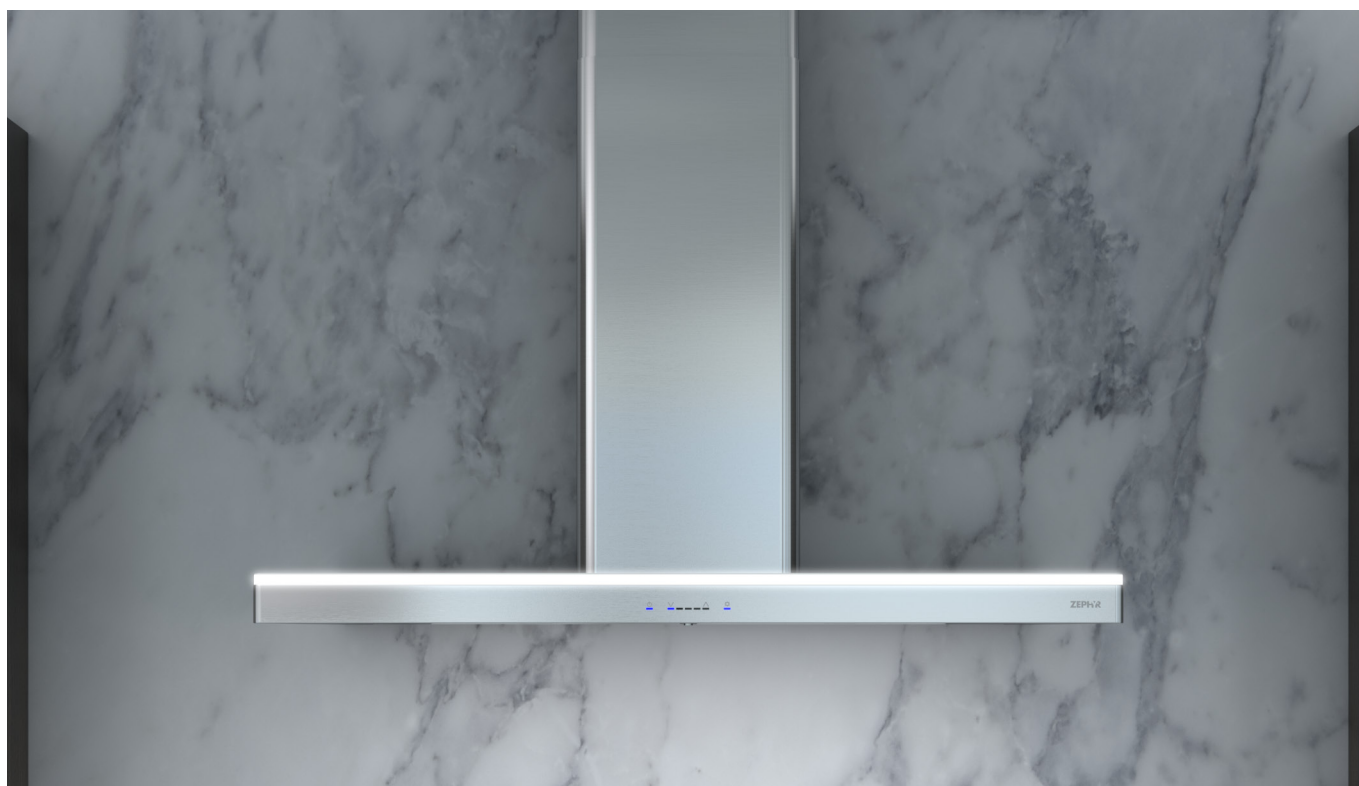




<b>SIZE</b>	
ZLU-E30AS	30"
ZLU-M90AS	36"
<b>PERFORMANCE</b>	
INTERNAL, MIN.-MAX. BLOWER CFM	200 - 600
INTERNAL, MIN.-MAX. SONES	1 - 6
<b>COLOR</b>	
STAINLESS STEEL	SS
<b>FEATURES</b>	
ACT™	Yes
CONTROLS	ICON Touch™
SPEED LEVELS	5*
5 MINUTE AUTO DELAY-OFF	Yes
LIGHTING	Bloom™ HD LED 6W x 2
DUAL LEVEL LIGHTING	Yes
LED ACCENT LIGHT	Yes; Cloud White, Deep Blue & Amber
FILTERS	Aluminum Mesh x 2
RECIRCULATING OPTION	Yes
EXTENSION DUCT COVER OPTION	Yes, Up to 12' Ceiling
<b>DUCT SPECIFICATIONS</b>	
VERTICAL - INTERNAL	6" Round
HORIZONTAL - INTERNAL	NA
<b>AC POWER</b>	
	120V, 60Hz at Max. 3A
<b>OPTIONAL ACCESSORIES</b>	
RECIRCULATING KIT	ZRC-00LU
EXTENSION DUCT COVER	Z1C-00LU
UNIVERSAL MAKE-UP AIR DAMPER	MUA006A
<b>MOUNTING HEIGHT**</b>	
	26" - 34"
<b>WARRANTY</b>	
	3 Years Parts, 1 Year Labor


Specifications subject to change, check [zephyronline.com](http://zephyronline.com) for up-to-date information.

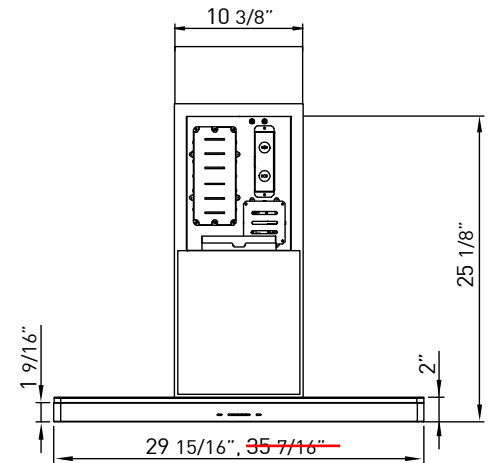

BACK

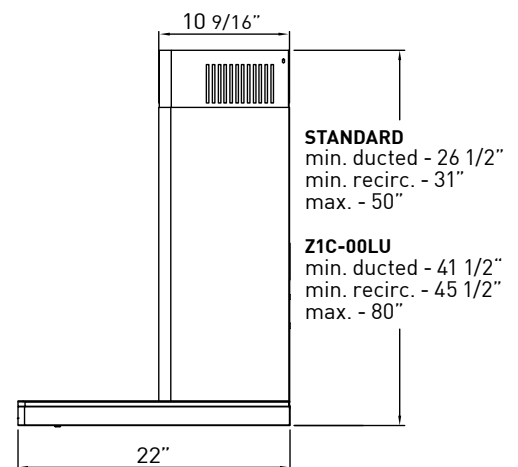

SIDE

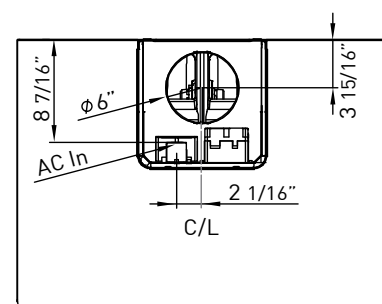

TOP

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height**	26"-33.5"	26"-34"	26"-34"	28"-34"	34"-34"	NA	NA	NA
	Recirc. Mounting Height**	26"-29"	26"-34"	26"-34"	28"-34"	34"-34"	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height**	NA	NA	26"-30.5"	26" - 34"	26"-34"	26"-34"	26"-34"	28"-34"
	Recirc. Mounting Height**	NA	NA	26"-26.5"	26" - 32.5"	26" - 34"	26"-34"	26"-34"	28"-34"

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



# WF50K7500AV

Samsung Front-Load Washer

## 5.0 cu. ft. Capacity

### Features

- AddWash
- Super Speed
- PowerFoam™
- Steam Wash
- VRT Plus™
- Smart Home Ready
- Self Clean+
- Smart Care
- Swirl Drum Design
- Direct Drive Motor
- 1300 RPM Maximum Spin Speed
- 14 Preset Wash Cycles
- 13 Options

### Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Prewash, Main Wash, Softener, Bleach



ENERGY STAR®-rated:

CEE Tier 3

IMEF = 2.92

IWF = 2.9

105 kWh/yr



AddWash



5.0 cu. ft. Capacity

### Available Colors:



Black Stainless Steel



White

## Signature Features

### AddWash

- Conveniently add in forgotten laundry after the cycle has begun with the **AddWash** door.
- Save time and energy by not doing an additional load of laundry.

### 5.0 CU. FT. CAPACITY

- Largest 27" Front Load Washer in the industry<sup>1</sup> lets you wash over 3 laundry baskets in a single load.<sup>2</sup>
- 5.0 cu. ft. capacity gets more laundry done in less time.

<sup>1</sup> Based on USDOE/EPA listing.

<sup>2</sup> Based on an 8-lb. load of laundry.

### SUPER SPEED

- Breakthrough technology provides a 50% faster and thorough wash cycle.
- Wash a full load in only 30 minutes.<sup>2</sup>

<sup>2</sup> Normal 1-hour wash can be completed in as little as 30 minutes as compared to WF511 washer without Super Speed.  
Based on DOE standard's average of 7.5 loads per week.

**SAMSUNG**




# WF50K7500AV

## Samsung Front-Load Washer

### Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


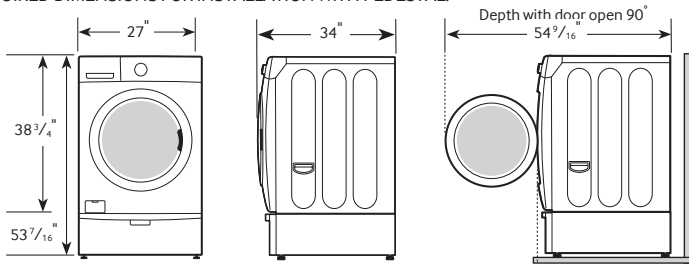


### Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


#### 1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

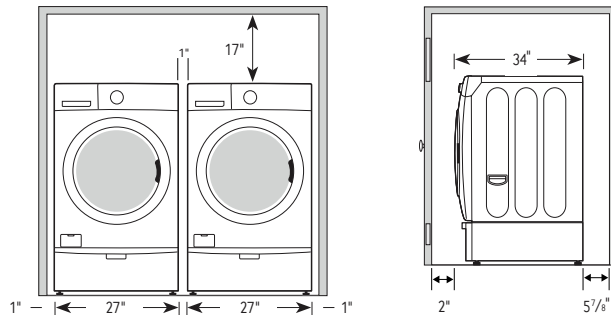

When installing with matching dryer, if the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

#### 2. With stacked washer and dryer

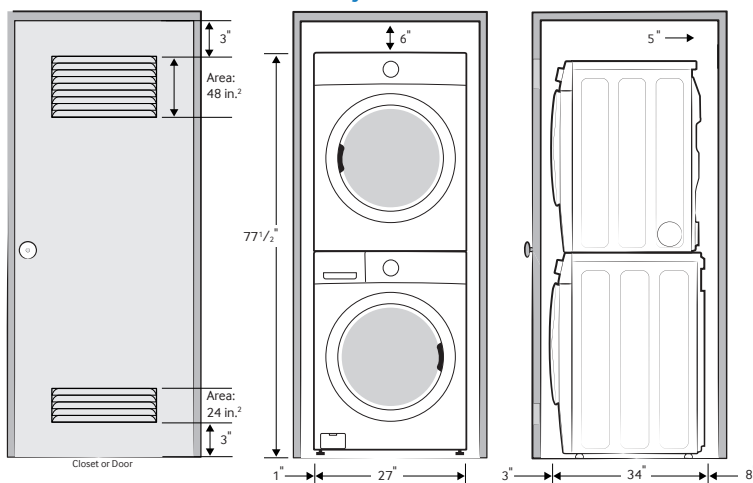

### 5.0 cu. ft. Capacity

#### 14 Preset Wash Cycles:

Eco Cold, Normal, Heavy Duty, Permanent Press, Sanitize, Allergen, Bedding, Deep Steam, Whites, Active Wear, Delicates, Wool, Quick Wash, Rinse and Spin

#### 13 Options:

Super Speed, Steam, Self Clean+, Delay End, My Cycle, Prewash, Extra Rinse, Extra Spin, Spin Only, Sound, Child Lock, Smart Care, Drum Light

#### 5 Temperature Settings:

Extra Hot, Hot, Warm, Eco Warm, Cold

#### 5 Spin Settings:

Extra High, High, Medium, Low, No Spin

#### 5 Soil Settings:

Heavy, Heavy Medium, Normal, Low Medium, Light

#### Dispenser Trays:

Prewash, Main Wash, Softener, Bleach

#### Warranty

One (1) Year Parts and Labor

One (1) Year Control Board

Three (3) Years Stainless Steel Drum

Ten (10) Years Direct Drive Motor

#### Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 34"

Weight: 238 lbs

#### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 15/16" x 36 3/16"

Weight: 244 lbs

Color	Model #	UPC Code
Black Stainless Steel	WF50K7500AV	887276135557
White	WF50K7500AW	887276135564

#### Matching Dryer (Electric/Gas)

Black Stainless Steel	DV50K7500EV	887276135946
White	DV50K7500EW	887276135960
Black Stainless Steel	DV50K7500GV	887276135977
White	DV50K7500GW	887276135984

#### Optional Stacking Kit

Sold separately	SKK-7A	887276146423
-----------------	--------	--------------

**SAMSUNG**

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

# DV50K7500EV

Samsung Front-Load Electric Dryer

## 7.5 cu. ft. Capacity

### Features


- ENERGY STAR® 2016 Certified
- Multi-Steam Technology:
  - Steam Refresh
  - Steam Wrinkle Away
  - Steam Sanitize
- Vent Sensor™
- Stainless Steel Drum
- Eco Dry Technology
- Smart Home Ready
- Smart Care
- Sensor Dry
- 14 Preset Drying Cycles
- 12 Options
- 5 Temperature Settings
- 4-Way Venting
- Dual Heaters
- Dryer Rack
- Dryer Drum Light
- Reversible See-Through Door

### Convenience

- Child Lock
- My Cycle Option
- Filter Check Indicator



Multi-Steam Technology

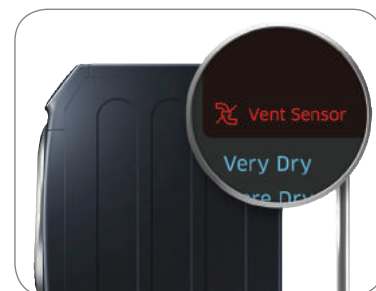

Vent Sensor

### Available Colors:



Black Stainless Steel



White

## Signature Features

### ENERGY STAR® 2016 CERTIFIED

- Meets strict energy-consumption requirements.

### MULTI-STEAM TECHNOLOGY

- Helps remove wrinkles and odors, and freshens clothes so you can spend less time ironing and less money at the dry cleaners.

### VENT SENSOR™

- Detects duct blockages and reminds you to clean your vent.
- Conveniently allows you to forward these alerts to your smartphone.


**SAMSUNG**

# DV50K7500EV

## Samsung Front-Load Electric Dryer

### Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


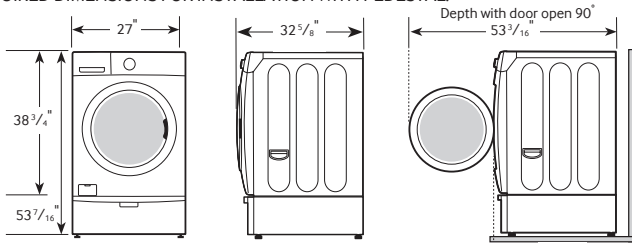


### Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


#### 1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

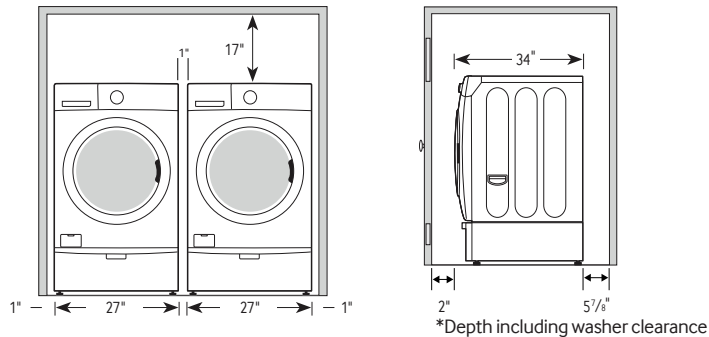

If the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

#### 2. With stacked washer and dryer

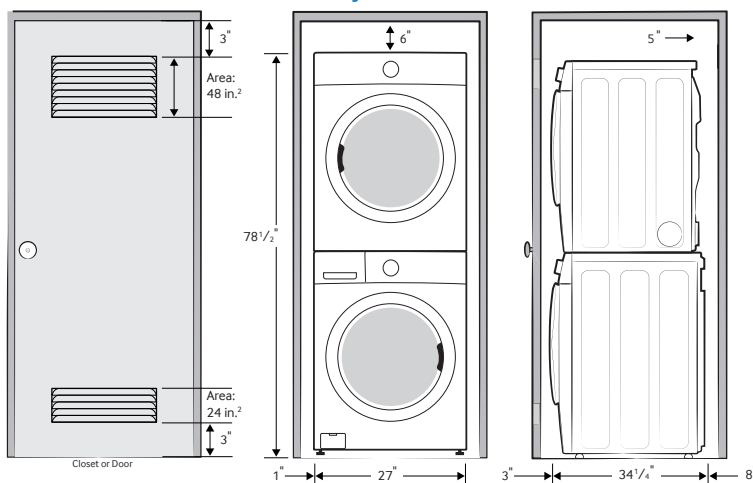

### 7.5 cu. ft. Capacity DOE

#### 4-Way Venting

#### 14 Preset Dry Cycles:

Steam Refresh, Steam Wrinkle Away, Steam Sanitize, Eco Normal, Normal, Heavy Duty, Permanent Press, Active Wear, Bedding, Delicates, Wool, Time Dry, Air Fluff, Quick Dry

#### 12 Options:

Mixed Load Bell, Wrinkle Prevent, Anti-Static, My Cycle, Rack Dry, Adjust Time (Up), Adjust Time (Down), Eco Dry, Sound, Child Lock, Smart Care, Drum Light

#### 5 Temperature Settings:

High, Medium, Medium Low, Low, Extra Low

#### 5 Dry Levels:

Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

#### Warranty

One (1) Year Parts and Labor

One (1) Year Control Board

#### Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 32 5/8"

Weight: 126 lbs

#### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 3/8" x 34 11/16"

Weight: 134 lbs

Electric	Model #	UPC Code
Black Stainless Steel	DV50K7500EV	887276135946
White	DV50K7500EW	887276135960

Gas	Model #	UPC Code
Black Stainless Steel	DV50K7500GV	887276135977
White	DV50K7500GW	887276135984

#### Matching Washer

Black Stainless Steel	WF50K7500AV	887276135557
White	WF50K7500AW	887276135564

#### Optional Stacking Kit

Sold separately	SKK-7A	887276146423
-----------------	--------	--------------

#### Optional Side Vent Kit

Sold separately	DV-2A/XAA	887276146416
-----------------	-----------	--------------

**SAMSUNG**

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

The Emerging Technology award recognizes innovative products that have the potential to significantly reduce greenhouse gas emissions.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.