

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00015938

Salesperson: LISA AFSHAR
Purchase Date: 4/15/17
Invoice Finished Date:
Delivery/Pickup Date: Aug 30, 2017
Invoice Type: VBL
Date Printed: Apr 20, 2017
Page: 1

ONLINE BANKING ACCOUNT

BILL TO: 4165670190

ALESSANDRIWI, CARLO

LOT 172

X

SHIP TO: 4165670190

ALESSANDRIWI, CARLO/ALESSANDRINI

69 GIBSON CIRCLE

LOT 172

BRADFORD, ON

TEL# (416) 567-0190

BUS#

TEL# (416) 567-0190

BUS#

Directions: X

| QTY | LOC | MODEL # | SERIAL # | COLOUR | BRAND - DESCRIPTION |
|-----|-----|--|----------|----------|--|
| | | This Invoice has been split, further details on ' V000008763' ! | | | |
| 1 | | KBSD602ESS | | STAINLES | KIT, RESB: REFRIGERATOR, SIDE-BY-SIDE, BU 20.8 CU. FT. CAP, 42 WIDTH, SIDE BY SIDE, EXTERIOR I |
| 1 | | KDRS467VSS | | STAINLES | KIT, RADP: RANGE, DUAL FUEL, PROFESSIONAL 36, DUAL, 6B (2-20K DUAL STACKED, 3-15K, 5K), S/C, F/S, |
| 1 | | DRIVER BASIC LDRY H/U DECLINED MUST ADD WASHER HOSES MUST ADD WASHER HOSES | | | |
| 1 | | HOSE KIT WS5SS-ST | | | REL, ALAU: ACCESSORY, LAUNDRY HOSE-KIT, FOR STEAM DRYER, ALSO INCLUDES 1 WSHR HOSE |
| 1 | | HOSE LNDRY 6FT 48 | | | REL, AWA: ACCESSORY WASHER 1X 6 FT WASH HOSE, 3/4, STAINLESS STEEL BRAID |
| | | This special order product requires a 50% deposit & is considered FINAL SALE. x _____ PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE. | | | |
| 1 | | EPL636SI | | STAINLES | ELA, HOWC: HOOD, WALL MOUNT ELICA PILATO, 36W, 600 CFM, TCH CTRL, LCD, 4 SPD |
| | | This special order product requires a 50% deposit & is considered FINAL SALE. x _____ PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE. | | | |
| 1 | | P-DELIVERY \$10,000-19,999 | | | |
| 1 | | SALES DELIVERY ALLOWANCE | | | |
| 1 | | WF45M5500AP/A5 | | PLATINU | SAM, WAFL: WASHER, FRONT LOAD, LARGE CAPA 5.2 CU. FT, VRT®, STEAM, ENERGY STAR®, DIAMOND DRUM |

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00015938

Salesperson: LISA AFSHAR
Purchase Date: 4/15/17
Invoice Finished Date:
Delivery/Pickup Date: Aug 30, 2017
Invoice Type: VBL
Date Printed: Apr 20, 2017
Page: 2

ONLINE BANKING ACCOUNT

BILL TO: 4165670190
ALESSANDRIWI, CARLO
LOT 172
X

TEL# (416) 567-0190 BUS#

Directions: X

SHIP TO: 4165670190
ALESSANDRIWI, CARLO/ALESSANDRINI
69 GIBSON CIRCLE
LOT 172
BRADFORD, ON

TEL# (416) 567-0190 BUS#

| QTY | LOC | MODEL # | SERIAL # | COLOUR | BRAND - DESCRIPTION |
|-----|-----|---|----------|----------|--|
| 1 | | DVE45M5500P/AC | | PLATINU | SAM, DREFL: DRYER, ELECTRIC - TO MATCH LAR |
| 1 | | KDFE104DSS | | STAINLES | MATCHING ELECTRIC DRYER FOR WF45M5500AP/A5, 7.5 CU |
| 1 | | PART# W10574777 REQUIRED FOR INSTALLATION (EXTRA CHARGE). | | | KIT, DIS: DISHWASHER |
| | | W10685193 | | | 24 DISH 2.5CNSL,,CAP TCH CTRL,6 CYC/5OPT 46DBA |
| | | Payment | | | REL, ADI: ACCESSORY, DISHWASHER |
| | | | | | 3/4 X 3/8 ELBOW HOSE FITTING |
| | | | | | TRANSFER PAYMENT |

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

KitchenAid®

FOR THE WAY IT'S MADE.®

Side By Side Built-In Refrigerator

PRODUCT MODEL NUMBERS

KBSD602E KBSD606E KBSD608E KBSN602E KBSN606E
KBSD612E KBSD616E

Electrical: A 115 volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


IMPORTANT:

- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

PRODUCT DIMENSIONS

- The depth from the front of the top grille to the back of the refrigerator cabinet is 5 $\frac{5}{8}$ " (64.5 cm).
- The power cord is 84" (213 cm) long.
- Height dimensions are shown with leveling legs extended $\frac{1}{8}$ " (3 mm) below the rollers.

SIDE VIEW

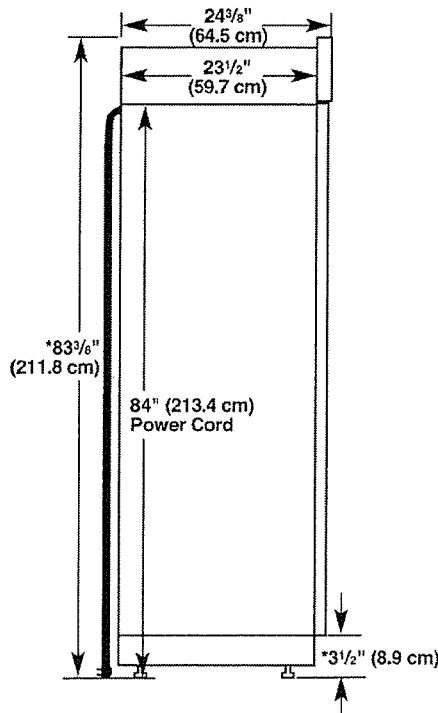


*When leveling legs are fully extended to 1 $\frac{1}{4}$ " (3.2 cm) below rollers, add 1 $\frac{1}{8}$ " (2.9 cm) to the height dimensions.

OPENING DIMENSIONS

To avoid tipping during use, the solid soffit must be within 1" (2.5 cm) maximum above the refrigerator. If the solid soffit is higher than 1" (2.5 cm) or one is not available, then the refrigerator must be braced. If the anti-tip boards are needed, they must be attached to the rear wall studs 80" to 90" (203 cm to 229 cm) above the floor. See "Install Anti-Tip Boards" for more information.


NOTE: A clearance of $\frac{1}{2}$ " (1.3 cm) above the top grille must be maintained in order for the top grille to be removed.

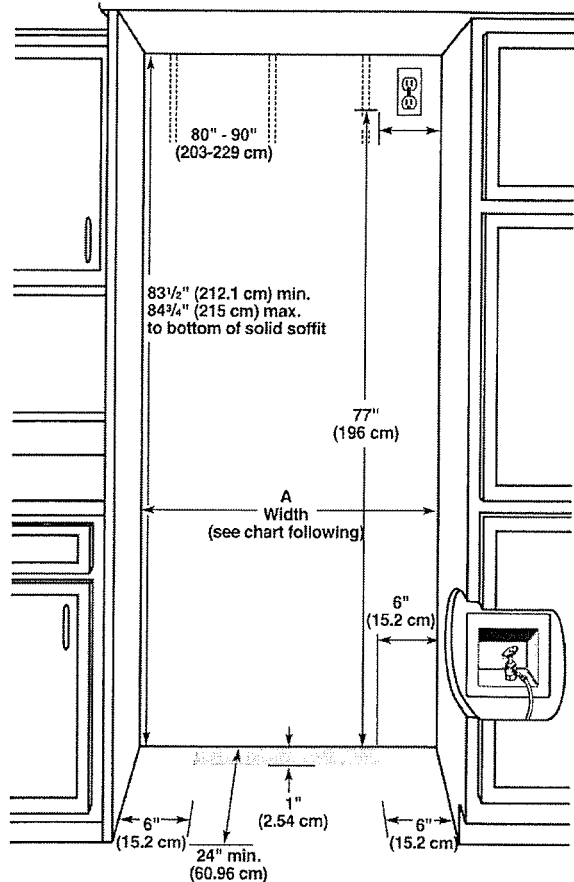

| Model | Width A (as shown above) | Dimension B (as shown above) |
|-------|--|------------------------------|
| 36 | 35 $\frac{1}{2}$ " to 35 $\frac{3}{4}$ " (790.2 cm to 900.8 cm) | 4" (10.2 cm) |
| 42 | 41 $\frac{1}{2}$ " to 41 $\frac{3}{4}$ " (105.4 cm to 106.1 cm) | 7 $\frac{1}{2}$ " (19.1 cm) |
| 48 | 47 $\frac{1}{2}$ " to 47 $\frac{3}{4}$ " (120.7 cm to 121.3 cm) | 13 $\frac{1}{2}$ " (34.3 cm) |

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.


TOP VIEW

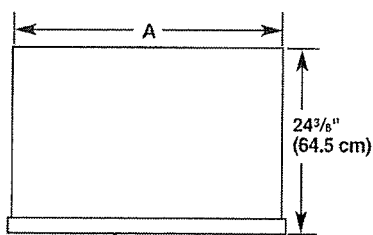

| Model | Width A |
|-------|-------------------|
| 36 | 36 1/2" (88.0 cm) |
| 42 | 41" (104.1 cm) |
| 48 | 47" (119.4 cm) |

FRONT VIEW

- Width dimensions were measured from trim edge to trim edge.
- Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.

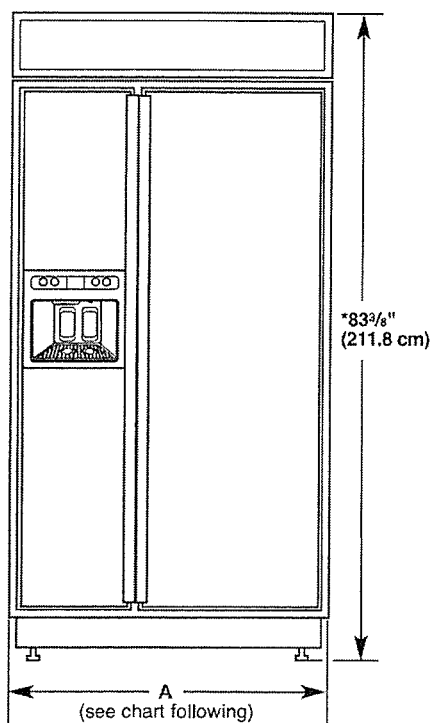

| Model | Width A (Trim edge to trim edge) |
|-------|----------------------------------|
| 36 | 36 1/2" (92.3 cm) |
| 42 | 42 1/2" (107.5 cm) |
| 48 | 48 1/2" (122.8 cm) |

*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/8" (2.9 cm) to the height dimensions.


DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 5" (12.7 cm) minimum space between the side of the refrigerator and a corner wall.


NOTE: More clearance may be required if you are using overlay panels, custom handles, or extended handles on a Classic model.

To adjust the door swings, see "Adjust Doors."


36" (91.4 cm) Models

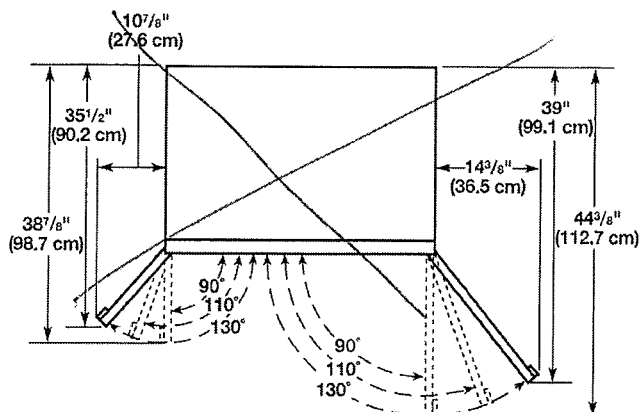

42" (106.7 cm) Models

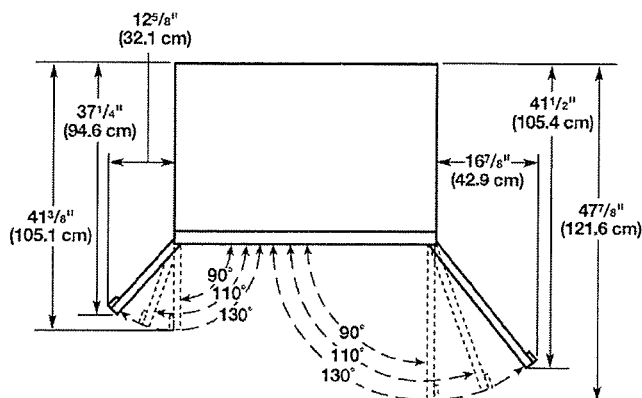

48" (121.9 cm) Models

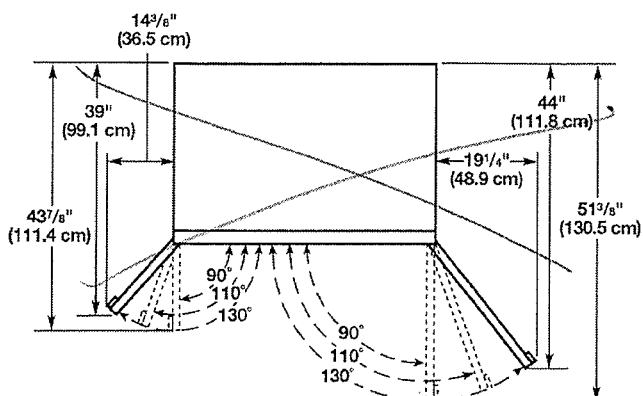

KitchenAid®

~~30" (76.2 cm), 36" (91.4 cm), and 48" (121.9 cm)~~ Commercial-Style Dual Fuel Convection Ranges

PRODUCT MODEL NUMBERS

KDRS407V ~~KDRS463V~~ KDRU767V
~~KDRS463V~~ KDRU763V KDRU763V
KDRS467V

ELECTRICAL CONNECTION

To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located on the right vertical surface of the oven door frame. Refer to the illustrations in "Product Dimensions" of the "Location Requirements" section.
- This range may be manufactured with a 4-wire power supply cord or may not include a power supply cord. If your range does not include a power supply cord, use a 4-wire power supply cord rated at 250 volts, 40 or 50 amps, and investigated for use with ranges

| Range Rating* | | Specified Rating of Power Supply Cord Kit and Circuit Protection | |
|---------------|---------------|--|------------|
| 120/240 Volts | 120/208 Volts | Amps | Range Size |

| | | | |
|-------------|-------------|------------|---|
| 8.8–16.5 kW | 7.8–12.5 kW | 40 or 50** | 30" (76.2 cm) 36" (91.4 cm) |
|-------------|-------------|------------|---|

| | | | |
|--------------|--------------|----|----------------|
| 16.6–22.5 kW | 12.6–18.5 kW | 50 | 48" (121.9 cm) |
|--------------|--------------|----|----------------|

* The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

** If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 13/8" (34.9 mm) diameter connection opening.

- A circuit breaker is recommended.
- Wire sizes and connections must conform with the rating of the range.
- The Tech Sheet is located behind the kick plate in a clear plastic bag.

TYPE OF GAS

Natural Gas:

This range is factory set for use with Natural gas. The model/serial/rating plate located on the right vertical surface of the oven door frame has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP-Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the range cooktop from the gas specified on the model/serial/rating plate for use with a different gas without consulting the serving gas supplier. To convert to LP gas, use the LP gas conversion kit provided with your range and see the "Gas Conversions" section. The parts for this kit are in the literature package supplied with the range.

GAS SUPPLY LINE


- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape.

†TEFLON is a registered trademark of Chemours.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4-5 ft (122–152.4 cm) long, 5/8" (1.6 cm) or 3/4" (1.9 cm) I.D. flexible metal appliance connector may be used for connecting range to the gas supply line.




- A 1/2" (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the range pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.

IMPORTANT: All connections must be wrench-tightened. Do not make connections to the gas regulator too tight. Making the connections too tight may crack the regulator and cause a gas leak. Do not allow the regulator to turn or move when tightening fittings.

- Must include a shut-off valve:


The supply line must be equipped with a manual shut-off valve. This valve should be located in the same room but external to the range opening such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shut-off valve. The valve is for turning on or shutting off gas to the range.



A. Gas supply line
B. Shut-off valve "open" position
C. To range

PRODUCT DIMENSIONS


30" (76.2 cm) models

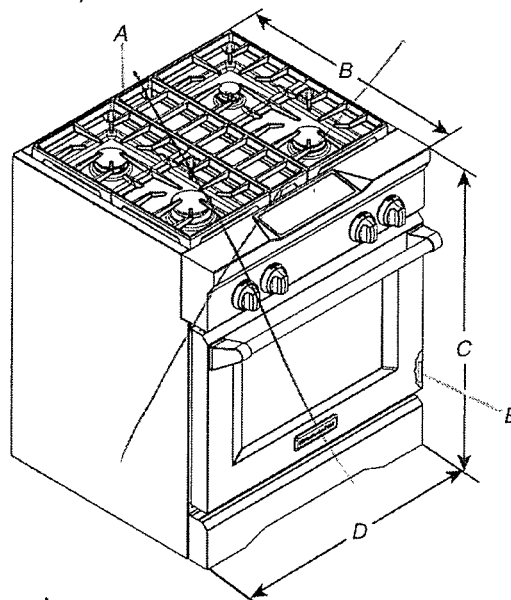

A. Optional backguard may be installed.
B. 27 1/4" (70.5 cm) depth with control panel (See NOTE)
C. 35 1/2" (90.8 cm) cooktop height when sitting on the wheels
D. 30" (76.2 cm) width
E. Model/serial/rating plate location

PRODUCT DIMENSIONS CONTINUED


36" (91.4 cm) models

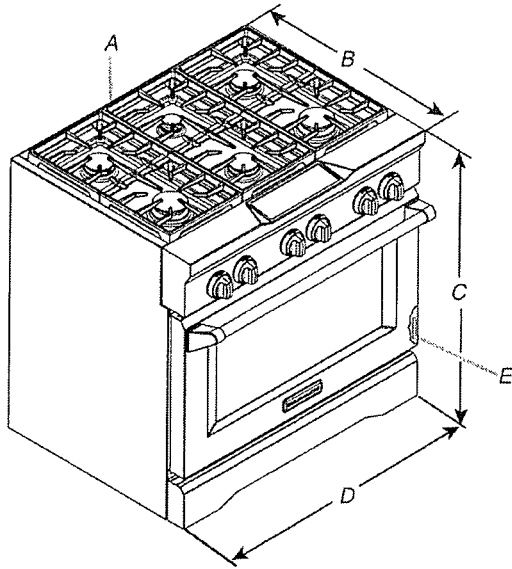

- A. Optional backguard may be installed.
- B. 27¹/₄" (70.5 cm) depth with control panel (See NOTE)
- C. 35³/₄" (90.8 cm) cooktop height when sitting on the wheels
- D. 36" (91.4 cm) width
- E. Model/serial/rating plate location

48" (121.9 cm) models

NOTE: The following illustration is for dimension planning purposes only, and the locations and appearances of the features shown may not match those of your model.

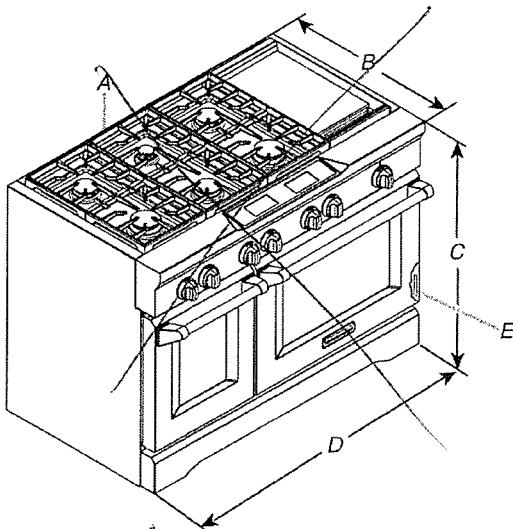


- A. Optional backguard may be installed.
- B. 27³/₄" (70.5 cm) depth with control panel (See NOTE)
- C. 35³/₄" (90.8 cm) cooktop height when sitting on the wheels
- D. 48" (121.9 cm) width
- E. Model/serial/rating plate location

NOTE: When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 1⁷/₈" (4.8 cm) beyond 24" (61.0 cm) base cabinet.

CABINET DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, and 36" (91.4 cm) countertop height. Dimensions must be met in order to ensure a flush fit to back wall.

IMPORTANT: If installing a range hood or hood liner above the range, follow the range hood or hood liner installation instructions for dimensional clearances above the cooktop surface.

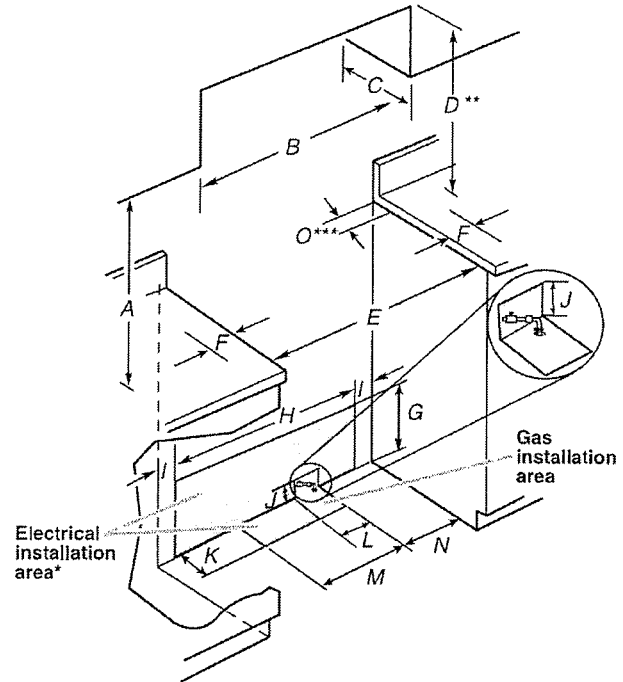

- A. 18" (45.7 cm) upper cabinet to countertop
- B. 30" (76.2 cm) model: 30" (76.2 cm) min. upper cabinet width
36" (91.4 cm) model: 36" (91.4 cm) min. upper cabinet width
48" (121.9 cm) model: 48" (121.9 cm) min. upper cabinet width
- C. 13" (33 cm) max. upper cabinet depth
- D. For minimum clearance to top of range**
- E. 30¹/₄" (76.8 cm) on 30" (76.2 cm) models
36¹/₄" (92.1 cm) on 36" (91.4 cm) models
48¹/₄" (122.6 cm) on 48" (121.9 cm) models
- F. 6" (15.2 cm) min. clearance from both sides of range to side wall or other combustible material
- G. 15" (38.1 cm)
- H. 22" (55.9 cm) on 30" (76.2 cm) models
28" (71.1 cm) on 36" (91.4 cm) models
40" (101.6 cm) on 48" (121.9 cm) models
- I. 1⁷/₈" (4.8 cm)
- J. 3" (7.6 cm)
- K. 5" (12.7 cm)
- L. 6" (15.2 cm) on 30" (76.2 cm) models
14" (35.5 cm) on 36" (91.4 cm) models
24" (61.0 cm) on 48" (121.9 cm) models
- M. 10¹/₂" (26.7 cm)
- N. 6" (15.2 cm)
- O. 6" (15.2 cm)***

* Receptacle must be rotated 90° for Canadian installation.

** Minimum Clearances

30" (76.2 cm) models: 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet

36" (91.4 cm) models: 42" (106.7 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet

48" (121.9 cm) models: 42" (106.7 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet

***If the surface of the back wall is constructed of a combustible material and a backguard is not installed, a 6" (15.2 cm) minimum clearance is required for all models.

KitchenAid®

FOR THE WAY IT'S MADE.®

Undercounter Dishwasher

PRODUCT MODEL NUMBERS

KDFE104D, KDFE304D, KDTE204D, KDTE404D, KDTE704D, KDTM354D, KDFE204E, KDFE454C, KDTE104E, KDTE204E, KDTE254E, KDTM354E, KDTM384E, KDTM404E, KDTM504E, KDTM704E, KDTM804E


Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line.

Note: 1/2" minimum plastic tubing is not recommended.


Use a 90° elbow with 3/4" hose connection with rubber washer (Part Number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part Number 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

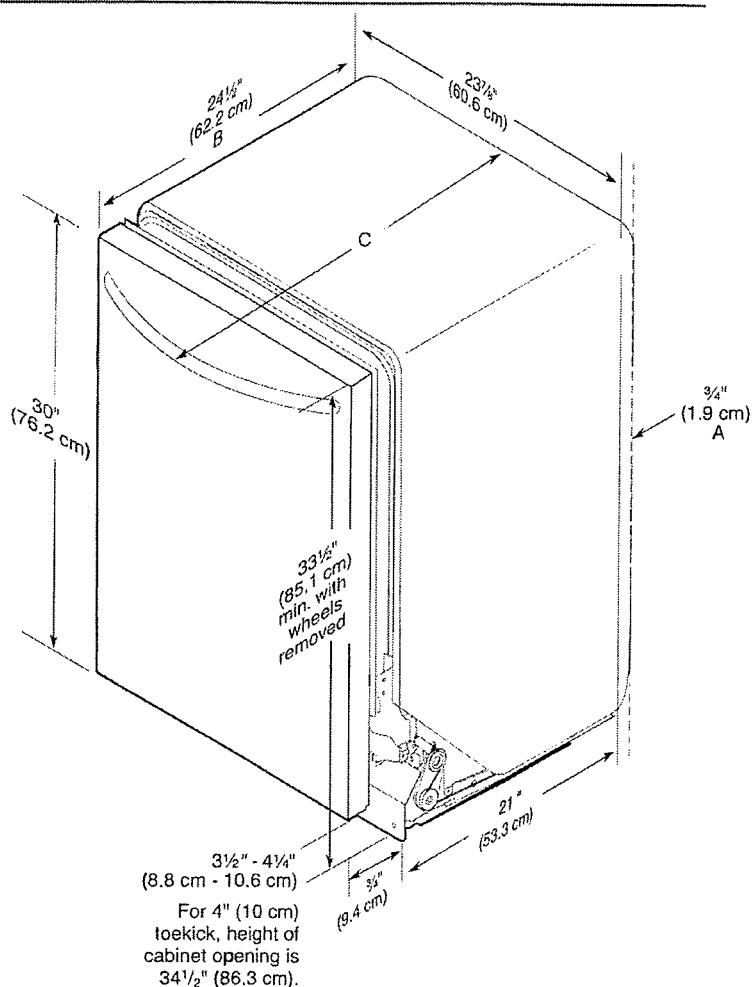


CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

* Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) be removing the rear leveling legs from dishwasher.

** Minimum, measured from narrowest point of opening.

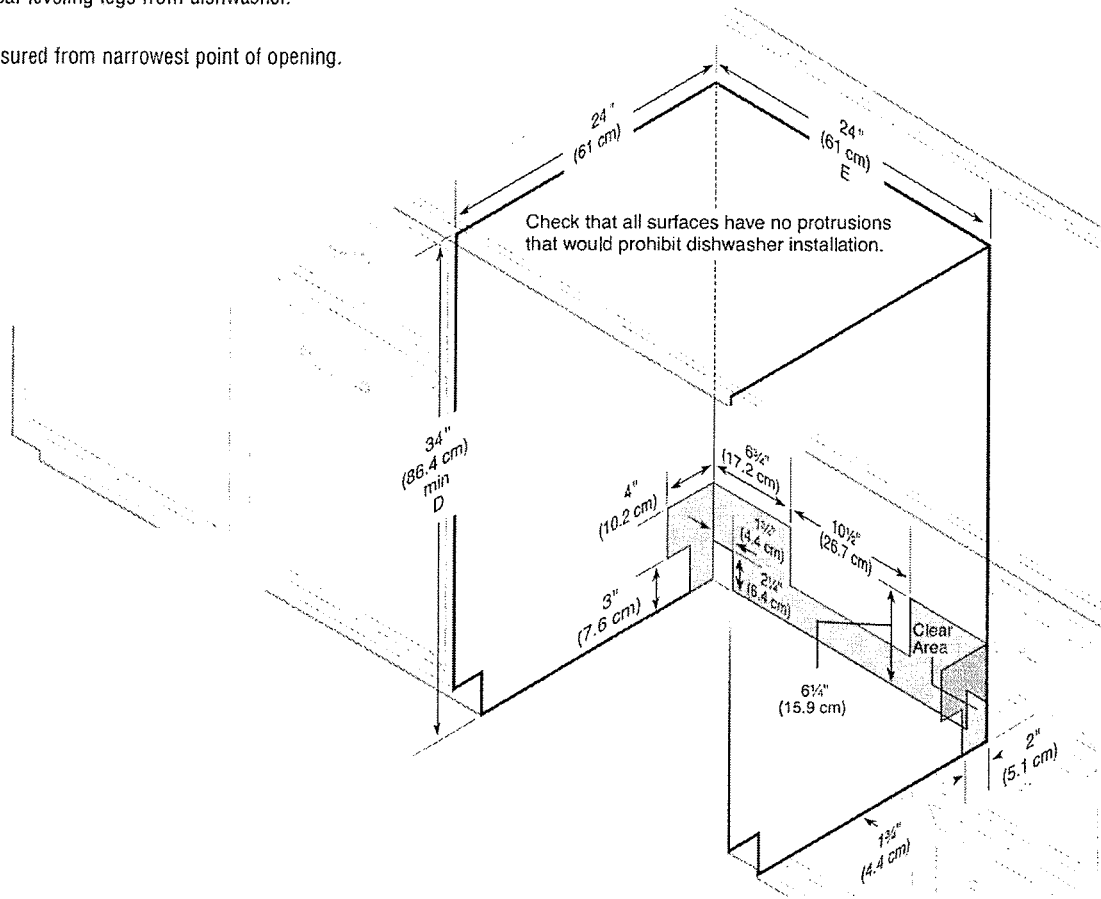



ASPIRE SERIES


Dimensions

30" W x 21" D x 10 1/4" H
36" W x 21 1/2" D x 10 1/4" H


Models

EPL63051 Pilato 30" Stainless
EPL63651 Pilato 36" Stainless


Special features




halogen lamps



multi-function electronic controls
with LCD display



stainless steel micro hole filters

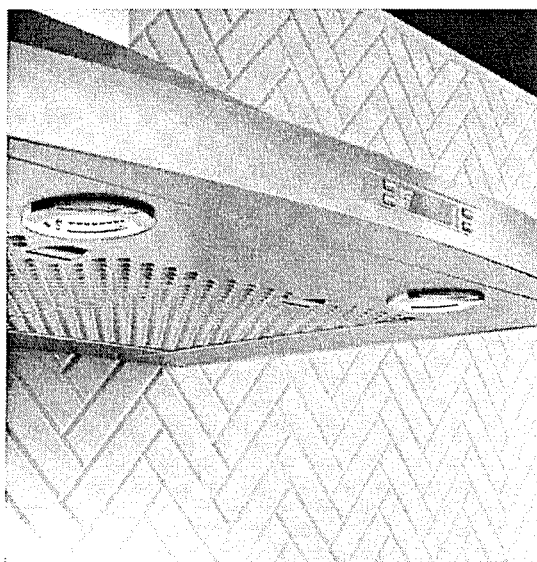

The rounded front, beautifully sloping angles and stainless steel finish of Pilato make a striking visual statement. Available in 30" or 36" widths, Pilato features include a powerful 600 CFM blower, halogen lighting with 2 light intensities, dishwasher-safe stainless steel microhole filters and multi-function electronic controls with LCD display that deliver convenience and safety.

Designed for standard ducted installation, Pilato can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

FEATURES


| | |
|-------------------------------------|--|
| Size (in) & Type Finish | 30" or 36" Wide Wall-Mount Chimney Stainless Steel |
| Controls | Multi-function electronic with LCD display |
| Illumination | 2, 40 Watt Halogen Lamps, 2 Light Intensities (bulbs included) |
| Installation Type | Ducted or Recirculating Installation Recirculating Kit Sold Separately |
| Blower Type | 600 CFM, 4-Speed Internal |
| Blower Performance | Speed 1, 160 CFM, 1.7 Sones Speed 2, 280 CFM, 3.3 Sones Speed 3, 475 CFM, 6.0 Sones Speed 4, 600 CFM, 8.2 Sones |
| Filter Type | Dishwasher-Safe, Stainless Steel Micro Hole (2 w/ 30", 3 w/ 36") |
| Telescopic Chimney Extension | For heights 7'11" - 9'2" (ducted) For heights 7'11" - 9'6" (recirculating) |
| Duct Transition | 6" Round with Back Draft Damper (top) |
| Electrical | 120V-60Hz 490 Watts at 4.1 Amps |
| Warranty | 2 Year Parts & Labor, In-Home Service |

ACCESSORIES



Optional Recirculating Kit for 30" and 36"

CODE: KIT02766
MODEL: EXXCEK09




Optional Long Chimney Extension Kit

Reaches 8'11" - 11'4" (ducted)
Reaches 9'3" - 11'8" (recirculating)

CODE: KIT02762
MODEL: EXXCEK05

LINE DRAWING

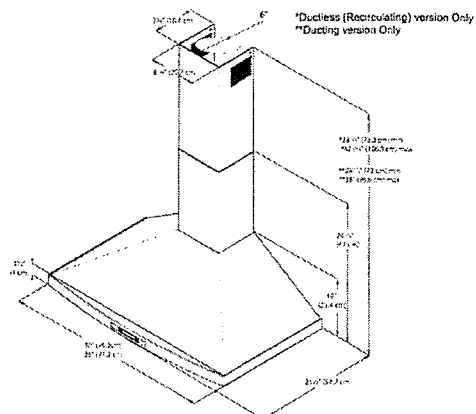

CONSUMABLE PARTS

Replacement Grease Filter (1)
CODE: GF04YB

Replacement Carbon Filter (1)
CODE: KIT02667

Replacement Light Bulb (1)
CODE: 2006BH

Consumable parts are sold in units of one (1). Order accordingly.

SPECIAL FEATURES




Elica CRS:
CFM Reduction System (CRS), is an exclusive feature to Elica hoods, which enables the installer to reduce the maximum blower CFM, to meet local code requirements.



Elica Heat Guard:
A safety feature that protects the hood and cabinetry from excessive heat, by sensing extreme temperatures (>158 degrees) and will automatically adjust the blower speed to HIGH. Blower speed will automatically adjust back once temperatures drop to a safe level.

Specification sheet

Samsung washer

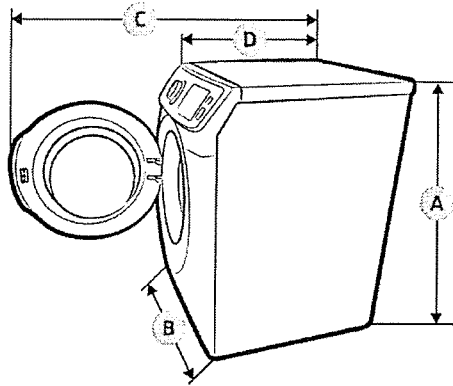


| Type | | | Front loading washer | |
|-----------------------------|-------------------------|-------|----------------------|-------------|
| | | | WF45M5500A* | WF45M5100A* |
| Dimensions (inches (mm)) | A. Height-overall | | 38.7 (984) | |
| | B. Width | | 27 (686) | |
| | C. Depth with door open | | 54.6 (1386) | |
| | D. Depth | | 34 (864) | |
| Water pressure (psi (kPa)) | | | 20-116 (137-800) | |
| NET weight (lb (kg)) | | | 218 (99) | |
| Spin revolution | | | 1300 rpm | |
| Heater rating | | | 900 W | - |
| Heater rating | Washing | 120 V | 200 W | 200 W |
| | Washing and heating | 120 V | 1150 W | - |
| | Spin | 120 V | 550 W | 550 W |
| | Drain | 120 V | 80 W | 80 W |

Specifications

Specifications

Specification sheet

Samsung Dryer

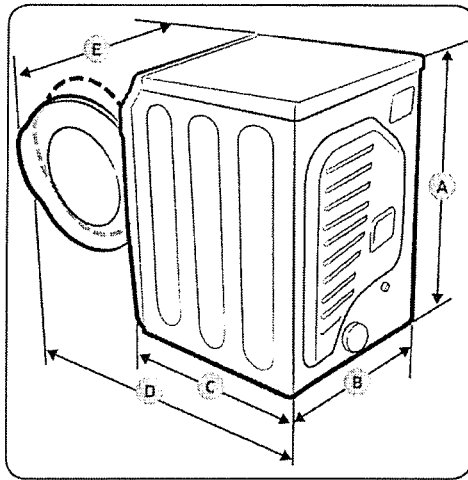

NOTE

"A. Height" Spec can vary from 42.4 to 43.3 inches (107.7 - 108.9 cm) depending on the leveling feet adjustments.

| Type | | | Front loading dryer |
|----------------------------|------------------------------|------------------------------------|----------------------|
| | | | DVE(G)45M5500* |
| Dimensions | A. Height | Product - inches (cm) | 38.7 (98.4) |
| | | Required for Installation - inches | 40.7 |
| | B. Width | Product - inches (cm) | 27.0 (68.6) |
| | | Required for Installation - inches | 29.0 |
| | C. Depth | Product - inches (cm) | 32.4 (82.3) |
| | | Required for Installation - inches | 37.6 |
| | D. Depth with door open 90° | Product - inches (cm) | 53 (134.5) |
| | | Required for Installation - inches | 58 |
| | E. Width with door open 110° | Product - inches (cm) | 39.4 (100) |
| | | Required for Installation - inches | 44.6 |
| Water pressure - psl (kPa) | | | 20 - 116 (137 - 800) |
| Weight | | lb (kg) | 121.3 (55) |
| Heater rating | | Electric (W) | 5300 |
| | | Gas (BTU/hr) | 22000 |