


JENN-AIR® DETAILED PLANNING DIMENSIONS

317


72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

JFC2290RE – 35 $\frac{1}{8}$ " x 71 $\frac{1}{8}$ " x 29 $\frac{3}{8}$ " (depth with handles)

PRODUCT DIMENSIONS

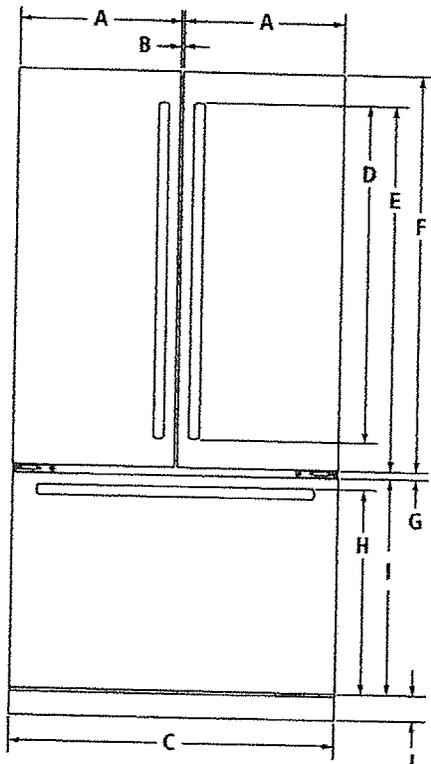

FRONT VIEW

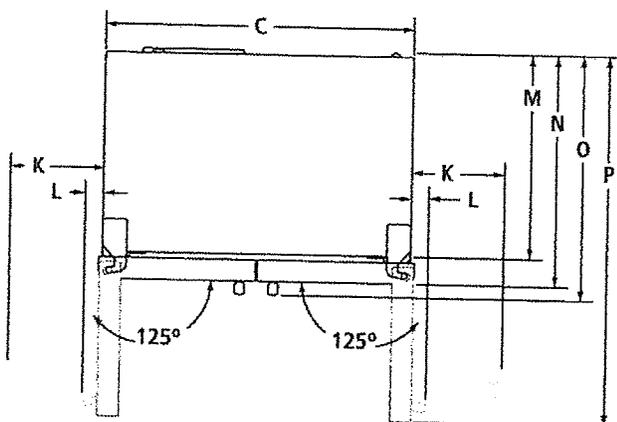

TOP VIEW

MODEL #	JFC2290RE	
	in	cm
A	Width of each door	17 $\frac{7}{8}$ 44.8
B	Space between doors	$\frac{3}{8}$ 1.0
C	Overall width	35 $\frac{1}{8}$ 90.5
D	Height of door handles	
	Pro-Style® Stainless	33 $\frac{1}{4}$ 84.5
	Euro-Style Stainless	37 $\frac{7}{8}$ 95.6
E	Height to top of door handles	
	Pro-Style® Stainless	38 $\frac{1}{8}$ 98.1
	Euro-Style Stainless	40 $\frac{7}{8}$ 103.8
F	Height of doors	
	Pro-Style® Stainless	37 $\frac{7}{8}$ 95.6
	Euro-Style Stainless	37 $\frac{7}{8}$ 95.6
G	Space between doors and drawer	
	Pro-Style® Stainless	1 2.5
	Euro-Style Stainless	1 2.5
H	Height to top of drawer handle	
	Pro-Style® Stainless	22 $\frac{7}{8}$ 58.1
	Euro-Style Stainless	22 $\frac{7}{8}$ 57.5
I	Height of drawer	
	Pro-Style® Stainless	22 $\frac{7}{8}$ 57.5
	Euro-Style Stainless	22 $\frac{7}{8}$ 57.5
J	Height of grille	
	Pro-Style® Stainless	23 $\frac{3}{8}$ 60.6
	Euro-Style Stainless	23 $\frac{3}{8}$ 60.6
K	Width from side of refrigerator to handle – door fully open 125°	
	Pro-Style® Stainless	24 61.0
	Euro-Style Stainless	24 61.0
L	Width from side of refrigerator to handle – door open 90°	
	Pro-Style® Stainless	2 $\frac{1}{4}$ 5.7
	Euro-Style Stainless	2 5.1
M	Depth without doors	
	Pro-Style® Stainless	2 5.1
	Euro-Style Stainless	2 5.1
N	Depth with doors	
	Pro-Style® Stainless	27 $\frac{1}{8}$ 70.2
	Euro-Style Stainless	27 $\frac{1}{8}$ 70.2
O	Depth with handles	
	Pro-Style® Stainless	27 $\frac{1}{8}$ 70.2
	Euro-Style Stainless	27 $\frac{1}{8}$ 70.2
P	Depth with doors open 90°	
	Pro-Style® Stainless	30 $\frac{1}{4}$ 76.8
	Euro-Style Stainless	29 $\frac{3}{8}$ 75.2
	Floating Glass	29 $\frac{3}{8}$ 75.9

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8494AdZw615

JENN-AIR® DETAILED PLANNING DIMENSIONS

72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

JFC2290RE – 35⁵/₈" x 71⁷/₈" x 29⁵/₈" (depth with handles)

DIMENSIONS AS INSTALLED

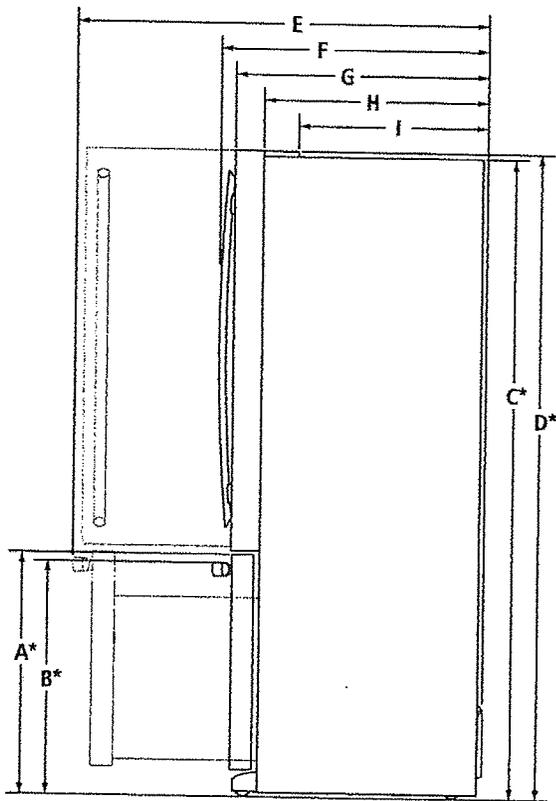

SIDE VIEW

MODEL #	JFC2290RE	
	in	cm
A*	Height to top of drawer (min.)	
	Pro-Style® Stainless	
	26 ³ / ₄	67.9
B*	Height to top of drawer handle (min.)	
	Pro-Style® Stainless	
	25 ³ / ₄	65.4
C*	Height to top of drawer (min.)	
	Euro-Style Stainless	
	26 ³ / ₄	67.9
D*	Height to top of drawer handle (min.)	
	Euro-Style Stainless	
	25 ¹ / ₂	64.8
E	Height of recessed refrigerator (min.)	
	Pro-Style® Stainless	
	71 ¹ / ₄	181.0
F	Height to top of hinges (min.)	
	Euro-Style Stainless	
	71 ⁷ / ₈	182.6
G	Depth with drawer fully open including drawer handle (min.)	
	Pro-Style® Stainless	
	45 ⁵ / ₈	115.3
H	Depth with handles (min.)	
	Euro-Style Stainless	
	44 ³ / ₄	113.7
I	Depth with doors (min.)	
	Pro-Style® Stainless	
	45	114.3
A*	Depth with handles (min.)	
	Euro-Style Stainless	
	30 ¹ / ₄	76.8
B*	Depth without doors (min.)	
	Euro-Style Stainless	
	29 ⁵ / ₈	75.2
C*	Depth with doors (min.)	
	Pro-Style® Stainless	
	27 ⁵ / ₈	70.2
D*	Depth without doors (min.)	
	Euro-Style Stainless	
	27 ⁵ / ₈	70.2
E	Depth to back of hinges (min.)	
	Euro-Style Stainless	
	27 ¹ / ₈	70.8
F	Depth without doors (min.)	
	Euro-Style Stainless	
	24 ¹ / ₂	62.2
G	Depth to back of hinges (min.)	
	Euro-Style Stainless	
	20 ⁵ / ₈	52.4

*Add 3/4" (1.9 cm) to the height dimension when leveling legs are fully extended.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8494AdZw615

JENN-AIR® DETAILED PLANNING DIMENSIONS


72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

JFC2290RE – 35 $\frac{3}{8}$ " x 71 $\frac{1}{8}$ " x 29 $\frac{3}{8}$ " (depth with handles)

OPENING/CLEARANCE DIMENSIONS

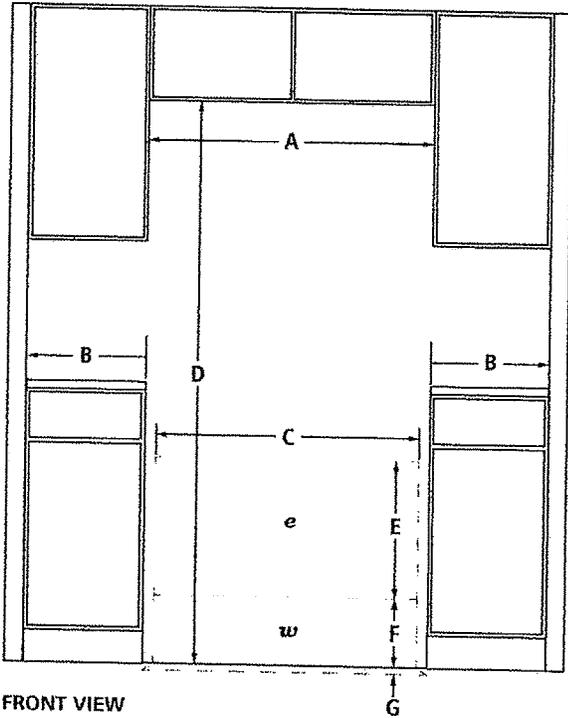

FRONT VIEW

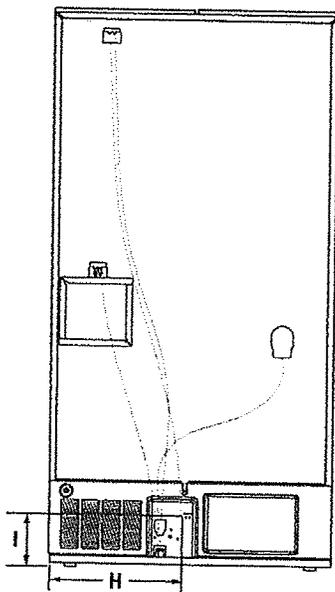

BACK VIEW

MODEL #	JFC2290RE	
	in	cm
A Width (min.)	36 $\frac{3}{8}$	93.0
Minimum width from side of refrigerator to fixed wall – door open 90° (full access to remove bins)	Pro-Style® Stainless	2 $\frac{1}{8}$ 6.7
	Euro-Style Stainless	2 5.1
	Floating Glass	2 $\frac{1}{4}$ 5.7
B Minimum width from side of refrigerator to fixed wall – door fully open 125°	Pro-Style® Stainless	10 $\frac{3}{8}$ 27.6
	Euro-Style Stainless	10 $\frac{3}{8}$ 26.4
	Floating Glass	10 $\frac{3}{8}$ 27.3
C Width of recommended electrical/water installation area	34	86.4
D Height (min.)	71 $\frac{1}{8}$	182.6
E Height of recommended electrical installation area (min.-max.)	10-24	25.4-61.0
F Height of recommended water installation area	10	25.4
G Depth of recommended water installation area	1	2.5
H Water line location – distance from side	24 $\frac{3}{8}$	62.5
I Water line location – distance from bottom	9 $\frac{3}{8}$	23.8
e Recommended electrical connection location		
w Recommended water connection location		

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch.

Minimum length of power cord is 60" (152.0 cm). Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8494AdZw615




Electric Dryer

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F, WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions

Front view:

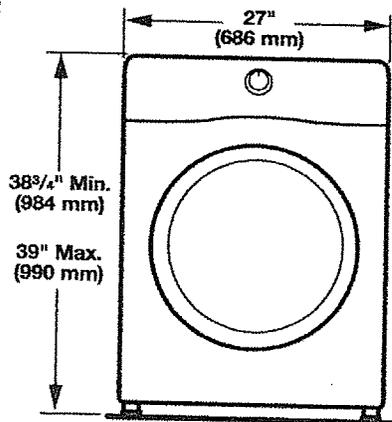


Side view:

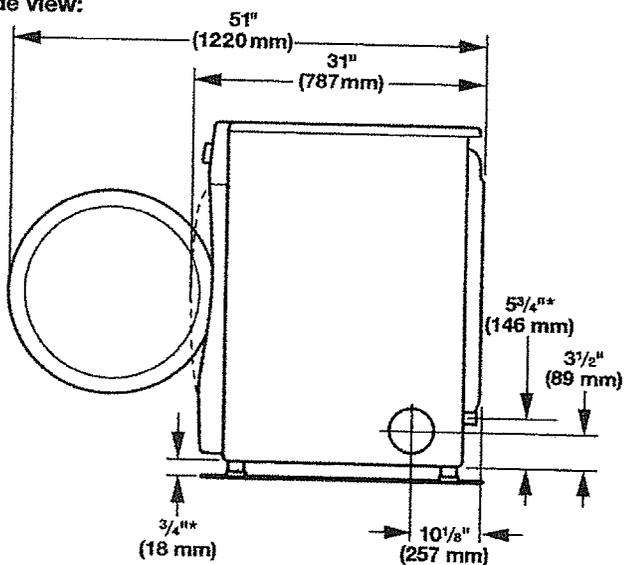

Back view:

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

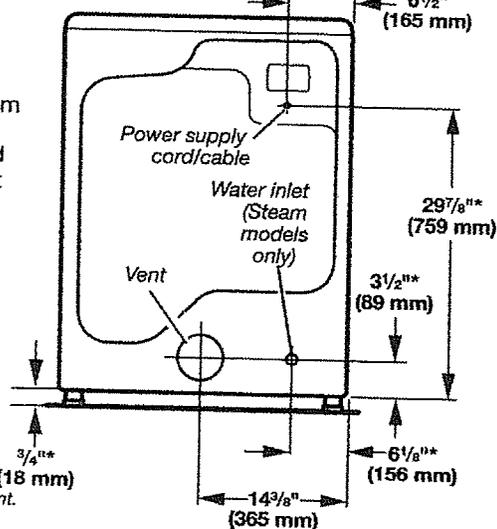


*Approx. measurement.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

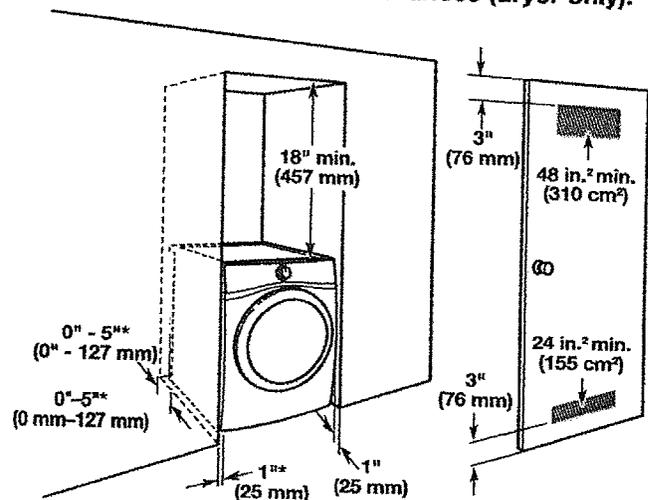


*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

**0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

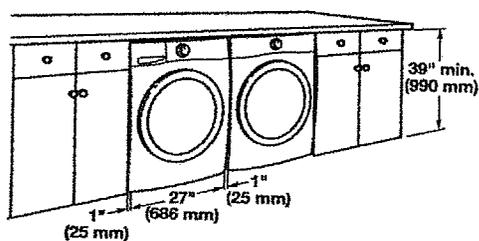

W10868947A
10/2016

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.


WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**

IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.


- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.
- Do not use plastic or metal foil vent.

Exhaust hoods:

Recommended Styles:

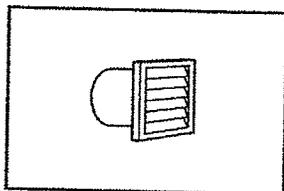


Louvered Hood

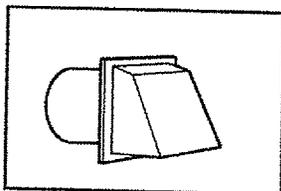

Box Hood

Acceptable Style:

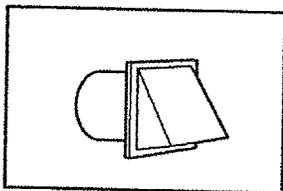

Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be DALV (Long Vent) - ELE - XXXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




Electric Dryer

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F,
WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions

Front view:

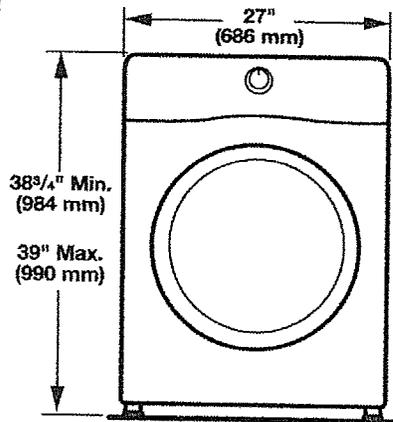


Side view:

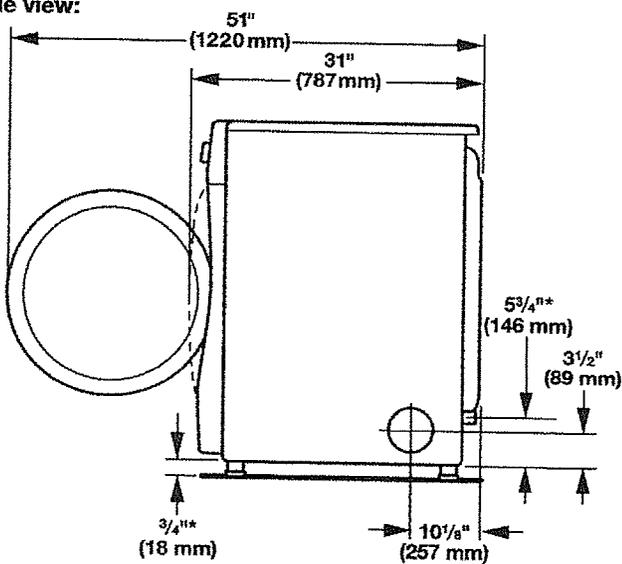

Back view:

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

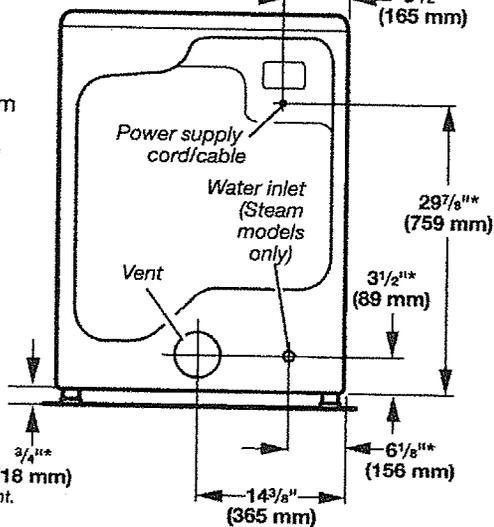


*Approx. measurement.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

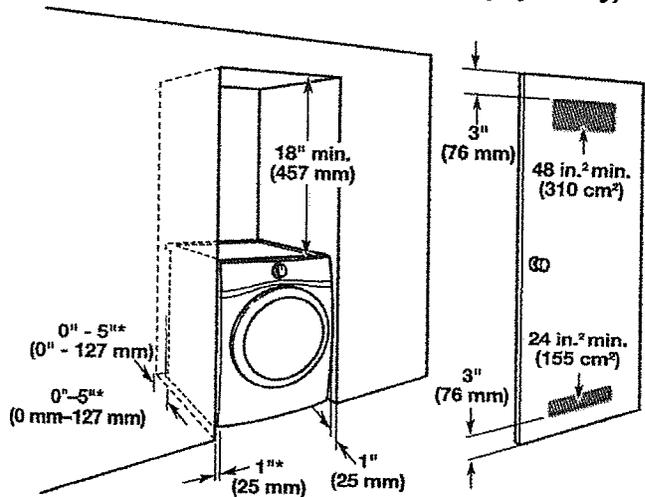


*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

**0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

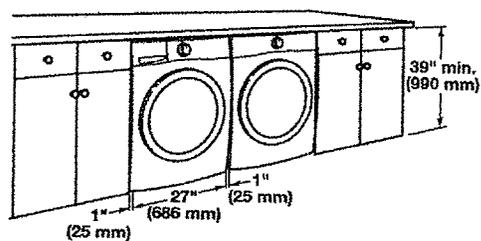

W10868947A
10/2016

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**


IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.

- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.


- Do not use plastic or metal foil vent.

Exhaust hoods:

Recommended Styles:

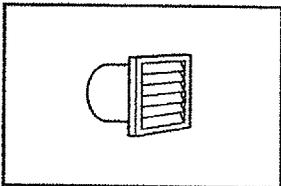


Louvered Hood

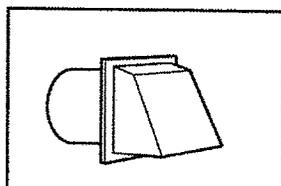

Box Hood

Acceptable Style:

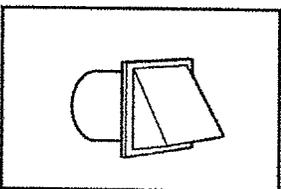

Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be DALV (Long Vent) - ELE - XXXXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,
WFW90HEF, WFW92HEF

Washer Dimensions:

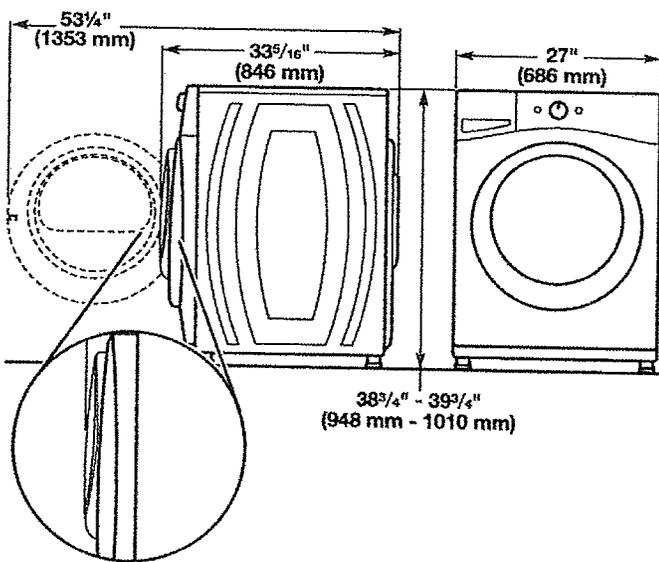

Recessed or closet installation -
stacked washer and dryer

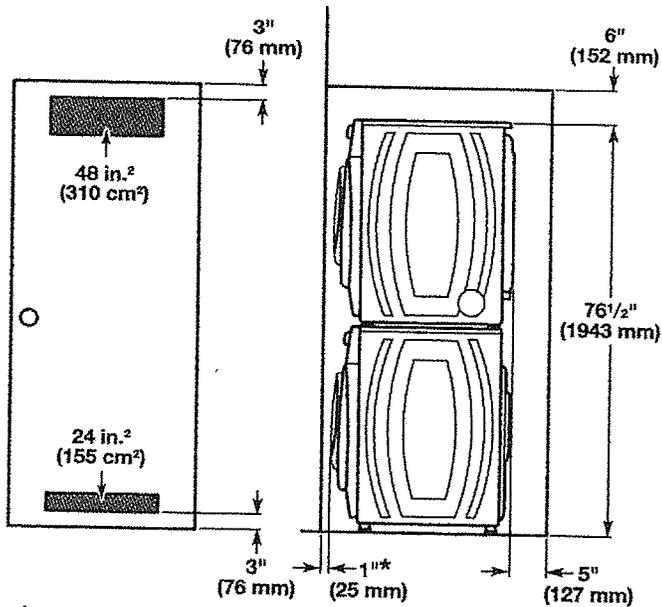


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

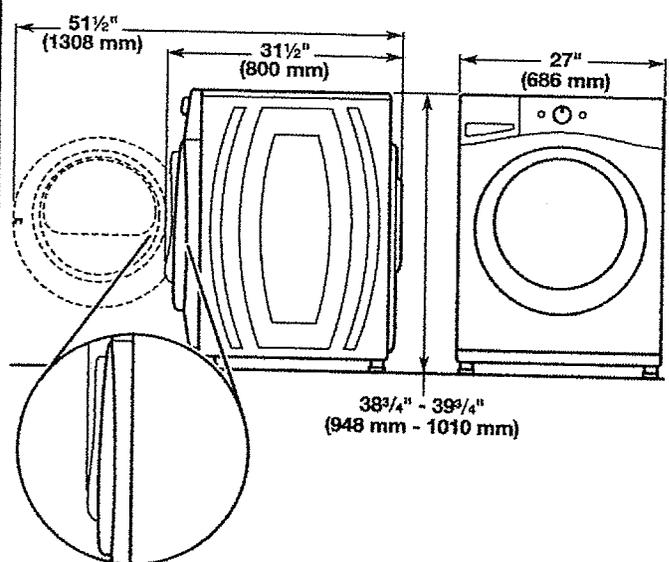


Recessed area or closet installation (washer only):

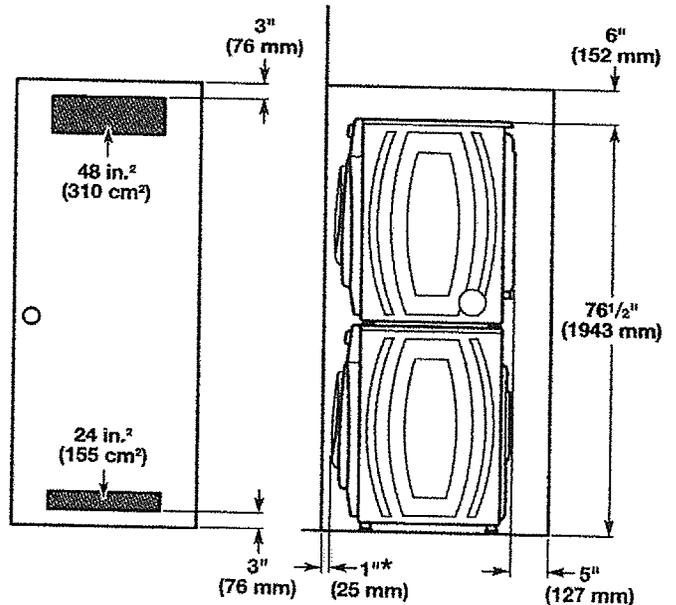


* Add spacing of 1" (25 mm) on all sides of washer.

Custom cabinet installation (washer only):

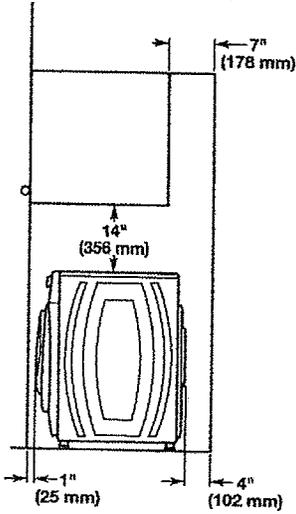

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

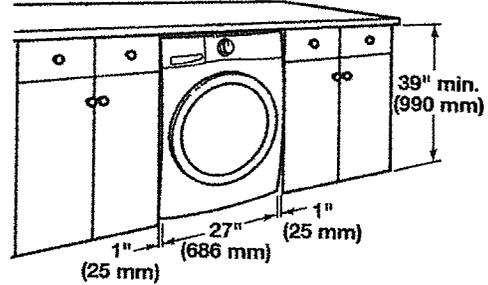

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

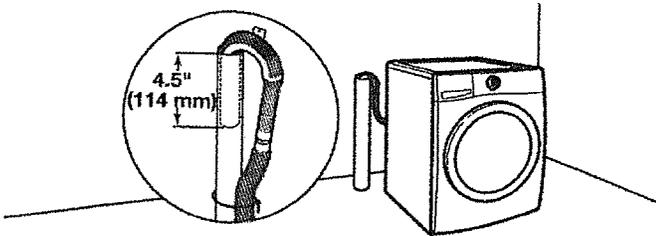


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

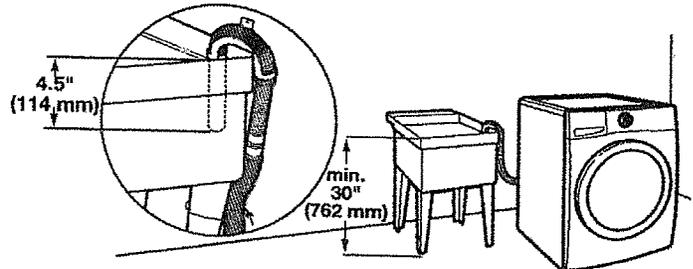


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

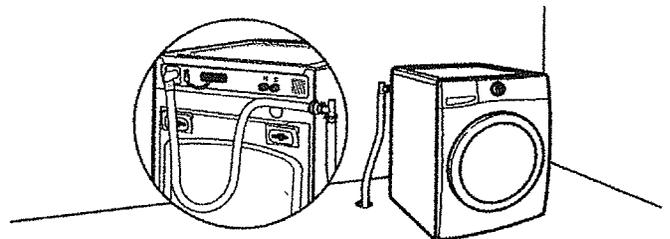

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Wall standpipe drain system

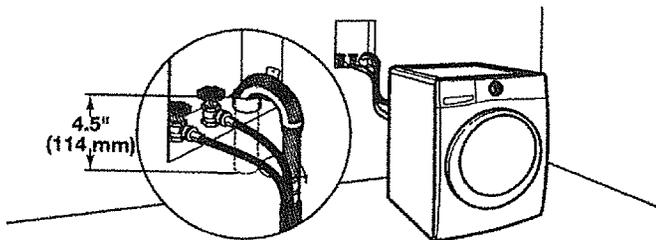

See requirements for floor standpipe drain system.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

JENN-AIR® DETAILED PLANNING DIMENSIONS

OVER-THE-RANGE MICROWAVE OVENS


JMV9196C, JMV8208C – 29⁷/₈" x 17¹/₁₆" x 16⁷/₁₆" – 17⁵/₁₆"

PRODUCT DIMENSIONS

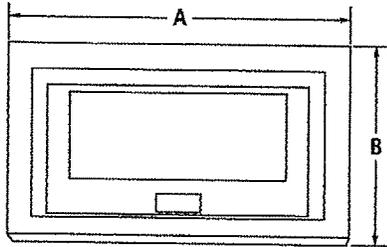


FRONT VIEW

MODEL #	JMV9196C JMV8208C	
	in	cm
A Overall width	29 ⁷ / ₈	76.0
B Overall height	17 ¹ / ₁₆	44.6
C Depth without door	16	40.6
D Depth with door	16 ¹⁵ / ₁₆ ± 3 ¹ / ₈	43.0 ± 1.0
E Depth with door open 90°	44 ⁷ / ₁₆	112.9

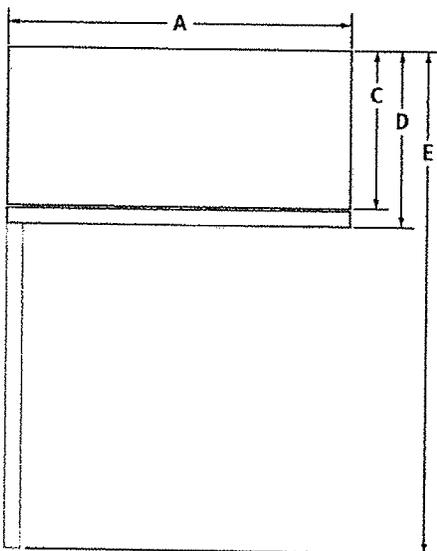

TOP VIEW

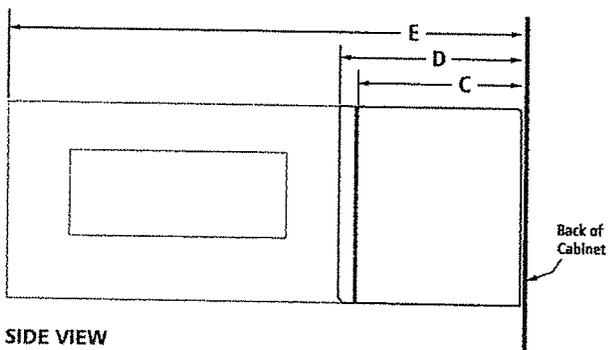

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8562AdZw815

JENN-AIR® DETAILED PLANNING DIMENSIONS


OVER-THE-RANGE MICROWAVE OVENS

JMV9196C, JMV8208C – 29⁷/₈" x 17³/₁₆" x 16⁹/₁₆" – 17⁵/₁₆"


OPENING/CLEARANCE DIMENSIONS

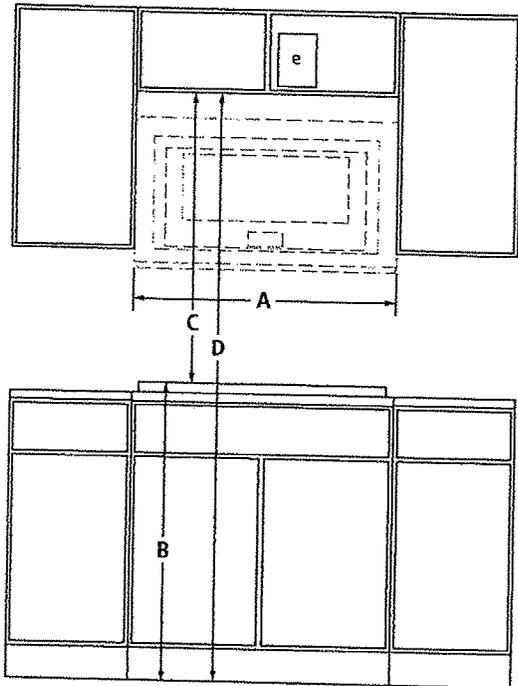

FRONT VIEW

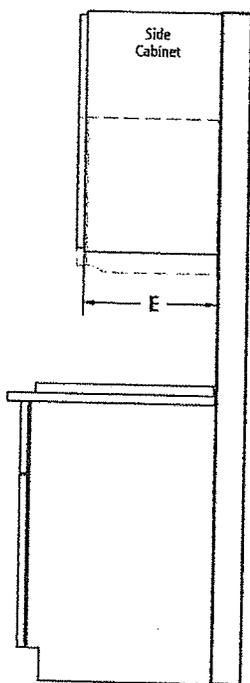

SIDE VIEW

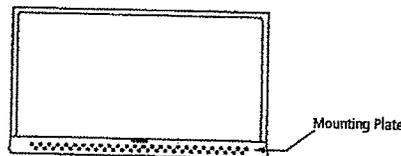

BACK VIEW

MODEL #	JMV9196C JMV8208C	
	in	cm
A	Width of cabinet opening (min.)*	30 76.2
B	Height from cooking surface to floor	— —
C	Suggested distance from top of cabinet opening to cooking surface	30 76.2
D	Height from floor to top of cabinet opening (B + C = D)	— —
E	Depth of upper cabinet (min.-max.)	12-14 30.5-35.6
e	Recommended electrical connection location	

*Optional filler kits available for width of 36" (91.4 cm)
Black: 8171337; Stainless Steel: 8171339

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

VENTING REQUIREMENTS

The microwave oven is factory set for recirculating ventilation. To vent through the roof or wall, refer to installation instructions for further information.

LOCATION REQUIREMENTS

Support structure must be able to support 150 lb (68 kg) including microwave oven and upper cabinet including contents.

Mounting plate must attach to a minimum of one 2" x 4" (5.1 cm x 10.2 cm) wall stud.

Minimum distance between a fixed wall on the hinged-side of the door and the microwave oven is 6" (15.2 cm).

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

JENN-AIR®


8562AdZw815

JENN-AIR® DETAILED PLANNING DIMENSIONS


30" DUAL-FUEL AND GAS RANGES

JDS1450D, JGS1450D – 29⁷/₈" x 36" x 28⁵/₁₆"

PRODUCT DIMENSIONS

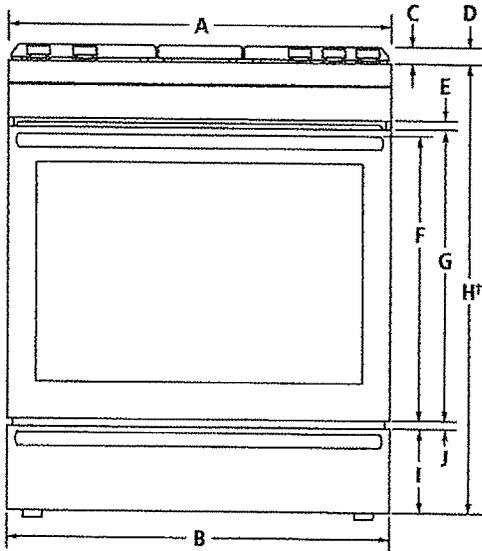

FRONT VIEW

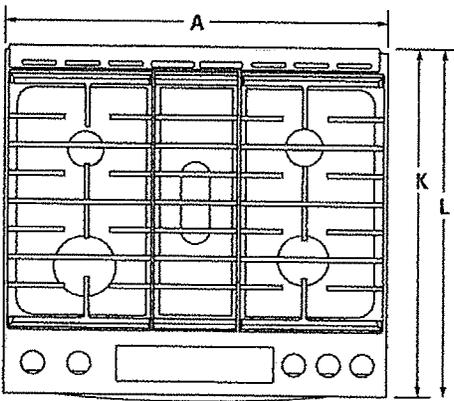

TOP VIEW

MODEL #	JDS1450D JGS1450D	
	in	cm
A	Overall width	29 ⁷ / ₈ 75.9
B	Width of door/drawer	29 ⁷ / ₈ 75.9
C	Height from cooktop to top of vent	1 ³ / ₁₆ 3.0
D	Height with grates	37 ⁷ / ₈ 96.2
	Height with vent*	37 ³ / ₈ 95.0
E	Space between door and control panel	1 ³ / ₁₆ 2.1
F	Height to top of handle Pro-Style® Stainless	22 ⁷ / ₈ 58.1
	Euro-Style (color-coordinating)	22 ⁷ / ₈ 58.1
G	Height of door	23 ³ / ₄ 59.0
H†	Height to top of cooktop edge	36 91.4
I	Height of warming drawer	6 ⁵ / ₁₆ 16.0
J	Space between door and warming drawer	1 ³ / ₁₆ 2.0
K	Depth from front of console to back of range (max.)	27 ¹³ / ₁₆ 70.7
	Depth from handle to back of range (max.) Pro-Style® Stainless	28 ¹⁵ / ₁₆ 73.5
L	Euro-Style (color-coordinating)	28 ⁵ / ₁₆ 71.9

*Model JGS1450D.

†With leveling legs screwed all the way in. Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8320CA2w1114

JENN-AIR® DETAILED PLANNING DIMENSIONS


30" DUAL-FUEL AND GAS RANGES

JDS1450D, JGS1450D – 29⁷/₈" x 36" x 28⁵/₁₆"

DIMENSIONS AS INSTALLED

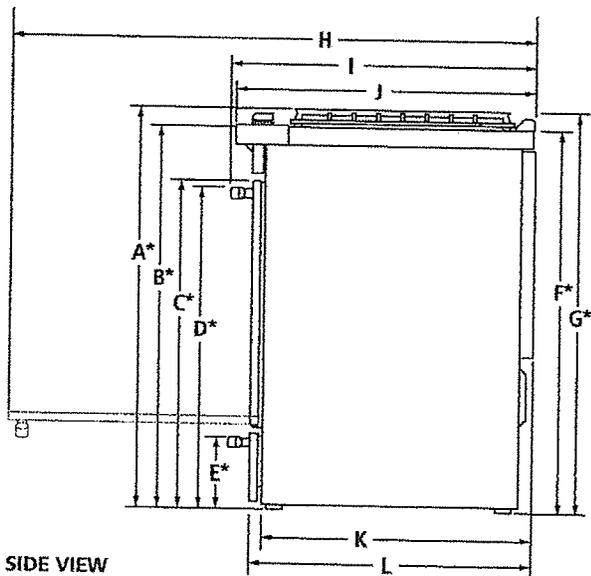

SIDE VIEW

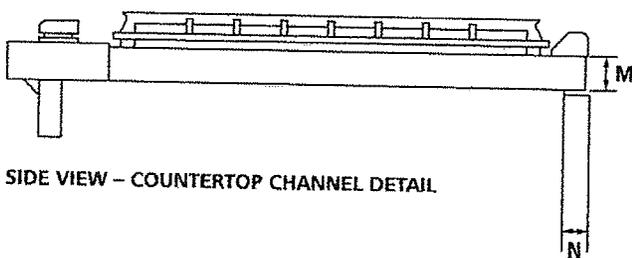

SIDE VIEW - COUNTERTOP CHANNEL DETAIL

MODEL #	JDS1450D JGS1450D	
	in	cm
A*	Height to top of grates (min.)	37 ⁷ / ₈ 96.2
B*	Height to top of cooking surface (min.)	35 ¹ / ₂ 90.2
C*	Height to top of door (min.)	30 ¹ / ₁₆ 78.0
D*	Height to top of handle (min.)	
	Pro-Style® Stainless	30 ¹ / ₂ 77.5
	Euro-Style (color-coordinating)	30 ¹ / ₂ 77.5
E*	Height to top of warming drawer (min.)	6 ⁷ / ₈ 17.5
F*	Height to top of countertop (min.)	35 ¹³ / ₁₆ 91.0
G*	Height to top of vent (min.)**	37 ³ / ₈ 95.0
H	Depth with door fully open	50 ⁹ / ₁₆ 128.5
I	Depth with handle	
	Pro-Style® Stainless	28 ¹⁵ / ₁₆ 73.5
	Euro-Style (color-coordinating)	28 ⁷ / ₁₆ 71.9
J	Depth from front of console to back of range (max.)	27 ¹³ / ₁₆ 70.7
K	Depth without door	25 63.5
L	Depth with door	26 ⁷ / ₁₆ 66.8
M	Height of countertop channel	1 ¹³ / ₁₆ 4.6
N	Depth to countertop channel	1 ³ / ₁₆ 3.0

*With leveling legs screwed all the way in. Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Model JGS1450D.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8320CAdZw1114

JENN-AIR® DETAILED PLANNING DIMENSIONS

30" DUAL-FUEL AND GAS RANGES

JDS1450D, JGS1450D – 29^{7/8}" x 36" x 28^{5/16}"

OPENING/CLEARANCE DIMENSIONS

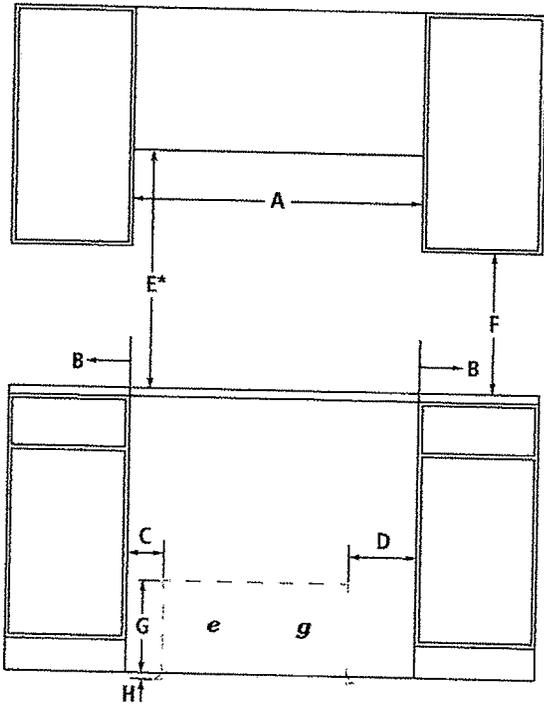

FRONT VIEW

MODEL #	JDS1450D JGS1450D	
	in	cm
A	Width of combustible area above cooking surface (min.)	30 76.2
B	Width from cooktop to fixed wall or other combustible material (min.)	3 7.6
C	Width from electrical installation area to cabinet (min.)	4 ^{13/16} 12.2
D	Width from gas installation area to cabinet (min.)	12 30.5
E*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30 76.2
F	Height to bottom of uncovered wood or metal cabinet (min.)	18 45.7
G	Height of electrical installation area (max.)	7 ^{11/16} 19.5
H	Depth of electrical installation area (max.)	3 ^{11/16} 9.4
I	Depth of upper cabinet (recommended)	13 33.0
J	Width of cutout (min.)	30 76.2
K	Width to power cord	2 ^{3/4} 7.0
L	Width to gas inlet	17 ^{15/16} 45.5
M	Height to gas inlet	4 ^{7/16} 11.3
e	Recommended junction box location	
g	Recommended gas access location	


*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or microwave hood combination above the range, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.


ELECTRICAL REQUIREMENTS

JDS1450D: 240 volt, 60 Hz, AC only, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended. Minimum length of power cord is 48" (121.9 cm).


JGS1450D: 120 volt, 60 Hz, AC only, 15-amp fused, grounded circuit is required. A dedicated circuit is recommended. Minimum length of power cord is 48" (121.9 cm).

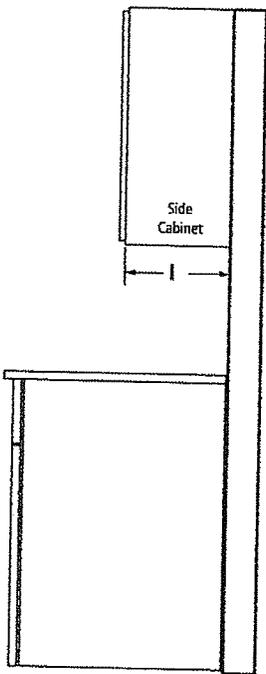

SIDE VIEW

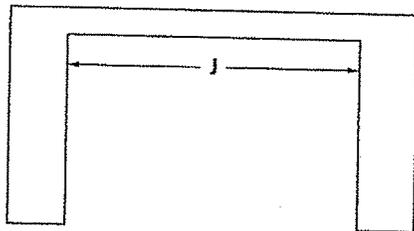

TOP VIEW - CUTOUT

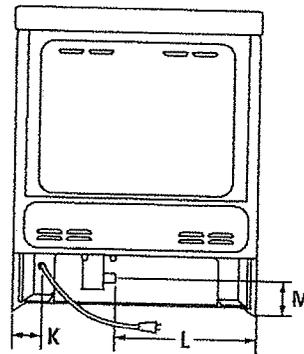

BACK VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8320CAdZw1114

JENN-AIR® DETAILED PLANNING DIMENSIONS


DISHWASHERS

JDB9800CW, JDB9200CW, JDB9000CW – 23³/₄" x 33⁷/₈" x 26⁷/₈" (including handle)


PRODUCT DIMENSIONS

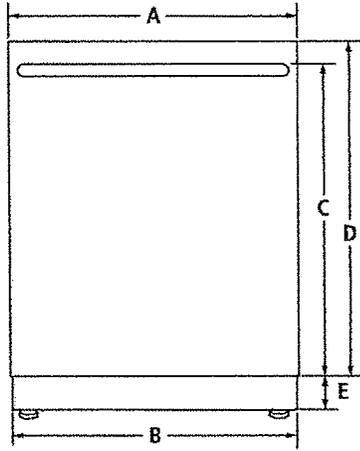

FRONT VIEW

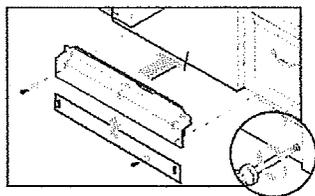

ADJUSTABLE TOE KICK

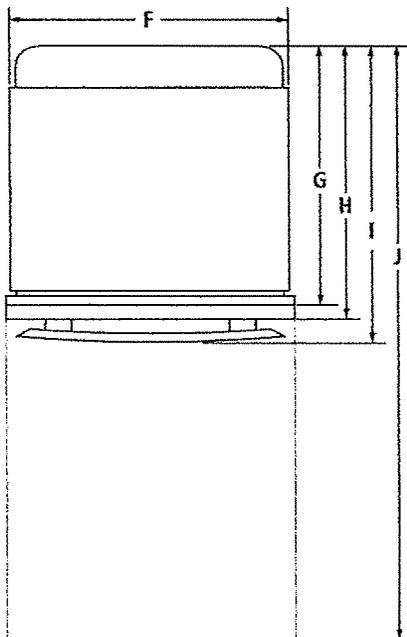

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


MODEL #	JDB9800CW JDB9200CW JDB9000CW	
	in	cm
A Width of door	23 ³ / ₄	59.7
B Width of toe kick	23 ³ / ₄	59.7
C Height to top of handle	Pro-Style® Stainless	27 ⁷ / ₈ 70.8
	Euro-Style (color-coordinating)	27 ⁷ / ₈ 70.8
	Floating Glass	27 ⁷ / ₈ 70.8
D Height of door	Pro-Style® Stainless	30 76.3
	Euro-Style (color-coordinating)	30 76.3
	Floating Glass	30 76.3
E Height of adjustable toe kick (min.-max.)	3 ¹ / ₂ - 4 ¹ / ₈	8.9- 10.5
F Width of recessed dishwasher	23 ³ / ₄	60.4
G Depth with tub flange	22 ⁵ / ₈	57.4
H Depth with door	Pro-Style® Stainless	24 ³ / ₈ 62.6
	Euro-Style (color-coordinating)	24 ³ / ₈ 62.6
	Floating Glass	25 63.5
I Depth with handle	Pro-Style® Stainless	27 ⁷ / ₈ 70.8
	Euro-Style (color-coordinating)	26 ⁷ / ₈ 68.3
	Floating Glass	27 ⁷ / ₈ 70.8
J Depth with door fully open	49 ³ / ₄	126.3

JENN-AIR® DETAILED PLANNING DIMENSIONS


DISHWASHERS

JDB9800CW, JDB9200CW, JDB9000CW – 23³/₈" x 33⁷/₈" x 26⁷/₈" (including handle)


OPENING/CLEARANCE DIMENSIONS

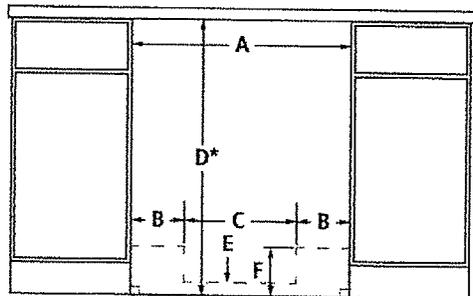

FRONT VIEW

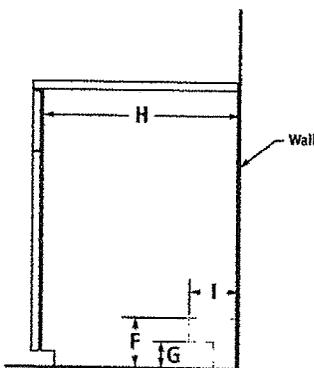

SIDE VIEW

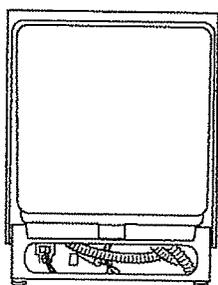

BACK VIEW

MODEL #	JDB9800CW JDB9200CW JDB9000CW	
	in	cm
A	Width (min.)	24 61.0
B	Width of possible utility installation area (back wall)	6 ³ / ₈ 17.2
C	Width of clear area (back wall)	10 ¹ / ₂ 26.7
D*	Height with wheels removed (min.)	33 ³ / ₈ 86.0
E	Height of possible utility installation area (back wall)	2 ¹ / ₂ 6.4
F	Height of possible utility installation area (back/side wall)	6 ³ / ₈ 15.9
G	Height of clear area (side wall)	3 7.6
H	Depth (min.)	24 61.0
I	Depth of utility location (side wall)	4 10.2

Electrical, water and drain connections may be installed in shaded areas

Recommended drain connection location – closest to sink	1 ¹ / ₂ dia. 3.8 dia.
Recommended electrical connection location – right-hand side or back wall	1 ¹ / ₂ dia. 3.8 dia.
Recommended water connection location – left-hand side or back wall	½ dia. 1.3 dia.

*Measured from the lowest point on the underside of countertop.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER SUPPLY REQUIREMENTS

120°F (49°C) hot water supply with water pressure between 20 and 120 psi (138 and 862 kPa) is required. If you have questions about your water pressure, call a licensed, qualified plumber.

DRAIN REQUIREMENTS

Connect drain hose to waste tee or disposer inlet above drain trap. Maximum drain hose length 12' (3.7 m).

LOCATION REQUIREMENTS

Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8768CdZw416