

10+315

Miele
 IMMER BESSER

Print Page



30" KFN14943 SD ed/cs Freestanding Bottom-Mount Fridge/Freezer

CleanTouch steel

- Right Hinge (hinge is interchangeable to left)
- Freestanding Unit

Miele Pricing

Miele Advantage

Miele Advantage Plus

[What is this?](#)[Add To Cart](#)[Find a Retailer](#)

Promotions:

 SAVE
 10%

 SAVE up to 10% with the Miele Complete
 Cooking Program!
[Learn More](#)

- Product Details
- Downloads
- Recommended Products
- ForeverCare
- Reviews

Series

Type

European

Width

Refrigerator capacity

11.5 cu. ft. / 327 L

Freezer capacity

4.1 cu. ft. / 115 L

Width

30" (76 cm)

Refrigeration Category

Bottom mount fridge freezer

Design


Freestanding

79" tall

Installation information

Appliance dimensions

Lot 315

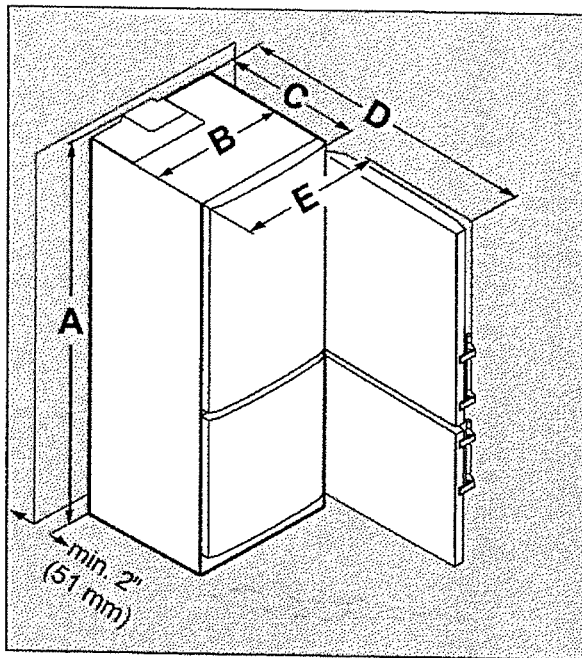

| | A | B | C | D | E |
|--------------------|------------------------|---------------------|-----------------------|----------------------|----------------------|
| KFN 14943 SD ed/cs | 2020 mm (79 17/32") | 747 mm (29 3/8") | 630 mm (24 13/16") | 1330 mm (52 3/8") | 790 mm (31 3/32") |

If the gap between the rear of the appliance and the wall is less than 2 inch (51 mm), the power consumption level may increase.

Miele
 IMMER BESSER

Print Page

Lot 315



36" HR 1134 G All Gas EasyControl Range

A Range Like No Other.

- EasyControl Display (7-Segment display)
- SoftOpen and SoftClose Door
- CleanTouch Steel Finish
- TwinPower Convection Fans
- Dishwasher safe grates

Miele Pricing

Miele Advantage

Miele Advantage Plus

[What is this?](#)

[Find a Retailer](#)

Promotions:

SAVE
10%

SAVE up to 10% with the Miele Complete Cooking Program! or

[Learn More](#)

SAVE UP TO
\$1,000

SAVE \$750 on all 36" Ranges

[Learn More](#)

- [Product Details](#)
- [Downloads](#)
- [Accessories](#)
- [Recommended Products](#)
- [ForeverCare](#)
- [Reviews](#)

Overview

Type

Range Type

All Gas

Gas Convection Oven

Gas Cooktop

Width

Width

36" (90 cm)


Configuration

All Gas Range dimensions

All Gas Range HR 11xx with Standard Burner Configuration

HR 1124, HR 1134, HR 1135, HR 1136

Lot 315

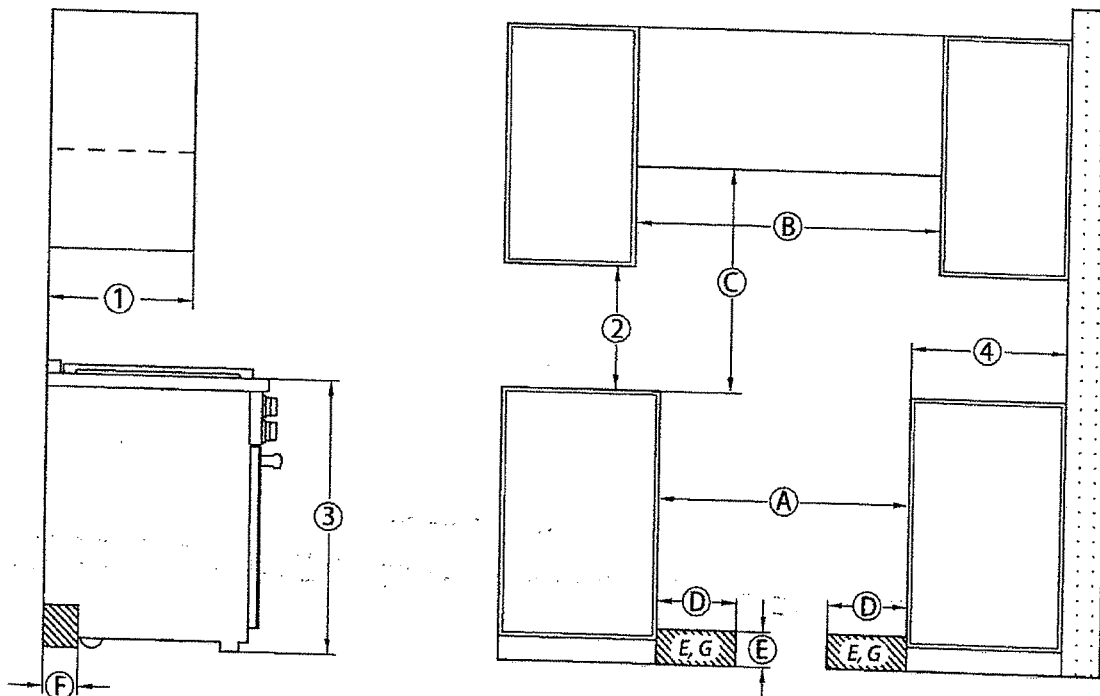

Ⓑ In case of combustible materials, a minimum distance of 6" must be observed on each side in addition to dimension Ⓐ.

Ⓓ, Ⓔ, Ⓕ The shaded area represents the installation area for the connections:
E = Electrical connection, G = Gas connection

| Position | Dimensions | Description |
|----------|-----------------------------|--|
| ① | 13" (330 mm) | Maximum depth of top cabinet |
| ② | 18" (457 mm) | Minimum distance to bottom edge of top cabinet |
| ③ | 35 1/2"-37" (901-940 mm) | Distance from the floor to cooktop surface |
| ④ | 10" (254 mm) | Minimum distance to combustible surfaces. |

All Gas Range dimensions

Lot 315

HR 1134

| Position | Dimensions | Description | |
|----------|--|--|-----------------------------|
| Ⓐ | Min. 36" (914 mm) | Width of cabinet opening | |
| Ⓑ | 6" + Ⓐ + 6" (150 mm + Ⓐ + 150 mm) | If combustible materials are present, an additional minimum distance of 6" (150 mm) (each side) is required. Ensure that the local regulations are observed. | |
| Ⓒ | 37" (940 mm) | Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. | |
| | 36" (914 mm) | Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL blower). | |
| | 30" (762 mm) | Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL blower). | |
| | For all other Hoods please consult the manufacturer's specifications for required distances. | | |
| Ⓓ | Approx. 13 3/4" (350 mm) | Maximum connection width right and left | Position of the wall socket |
| Ⓔ | Approx. 4 1/2" (115 mm) | Maximum connection height | |
| Ⓕ | Approx. 2 13/16" (72 mm) | Maximum connection depth | |

All Gas Range dimensions

Lot 315

HR 1134


| Position | Dimensions | Description | |
|----------|--|---|-----------------------------|
| Ⓐ | Min. 36" (914 mm) | Width of cabinet opening Please contact Miele Service for more information. | |
| Ⓑ | 37" (940 mm) | Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. | |
| | 36" (914 mm) | Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL blower). | |
| | 30" (762 mm) | Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL blower). | |
| | For all other Hoods please consult the manufacturer's specifications for required distances. | | |
| Ⓒ | Approx. 13 3/4" (350 mm) | Maximum connection width right and left | Position of the wall socket |
| Ⓓ | Approx. 4 1/2" (115 mm) | Maximum connection height | |
| Ⓔ | Approx. 2 13/16" (72 mm) | Maximum connection depth | |

All Gas Range dimensions

Lot 315

Detailed views of HR 1134

Side view of HR 1134

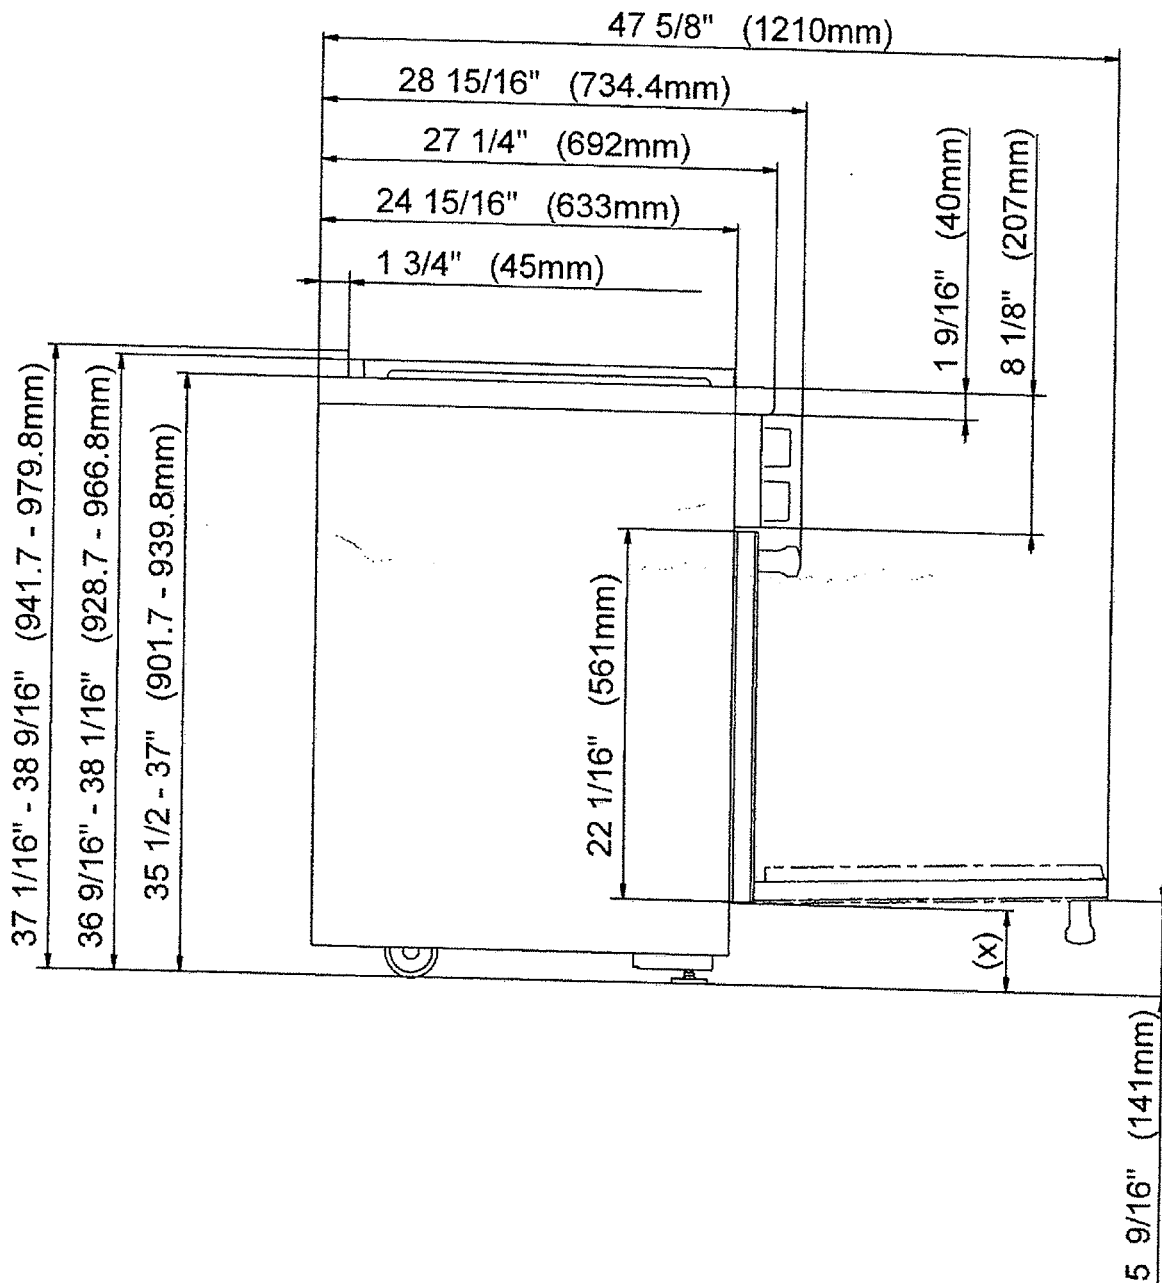


(x) = Depending on the appliance height adjustment: $5" - 6 \frac{1}{2}"$
(127 mm - 165.1 mm)

All Gas Range dimensions

LOT 315

Front side view of HR 1134

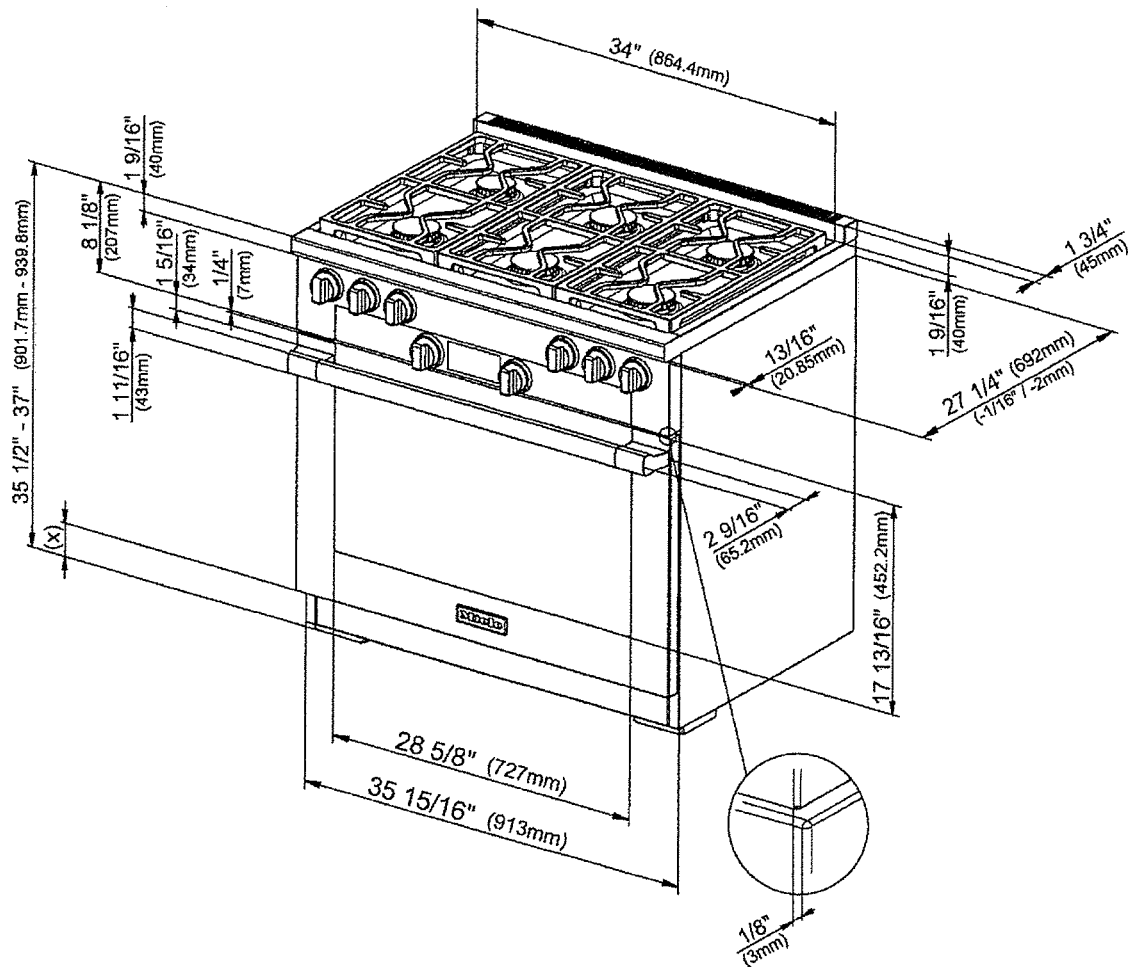


(x) = Depending on the appliance height adjustment: 5" - 6 1/2 " (127 mm - 165.1 mm)

All Gas Range dimensions

Rear view of HR 1134

Lot 315

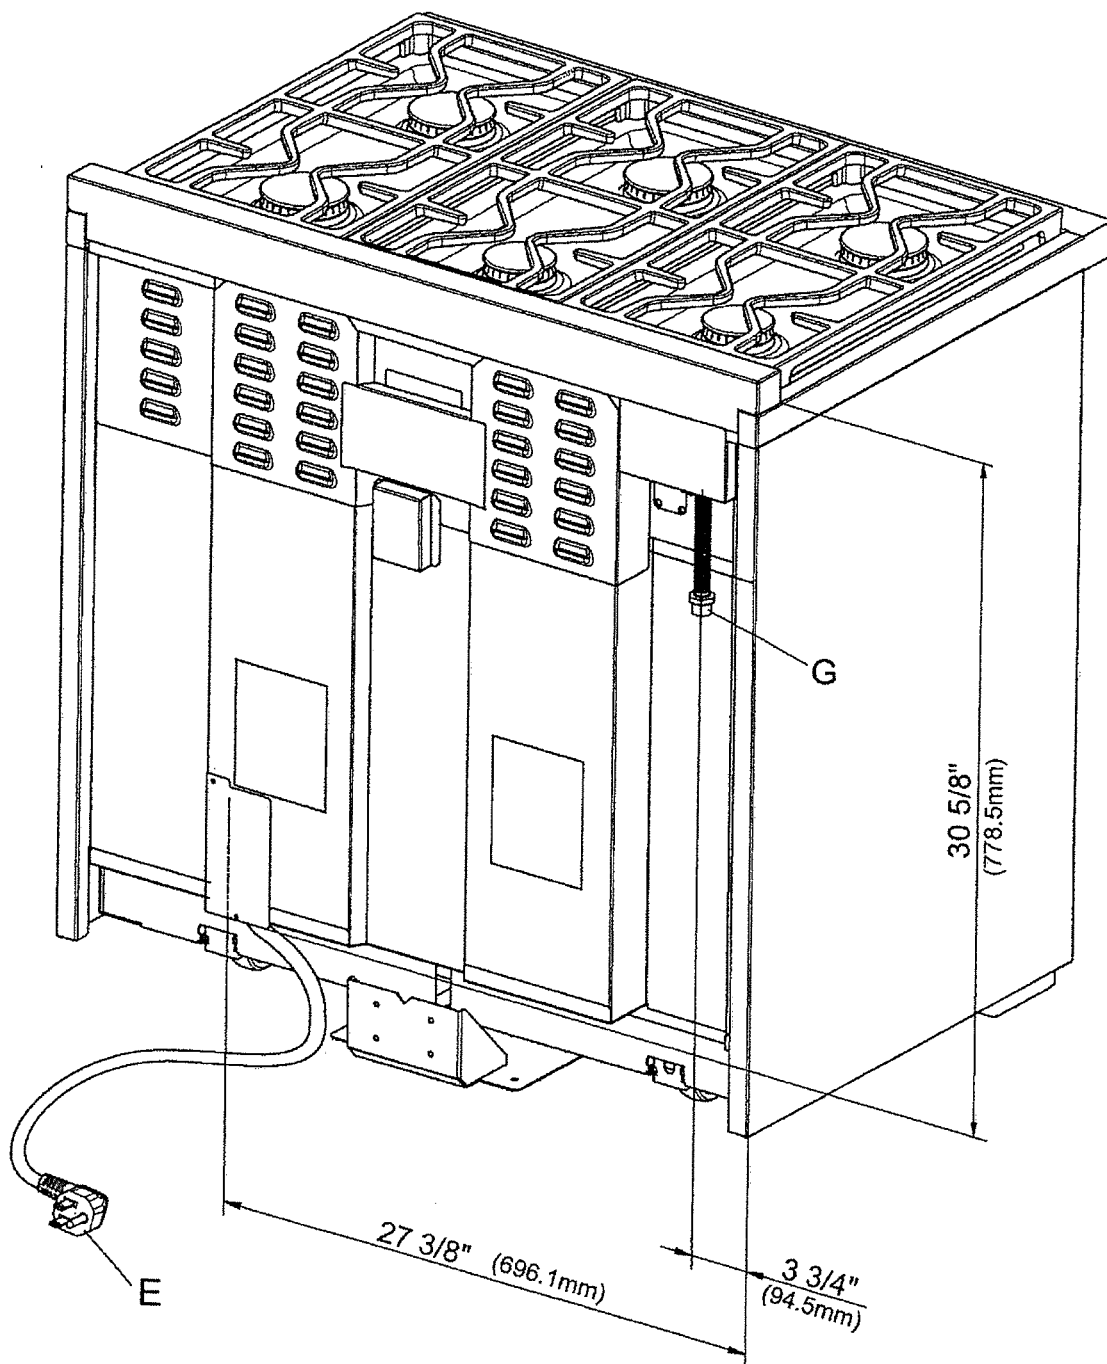

E = Electrical connection


G = Gas connection



Print Page

Lot 315

36" DAR1230 Wall Range Hood, Stainless Steel

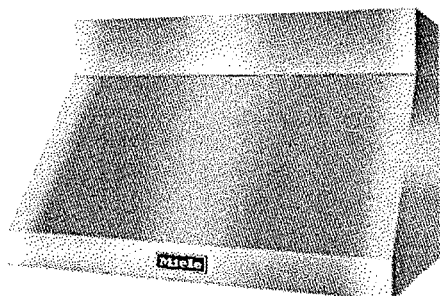

Design and perfect air filtration without compromise.

- Dishwasher safe stainless steel baffle filters
- 4 fan speed settings
- Integrated LED lighting
- Vented or recirculating
- Internal/external blower sold separately

Miele Pricing

Miele Advantage

Miele Advantage Plus

[What is this?](#)

[Find a Retailer](#)

Promotions:



SAVE up to 10% with the Miele Complete Cooking Program!

[Learn More](#)

- [Product Details](#)
- [Downloads](#)
- [Accessories](#)
- [Recommended Products](#)
- [ForeverCare](#)
- [Reviews](#)

Design

Stainless steel

Width

Width

36" (90 cm)

Features

LED lighting

Circulation

Vented application

Recirculated application




[Print Page](#)

700 CFM Internal Blower Lot 315

Miele Pricing

Plus Shipping and Handling

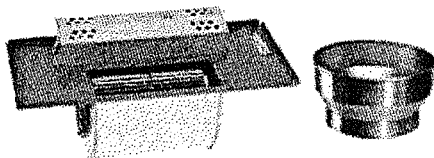


- [Product Details](#)
- [Reviews](#)

Design

You will have the choice between internal and external blower as part of the checkout process.

[Back to Top](#)

Appliance dimensions

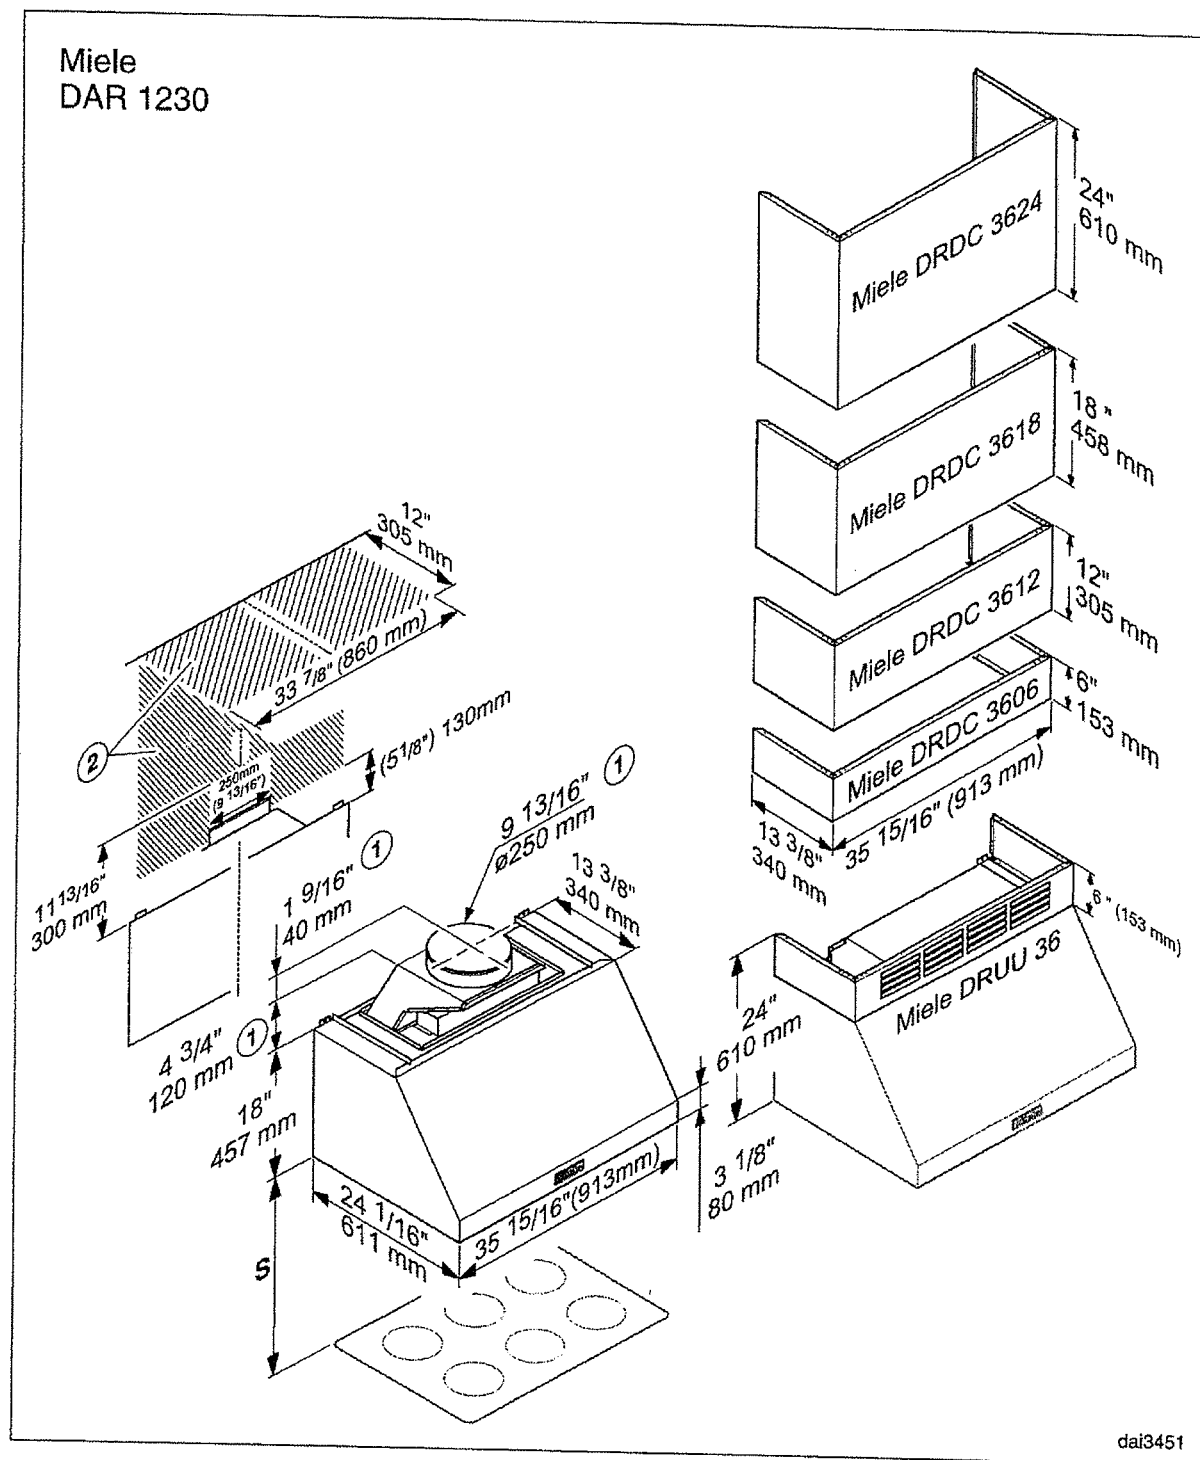


- ① The hood with exhaust collar is only used in air venting mode with an internal or external blower.
- ② Installation area; Wall/ceiling area respectively for vent hole and outlet installation. For recirculation mode only the outlet installation is required.

Plywood backing

The majority of the weight of the installed ventilation system will be supported by the retaining plate. It must be firmly attached to the stud framing **behind** the drywall. If studs are not available in the required locations, a plywood backing (min. ½" (13 mm) thick) spanning at least two studs **must** be installed. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.

(If plywood backing is not needed, proceed to the included "Installation diagram".)

To install a plywood backing

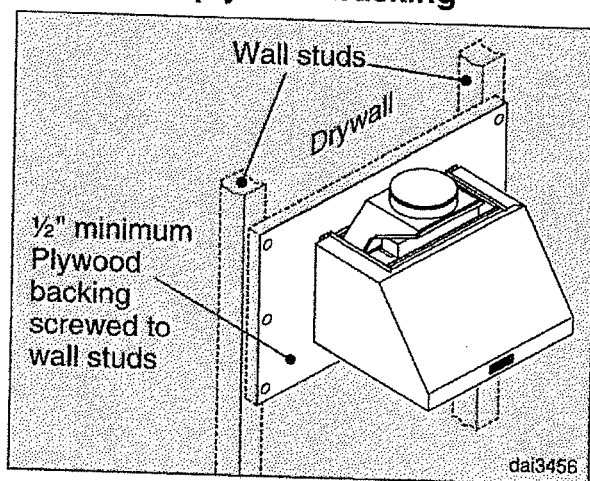

- Determine and mark the location for the canopy as outlined in "Appliance dimensions".
- Make a cutting line 3" (76 mm) above and 3" (76 mm) below the outline of the retaining plate.

- Find the studs to the left and right of the mounting location by tapping the wall or using a stud finder.
- Mark a vertical cutting line along the center of each stud.

CAUTION

When cutting or drilling into the wall or ceiling, do not damage electrical wiring and other hidden utilities.

- Remove the drywall between the cutting lines and replace it with plywood of a matching thickness (min. ½" (13 mm) thick). Tape the joints and refinish the wall.
- Proceed to the enclosed "Installation diagram" to complete the installation.