



All Refrigerator

FPRU19F8RF




Shown with companion, All-Freezer model FPFU19F8RF and optional coordinated Dual 75" Louvered Trim Kit (TRIMKITEZ2),


Signature Features




PureAir Ultra® Filtration System Fresh air offers great taste. PureAir Ultra® Filtration removes up to 7 times more odour than baking soda to keep ingredients tasting fresh.



Smudge-Proof™ Resists Engerprints and cleans easily



SpacePro™ Shelving System
Offers quick access to fresh ingredients
with organizational solutions designed for
space aptimization including SpacePro™
Door Bins SpacePro™ Crisper Bins and
SpacePro™ Full-Width Drawer.



Automatic Alerts
A erts you if the door is left open, if the temperature rises or if the power goes out so your foed stays at its optimal temperature.

18.6 Cu. Ft.

Product Dimensions

 Height (Cabinet Incl. Hinge)
 70:5/8

 Width
 52°

 Depth (Including Door)
 26:1/2°

More Easy-To-Use Features

SpacePro** Crisper Bins Keep a variety of foods fresh and easily accessible with our SpacePro** Crisper Bins.

SpacePro^{**} Full-Width Drawer Fits a variety of fresh foods for quick access

SpacePro* Shelving
Optimize your refrigerator space with adjustable shelving.

SpacePro Door Bins
Access fresh food from our adjustable
gallon-size door bins quickly

PowerBright** LED Lighting Find fresh foods quickly with PowerBright** LED Lighting

PrecisionPro Controls™ Adjust settings at the touch of a button

Stocath Made (Star-kii Certified)

Available in:

Stepher (F)

Optional Trim Kits


Single 79" Louvered or 75" Collar Trim Kit (TRIMKITEZI) Optional trim kit that is designed to provide a built-in look for the All Refrigerator Install with louver for 79" fit or essy-to-remove louver for a 75" fitted collar look

Dual 79" Louvered or 75" Collar Trim Kit (TRIMKITEZ2) Optional trim kit that is designed to provide a built-in look for the All Refrigerator and All Freezer when the units are installed next to each other, install with louver for 79" fit or easy-for-remove louver for a 75" fitted collar look.

Gaseti on a six flour dissed door rest of certain common odours in the frash flood compartment of a 21 Ca. Ft. rathgerator.

frigidaire.ca

FPRU19F8RF 18.6 Cu. Ft.

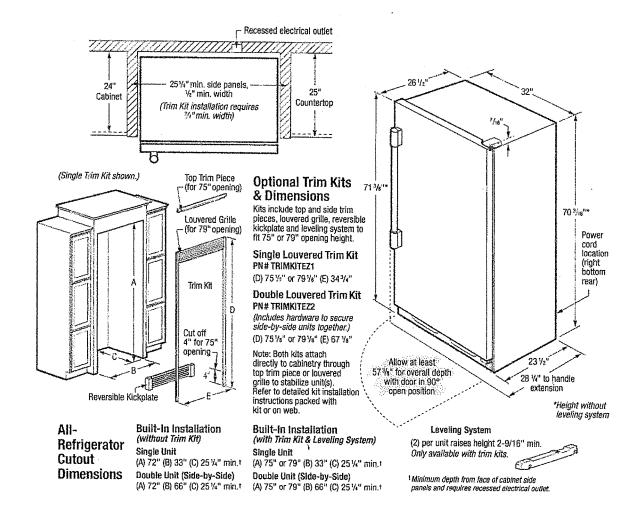

Built-In All-Refrigerator Specifications

- · Product Shipping Weight 245 Lbs.
- An electrical supply with grounded three-prong receptacle is required.
 The power supply circuit must be installed in accordance with current edition of *National Electrical Code (NFPA 70)* and local codes & ordinances.
- Voltage Rating 115V/60 Hz/20 Amps
- Connected Load (kW Pating) @ 115 Volts = 0.55 kW
- · Amps @ 115 Volts = 15 Amps
- Always consult local and national electric codes.
- Minimum 25-I/AV depth requires recessed electrical outlet.
- To allow for ease of installation, tape excess power cord to back of unit.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20° minimum clearance recommended to allow for optimum (40° door swing, providing complete drawer / crisper access and removal. (Absolute 4° minimum clearance will ONLY allow for 50° door swing which will provide limited drawer / crisper access with restricted removal.)
- Minimum 3/8" clearance required for sides and top of retrigerator or freezer with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- To ensure optimum performance, (do not install in areas where temperature drops below 55°F or rises above 110°F) and avoid installing in direct scalight or close proximity to range, dishwasher or other heat source.

 Refrigurator must be placed on level surface of hard material, same height as flooring. Surface must support approximately 800 lbs. when fully loaded. Unit equipped with 4-point leveling.

"Built-In Look" Specifications

- Minimum opening of 72" H \times 33" W x 25-1/4" D required for single-unit "Built-in Look" installation; 66" W required for double-unit installation, (72" H to be measured from finished floor to underside of soffit or overhead cabinet.)
- Remove all wall/floor moulding prior to bulk-in installation.

Optional Trim Kit Specifications

- If optional Single or Disuble Louvered Trim Kit is to be used, different cutout dimensions are required. Kit can be adapted to fit either 75" or 79" opening height. (Refer to cutout dimensions on this page and detailed Louvered Trim Kit installation instructions included with kit or on web.)
- Remove all wall / floor moulding prior to built-in installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

Optional Accessories


- Single Louvered Tom Kit (PN # TRIMKITEZI).
- Double Louvered Trim Kit (PN # TRIMKITEZ2).
- PureAdvantage* Air Filter Replacement Cartridge - (PN # 241754001).



DWHD650JFP SAPPHIRE® 6-PROGRAM DISHWASHER

PROFESSIONAL SERIES HANDLE











Also Available In: DWHD650JFM - Flat Stainless Steel Panel with Masterpiece® Series Handle DWHD650JPR - Custom Panel

FEATURES & BENEFITS

- Sapphire Glow® light illuminates with the sparkling blue light when the dishwasher is open
- ★ Blue PowerBeam® operating indicator lets you know when dishwasher is running
 - Flexible 3rd rack delivers added loading capacity as well as adjustability to accommodate larger or smaller items, wider ends and utensil handles
 - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
 - Crystal Protect® system adjusts the water softness during the cycle for perfectly clear crystal, free of water spots

ACCESSORIES (OPTIONAL)	
Dishwasher Softener Salt (4.4 lbs)	SGZ9091UC
Dishwasher Supply and Drainage Hose Extension 76 ³ /4"	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC











Accessory Kit includes Extra-tall-item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

Fine Silverware Carafe

* THERMADOR EXCLUSIVE

GENERAL PROPERTIES	
Number Of Wash Cycles	6
Number Of Options	5
dBA	42
Third Rack	Flexible
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Buttons
Concealed Heating Element	Yes
Leak Protection System	24/7 AquaStop® Plus
Water Softener	Yes
Five-Level Wash	Yes
Childlock	No
EFFICIENCY	
Water Usage Per Cycle (g)	2.2 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Qualified	Yes
Total Annual Energy Consumption (kWh)	260 kWh
Total Annual Water Consumption (g)	613 g
CAPACITY	
Number Of Place Settings	14
TECHNICAL DETAILS	
Watts (W)	1,300 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in)	47 1/4"
Minimum Water Pressure (lb/sin)	7
Max. Temperature for Water Intake	140° F
Length Inlet Hose (in)	55 1/8"

Length Outlet Hose (in)	55 1/8"	
DIMENSIONS & WEIGHT		
Overall Appliance Dimensions (HxWxD) (in)	34 ¹ /16" × 23 ⁹ /16" × 22 ⁷ /16"	
Required Cutout Size (HxWxD) (in)	34 ^{1/8} " x 24" x 24"	
Adjustable Feet	Yes	
Net Weight (lbs)	104 lbs	

ACCESSORIES (INCLUDED)

Baking-Sheet Spray Head Grey

WARRANTY	
Full Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime