

Lot 242

LEONE

HOOD SPECIFICATIONS

ASPIRE SERIES

Dimensions


30"W x 24"D x 12 1/8"H
36"W x 24"D x 12 1/8"H
42"W x 24"D x 12 1/8"H

Models

ELN630SS
ELN136SS
ELN142SS

Leone 30" Stainless
Leone 36" Stainless
Leone 42" Stainless


Special features




halogen lamps



metallic rotating knob controls



professional stainless steel baffle filters

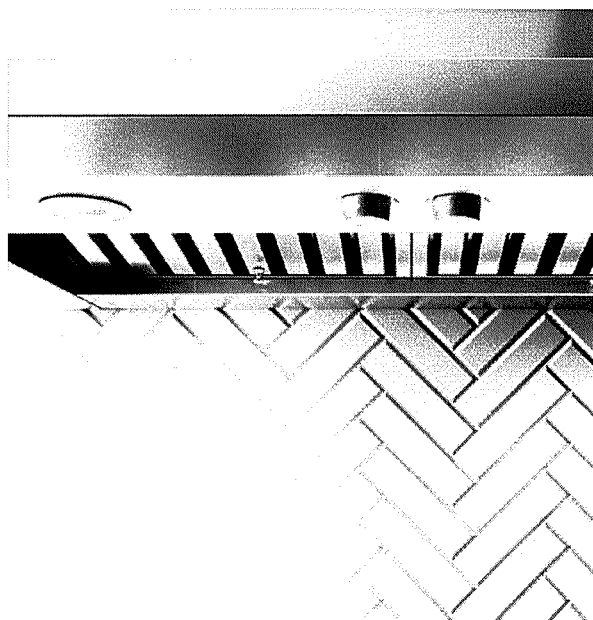


Give your professional kitchen a splash of Italian design with Leone's crisp lines, seamless welded corner craftsmanship, beveled rim and gleaming stainless steel, plus Leone comes "unbranded", for easy coordination with other appliances. Most importantly, Leone has the extra depth (24") and power (1200 CFM on 36" & 42" widths) needed to support professional ranges and cooktops. No ear plugs required with Leone's HUSH sound suppression system, which enables you to comfortably talk and entertain, even when cooking up a storm. Available in 30", 36" and 42" widths, Leone features metallic rotating knob controls, which operate the 4-speed blower and halogen lighting. Easy maintenance and a cleaner kitchen are assured with professional stainless steel baffle filters.

Leone is designed for standard ducted ventilation only (for heights 8'2" to 10'2").

FEATURES

Size (in) & Type Finish	30", 36" or 42" Wide Wall-Mount Chimney Stainless Steel													
Controls	Metallic rotating knob													
Illumination	2, 40 Watt Halogen Lamps, 2 Light Intensities (30", 36" & 42") (bulbs included)													
Installation Type	Ducted Installation Only													
Blower Type	600 CFM, 4-Speed Internal (30") 1200 CFM, 4-Speed Internal Blower (36" & 42")													
Blower Performance	<table> <tr> <td>Speed 1</td><td>(For 30") 205 CFM, 1.4 Sones</td><td>(For 36" & 42") 375 CFM, 1.6 Sones</td></tr> <tr> <td>Speed 2</td><td>(For 30") 350 CFM, 2.6 Sones</td><td>(For 36" & 42") 640 CFM, 3.5 Sones</td></tr> <tr> <td>Speed 3</td><td>(For 30") 510 CFM, 4.5 Sones</td><td>(For 36" & 42") 940 CFM, 6.0 Sones</td></tr> <tr> <td>Speed 4</td><td>(For 30") 600 CFM, 6.0 Sones</td><td>(For 36" & 42") 1200 CFM, 7.7 Sones</td></tr> </table>		Speed 1	(For 30") 205 CFM, 1.4 Sones	(For 36" & 42") 375 CFM, 1.6 Sones	Speed 2	(For 30") 350 CFM, 2.6 Sones	(For 36" & 42") 640 CFM, 3.5 Sones	Speed 3	(For 30") 510 CFM, 4.5 Sones	(For 36" & 42") 940 CFM, 6.0 Sones	Speed 4	(For 30") 600 CFM, 6.0 Sones	(For 36" & 42") 1200 CFM, 7.7 Sones
Speed 1	(For 30") 205 CFM, 1.4 Sones	(For 36" & 42") 375 CFM, 1.6 Sones												
Speed 2	(For 30") 350 CFM, 2.6 Sones	(For 36" & 42") 640 CFM, 3.5 Sones												
Speed 3	(For 30") 510 CFM, 4.5 Sones	(For 36" & 42") 940 CFM, 6.0 Sones												
Speed 4	(For 30") 600 CFM, 6.0 Sones	(For 36" & 42") 1200 CFM, 7.7 Sones												
Filter Type	Dishwasher-Safe, Professional Stainless Steel Baffle (1 w/ 30", 2 w/ 36" & 42")													
Telescopic Chimney Extension	For heights 8'8" - 10'4" (ducted)													
Duct Transition	8" Round with Back Draft Damper (top)													
Electrical	120V-60Hz 550 Watts at 4.6 Amps (600 CFM), 800 Watts at 6.7 Amps (1200 CFM)													
Warranty	2 Year Parts & Labor, In-Home Service													


ACCESSORIES



Optional Long Chimney Extension Kit
Reaches 9'10" - 13'0" (ducted)

CODE: KITO2785
MODEL: EXXCEK07

LINE DRAWING

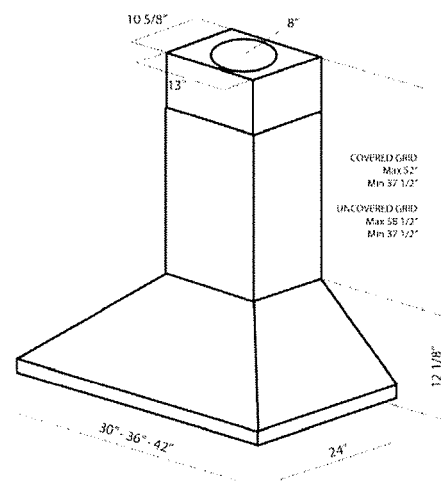

CONSUMABLE PARTS

Replacement Grease Filter (1)
CODE: GF09FA (30", 42")
CODE: GF09EA (36")

Replacement Light Bulb (1)
CODE: 2006EA

Consumable parts are sold in units of one (1). Order accordingly.


SPECIAL FEATURES



HUSH

Elica HUSH Silence System:
An exclusive sound deadening technology that effectively reduces sound levels by over 35%, compared to typical range hoods.

TECHNICAL DRAWING FOR HOOD TO BE INSTALLED

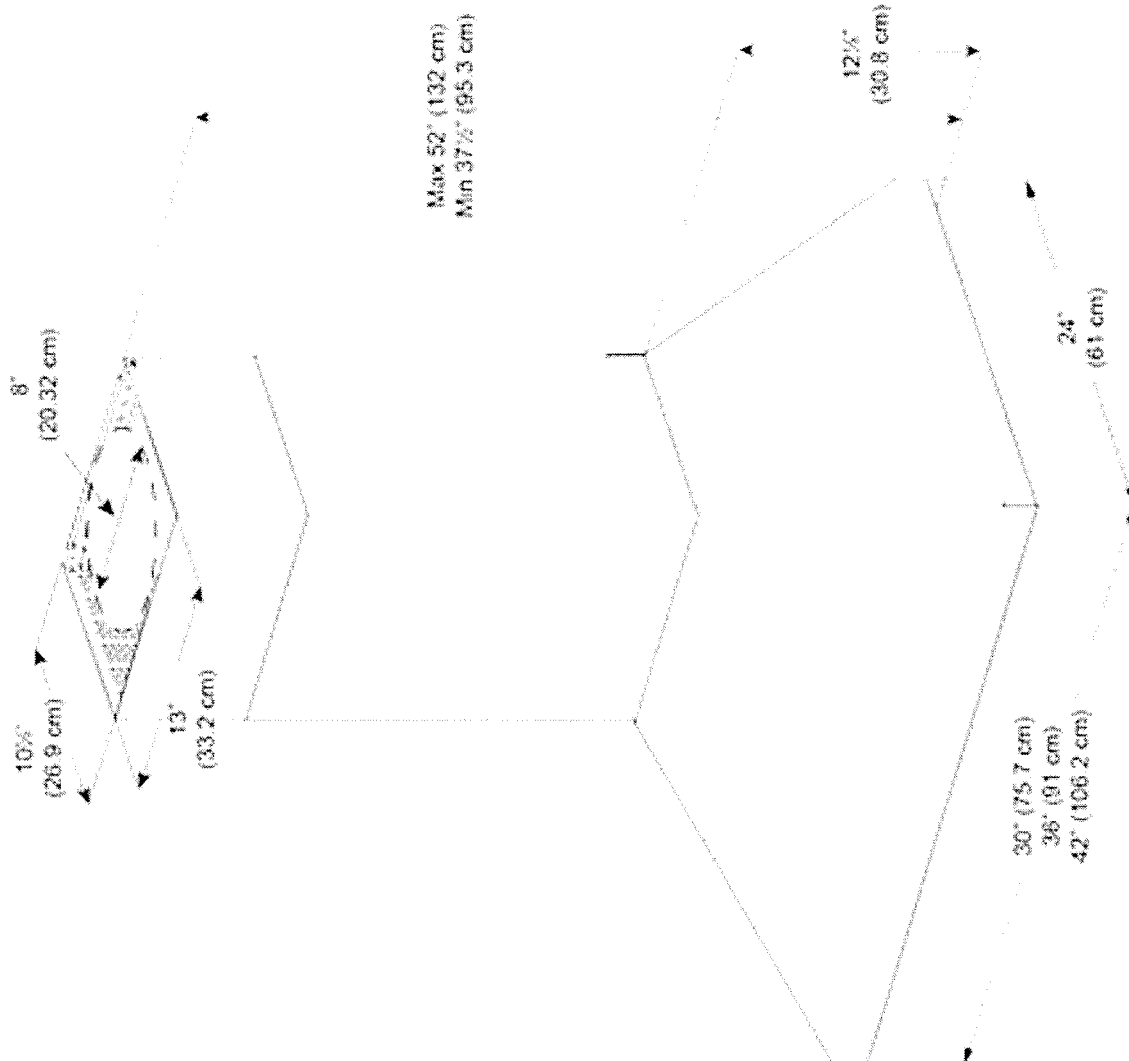

Miele

36" Dual Fuel Range

HR 1934 DF, HR 1934 DF LP




Image of the HR 1936 DF GD 36" Range with Griddle

mieleusa.com

36" Dual Fuel Range

Model: HR 1934 DF / HR 1934 DF LP

Miele



HR 1934 DF / HR 1934 DF LP

Features:

- M Touch controls and backlit precision knobs
- ComfortLift panel
- M Pro dual stacked burner system with TrueSimmer
- ComfortClean dishwasher-safe grates
- TwinPower Convection fans
- 21 Operating modes including Self Clean
- Moisture plus
- MasterChef and MasterChef Plus automatic programs
- Wireless roast probe
- Soft Close and Soft Open
- Clean Touch Steel™ front

SPECIFICATIONS

HR 1934 DF —	Item 25193451USA
HR 1934 DF LP —	Item 25193452USA
Overall Unit Width	35 ¹⁵ / ₁₆ " (913 mm)
Overall Unit Height to Cooktop	35 ¹ / ₂ " — 37" (901.7 — 939.8 mm)
Overall Unit Depth to Front of Control Panel	26 ¹ / ₂ " (673 mm)
Oven Door Clearance	22 ³ / ₄ " (577 mm)
Niche	
Minimum Cabinet Niche Width	36" (914 mm)
Minimum Cabinet Opening Height	35 ¹ / ₂ " (901.7 mm)
Burners (G/LP)	M Pro Power Plus - Standard Configuration*
Gas Burners:	(1) 12,500 BTU (G/LP); (5) 19,500 BTU (G/LP)
Total BTU Output	110,000 BTU (G/LP)
Gas	
Gas Line Connection	1/2" NPT
Operational Altitudes	
	Miele Natural Gas and LP Ranges and Rangetops will function up to 9,800 ft. in altitude without adjustment; the following exception will function up to 6,500 ft. in altitude without adjustment:
High Altitude	<ul style="list-style-type: none"> • Griddle in LP: HR 1136 LP, HR 1936 LP, HR 1956 LP, KMR 1136 LP, KMR 1356 LP • Grill in G: HR 1135 G, HR 1935 G, HR 1955 G, KMR 1135 G, KMR 1355 G
	If an installation exceeds these elevations, please contact rangejetkit@mieleusa.com .
Plumbing	
	An Inline water filter, like activated carbon, is required to reduce mineral deposits. Do not connect to a Reverse Osmosis (RO) water system. Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 and 145 psi (1 and 10 bars). If the pressure is higher, install a pressure-reducing valve. The supplied hose has a length of 4' 11" (1.5 m). The hose must not be shortened. The total hose length must not exceed 24.5 ft. (7.5 m).
Water Supply Requirements	
	Supplied hose: flexible braided 4'11" (1.5 m) with 3/8" O.D. compression fitting for connection to a shut off valve
Plumbed Hose Connection	
Electrical	
Electrical Requirements	120V / 240V, 60Hz, 30 Amps 120V / 208V, 60Hz, 30 Amps
Power Cord	NEMA 14-30 plug, 5' 11" (1.8 m) long
Shipping	
Shipping Weight	438.7 lbs. (199 kg)
Shipping Dimensions	43 ⁵ / ₁₆ " (1100 mm) W x 52" (1,294 mm) H x 31 ¹ / ₂ " (800 mm) D
Support	
Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

* Please note if a BTU-reducing kit is necessary, an authorized installer is required to modify the product to meet ANSI Z21.


36" Dual Fuel Range

Model: HR 1934 DF / HR 1934 DF LP



PRODUCT VIEWS

Isometric

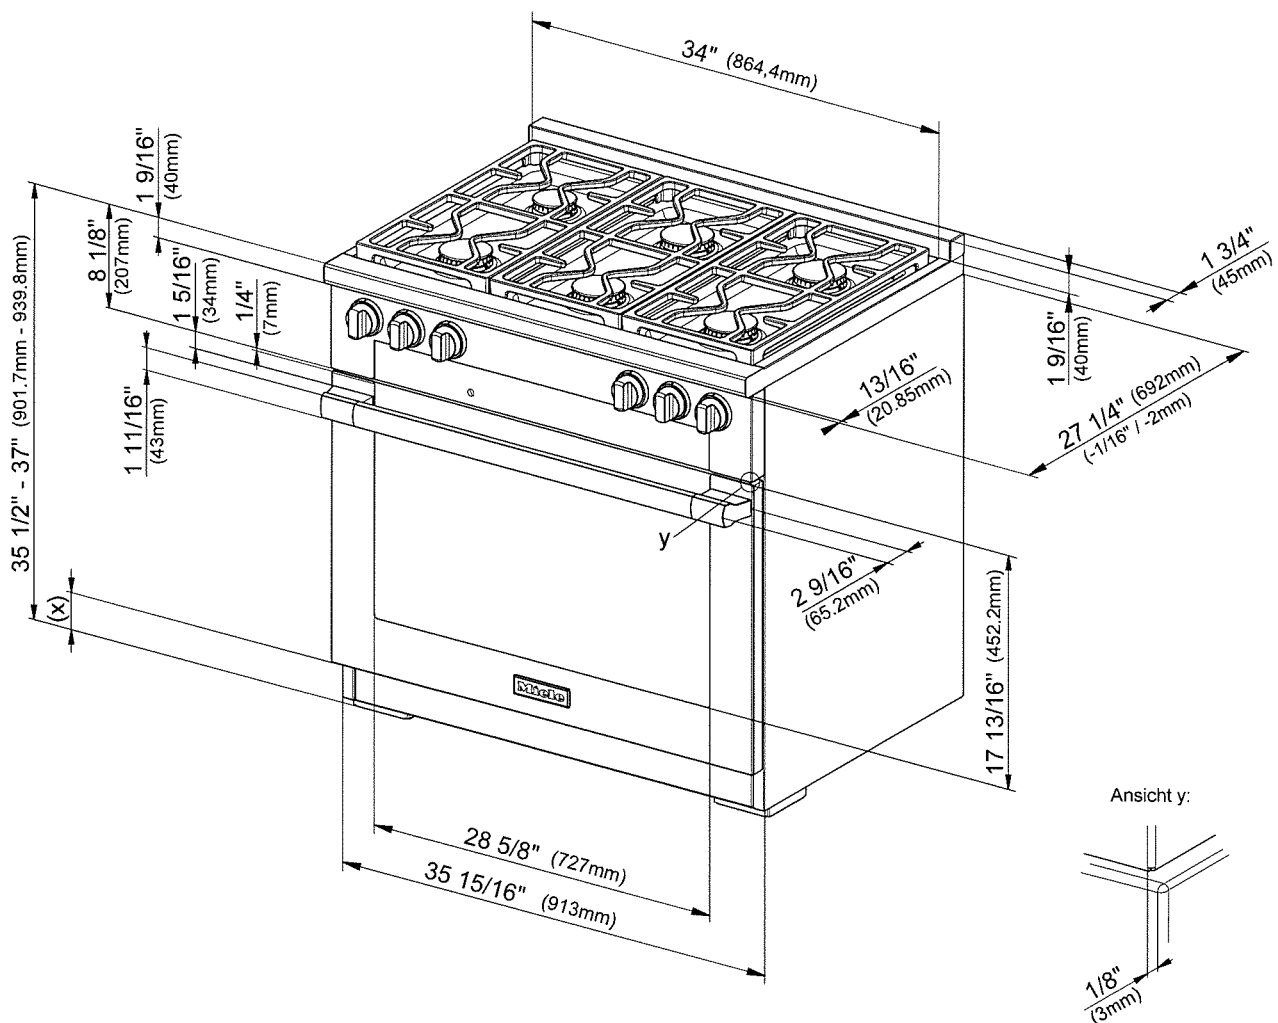

(x) = Toe-kick height adjustment 5" - 6 1/2" (127 mm - 165.1 mm)


36" Dual Fuel Range

Model: HR 1934 DF / HR 1934 DF LP

Miele

PRODUCT VIEWS

Rear View

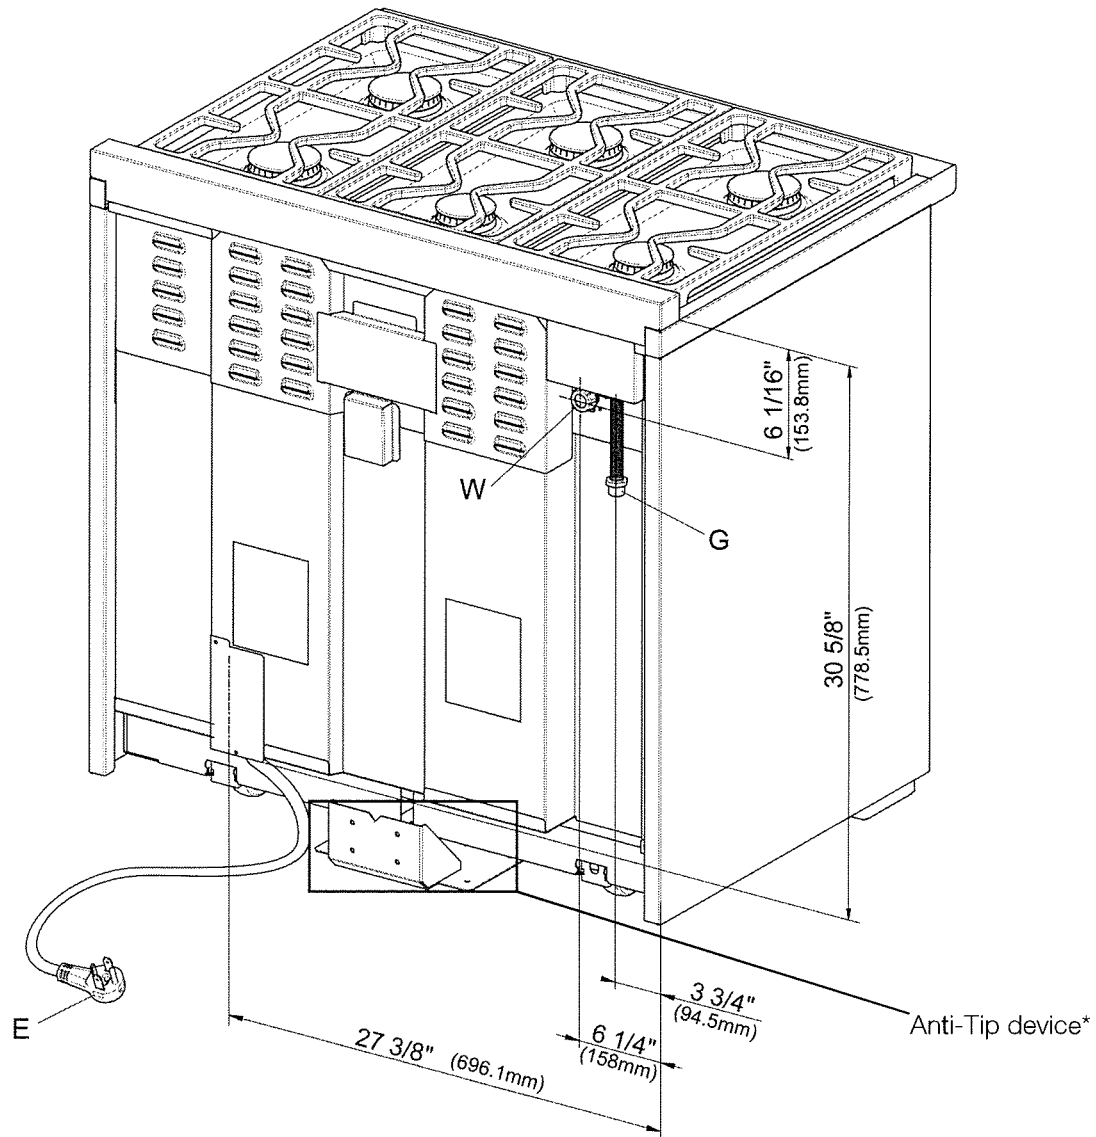

E = Electrical connection

W = Plumbing

G = Gas connection

*Anti-tip device must be fastened securely in place to all studs or floor. Please refer to the Anti-tip device section in the installation manual for further details.


36" Dual Fuel Range

Model: HR 1934 DF / HR 1934 DF LP



PRODUCT VIEWS

Detailed Side View

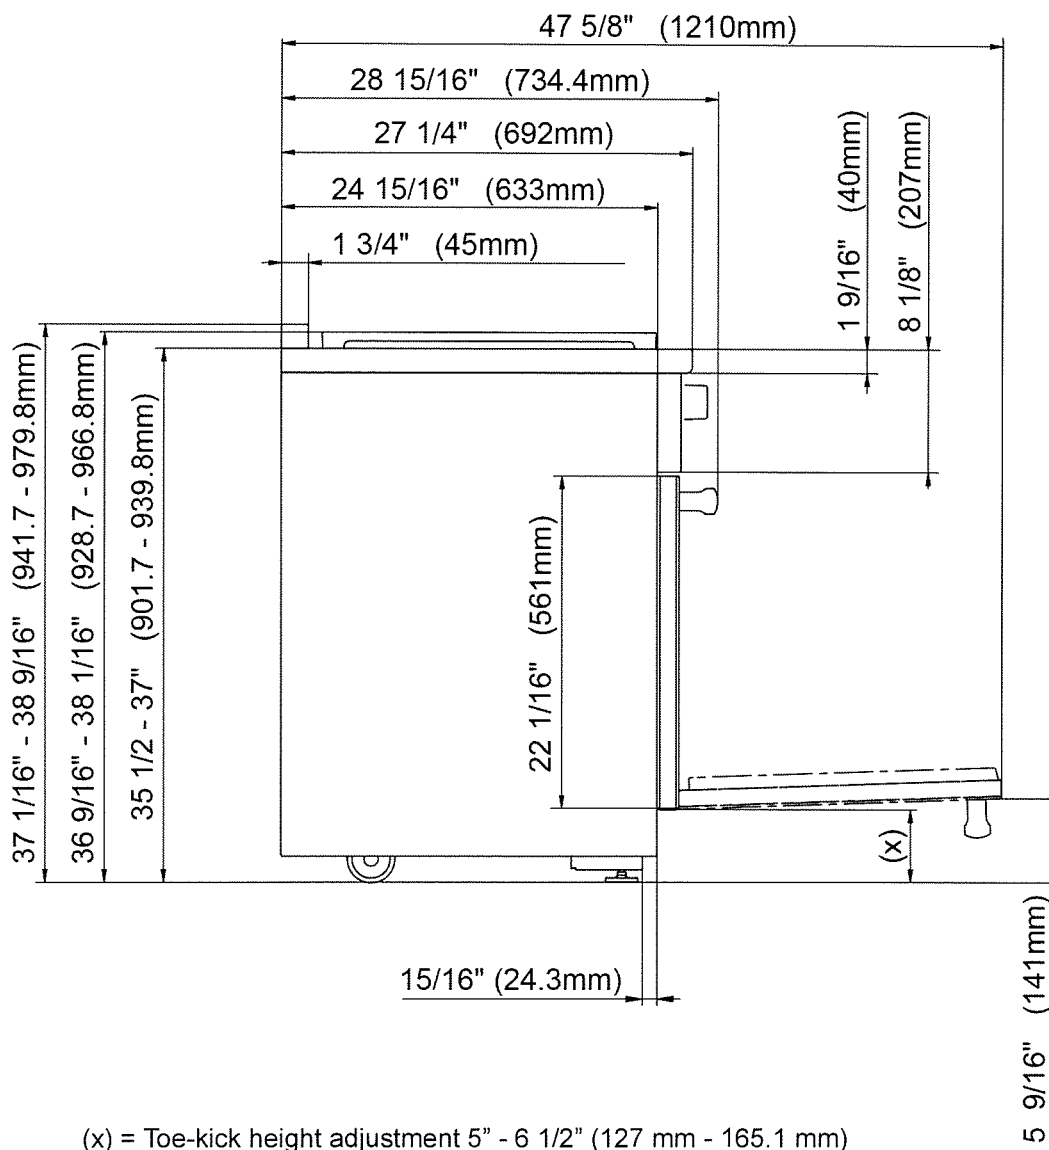


36" Dual Fuel Range
Model: HR 1934 DF / HR 1934 DF LP



PRODUCT VIEWS



Detailed Bullnose and Handle View

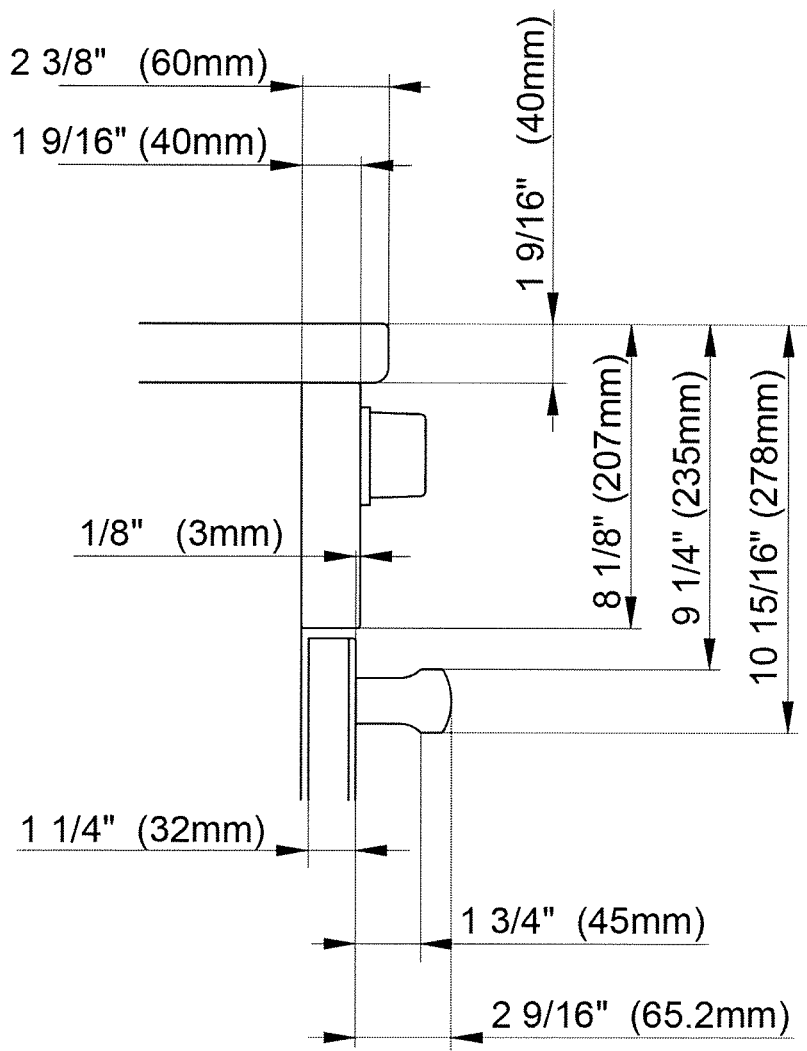


Pre-Finished Dishwasher

CLASSIC G 4227 SCU SS

DISHWASHER SPECIFICATIONS

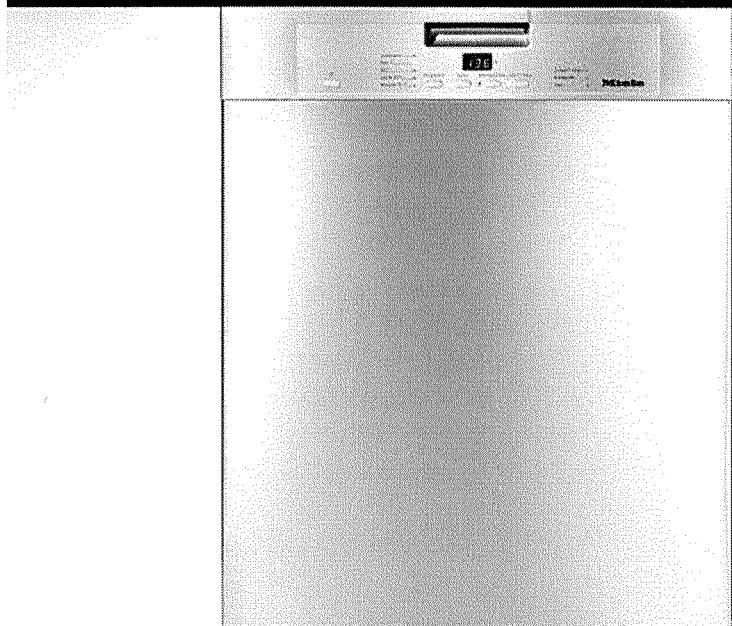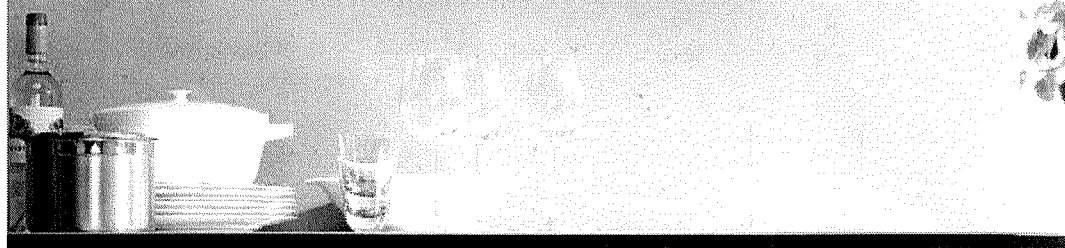

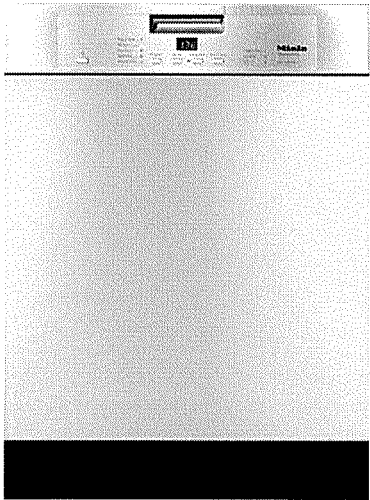

G 4227 SCU SS

Features:

- Cutlery tray
- FlexiCare basket design
- AutoSensor technology
- 5 wash programs
- Short option
- CleanAir™ drying system
- ComfortClose Door
- Delay Start
- Double waterproof system
- Accommodates 16 place settings

SPECIFICATIONS

G 4227 SCU SS - Item 21422737USA

Overall Unit Width	23 ⁹ / ₁₆ " (598mm)
Overall Unit Height	33 ¹¹ / ₁₆ " - 36 ¹ / ₄ " (855 - 920mm)
Overall Unit Depth	22 ⁷ / ₁₆ " (570mm)
Niche	
Minimum Cabinet Opening Width	23 ⁵ / ₈ " (600mm)
Minimum Cabinet Opening Height	33 ³ / ₄ " (857mm)
Minimum Cabinet Opening Depth	22 ⁷ / ₁₆ " (570mm)

Plumbing

Water Supply Requirements

May be connected to a cold or hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/8" compression. The water shut-off valve must be accessible after installation. The water pressure must be between 4.35 psi (0.3 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed.

Water Connection Line

4' 11" (1.5m) flexible water intake hose is supplied with a 3/8 compression connection.

Drain Hose

4' 11" (1.5m) flexible drain hose is supplied.

Electrical

Electrical Requirements - Volts/Amps

110V / 120V, 60Hz, 15 Amps

Power Cord - Plug and length

Yes - NEMA 5-15 plug, 5' 6" (1.7m), Convertible to Hardwire

Shipping

Shipping Weight

118 lbs (53.5 kg)

Support

Call Miele

800.843.7231


Miele Website

🔗www.mieleusa.com

20/20 Link


🔗2020technologies.com

INSTALLATION SPECIFICATIONS

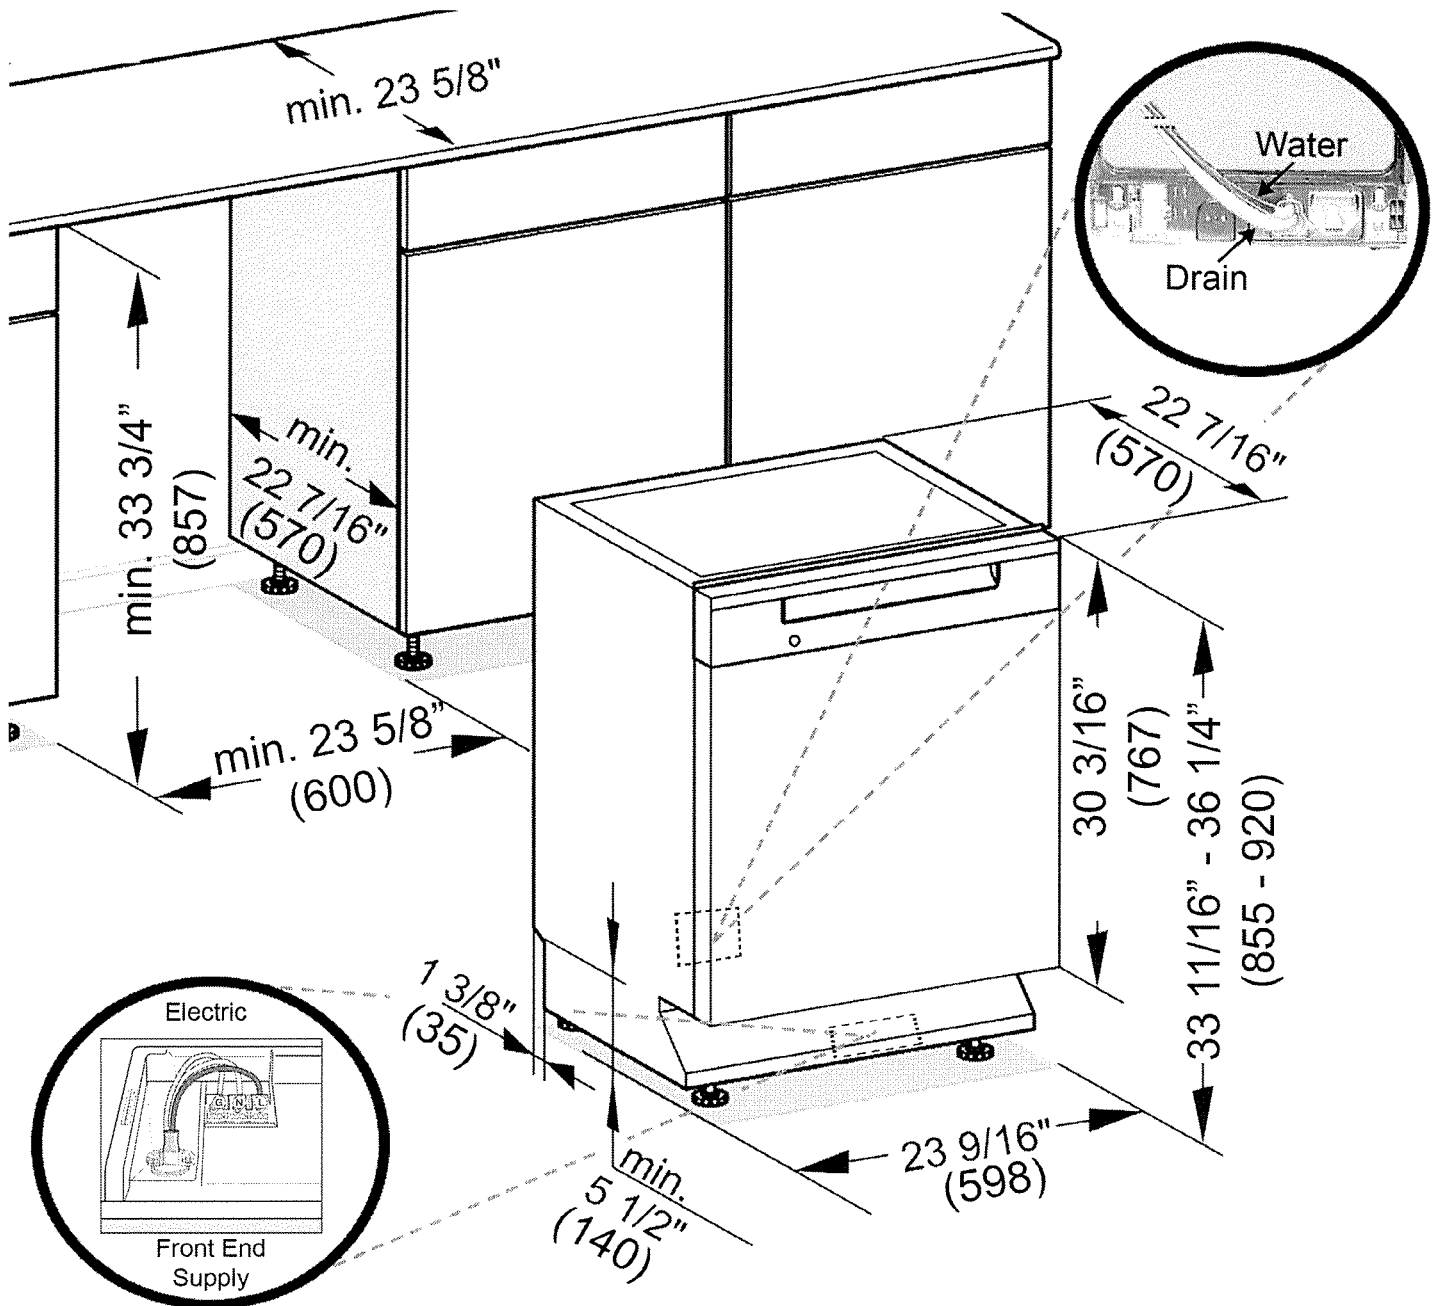

- Drain -** 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear)
- Water -** 4 ft 11 in (1.5 m) flexible water intake hose with 3/8" compression fitting.
(Connects from lower center rear)
- Electric -** 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply. (Connects via Front End Supply or may be hardwired)

Acceptable Height Istallation

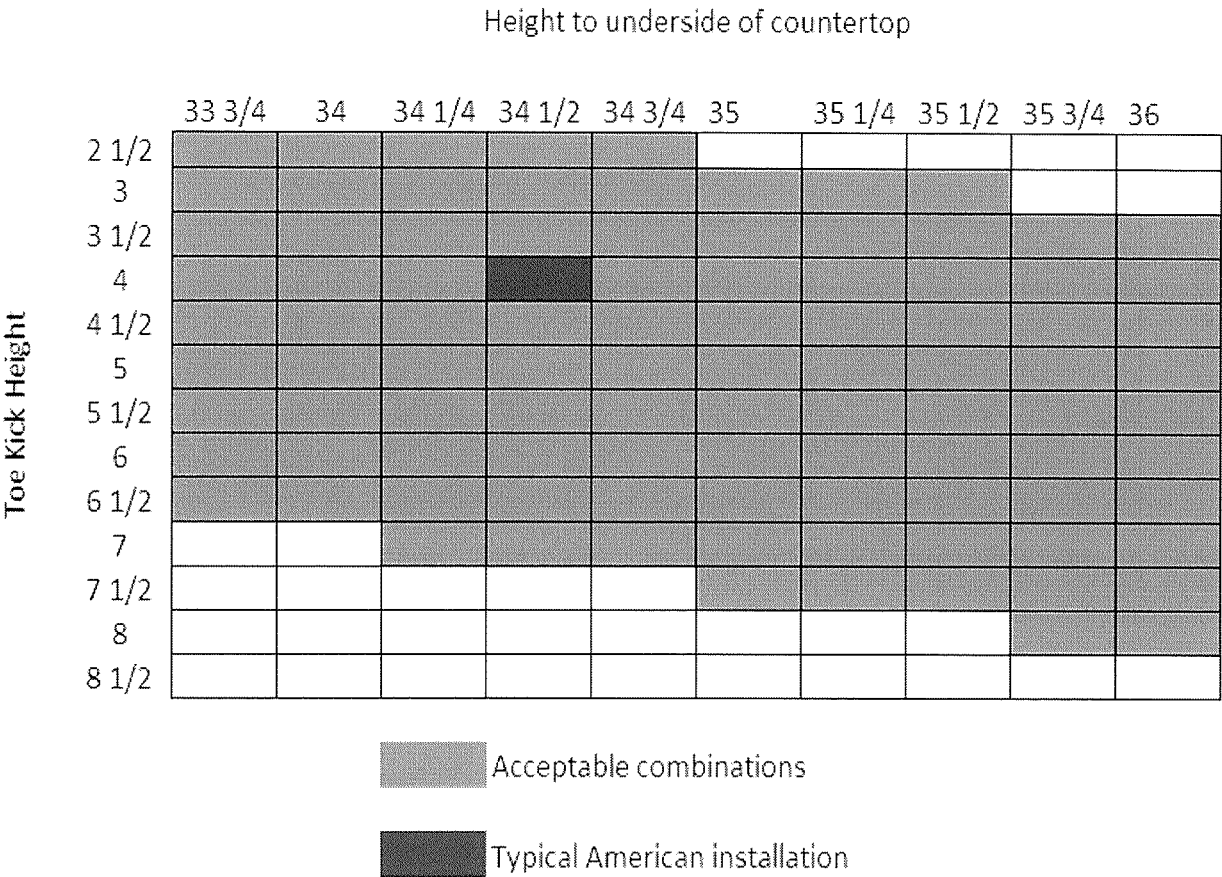


Miele

ContourLine
24" Microwave Oven


M 6160 TC

BUILT
IN
MICROWAVE
SPECIFICATION

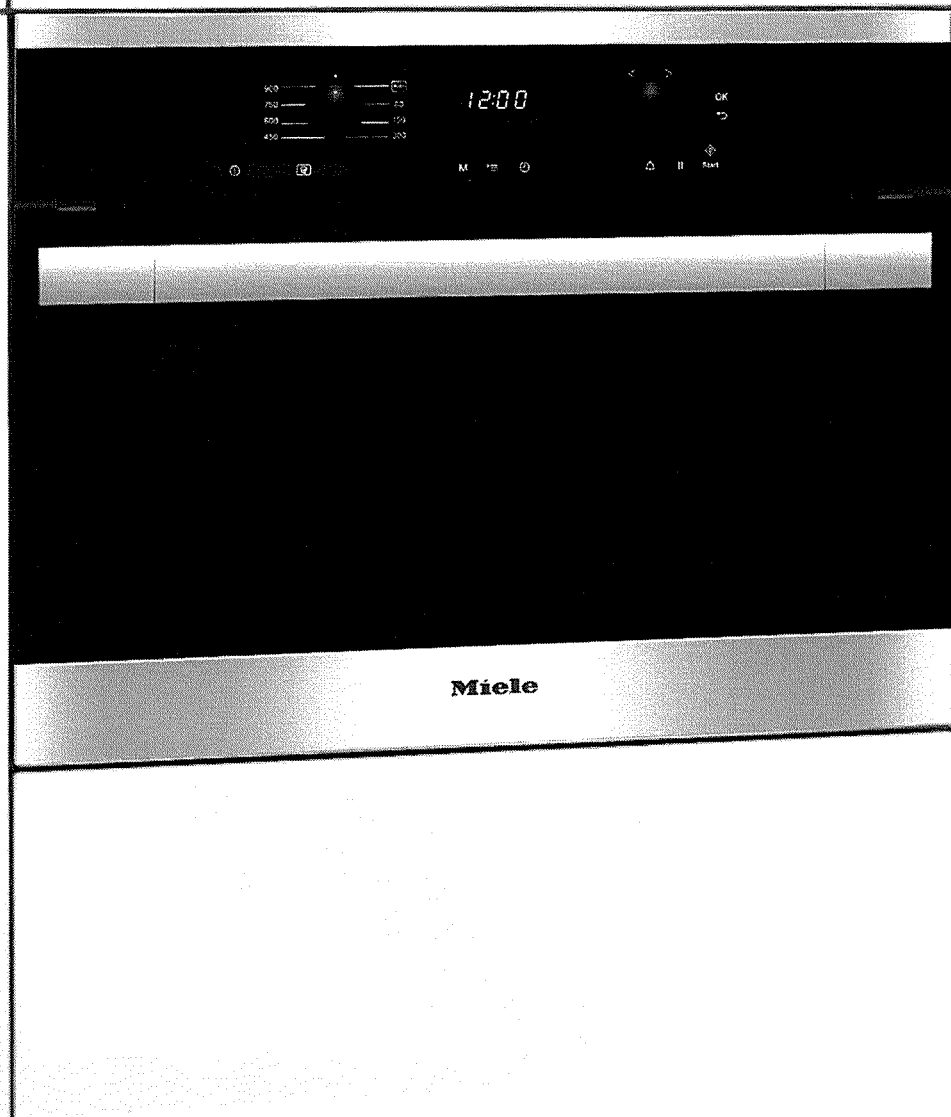

ContourLine 24" Microwave Oven

M 6160 TC

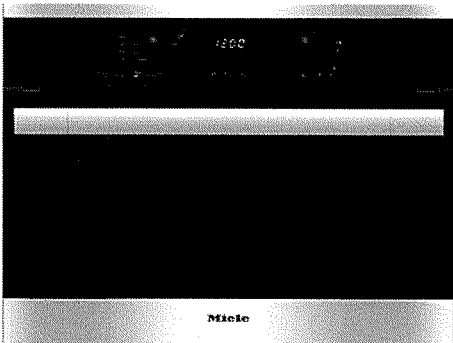

M 6160 TC

Features:

- DirectSelect controls offer turn dial operation with a 7-segment liquid crystal display
- Popcorn button
- 900 watt microwave
- XL cavity — 1.62 cu ft (46 l) with a 5.8" turntable diameter to reheat several plates at one time
- 16 automatic programs
 - 9 for defrosting
 - 3 for cooking frozen food
 - 4 for fresh ingredients
- Minute plus button
- Timer
- LED lighting for the perfect illumination and low maintenance
- Horizontal alignment with other 60cm appliances
- Comfort handle

SPECIFICATIONS

M 6160 TC — Item 24616050USA

Overall Unit Width - Excluding Fascia Dimension	21 ⁵ / ₈ " (550 mm)
Overall Height - Excluding Fascia Dimension	16 ¹ / ₄ " (413 mm)
Overall Depth - Excluding Fascia Dimension	19 ³ / ₁₆ " (487 mm)
Oven Door Clearance	15 ¹ / ₂ " (394 mm)
Overall Oven Interior Capacity	Suitable for plates with a diameter up to 15.8"
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595 mm) W x 17 ¹⁵ / ₁₆ " (455.5 mm) H x 7 ⁷ / ₈ " (23 mm) D

Built-In

Minimum Cabinet Width	22 ¹ / ₁₆ " (562 mm)
Minimum Cabinet Depth	21 ⁵ / ₈ " (550 mm)
Minimum Cabinet Height	17 ¹¹ / ₁₆ " (450 mm)
Minimum Base Support	40 lbs (18 kg)

Electrical

Electrical Requirements	120V 15A 60Hz
Power Cord	Molded NEMA 5-15 plug, 5 ft. (1.5 m)
Total Amps	11.4A (120V)

Shipping

Shipping Weight	49 lbs (22 kg)
Shipping Dimensions	25 ⁷ / ₈ " W x 19 ¹³ / ₁₆ " H x 21 ¹ / ₈ " L

Support

Call Miele	800.843.7231
Miele Website	~@www.mieleusa.com
20/20 Link	~@2020technologies.com


ContourLine 24" Microwave Oven

M 6160 TC




HANDLE DETAILS

All Miele Signature And PureLine
Handle Dimensions

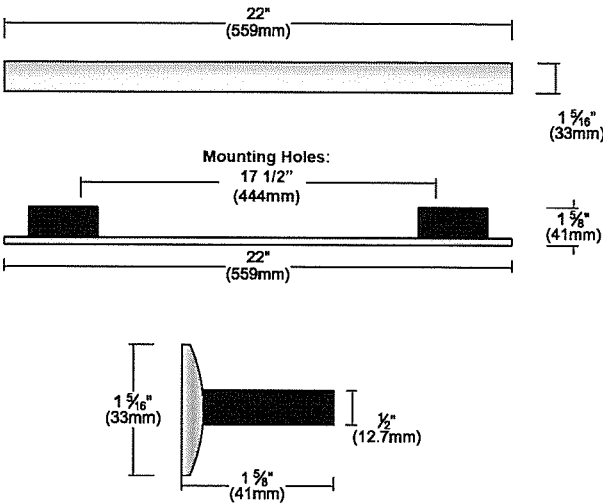

Please note hinges may require adjusting or replacing when changing from a ContourLine Handle to a Pureline or Signature handle.

All ContourLine Handle
Dimensions

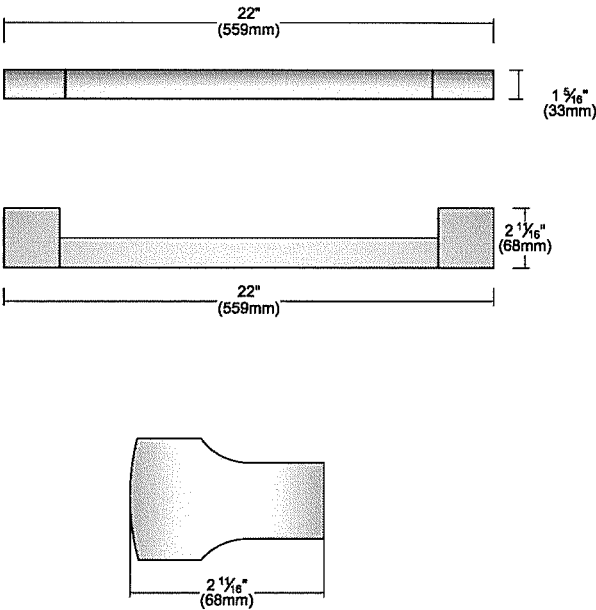

Please note hinges may require adjusting or replacing when changing from a Pureline or Signature handle to a ContourLine Handle.


ContourLine 24" Microwave Oven

M 6160 TC




INSTALLATION SPECIFICATIONS

Side flush

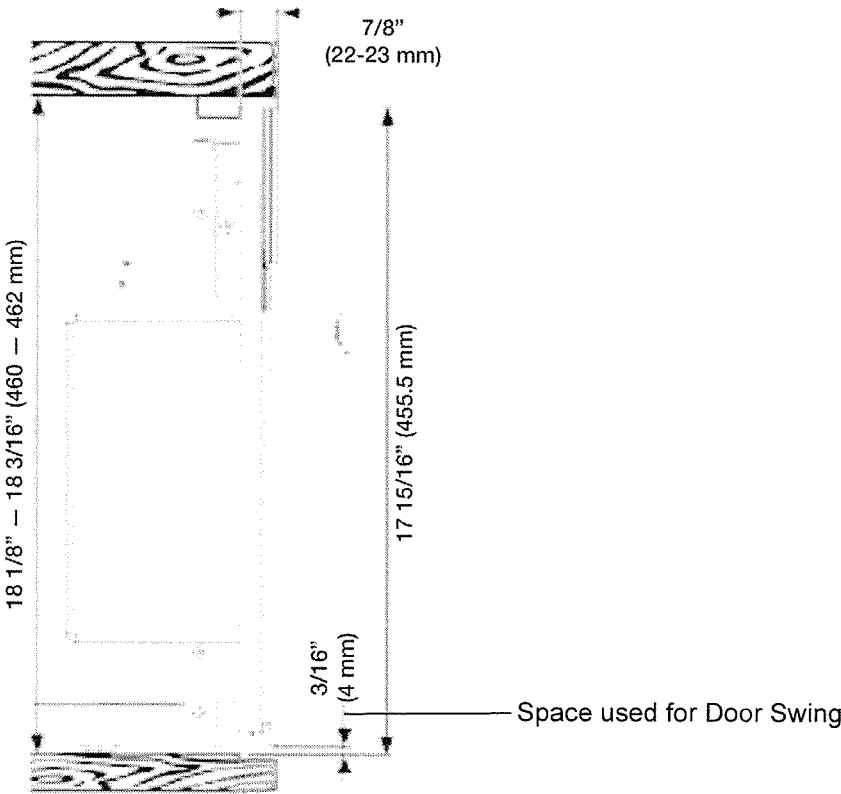

Side proud

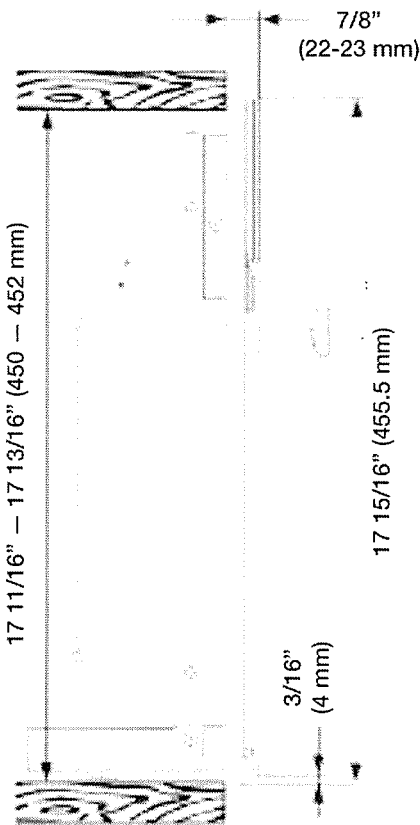


ContourLine 24" Microwave Oven M 6160 TC



INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

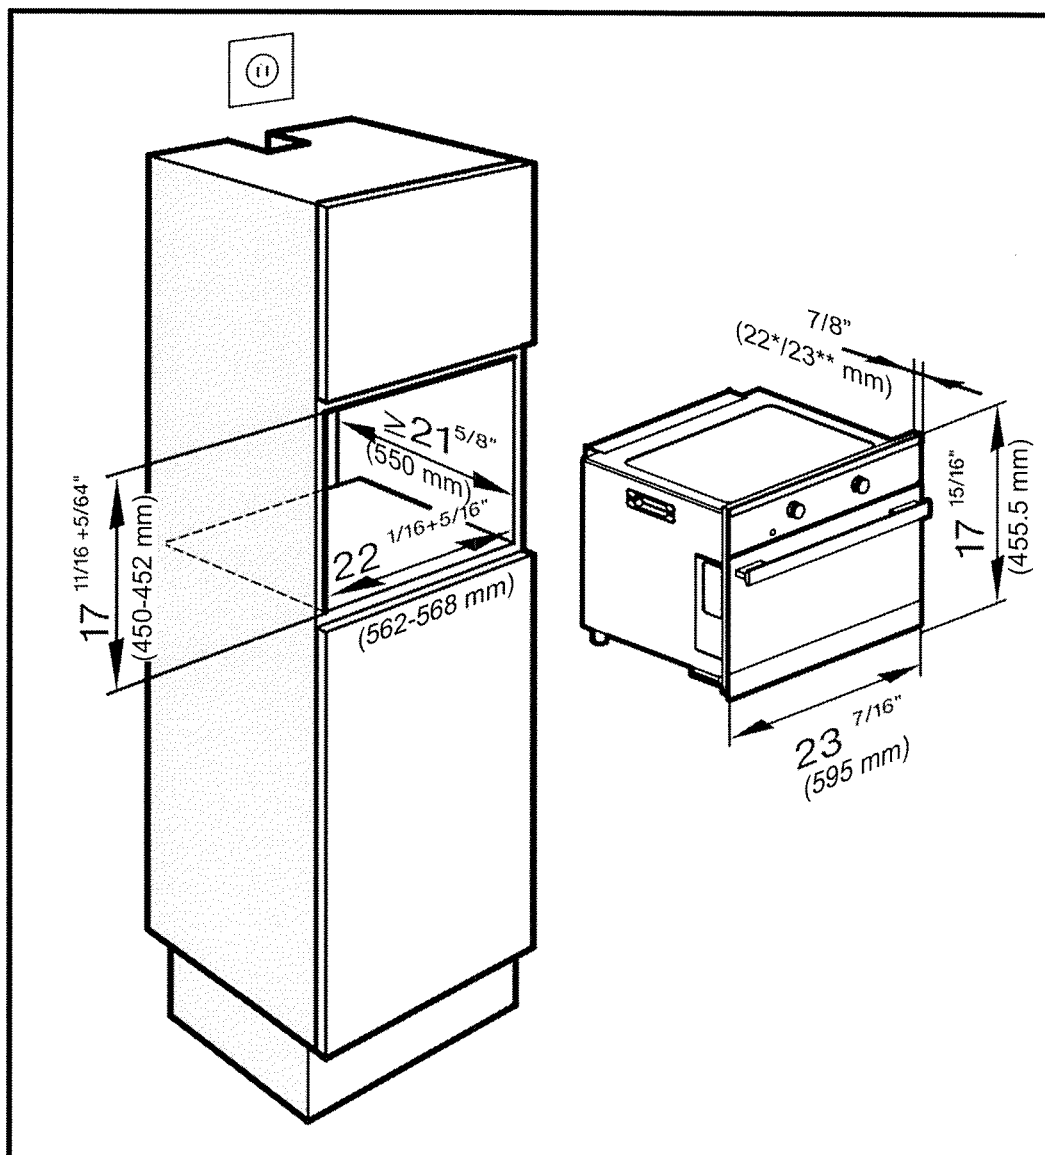

* Oven with glass front
** Oven with metal front

AVG



WINE FRIDGE SPECIFICATIONS

A new generation of Avantgarde products !

FEATURES

Interior Control

2 separate temperature zones: 2-18° C

Wine Cellar with 20 bottle and 71 cans capacity

ACCESSIBILITY

5 easy, smooth gliding, ball bearing, vinyl coated shelves with wood front trim that provide visibility and quick access

3 glass shelves

Energy-efficient white LED lights

LOOK

Stainless Steel frame

Tubular handle

Tinted door glass

Stainless steel Kick plate

DETAILS

Built-in unit

Size: 23 3/4" W x 24 1/8" D x 33 3/4" H

Cabinet depth without door: 21 7/8"

2 year warranty on parts and labor, 3 years on sealed system

PRYMO



PMC80DS

RF23J9011SR

FRIDGE SPECIFICATIONS

23 cu. ft. Counter Depth 4-Door Refrigerator with Cool Select Plus

Features



- 4-Door Counter-Depth Design
- Large Capacity – 23 cu. ft.
- Cool Select Plus
- Triple Cooling System
- Ice Master Ice Maker in the Refrigerator
- ENERGY STAR® Compliant
- High-Efficiency LED Lighting
- Stainless-Look Display
- Stainless Steel Accents on Interior Shelving and Door Bins
- Fingerprint Resistant Coating
- Tempered Glass Spill-Proof Shelves
- Flip-Up Shelf
- Gallon Door Bins
- Two Clear Crispers

Convenience


- Door Alarm
- Water Filter Indicator



ENERGY STAR® rated:
679 kWh/yr

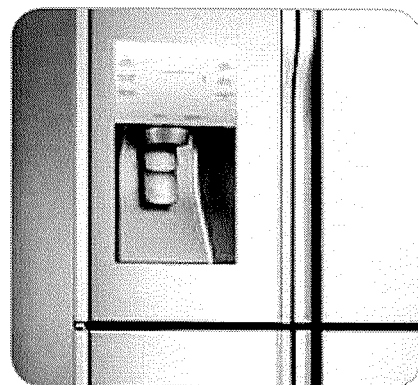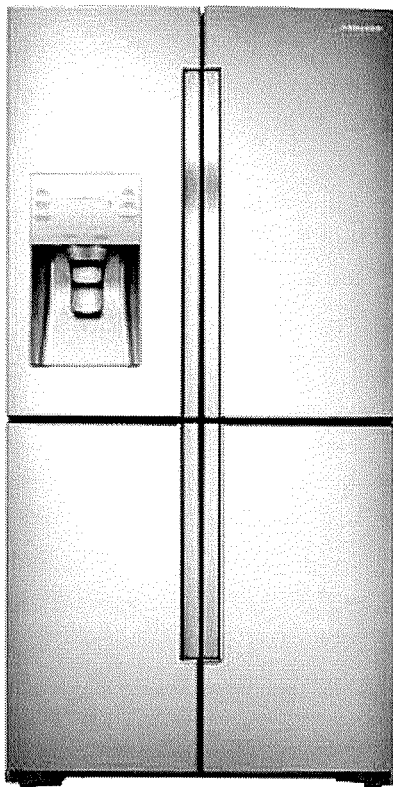

Clean, Modern Design

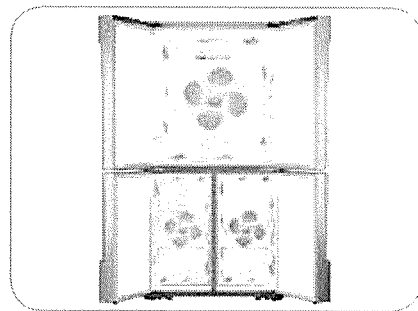

Triple Cooling System

Available Color



Stainless Steel

Signature Features

CLEAN, MODERN DESIGN

- Artful and symmetric design expresses individuality.
- Beautifully appointed stainless steel body and interior trim.

COUNTER DEPTH


- More capacity, smaller floor space.
- Our 23 cu. ft.* capacity French Door has enough room to fit up to 23 bags of groceries.*
- Stylish counter-depth design allows for more workable space in the kitchen.

*Actual capacity limited by weight and distribution. Always use proper loading technique. Grocery comparison based on each cubic foot of usable space equalling one paper bag.

COOL SELECT PLUS

- Versatile, bottom-right door can be a fridge or freezer, maximizing fresh food storage space.
- The most fresh food storage available in its class at 18.05 cu. ft. when the Cool Select Plus is used as a refrigerator.*
- Four customizable temperature settings: Freezer at -9°F – 1°F, Soft Freeze at 23°F, Chill at 30°F and Cool at 41°F.

*Among consumer grade freestanding refrigerators.



Ranked “Highest in customer satisfaction with French Door refrigerators, in a tie.”*

—J.D. Power


SAMSUNG

23 cu. ft. Counter Depth 4-Door Refrigerator with Cool Select Plus


Installing Your Refrigerator

1. Measure the height, width and depth of the opening, making sure to include baseboards, molding, tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual online at samsung.com.

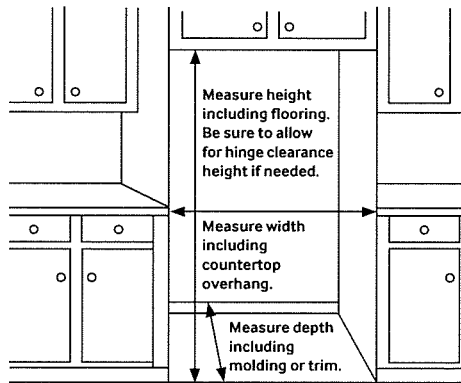

Dimensions

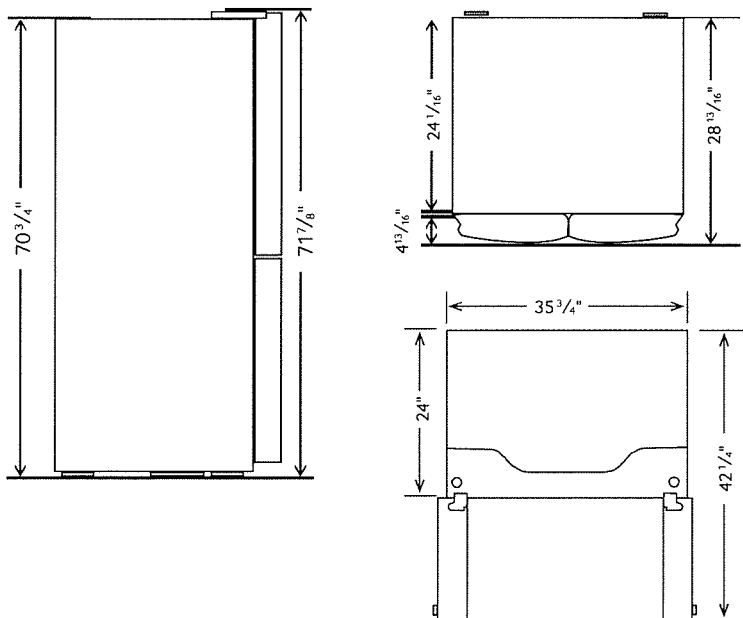

Total Capacity: 22.5 cu. ft.

Refrigerator: 13.6 cu. ft.

- Premium External Filtered Water and Ice Dispenser (Crushed or Cubed Ice)
- Ice Master Ice Maker
- High-Efficiency LED Lighting
- 2 Clear Crispers
- 5 Tempered Glass Spill-Proof Shelves
 - 1 Slide-in & fold-up
 - 1 Flip-Up
 - 3 Fixed

Cool Select Plus: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Drawers
- 4 Temperature Zones:
 - 41°F
 - 30°F
 - 23°F
 - -9°F – 1°F
- High-Efficiency LED Lighting

Freezer: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Freezer Drawers
- High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labor on Refrigerator
 Five (5) Years Parts and Labor on Sealed Refrigeration System Only*
 Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor

*Compressor, evaporator, condenser, drier, connecting tubing

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):
 35 3/4" x 71 7/8" x 28 7/8"

Dimensions (WxHxD without hinges and door):
 35 3/4" x 70 3/4" x 24 1/16"

Dimensions (WxHxD with hinge and door, no handle):
 35 3/4" x 71 7/8" x 28 7/8"

Weight: 352.7 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 5/16" x 78" x 31 5/16"

Weight: 385.8 lbs.

Color	Model #	UPC Code
Stainless Steel	RF23J9011SR	887276088969

SAMSUNG

*Samsung received the highest numerical score for French door refrigerators in a tie in the proprietary J.D. Power 2014 Kitchen Appliance Study™. Study based on 15,380 total responses measuring 10 French door refrigerators brands and measures opinions of consumers about their new appliance purchased in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2015 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660 Tel: 800-SAMSUNG samsung.com

LAUNDRY SPECIFICATIONS

FRONT LOAD WASHERS

Performance

- 5.2 cu.ft. Ultra Large Capacity with NeveRust™ Stainless Steel Drum (IEC)
- DirectDrive™ Motor for the Ultimate in Durability and Reliability with 10 Year Warranty
- 10° TiLTub™ for Easy Reach into the Rear of the Drum
- 1300 RPM Powerful Spin for Efficient Water Extraction

Intelligent Fabric Care




- TurboWash™ Technology
- Steam Technology
- ASC Certified Allergiene™ Cycle
- NSF Certified Sanitary Cycle
- ColdWash™ Technology
- 6Motion™ Technology
- NFC Tag On
- SmartDiagnosis™
- TrueBalance™ Anti-Vibration System
- Magnet Ventilation
- SenseClean™ System for Intelligent Fabric Care
- 12 Washing Programs and 5 Temperature Settings
- Delay Wash up to 19 hours for Washing Convenience

Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

Technology Benefits

- LoDecibel™ Quiet Operation
- Highly Energy and Water Efficient

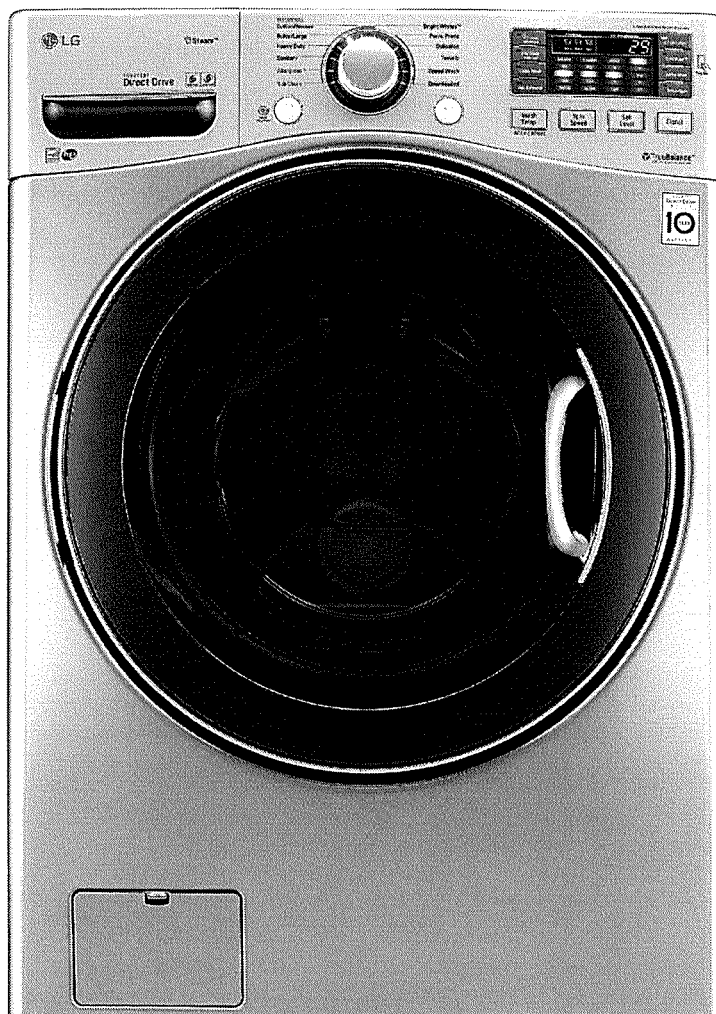

Fast Forward your Laundry

Tired of spending hours on end finishing your family's laundry? Now, those days are gone. LG's revolutionary TurboWash™ Technology allows you to save 20 minutes on larger loads, with outstanding cleaning performance! It's like pressing the fast forward button on your laundry.

Deep Clean with Steam

LG Steam Technology penetrate fabric to remove soil and enhance cleaning results, it also removes common household allergens. The Allergiene™ cycle gently removes over 95% of common household allergens, like dust mites and pet dander from even the most delicate fabrics. It's so effective it's certified by the Asthma Society of Canada (ASC).

More Free Time

Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The ultra large capacity (5.2 cu.ft.) washer lets you do more laundry in fewer loads. That's time well saved.

PRODUCT FEATURES

TYPE	
Front Loader	•
Design Lock	Front Control
Intelligent Electronic Controls with Dual LED Display	•
Dial-A-Cycle™	•
Capacity	IEC 5.2 cu.ft.
TYPE	
Energy Star	•
WASH PROGRAMS	
12 Programs	Cotton/Normal, Bulky/Large, Perm. Press, Delicates, Download, Speed Wash, Tub Clean, Sanitary, Allergiene™, Heavy Duty, Towels, Bright Whites™
10 Options	Prewash, Rinse+Spin, TurboWash™, Extra Rinse, Child Lock, ColdWash™, Steam, FreshCare™, Delay Wash (up to 19 hours), Add Garment
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)
5 Spin Speeds	Extra High (1300 max), High, Medium, Low, No Spin
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	5
FABRIC CARE FEATURES	
TurboWash™	•
Steam	•
Allergiene™ Cycle	•
ColdWash™	•
6Motion™	•
SenseClean™ System	
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
NFC Tag On	•
SmartDiagnosis™	•
Load Sense	•
Status Indicator(s)	
End of Cycle Signal	•

Count On It

When you buy a washer, you don't want to worry that it won't last. Because the DirectDrive™ Motor uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a 10-year warranty.

NFC Tag On

Easily change and customize cycles with a simple tap of a smart phone app. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

All the Right Moves

With 6Motion™ Technology, each wash cycle combines up to 6 different wash motions to provide a revolutionary cleaning experience and ultimate fabric care.

Child Lock	•
Auto Suds Removal	•
Forced Drain System	•
Internal Water Heater	•
Easy Loading TilTub™	•
Leveling Legs	4 Adjustable Legs
LoDecibel™ Quiet Operation	•
MOTOR AND AGITATOR	
Motor Type / Motor Speed / Axis	Direct Drive / Variable / Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	Painted Steel
Control Panel	Plastic
Top Plate	Painted
Transparent Glass Door	•
Door Rim	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings / Electrical Requirements / Type	UL Listed / 120V, 10 Amps / Electric
OPTIONS	
Pedestal	WDP4V
Pedestal (WxHxD)	27" x 13 3/5" x 25 2/5"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	29 1/2" x 43 5/16" x 31 5/16"
Weight (Product/Carton)	202.8 lbs/224.8 lbs
UPC CODES	
WM3770HVA (Washer)	772454 067594
WDP4V (Pedestal)	772454 052866
KSTK1 (Stacking Kit)	772454 059896
WARRANTY	
	1 Year Parts and Labour
	5 Years Part on Drum
	10 Years Part on DirectDrive™ Motor



LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6

Tel: 647-253-6300 | LG.com

Customer Service & Parts

1-888-542-2623

Design, features and specifications are subject to change without notice.

Non-metric weights and measurements are approximate.

All trademarks are property of their respective owners.

Printed in August 2016

LAUNDRY DRYER SPECS

ELECTRIC DRYERS

**Performance**

- 7.4 cu.ft. Ultra Large Capacity with Aluminized Alloy Steel Drum (Alcosta)

Intelligent Fabric Care


- TrueSteam™ Technology
- SteamFresh™ Cycle
- SteamSanitary™ Cycle
- ReduceStatic™ Option
- Easylron™ Option
- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- NFC Tag On
- SmartDiagnosis™
- 12 Drying Programs
- 5 Temperature Settings
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Drying Rack
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Custom Program
- Damp Dry Signal

Style and Design


- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

Technology Benefits

- LoDecibel™ Quiet Operation



Graphite Steel

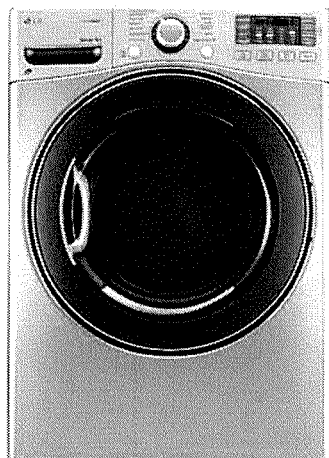

ELECTRIC DRYERS

Harness the Power of Steam

LG's **TrueSteam™ Technology** uses a steam generator to produce real steam right into the dryer giving you unique cycle options that remove wrinkles, odours, static and allergens.

The Quick Fix

Late for the party and no time to iron your favourite outfit? The **SteamFresh™ Cycle** refreshes and reduces wrinkles in up to five garments at a time with one 20-minute dryer cycle.

Refresh and Sanitize

SteamSanitary™ Cycle refreshes and sanitizes dry items in the steam dryer. The SteamSanitary™ Cycle kills bacteria on your clothes and is great for decorative pillows and other non-washable items.

Dry Big Loads

Accurately dry big and bulky loads with **7.4 cu.ft. ultra large capacity**. Less time in laundry room, more time for life.

NFC Tag On


Easily change and customize cycles with a **simple tap of a smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

Accurate Drying

LG's **Sensor Dry System** measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.

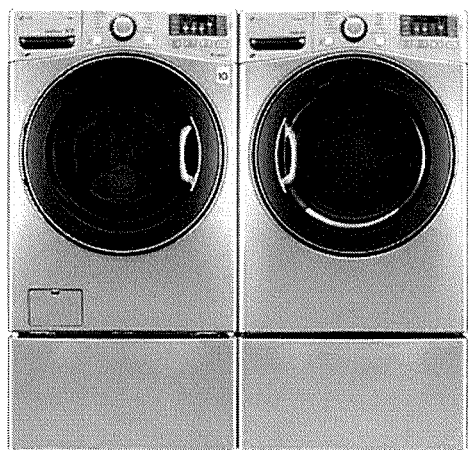

LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X6
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623

DLEX3570V

TYPE	
Front Loader	●
Design Look	Front Control
Intelligent Electronic Controls with Dual LED Display	●
Dial-A-Cycle™	●
Capacity	7.4 cu.ft.
Dry Linen Capacity	>10.2 kg
DRYING PROGRAMS	
12 Programs	Sensor Dry, SteamFresh™, SteamSanitary™, Towels, Perm Press, Cotton/Normal, Heavy Duty, Delicates, Small load, Bulky/Large, Anti-Bacterial Manual Dry, Speed Dry, Air Dry
10 Options	More Time, Less Time, ReduceStatic™, EasyIron™, Custom Program, Wrinkle Care, Rack Dry, Child Lock, Damp Dry Signal, Signal ON/OFF
5 Temperature Settings	High, Medium High, Medium, Low, Ultra Low
5 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
SteamFresh™ Cycle	●
SteamSanitary™ Cycle	●
ReduceStatic™ Option	●
EasyIron™ Option	●
Sensor Dry	●
Precise Temperature Control and Variable Heater	●
CONVENIENCE FEATURES	
NFC Tag On	●
SmartDiagnosis™	●
FlowSense™ Duct Clogging Indicator	●
Wrinkle Care Option	●
Remaining Time Display/Status Indicator(s)	●
End of Cycle Signal	●
Child Lock	●
Drying Rack	●
Drum Light	●
Reversible Door	●
Leveling Legs	4 Adjustable Legs
Venting Option	4 Way Venting
3 Minute Installation Check	●
LoDecibel™ Quiet Operation	●
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum (Alcosta)	●
Cabinet	Painted Steel
Control Panel	Plastic
Top Plate	Painted
Transparent Glass Door	●
Door Rim	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	240V, 30 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4V
Pedestal (WxHxD)	27" x 13 3/5" x 28 2/5"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product/Carton)	134.1 lbs/144 lbs
UPC CODES	
DLEX3570V	772454 063268
WDP4V	772454 052866
KSTK1	772454 059896
WARRANTY	
1 year parts and labour	

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.
All trademarks are property of their respective owners