


Double Wall Oven

FGET3065PF

30" Electric

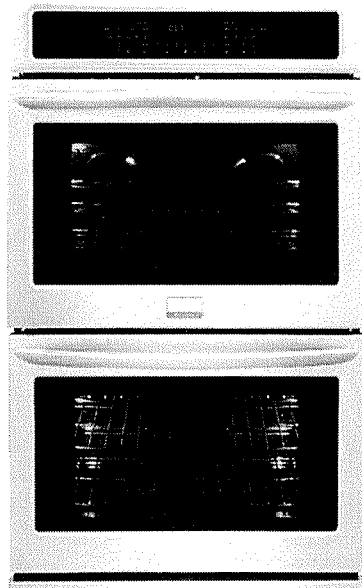

Product Dimensions

Height	50-7/16"
Width	30"
Depth	24-3/4"

More Easy-To-Use Features

Even Baking Technology

Our Even Baking Technology ensures even baking every time.

Effortless™ Temperature Probe

Take the guesswork out of cooking with the Effortless Temperature Probe that shows you the internal cooking temperature of your food. You can set the desired finished temperature and the oven alerts you when that temperature has been reached.

Steam Cleaning

A light oven cleaning that's chemical-free, odour-free, and fast.

Smudge-Proof™ Stainless Steel

Reduces fingerprints and smudges so it's easy to clean.

Express-Select® Controls

Easily set cooking temperature or choose one-touch cooking options.

One-Touch Keep Warm Setting

Just one touch of a button keeps food warm until everything — and everyone — is ready.

Auto Oven Shut-Off

As an extra safety measure, the oven will automatically shut off after six hours.

Sabbath Mode (Star-K® Certified)

Available in:

Stainless
(F)


**Based on single rack cooking performance, not set temperature, using Quick Preheat.*

Signature Features



Quick Preheat

Preheat in less than six minutes.*



True Convection

Single convection fan circulates hot air throughout the oven for faster and more even multi-rack baking.



Power Broil

Added power means you can broil food faster.



Effortless™ Convection

Takes the guesswork out of convection cooking — our ovens automatically adjust standard baking temperatures to convection temperatures for consistent results.

Features

Oven Control/ Timing System	Express-Select™
Windows	Extra-Large
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Oven Cleaning System	Self-Clean w/ Steam Clean Option

Oven Controls

Bake/ Broil	Yes/ Variable (400 - 550 °F)
Effortless™ Convection Conversion	Yes
Convection Bake/ Broil/ Roast	Yes/ Yes/ Yes
Oven Preheat	Quick
My Favourite	
Slow Cook	
Effortless™ Temperature Probe	Yes (Upper Oven)
Chicken Nugget Button	
Pizza Button	
Keep Warm	Yes
Add-a-Minute	
Delay Start	Yes
Self-Clean/ Clean Options	Yes/ 2, 3, 4 Hours
Steam Clean	Yes
Delay Clean	Yes
Kitchen Timer/ Timed Cook Option	Yes/ Yes
Control Lock	Yes
Auto Oven Shut-Off	6 Hours
Oven Lock-Out	Yes

Upper Oven Features

Capacity (Cu.Ft.)	4.6
Convection System	True Convection
Oven Light	2 Halogen
Hidden Bake Element	Yes
Rack Configuration	2 Heavy Duty, 1 Offset Rack
Baking System	Even Baking Technology
Broiling System	Power Broil
Bake/ Broil Element (Watts)	2,000 / 3,400

Lower Oven Features

Capacity (Cu.Ft.)	4.6
Convection System	True Convection
Oven Light	2 Halogen
Hidden Bake Element	Yes
Rack Configuration	2 Heavy Duty, 1 Offset Rack
Baking System	Even Baking Technology
Broiling System	Power Broil
Bake/ Broil Element (Watts)	2,000 / 3,400

Optional Accessories

3"-High Bottom Trim-Stainless Steel	(S) PN# 318903519
10'-Long Armoured Power Cable	PN# 903056-9010


Certifications

A.D.A. Compliant	
Sabbath Mode (Star-K® Certified)	Yes

Specifications

Oven Interior (H x W x D)	17-1/2" x 24-1/8" x 18-3/4"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240/208 Volts¹	7.4 / 5.6
Amps @ 240/208 Volts	30.8 / 26.9
Minimum Circuit Required (Amps)	40
Shipping Weight (Approx.)	280 Lbs.

¹Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt,
60 Hertz AC only electrical supply with ground required on
separate circuit fused on both sides of line.

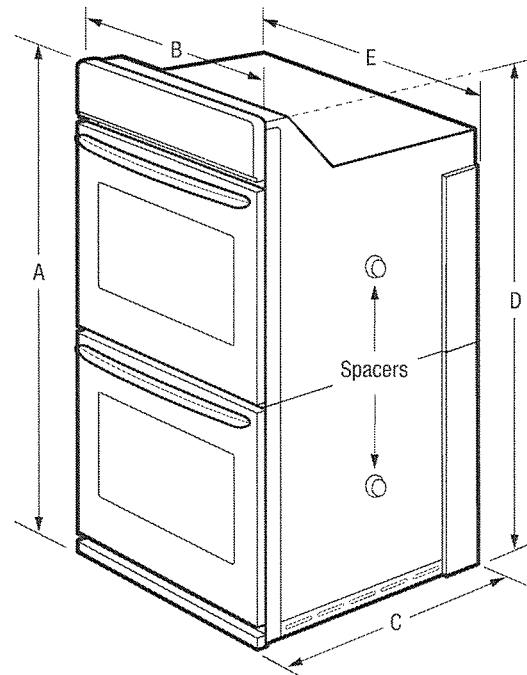

NOTE: For planning purposes only. Always consult local and national electric codes.
Refer to Product Installation Guide for detailed installation instructions on the web
at frigidaire.ca.



Product Dimensions

A-Height	50-7/16"
B-Width	30"
C-Depth	24-3/4"
D-Height (Wrapper)	48-5/8"
E-Width (Wrapper)	28-1/4"
Depth with Door Open 90°	45-3/4"

Cutout Dimensions


Height (Min.)/(Max.)	48-7/8" / 49-7/8"
Width (Min.)/(Max.)	28-1/2" / 29"
Depth (Min.)	24"

Accessories information available
on the web at frigidaire.ca

Lot
241

FRIGIDAIRE

GALLERY

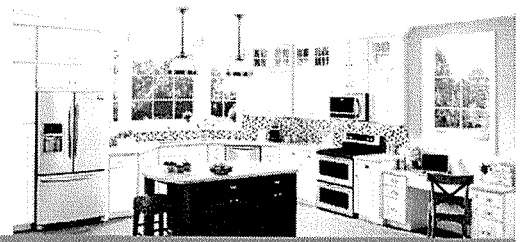

Built-In Cooktop

FGIC3067MB

30" Induction

Product Dimensions

Width	30-3/4"
Depth	21-1/2"
Height	4-3/8"

More Easy-To-Use Features

Cooktop Stays Cooler

With induction cooking, heat is transferred directly to the cookware, so the cooktop stays cooler to the touch—making it easier to clean.

Power Assist Function

Generates rapid heat for a faster boil.

Cooking Versatility

Gentle enough to melt chocolate and powerful enough to boil water, so it's great for entertaining or getting dinner on the table quickly.

Express-Select® Controls

Easily go from warm to boil.

Smoothtop Ceramic Glass Cooking Surface


Hot Surface Indicators

Available in:



Black
(B)

Elements	Size	Watts
Right Front	10"	2,500/3,400
Right Rear	6"	1,450/2,000
Left Front	7"	1,800/2,600
Left Rear	8"	2,300/3,200

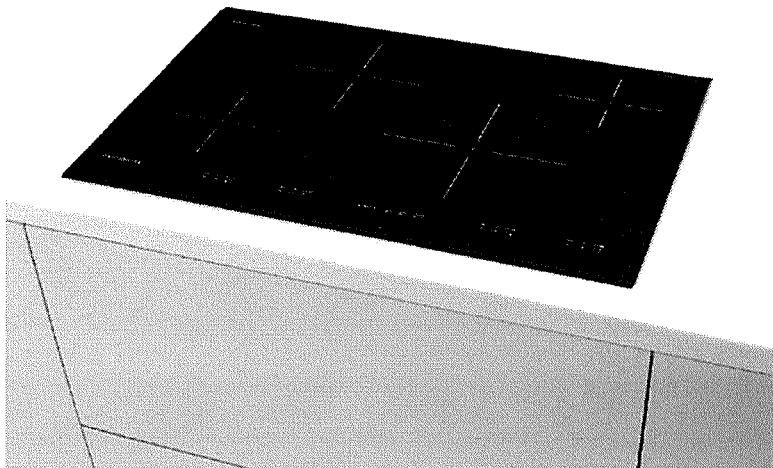

Signature Features



More Responsive

Cooking with induction is more responsive than gas or electric so you can easily go from simmer to boil.




Versatile Induction Elements

With up to five powerfully efficient induction elements, the Induction Cooktop offers the superior cooking flexibility. And the 10" induction element offers up to 3,400 watts of power, so you can bring water to a boil quickly.



Exceptional Temperature Control

Adjust heat with greater accuracy than on gas or electric cooktops especially at lower settings.



More Energy-Efficient

Cooking with induction is 70% more efficient than gas and 20% more efficient than electric.

Features

Controls	Express-Select ¹
Surface Type	Black Ceramic Glass
Right Front Element (Watts)	10" - 2,500/3,400
Right Rear Element (Watts)	6" - 1,450/2,000
Left Front Element (Watts)	7" - 1,800/2,600
Left Rear Element (Watts)	8" - 2,300/3,200
Hot Surface Indicators	Yes
Control Location	Center Front

Certifications


Sabbath Mode (Star-K[®] Certified)

Specifications

Power Supply Connection Location	Right Rear
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts ²	8.4/7.3
Amps @ 240/208 Volts	35.1/35.0
Minimum Circuit Required (Amps)	40
Approved for Electric Single Wall Oven Combination Installation ²	Yes
Shipping Weight (Approx.)	48 Lbs.

¹Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

²Cooktops are approved for installation above any of our Electric Single Wall Ovens.

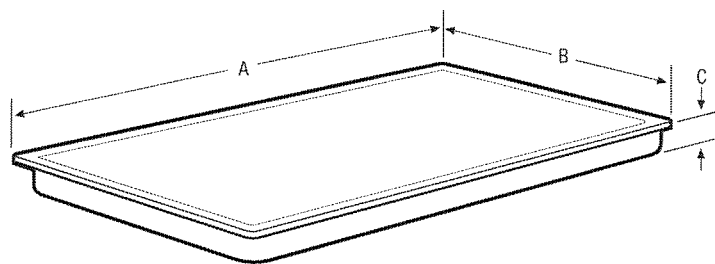

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions

A - Width	30-3/4"
B - Depth	21-1/2"
C - Height	4-3/8"

Cutout Dimensions

Width (Min.)/(Max.)	29-5/8" / 29-3/4"
Depth (Min.)/(Max.)	20-3/8" / 20-1/2"
Height	4-1/2"

Granite Countertop
Installation Not Available

Accessories information available
on the web at frigidaire.ca