

GOEMANS APPLIANCES

Appliance Specification Confirmation Sheet

Appliance specifications for: *Annil + Geeta Dharamdial*

Sales Rep: *Judith*

Invoice: *HB00016181*

Store Location: *Vaughan*

HB00016182

Email:

Date: *31 May 2017*

Pages including cover: *26 pages*

Please find attached the most current specifications for the appliances purchased by our mutual customer.

We have included a copy of the customers packing slip with full model numbers. Please take a moment to check against the specification sheets to insure you have all the information you may require.

While we have provided the most current information available from the manufacture, the dimensions and information attached are for planning purposes only. As per the manufacturer specifications are subject to change without notice.

Please do not hesitate to call or e-mail the sales rep if you require further information not enclosed. We are always pleased to help.

We have advised the customer that it is their responsibility to communicate any changes to this order to their kitchen designer/builder as soon as possible to avoid errors in design or rough in.

Please sign below confirming both receipt of this package and that you have reviewed the information enclosed to ensure specifications match the attached packing slip.

Signature

Print

Date



GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016181

Salesperson: JUDITH ORETA
Purchase Date: 5/30/17
Invoice Finished Date:
Delivery/Pickup Date: Dec 16, 2017
Invoice Type: VBL
Date Printed: May 31, 2017
Page: 1



ONLINE BANKING ACCOUNT

BILL TO: 4168807175

DHARAMDIAL, ANNIL & GEETA
9255 JANE ST
UNIT 414
MAPLE, ON L6A 0K1

TEL# (416) 880-7175 BUS# (416) 882-9191

Directions: na

SHIP TO: 4168807175

DHARAMDIAL, ANNIL & GEETA
9255 JANE ST
UNIT 414
MAPLE, ON L6A 0K1

TEL# (416) 880-7175 BUS# (416) 882-9191

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1	①	WF50K7500AV/A2		BLACK ST	SAM, WAFL: WASHER , FRONT LOAD, LARGE CAPA 5.8 CU.FT, VRT® PLUS, POWERFOAM, STEAM, HEATER, DI
1	②	MUST PURCHASE OPTIONAL HOSES DV50K7500EV/AC		BLACK ST	SAM, DREFL: DRYER , ELECTRIC - TO MATCH LAR MATCHING ELECTRIC DRYER FOR WF50K7500AV/A2, 7.5 CU
		STANDARD HOSES SHIP WITH THIS UNIT SPP 4 YR EXT GOLD - 2 APP - \$1500-2499.99			
		Model #	Mfg Wty # of Months		
		DV50K7500EV/AC	12		
		wf50k7500av/a2	12		
1	③	HBLP451UC		Stainless	BOS, OVS: OVEN , SINGLE BENCHMARK, 30W, EU CONV., TFT TOUCH CONTROL
1	④	P-CBOS-1704-250		STAINLES	BOS, OVSS: OVEN , SINGLE, STEAM OR SPEED BENCHMARK SERIES, 30W, SPEED/CONV, TFT DSPLY, 240 V
1		HMCP0252UC			
1		P-CBOS-1704-100			
		*****pls deliver with HB00016182			
		Payment			TRANSFER PAYMENT

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

WF50K7500AV

Samsung Front-Load Washer

5.0 cu. ft. Capacity

Features

- AddWash
- Super Speed
- PowerFoam™
- Steam Wash
- VRT Plus™
- Smart Home Ready
- Self Clean+
- Smart Care
- Swirl Drum Design
- Direct Drive Motor
- 1300 RPM Maximum Spin Speed
- 14 Preset Wash Cycles
- 13 Options

Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Prewash, Main Wash, Softener, Bleach



ENERGY STAR®-rated:


CEE Tier 3

IMEF = 2.92




IWF = 2.9

105 kWh/yr

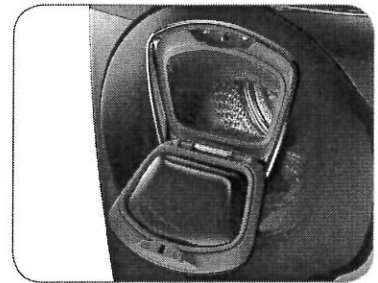

AddWash

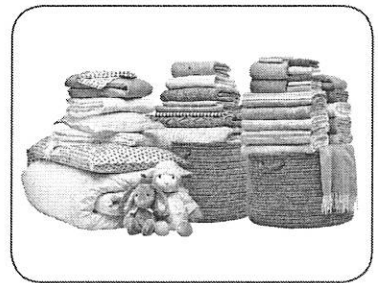

5.0 cu. ft. Capacity

Available Colors:



Black Stainless Steel



White

Signature Features

AddWash

- Conveniently add in forgotten laundry after the cycle has begun with the AddWash door.
- Save time and energy by not doing an additional load of laundry.

5.0 CU. FT. CAPACITY

- Largest 27" Front Load Washer in the industry¹ lets you wash over 3 laundry baskets in a single load.²
- 5.0 cu. ft. capacity gets more laundry done in less time.

¹Based on USDOE/EPA listing.

²Based on an 8-lb. load of laundry.

SUPER SPEED

- Breakthrough technology provides a 50% faster and thorough wash cycle.
- Wash a full load in only 30 minutes.²

²Normal 1-hour wash can be completed in as little as 30 minutes as compared to WF511 washer without Super Speed.
Based on DOE standard's average of 7.5 loads per week.


SAMSUNG

WF50K7500AV

Samsung Front-Load Washer

Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


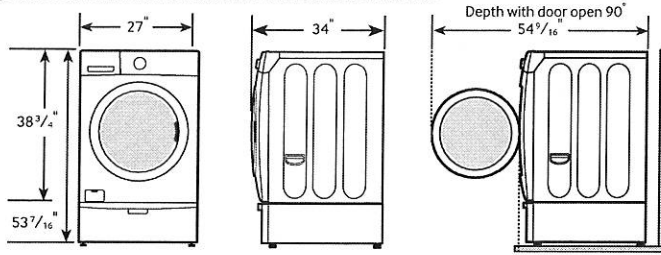


Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.² (see stacked build below). Your washer alone does not require a specific air opening.


1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

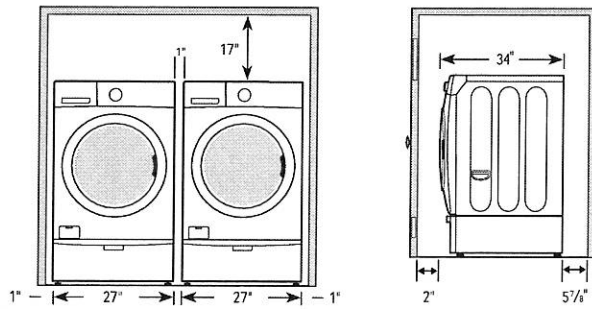

When installing with matching dryer, if the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

2. With stacked washer and dryer

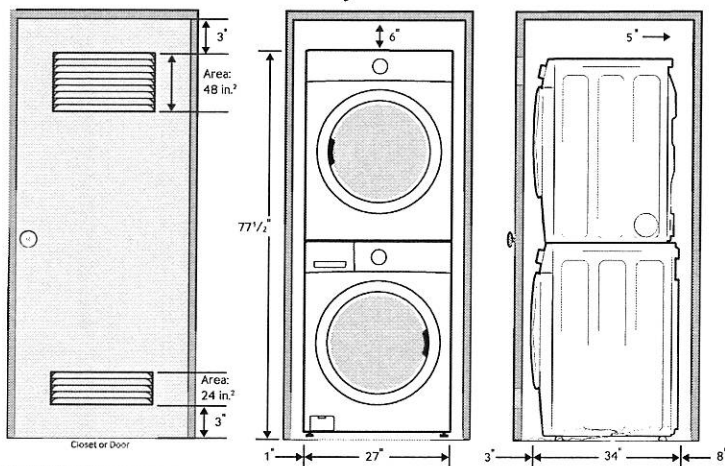

5.0 cu. ft. Capacity

14 Preset Wash Cycles:

Eco Cold, Normal, Heavy Duty, Permanent Press, Sanitize, Allergen, Bedding, Deep Steam, Whites, Active Wear, Delicates, Wool, Quick Wash, Rinse and Spin

13 Options:

Super Speed, Steam, Self Clean+, Delay End, My Cycle, Prewash, Extra Rinse, Extra Spin, Spin Only, Sound, Child Lock, Smart Care, Drum Light

5 Temperature Settings:

Extra Hot, Hot, Warm, Eco Warm, Cold

5 Spin Settings:

Extra High, High, Medium, Low, No Spin

5 Soil Settings:

Heavy, Heavy Medium, Normal, Low Medium, Light

Dispenser Trays:

Prewash, Main Wash, Softener, Bleach

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 34"

Weight: 238 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 15/16" x 36 3/16"

Weight: 244 lbs

Color

Black Stainless Steel

White

Model

WF50K7500AV

WF50K7500AW

UPC Code

887276135557

887276135564

Matching Dryer (Electric/Gas)

Black Stainless Steel

White

DV50K7500EV

DV50K7500EW

887276135946

887276135960

Black Stainless Steel

White

DV50K7500GV

DV50K7500GW

887276135977

887276135984

Optional Stacking Kit

Sold separately

SKK-7A

887276146423

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.


DV50K7500EV

Samsung Front-Load Electric Dryer


7.5 cu. ft. Capacity

Features

- ENERGY STAR® 2016 Certified
- Multi-Steam Technology:
 - Steam Refresh
 - Steam Wrinkle Away
 - Steam Sanitize
- Vent Sensor™
- Stainless Steel Drum
- Eco Dry Technology
- Smart Home Ready
- Smart Care
- Sensor Dry
- 14 Preset Drying Cycles
- 12 Options
- 5 Temperature Settings
- 4-Way Venting
- Dual Heaters
- Dryer Rack
- Dryer Drum Light
- Reversible See-Through Door

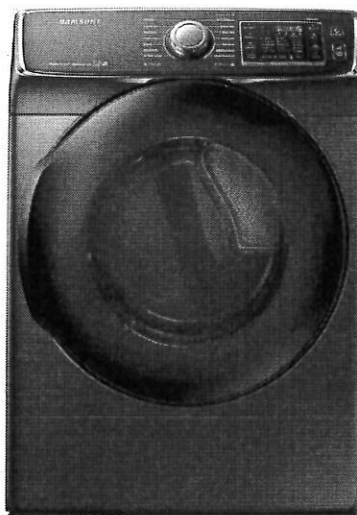

Multi-Steam Technology

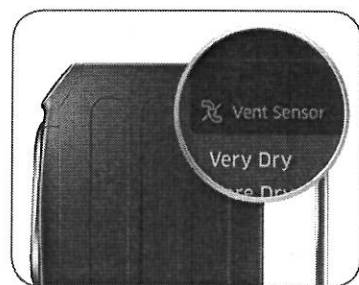

Vent Sensor

Convenience

- Child Lock
- My Cycle Option
- Filter Check Indicator

Available Colors:



Black Stainless Steel



White

Signature Features

ENERGY STAR® 2016 CERTIFIED

- Meets strict energy-consumption requirements.

MULTI-STEAM TECHNOLOGY

- Helps remove wrinkles and odors, and freshens clothes so you can spend less time ironing and less money at the dry cleaners.

VENT SENSOR™

- Detects duct blockages and reminds you to clean your vent.
- Conveniently allows you to forward these alerts to your smartphone.




SAMSUNG

DV50K7500EV

Samsung Front-Load Electric Dryer

Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


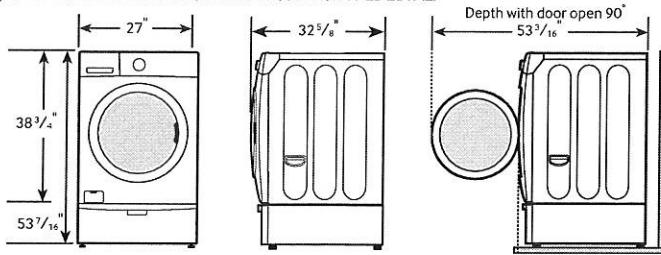


Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.² (see stacked build below). Your washer alone does not require a specific air opening.


1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

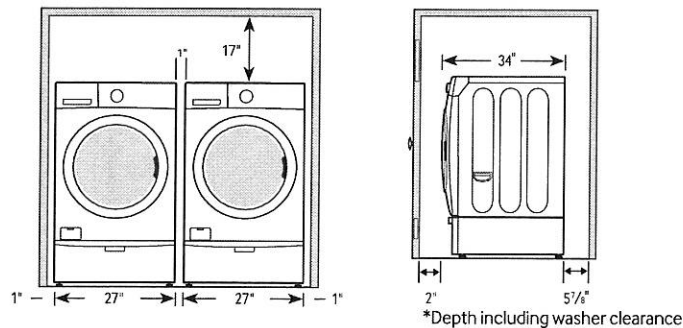

If the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

2. With stacked washer and dryer

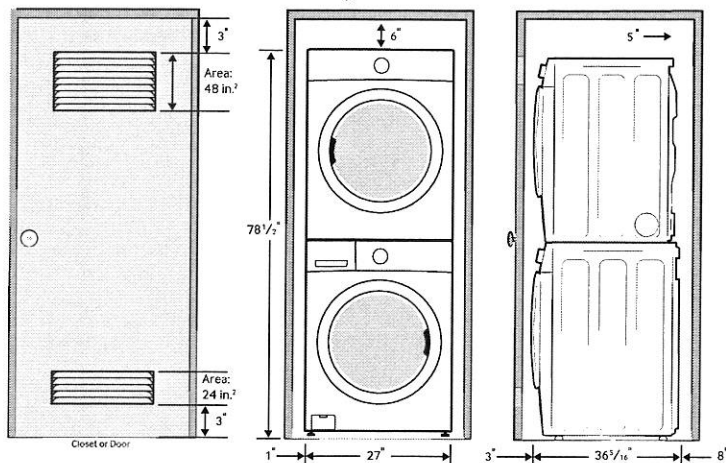

7.5 cu. ft. Capacity DOE

4-Way Venting

14 Preset Dry Cycles:

Steam Refresh, Steam Wrinkle Away, Steam Sanitize, Eco Normal, Normal, Heavy Duty, Permanent Press, Active Wear, Bedding, Delicates, Wool, Time Dry, Air Fluff, Quick Dry

12 Options:

Mixed Load Bell, Wrinkle Prevent, Anti-Static, My Cycle, Rack Dry, Adjust Time (Up), Adjust Time (Down), Eco Dry, Sound, Child Lock, Smart Care, Drum Light

5 Temperature Settings:

High, Medium, Medium Low, Low, Extra Low

5 Dry Levels:

Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 32 5/8"

Weight: 126 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 3/8" x 34 11/16"

Weight: 134 lbs

Electric

Model #	UPC Code
DV50K7500EV	887276135946
DV50K7500EW	887276135960

Gas

Model #	UPC Code
DV50K7500GV	887276135977
DV50K7500GW	887276135984

Matching Washer

Model #	UPC Code
WF50K7500AV	887276135557
WF50K7500AW	887276135564

Optional Stacking Kit

Sold separately	SKK-7A	887276146423
-----------------	--------	--------------

Optional Side Vent Kit

Sold separately	DV-2A/XAA	887276146416
-----------------	-----------	--------------

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.


The Emerging Technology award recognizes innovative products that have the potential to significantly reduce greenhouse gas emissions.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

30" Single Wall Oven

Benchmark® Series – Stainless Steel HBLP451UC

3



HBLP451UC
Stainless Steel

The Bosch wall oven features a QuietClose™ door that won't slam shut and a high-resolution TFT user interface.

Features & Benefits

Dampened hinges softly and quietly guide the QuietClose™ door shut.

The color TFT control panel with SteelTouch™ buttons is easy to use.

A full-extension telescopic rack offers safe access to the oven cavity.

The wall oven is designed to be installed flush with cabinetry.

Bosch wall ovens are compatible with most competitors' cutouts.

AutoProbe takes the guesswork out of rare, medium and well done cooking.

General Properties

Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, AutoProbe, Fast Preheat, EcoChef, Speed Convection (Frozen Foods)
---------------	--

Cleaning type	Self Clean
Telescopic rack	1
Illumination type	Halogen
Interior lights	2

Oven Performance

Bake element wattages	2,400 W
Broil element wattages	3,800 W
Convection element wattages	2,000 W

Technical Details

Watts (W)	6,325 W
Circuit breaker (A)	30 A
Volts (V)	240 / 208 V
Frequency (Hz)	60 Hz
Power cord length (in)	50"
Plug type	Fixed Connection, No Plug
Energy source	Electric

Dimensions & Weight

Overall appliance dimensions (HxWxD)(in)	29" x 29 3/4" x 24 1/2"
Required cutout size (HxWxD) (in)	27" – 28 5/8" x 28 1/2" x 23 1/2"
Oven cavity size (cu. ft.)	4.6
Overall oven interior dimensions (HxWxD) (in)	17 13/16" x 24 1/8" x 18"
Usable oven interior dimensions (HxWxD) (in)	12 5/16" x 23 1/4" x 15 1/4"
Net Weight (lbs)	149 lbs


Accessories—Included

Included	1 Telescopic and 2 Standard Oven Racks, Temperature Probe, Broiler Pan
----------	--

Accessories—Optional



HEZTR301
30" Telescopic Rack

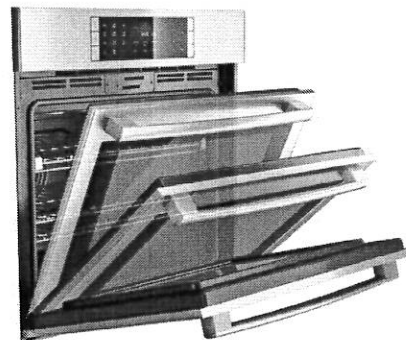

For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904

© BSH Home Appliances Limited. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

09/15



30" Single Wall Oven

Benchmark® Series – Stainless Steel HBLP451UC



BOSCH
Invented for life

Installation Details

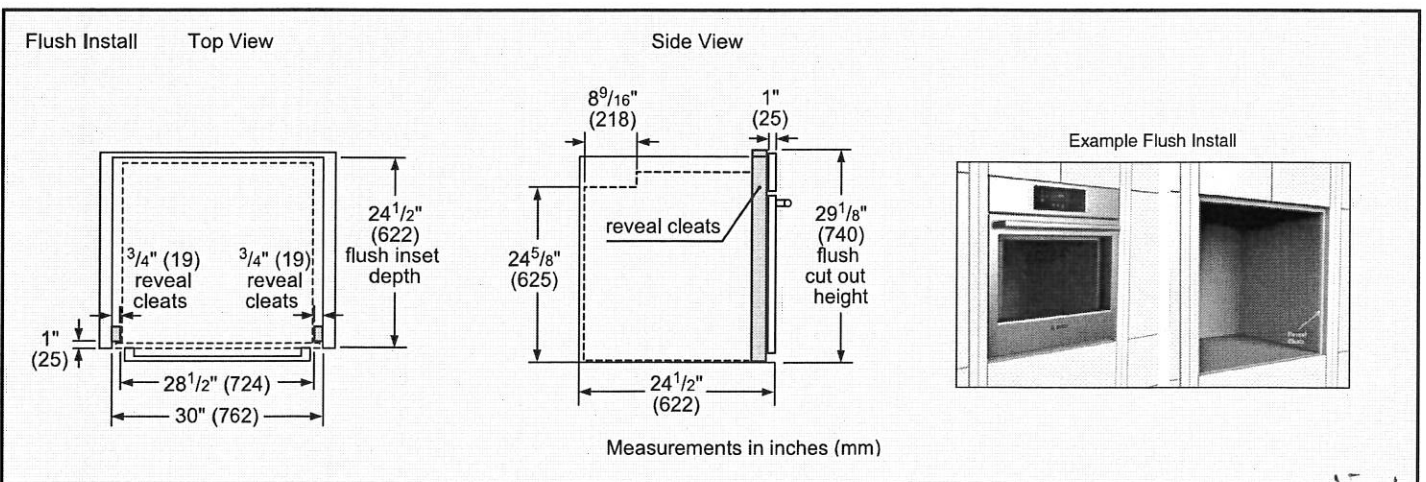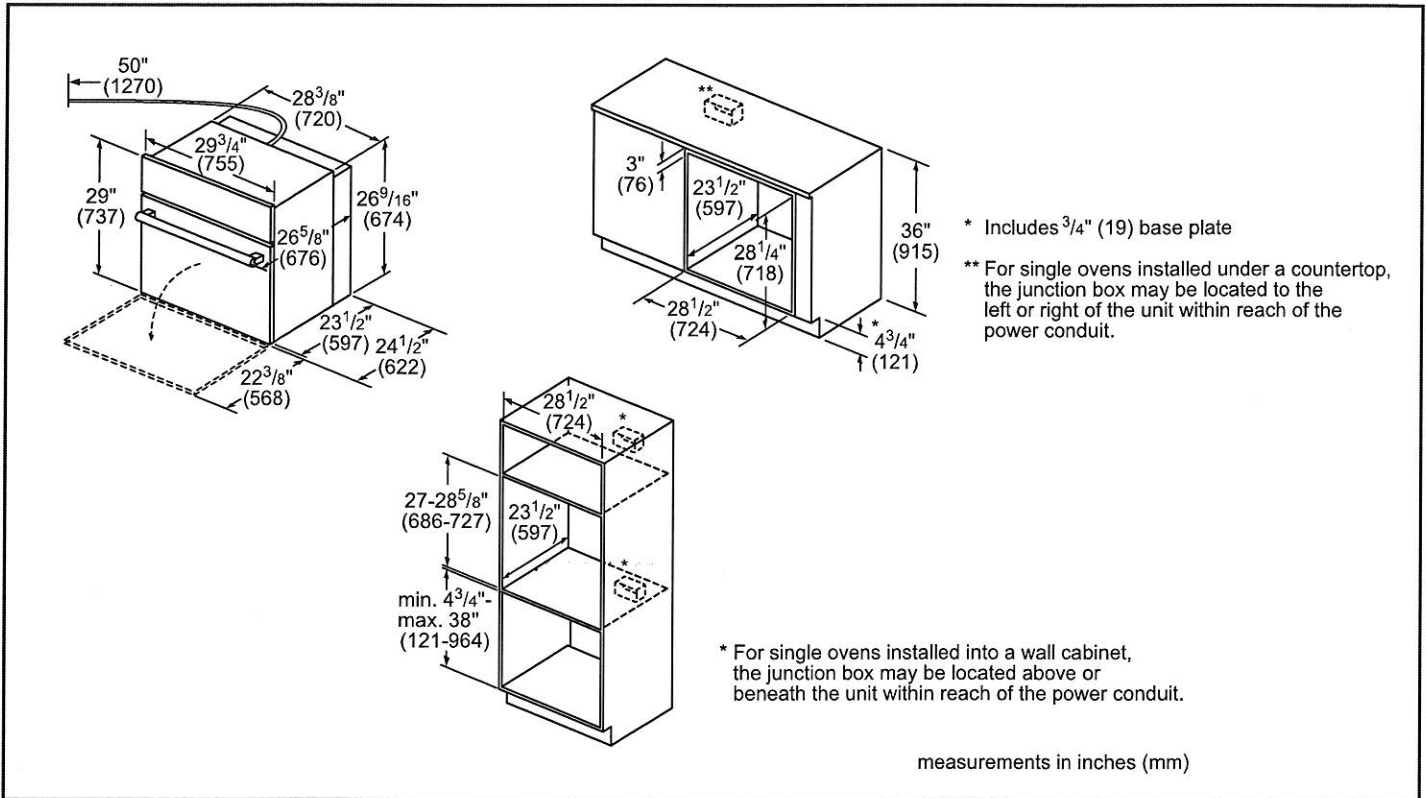

For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904


© BSH Home Appliances Limited. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Single Wall Oven

Benchmark® Series – Stainless Steel HBLP451UC



Installation Details

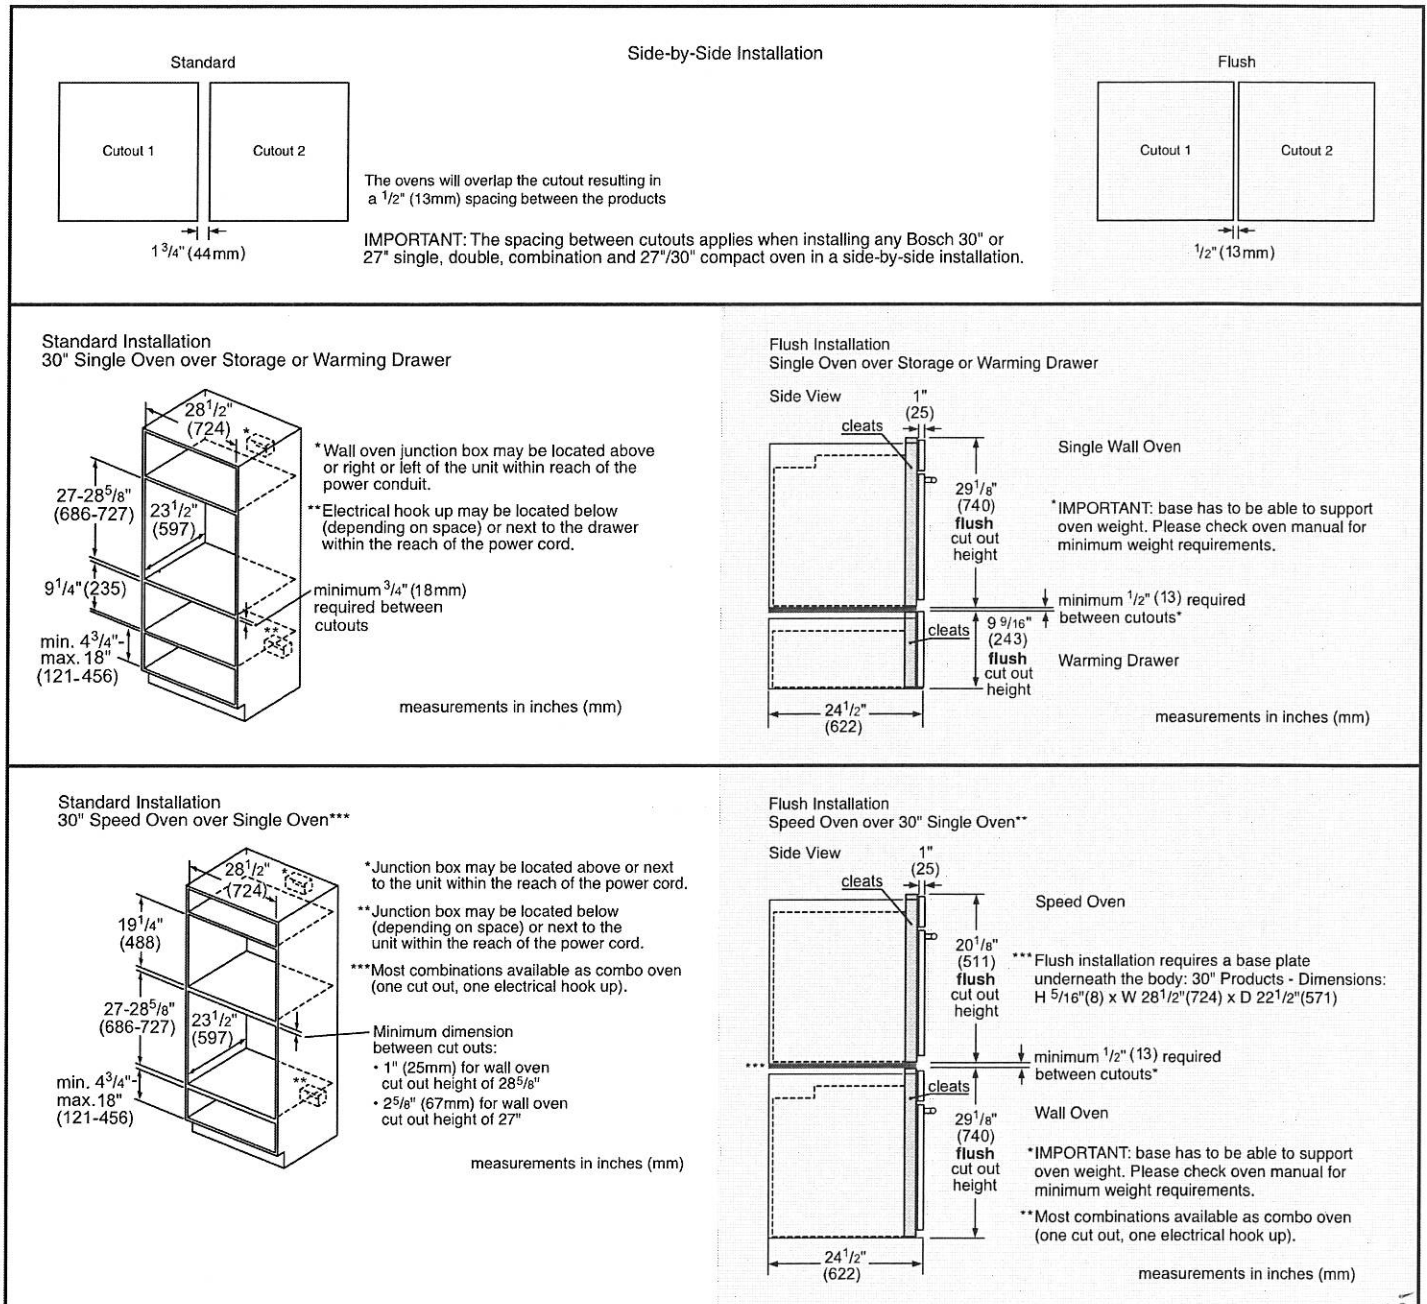

For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904

© BSH Home Appliances Limited. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Speed Oven

Benchmark Series – Stainless Steel HMCP0252UC



HMCP0252UC
Stainless Steel

The speed oven pairs the cooking qualities of a conventional oven with the speed of microwave technology.

Features & Benefits

SpeedChef™ cooking cycles offer faster cooking times for your convenience.

Flush install matches Bosch wall oven, steam oven, or warming drawer.

2-in-1 microwave and convection oven for a variety of cooking options.

30" width can be installed in horizontal and vertical configuration.

LED lights

TFT Display

General Properties

Cavity material	Stainless steel
Max. microwave power (W)	1,000 W

Capacity

Cavity capacity (cu. ft.)	1.6
Turntable diameter (in.)	14 1/8"

Technical Details

Watts (W)	3,840 W
Circuit breaker (A)	16 A
Volts (V)	208-240 V
Frequency (Hz)	60 Hz
Power cord length (in)	48"
Plug type	Fixed connection, 8" stripped wires

Dimensions & Weight

Overall appliance dimensions (HxWxD)(in)	19 5/8" x 29 3/4" x 22 3/8"
Required cutout size (HxWxD) (in)	(Standard) 19 1/4" x 28 1/2" x 22" (Flush) 20 1/8" x 30" x 23 1/2"
Oven overall interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – Metal Max. Cookware	12 3/4" dia.
Turntable – Ceramic Max. Cookware	12 1/2" dia.
Rack – Rectangular Cookware Max.	15" x 12"
Net weight (lbs)	92 lbs

Accessories—Included

Included	Metal turntable, cooking rack, ceramic cooking tray
----------	---



For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904


© BSH Home Appliances Limited. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Speed Oven


Benchmark Series – Stainless Steel HMCP0252UC



Installation Details

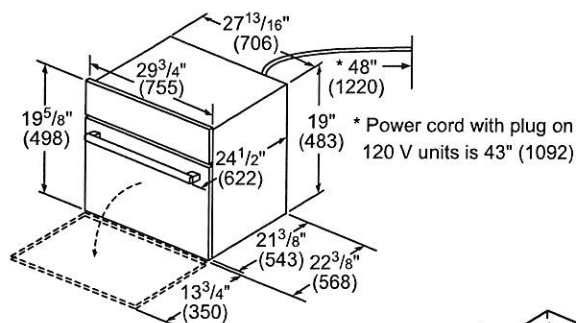


* Power cord with plug on 120 V units is 43" (1092)

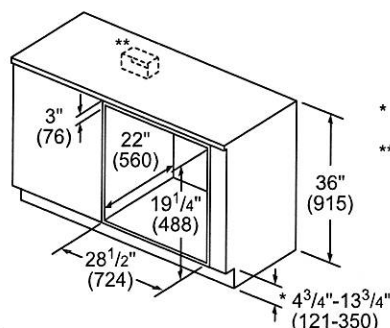

* Includes 3/4" (19) base plate

** Receptacle may be located to the left or right of the unit within reach of the power cord.

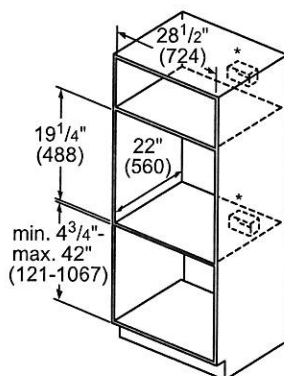


* Receptacle may be located above or beneath the unit within reach of the power cord.


IMPORTANT: Bosch Speed Oven is not approved to be installed under a cooktop.

measurements in inches (mm)

Flush Install Top View

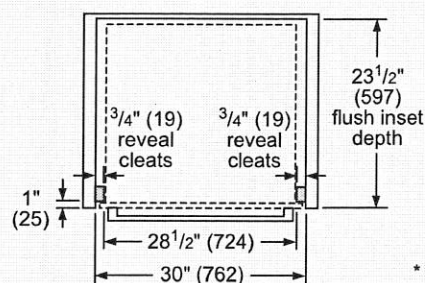


Side View



* Flush installation requires a 5/16" (8 mm) high x 28 1/2" (724 mm) wide x 22 1/2" (571 mm) deep baseplate underneath the unit body.

measurements in inches (mm)

Example Flush Install

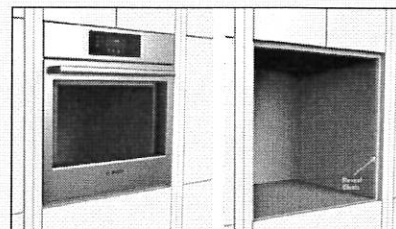

For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904

© BSH Home Appliances Limited. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016182

Salesperson: JUDITH ORETA
Purchase Date: 5/30/17
Invoice Finished Date:
Delivery/Pickup Date: Dec 16, 2017
Invoice Type: VBL
Date Printed: May 31, 2017
Page: 1



ONLINE BANKING ACCOUNT

BILL TO: 4168807175

DHARAMDIAL, ANNIL & GEETA
9255 JANE ST
UNIT 414
MAPLE, ON L6A 0K1

TEL# (416) 880-7175 BUS# (416) 882-9191

SHIP TO: 4168807175

DHARAMDIAL, ANNIL & GEETA
9255 JANE ST
UNIT 414
MAPLE, ON L6A 0K1

TEL# (416) 880-7175 BUS# (416) 882-9191

Directions: na

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1	①	PRG366JG		STAINLES	THE, RAGP: RANGE, GAS, PROFESSIONAL 36W,27D,6B,NATURAL GAS
1	②	DWHD650JFP		STAINLES	THE, DISIC: DISHWASHER, INTEGRATED, COLOUR SAPPHIRE,6PROG,42DBA,5OPT,PRO HNDL
1	③	P-SAPPHIRE DISH UPGRADE JS48PPDUDE		PRO STAIN	JEN, RESB: REFRIGERATOR, SIDE-BY-SIDE, BU 48, ADVANCED INTEGRATED LCD ICE & WATER DISPENSER
This special order product requires a 50% deposit & is considered FINAL SALE. x _____ PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.					
-1	④	P-CJEN-1704-10PER PH36GS		STAINLES	THE, HOWC: HOOD, WALL MOUNT PRO,36W,27D,BAFFLES,HAL,HEAT LAMPS INCL,REQ BLOWER
This special order product requires a 50% deposit & is considered FINAL SALE. x _____ PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.					
1		VTN1030N		STAINLES	THE, HOBI: HOOD, BLOWER, INTERNAL BLOWER, INTERNAL,1000CFM
This special order product requires a 50% deposit & is considered FINAL SALE. x _____ PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.					
1		P-DELIVERY \$30,000+			
-1		SALES DELIVERY ALLOWANCE SPP 4 YR EXT GOLD - 5 APP - \$15000-99999			

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

PRO GRAND® RANGES

PLANNING INFORMATION

MODEL OPTIONS

There are two sizes of Thermador Pro Grand® Ranges to choose from—36-inch and 48-inch—in your choice of all-gas or dual-fuel configurations. All models are 27-Inch deep and available in stainless steel or exclusive models available with porcelain cooktop. Dual-fuel models can be converted to Liquid Propane (LP) using the included kit. All-gas models are available in Natural Gas or Liquid Propane (LP) and should be ordered separately from the factory. Be sure to reference the correct model information in this design guide.

INSTALLATION CONSIDERATIONS

The information in this design guide provides key features, product dimensions, cutouts and installation specifications. Before installing a Thermador Pro Grand Range, be sure to verify the cutout dimensions and electrical/gas connections. Also, always consult with the installation manual packed with the product for complete details before installing.

ELECTRICAL AND GAS SPECIFICATIONS

Be sure your appliance is properly installed and grounded by a qualified technician. Installation, electrical and gas connections, and grounding must comply with all applicable local codes.

GAS REQUIREMENTS AND HOOKUP

Verify that the type of gas being used at the installation site matches the type of gas used by the appliance. If an LP kit is utilized, conversion from natural gas to propane must be done by qualified service personnel only. Please refer to the LP Conversion Instructions for further information.

A manual gas shut-off valve must be installed external to the appliance, in a location accessible from the front, for the purpose of shutting off the gas supply. The supply line must not interfere with the back of the unit.

NATURAL GAS REQUIREMENTS:

Inlet Connection: 3/4" NPT external, 1/2" NPT internal (Minimum 3/4" diam. flex line)

Supply Pressure: 6" min. to 14" max. water column (14.9 to 34.9 mb)

Manifold Pressure: 5" water column (12.5 mb)

PROPANE GAS REQUIREMENTS:

Inlet Connection: 3/4" NPT external, 1/2" NPT internal (Minimum 3/4" diam. flex line)

Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)

Manifold Pressure: 10" water column (24.9 mb)

DUAL-FUEL:

Thermador Pro Grand Dual-Fuel Ranges are dual rated, designed to be connected to either 240/208V AC, 60 Hz, 4-wire, single-phase power supply. The connection may be made with a range supply cord kit (purchased separately) or by hard-wiring to the power supply. A dedicated circuit breaker is required.


MODEL	REQUIRED CIRCUIT BREAKER
	240/208V AC, 60Hz
PRD366JGU	35 Amp
PRD364JDGU	35 Amp
PRD486JDGU	50 Amp
PRD48JDSGU	50 Amp

ALL-GAS:

Thermador Pro Grand All-Gas Ranges are equipped with a 3-wire plug and are designed to be connected to a 120V AC, 60 Hz, single-phase power supply. A dedicated circuit breaker is required.

MODEL	REQUIRED CIRCUIT BREAKER
	120V AC, 60Hz
PRG366JG - NG	15 Amp
PRL366JG - LP	15 Amp
PRG364JDG - NG	20 Amp
PRL364JDG - LP	20 Amp
PRG486JDG - NG	20 Amp
PRL486JDG - LP	20 Amp

IMPORTANT: The cord supplied with gas ranges having an electric griddle requires a NEMA 5-20 receptacle as shown here. Local codes may require a different wiring method. A dedicated 20 Amp service is required for proper operation.



①

PRO GRAND® RANGES PLANNING INFORMATION

PRO GRAND RANGES

ELECTRICAL AND GAS LOCATIONS

Typical placement of the electrical and gas supply can be found within the "Cutout and Range Dimensions" located on the product pages. Alternate placement within the supply zone is acceptable. Dual-Fuel ranges may be connected to the power supply with a range supply cord kit (sold separately) or by hard-wiring to the power supply. All-gas ranges may be connected to the power supply with the supplied range cord or by hard-wiring. It is the responsibility of the installer to provide the proper wiring components (cord or conduit and wires) and complete the electrical connection as dictated by local codes and ordinances and/or the National Electric Code. The units must be properly grounded.

Installation of the range must be planned so that the rough-in of the junction box for the receptacle or conduit connection will allow maximum clearance to the rear of the unit.



WARRANTY

Limited warranty parts and labor (2 year)

See page 302 for additional warranty details.



WARNING: All ranges can tip, causing injury. Install anti-tip device packed with range.

Thermador Pro Grand® Ranges are CSA approved.



VENTILATION REQUIREMENTS

We strongly recommend that a Thermador Professional Wall or Island Hood or Custom Insert be installed with all Thermador Pro Grand Ranges. Downdraft ventilation should not be used. Do not install a microwave-hood combination above the cooktop, as these types of units do not provide the proper ventilation and are not suitable for use with Thermador Pro Grand Ranges.

For high output gas cooktops (60,000 BTU or greater), the minimum of one (1) CFM of ventilation per 100 BTU is recommended. If the cooktop has a grill or griddle, add 150 CFM to the estimated blower capacity. Additional blower capacity may be required for longer duct runs.

The following table indicates the ventilation hood options that are recommended for use with Thermador Pro Grand Ranges. Refer to the Ventilation section or www.Thermador.com for a complete selection of Professional ventilation options, blowers, and accessories.

WIDTH	CONFIGURATION	VENTILATION OPTIONS
36"	4 Burners w/Grill or Griddle 6 Burners	36" or 42" Pro Wall Hood 36" Custom Insert with optional blower 42" or 48" Island Hood with optional blower
48"	6 Burners w/Grill or Griddle	48" or 54" Pro Wall Hood 48" Custom Insert with optional blower 54" Island Hood with optional blower

for

PRO GRAND® RANGES

36-INCH GAS

PRG366JG / PRL366JG



PROFESSIONAL

PRG366JG / PRL366JG


Natural Gas / Liquid Propane (LP) Gas Commercial-Depth Range, Porcelain Cooktop Surface

SPECIFICATIONS

	PRG366JG	PRL366JG
Total Number of Cooktop Burners	6	
Product Width	35 15/16"	
Product Height	35 7/8"–36 3/4"	
Product Depth	28 1/2"	
Overall Oven Capacity* (cu. ft.)	5.5	
Overall Oven Interior Dimensions (W x H x D)	28" x 15" x 22"	
Usable Oven Interior Dimensions (W x H x D)	25 1/2" x 11 3/4" x 19 5/8"	
Cutout Width	36"	
Cutout Height	35 7/8"–36 3/4"	
Cutout Depth	24"–25 1/8"	
Cooktop Surface	Porcelain	
Gas Cooktop Burners	1 @ 22,000 BTU / 5 @ 18,000 BTU	1 @ 18,000 BTU / 5 @ 15,000 BTU
Oven Bake	17,000 BTU	17,000 BTU
Oven Broil	30,000 BTU	25,000 BTU
Total Gas Connection Rating	142,000 BTU	118,000 BTU
LP Convertible	Order LP or NG	
Electrical Supply	120V AC, 60 Hz	
Required Circuit Breaker	15 Amp	
Power Cord	96", 3-Wire	
Shipping Weight (lbs.)	420	

*According to AHAM Standards

ACCESSORIES



PA36JLBG
Low Backguard



PAGRIDDLE
Griddle



PAKNOBLKJG
Black Knob Kit



PA12CHPBLK
12" Cutting Board



PA36JHSG
High Shelf



PWOKRINGHC
Wok Ring



PAKNOBLUJG
Blue Knob Kit



PA36JTKG
Toekick

PRG366JG / PRL366JG

INNOVATION

- ★ - Patented Pedestal Star® Burner with QuickClean Base™ designed for easy surface cleaning and superior heat spread for any size pan
- ★ - Powerful 22,000/18,000 BTU (NG/LP) burner (front right)
- ★ - Precision simmering capabilities as low as 100°F (375 BTU) with 4 ExtraLow® Simmer burners
- ★ - SoftClose® hinges for ultra smooth closing of the oven door
- ★ - Superfast 2-hour self-clean mode—fastest in the industry

PERFORMANCE

- 18,000 BTU (NG) Star® Burners
- Electronic oven display interfaces to cook timer, meat probe and preheat status with audible alert
- Powerful, 30,000/25,000 BTU bake and 17,000 BTU broil burners (NG/LP)
- Convection Bake offers precise multi-level baking results
- Large oven 5.5 cu. ft.—accommodates commercial sheet pan
- Full Access® telescopic racks, integrated easy-grip handle
- Six rack levels for multiple item cooking
- Star-K certified

DESIGN

- Bold Professional design
- Pinhole and panel lighting concepts provide functional and stylish aesthetics
- Restaurant style metal knobs
- Professional style, continuous cast iron grates
- Continuous porcelain, easy-to-clean cooking surface
- Large oven door window for maximum viewing
- Powerful halogen lighting illuminates the oven cavity
- Signature blue indicator lighting

★ THERMADOR EXCLUSIVE

IMPORTANT NOTE: A Low Backguard, High Shelf or Island Trim is required for installation.

PRO GRAND® RANGES 36-INCH GAS

PRG366JG / PRL366JG

INSTALLATION OPTIONS

Thermador Pro Grand® Ranges feature a bold, professional design and a commercial-depth of 27-inches. These ranges can be installed in a wall or island installation.

BACKGUARDS

When using the Flush Island Trim, Thermador recommends a minimum 12" (305 mm) rear clearance to a combustible surface (see Figure 1, Cabinet Clearances). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

NATURAL GAS OR LP


Thermador All-Gas Pro Grand Ranges are shipped by the factory to operate on natural gas. They must be converted for use with propane. Verify that the type of gas being used at the installation site matches the type of gas used by the appliance. If the location/job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Field conversion must be done by qualified service personnel only. Please refer to the LP Conversion Instructions for further information.

IMPORTANT



We strongly recommend that a Thermador Professional Wall or Island Hood or Custom Insert be installed with all Thermador Pro Grand Ranges. Downdraft ventilation should not be used. Do not install a microwave-hood combination above the cooktop, as these types of units do not provide the proper ventilation and are not suitable for use with Thermador Pro Grand Ranges. Refer to the Ventilation section or www.Thermador.com for a complete selection of Professional ventilation options, blowers, and accessories.


Due to the 27-inch commercial-depth of Pro Grand Ranges, the PH Professional Series Wall Hoods or Professional Series Custom Inserts would provide the appropriate depth from the wall to correspond

36-INCH CUTOUT AND RANGE DIMENSIONS

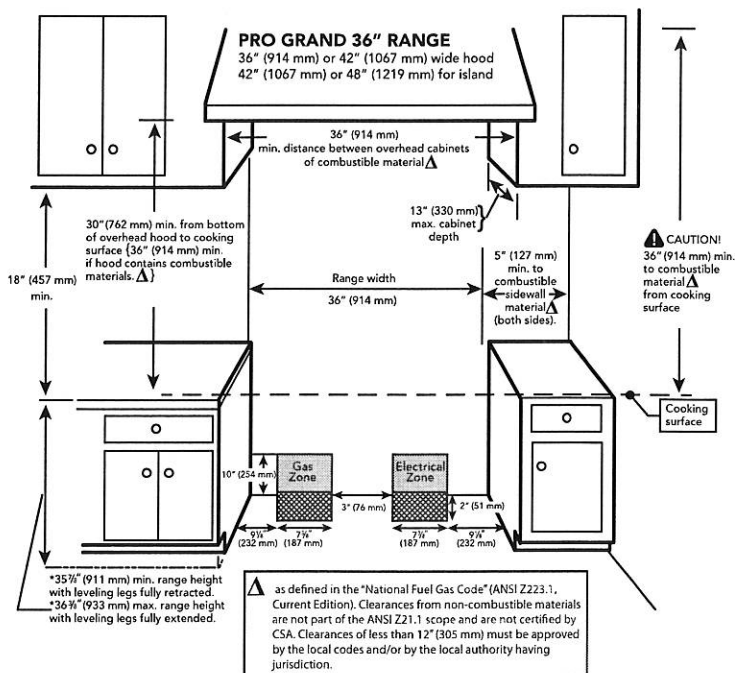

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

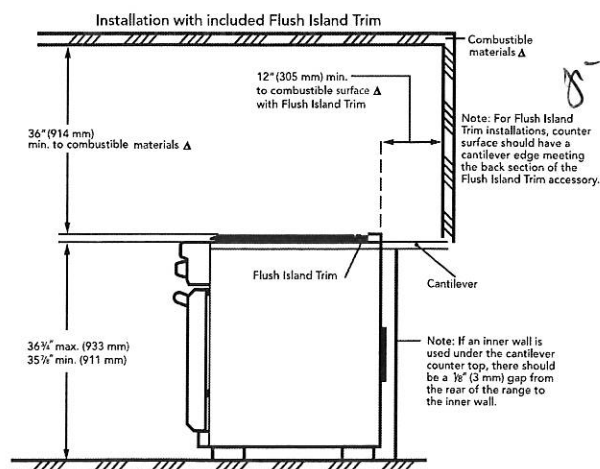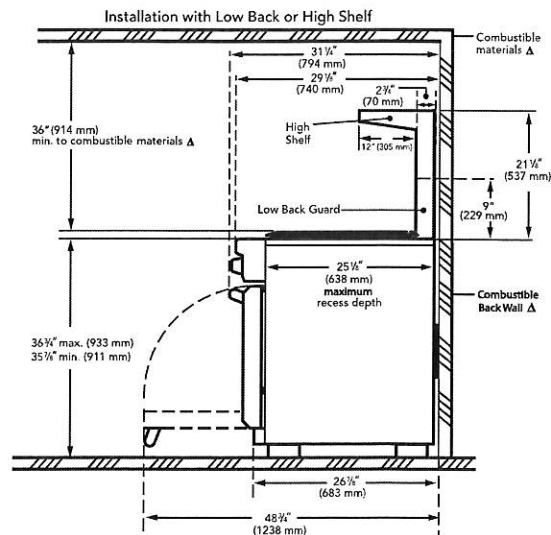

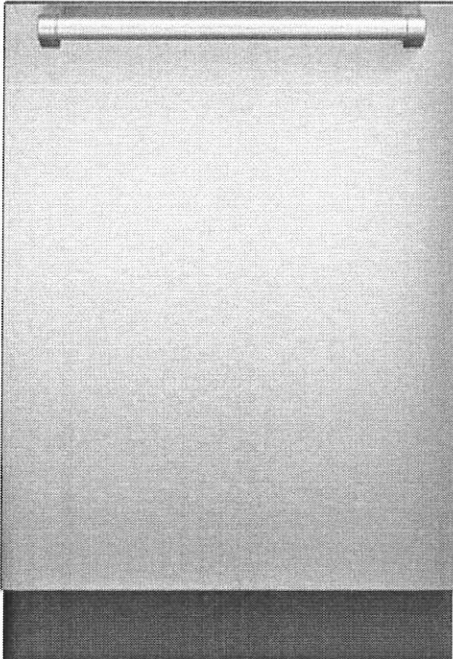

Design

- Professional Handle and Fully Flush Stainless Steel Panel
- Sapphire 24"
- 6 Programs and 5 options
- DWHD650JFP
- Professional Handle
- Stainless Steel Control Panel
- Sleek charcoal-grey racks with height-adjustment ability for added flexibility
- Blue LED Display
- 18/10 high-grade stainless steel interior offers long-lasting reliability, never rusts and resists nicks and chips
- Silver Painted Toe Kick

Quality

- Sapphire Glow™ internal light illuminates glassware
- Blue PowerBeam® operating indicator lets you know when the unit is running
- Flexible 3rd Rack delivers added loading capacity as well as adjustability to accommodate larger items, wider ends and utensil handles
- Flexible Folding Tines fold down to accommodate larger pots, pans and dishes and add flexibility to hold items twice as wide as standard models and significantly wider than competitors
- Dosage Assist optimizes break down of detergent tablets

Performance

- Crystal Protection™ System ensures perfect results for fine crystal
- PowerBoost® option increases temperature and pressure in the lower rack for the ultimate in heavy-duty cleaning
- Sens-A-Wash® ensures superior washing and drying guaranteed

DISHWASHERS SAPPHIRE® 6-PROGRAM

DWHD650JFP / DWHD650JFM / DWHD650JPR

INSTALLATION OPTIONS

CUSTOM DOOR PANELS (DWHD650JPR)

Fully integrated models allow you to have a custom door panel made to match your cabinetry. The custom door can be a two-piece configuration to look like a drawer at the top and a cabinet door at the bottom or like a single full-length door. A template is included with the fully integrated models to explain the mounting procedure.

NOTE: The door springs that are included with the fully integrated units will provide proper function for custom door panels weighing between 9 and 18 pounds. No tension adjustment screws are necessary.

WATER AND ELECTRICAL LOCATIONS

For proper dishwasher operation and appearance, ensure that the enclosure is square and has the dimensions shown. Plumbing and electrical service must enter shaded area.

Make required openings to allow for passage of the water, drain and electrical line. In order to avoid interference with the dishwasher when sliding it into the cabinet, place your openings within the dimensions shown.

NOTE: If the incoming electric supply, water supply and drain connections are all in the same cabinet, the one 4 1/2" x 2 1/2" hole will be large enough for all three to pass through.

The dishwasher electrical supply junction box and dedicated receptacle must be mounted in an accessible cabinet adjacent to the dishwasher (do not mount the junction box or receptacle behind the dishwasher). You will need a 4 1/4" x 2" (108 x 51 mm) opening through the cabinet in order to pass the junction box through.

The electrical supply can be connected in one of two ways:

- Use the included 3-wire plug and junction box to connect to a dedicated household receptacle.
- Permanently connect to household or field wiring

WATER AND ELECTRICAL LOCATION DIMENSIONS


SAPPHIRE SERIES

REQUIRED OPENINGS:




4 1/4" x 2" (108 x 52 mm) – To pass the included electrical supply junction box through to an adjacent cabinet

4" x 2" (100 x 50 mm) – To pass the included water supply line toward the water supply

1 1/4" (32 mm) diameter – To pass the dishwasher drain hose toward the drain connection




Electrical and Water Connection



DISHWASHER & CUTOUT DIMENSIONS


DWHD650JFP DWHD650JFM

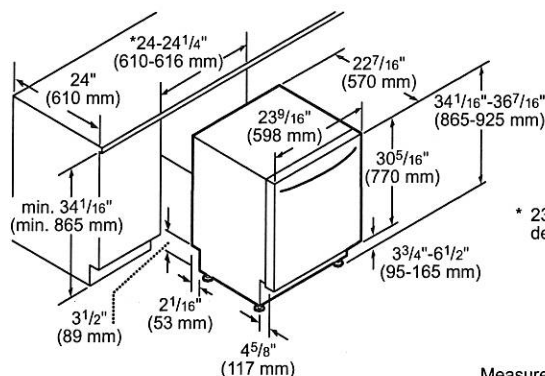

* 23 5/8" (600 mm) without decor strips


Measurements in inches and mm

DWHD650JPR

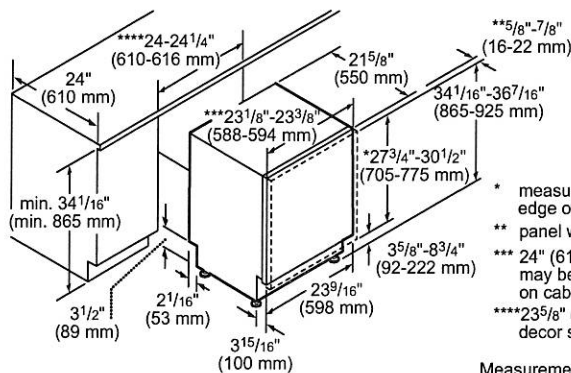

* measured from the bottom edge of the countertop panel
** panel weight 9-18 lb (4-8 kg)
*** 24" (610 mm) wide panel may be used depending on cabinet design
**** 23 5/8" (600 mm) without decor strips

Measurements in inches and mm




* measured from the bottom edge of the countertop panel
** thickness recommended 3/4" (20 mm), panel weight 9-18 lb (4-8 kg)
*** 24" (610 mm) wide panel may be used depending on cabinet design

Measurements in inches and mm


48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER

JS48PPDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{3}{4}$ " (with handles)JS48SSDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{1}{8}$ " (with handles)

PRODUCT DIMENSIONS

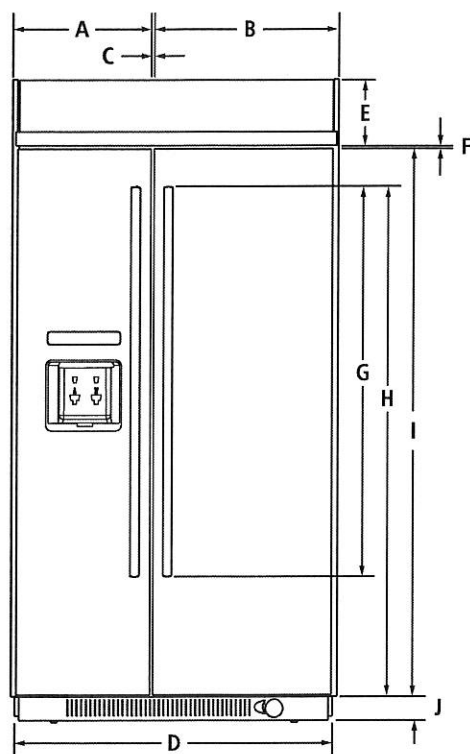

FRONT VIEW

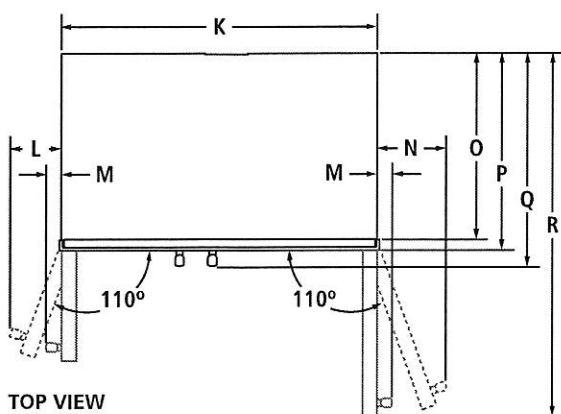

TOP VIEW

MODEL #		JS48PPDUDE JS48SSDUDE	
		in	cm
A	Width of freezer door (including hinge side offset)	20	50.8
B	Width of refrigerator door (including hinge side offset)	27	68.6
C	Space between doors	$\frac{3}{8}$	1.0
D	Overall width (Including side trim)	48 $\frac{3}{8}$	122.9
E	Height of top grille	8 $\frac{5}{8}$	21.7
F	Space between doors and top grille	$\frac{3}{8}$	1.0
G	Height of handles		
	Pro-Style® Stainless	45 $\frac{5}{16}$	115.7
	Euro Style Stainless	50	127.1
H	Height to top of handles		
	Pro-Style® Stainless	63 $\frac{11}{16}$	163.5
	Euro Style Stainless	65 $\frac{3}{4}$	167.0
I	Height of doors	71	180.2
J	Height of bottom grille	3	7.6
K	Width of recessed refrigerator	47	119.4
L	Width from side of refrigerator to freezer handle – door fully open 110°		
	Pro-Style® Stainless	8 $\frac{3}{8}$	21.3
	Euro Style Stainless	8	20.3
M	Width from side of refrigerator to handle – door open 90°		
	Pro-Style® Stainless	2 $\frac{5}{8}$	6.7
	Euro Style Stainless	2	5.1
N	Width from side of refrigerator to refrigerator handle – door fully open 110°		
	Pro-Style® Stainless	10 $\frac{7}{8}$	27.6
	Euro Style Stainless	10 $\frac{1}{4}$	26.1
O	Depth without doors	22 $\frac{1}{8}$	56.2
P	Depth with doors	25 $\frac{1}{8}$	63.8
Q	Depth with handles		
	Pro-Style® Stainless	27 $\frac{3}{4}$	70.5
	Euro Style Stainless	27 $\frac{1}{8}$	68.8
R	Depth with refrigerator door open 90°	50 $\frac{13}{16}$	129.0


IMPORTANT: Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER

JS48PPDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{3}{4}$ " (with handles)JS48SSDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{1}{8}$ " (with handles)

DIMENSIONS AS INSTALLED

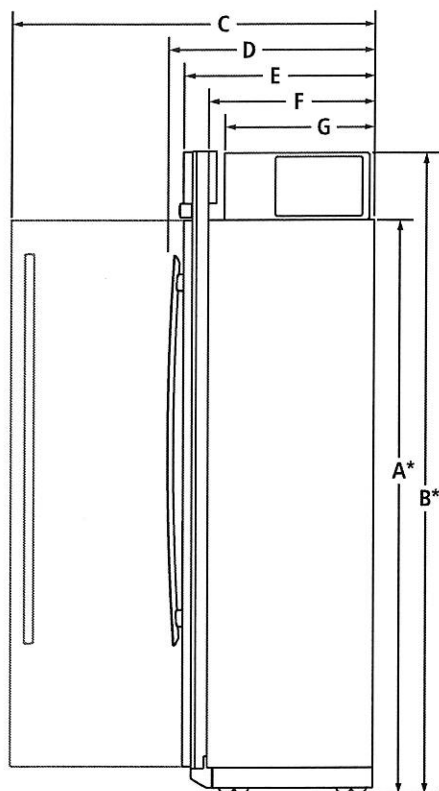

SIDE VIEW

MODEL #	JS48PPDUDE JS48SSDUDE	
	in	cm
A*	Height without compressor (min.)	74 $\frac{3}{8}$ 188.9
B*	Height of recessed refrigerator (min.)	83 $\frac{3}{8}$ 211.8
C	Depth with refrigerator door open 90° (min.)	51 $\frac{1}{8}$ 129.7
D	Depth with handles (min.)	
	Pro-Style® Stainless	27 $\frac{3}{4}$ 70.5
	Euro Style Stainless	27 $\frac{1}{8}$ 68.8
E	Depth with doors (min.)	25 $\frac{1}{8}$ 63.8
F	Depth without doors (min.)	22 $\frac{1}{8}$ 56.2
G	Depth of compressor (min.)	19 $\frac{5}{8}$ 49.8

*Add 1 $\frac{1}{4}$ " (3.2 cm) to the height dimension when leveling legs are fully extended.**IMPORTANT:** Dimensional specifications are provided for planning purposes only.



Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

48" SIDE-BY-SIDE REFRIGERATORS WITH ICE & WATER DISPENSER

JS48PPDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{3}{4}$ " (with handles)JS48SSDUDE – 48 $\frac{3}{8}$ " x 83 $\frac{3}{8}$ " x 27 $\frac{1}{8}$ " (with handles)

OPENING/CLEARANCE DIMENSIONS

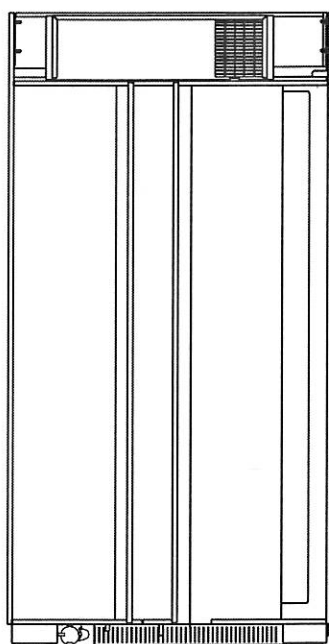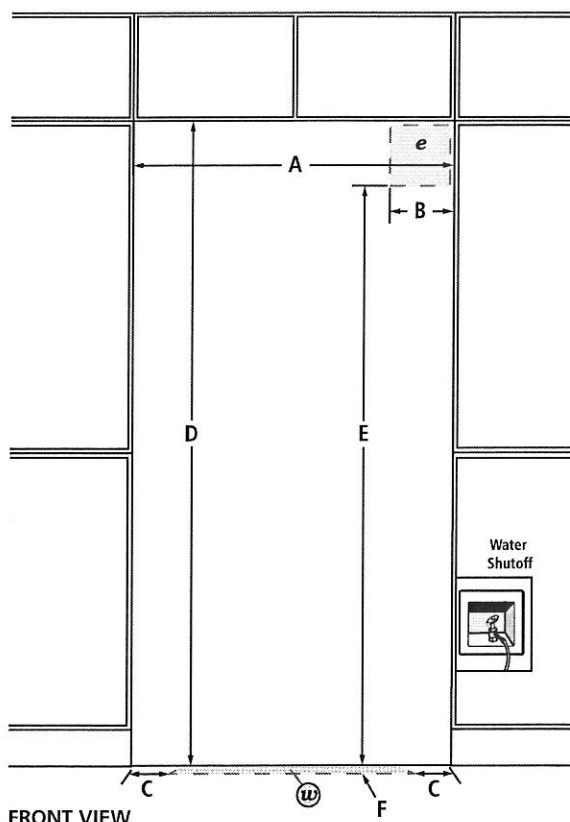

MODEL #		JS48PPDUDE JS48SSDUDE	
		in	cm
A	Width (min.)	47 $\frac{1}{2}$	120.7
B	Width of recommended electrical location	13 $\frac{1}{2}$	34.3
C	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch.

Minimum length of power cord is 84" (213.4 cm). Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]) and contents of the refrigerator and must be at the same level as flooring in the room.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


JENN-AIR®

8116AdZw915

PH36GS

27-INCH DEPTH WALL HOOD (36-INCH WIDTH)

PROFESSIONAL SERIES

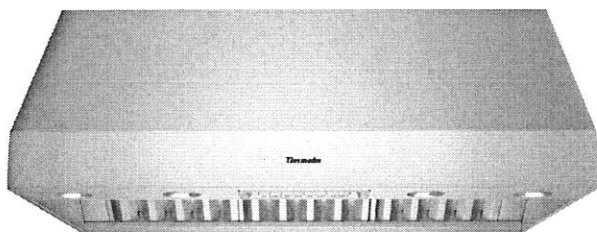

42-inch model PH42GS shown.
36-inch model PH36GS features 2 lights.

FEATURES & BENEFITS

- Three fan speeds
- Auto function senses heat from the cooking surface and adjusts fan speeds
- Powerfully Quiet ventilation systems
- Extended capture area ensures removal of smoke and odor
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- 27" depth hood is a perfect companion to the Pro Grand Professional Range
- Delayed shut-off tackles lingering odors for up to 10 minutes
- Dimmer lighting – for a soft lighting effect
- Two infrared keep-hot lamps hold food warm until serving time

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25

For use with the following Inline and Remote Blowers: VTR630P, VTR1030P, VTR1330P, VTI610P, VTI1010P

Roofplates

RFPLT600P - For use with 600 CFM Remote Blower VTR630P

RFPLT1000P - For use with 1000 CFM Remote Blower VTR1030P and 1300 CFM Blower VTR1330P

36" W, 6" H Stainless Steel Duct Cover	DC36US
36" W, 12" H Stainless Steel Duct Cover	DCT36US
Roof Jack and Transition	RJ310
10" Wall Cap	WC10

GENERAL PROPERTIES

Operating Mode	Ducted
Maximum CFM	N/A
Number of Speed Settings	3-Stage
Motor Location	Blower (Sold Separately)
Number Of Lights	2
Bulb Type	40 W - G9 Base
Total Power Of The Lamps (W)	80 W
Damper Included	Yes
Grease Filter Material	Washable Stainless Steel
Grease Filter Type	Commercial-Style Baffle

TECHNICAL DETAILS

Watts (W)	N/A
Current (A)	15; 20 A
Volts (V)	120 V
Frequency (Hz)	60 HZ
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in)	18" x 35 15/16" x 27"
Required Distance Above Cooktop / Range Cooking Surface	30" / 30"
Diameter of Air Duct (in) Top	10"
Diameter of Air Duct (in) Back	10"
Net Weight (lbs)	80 lbs

ACCESSORIES (REQUIRED)

Blower (Sold Separately)

BLOWER OPTIONS

Remote Blower (Mounted to Roof or External Wall)	VTR630P - 600 CFM
	VTR1030P - 1000 CFM
	VTR1330P - 1300 CFM
Inline Blower (Mounted Between Kitchen and External Wall)	VTI610P - 600 CFM
	VTI1010P - 1000 CFM
Integrated Blower (Mounted in Hood)	VTN630N - 600 CFM
	VTN1030N - 1000 CFM

WARRANTY


Limited Warranty Parts And Labor	2 Year
----------------------------------	--------

4

PH36GS
27-INCH DEPTH WALL HOOD (36-INCH WIDTH)
PROFESSIONAL SERIES



HOOD DIMENSIONS

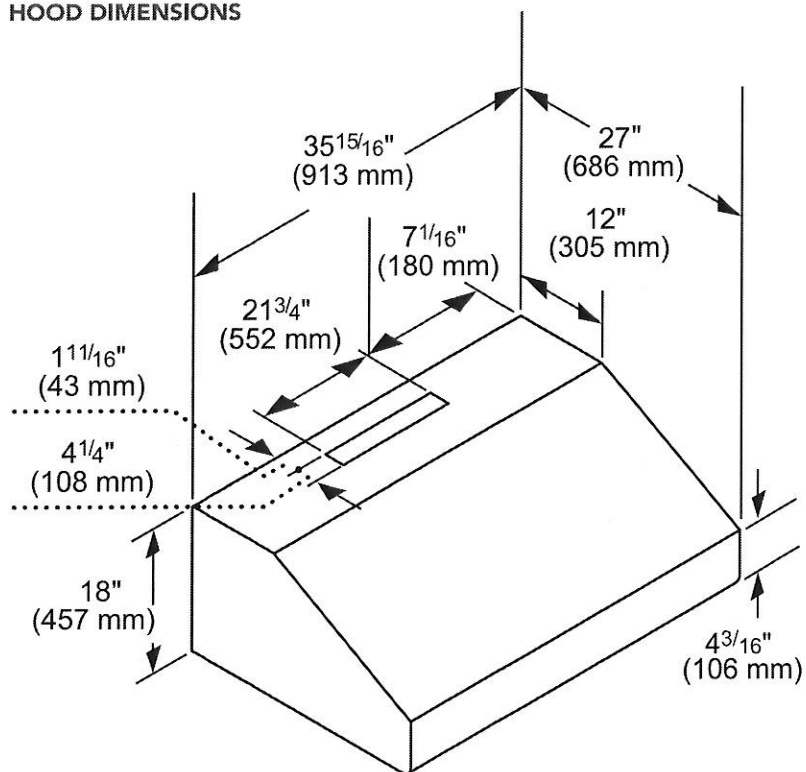


measurements in inches and mm

OPTIONAL ACCESSORIES

36" WIDE DUCT COVER
DC36US 6" HIGH
DCT36US 12" HIGH

Stainless steel duct cover for wall hood applications

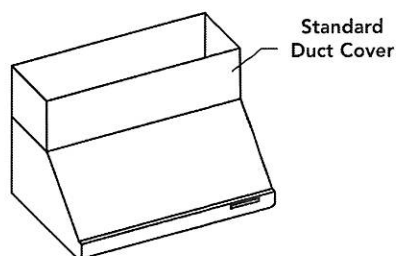

PH36GS


27-INCH DEPTH WALL HOOD (36-INCH WIDTH)

PROFESSIONAL SERIES




REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630P-600 CFM

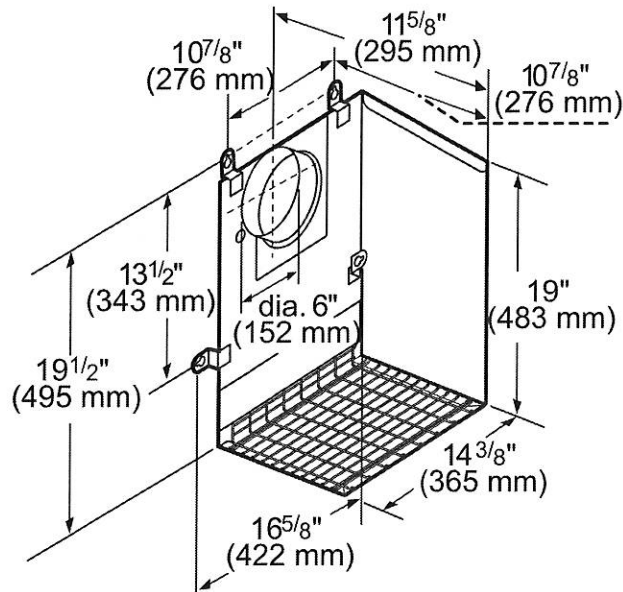


measurements in inches and mm

VTR1030P-1000 CFM

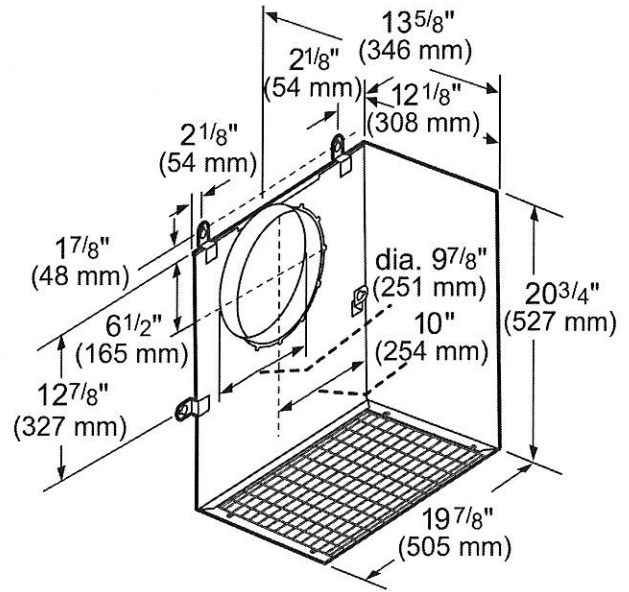

measurements in inches and mm

VTR1330P-1300 CFM

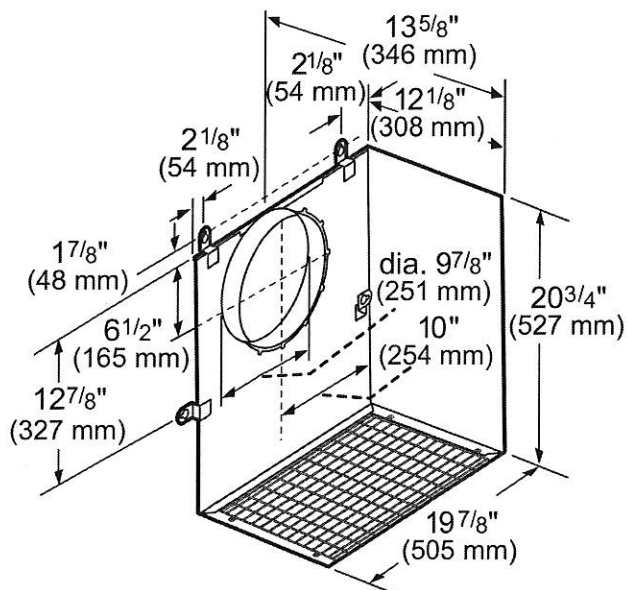


measurements in inches and mm

PH36GS
27-INCH DEPTH WALL HOOD (36-INCH WIDTH)
 PROFESSIONAL SERIES




INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610P-600 CFM

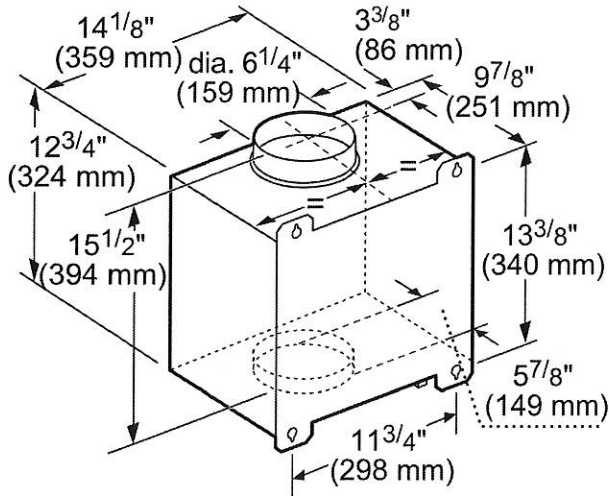

measurements in inches and mm


VTI1010P-1000 CFM

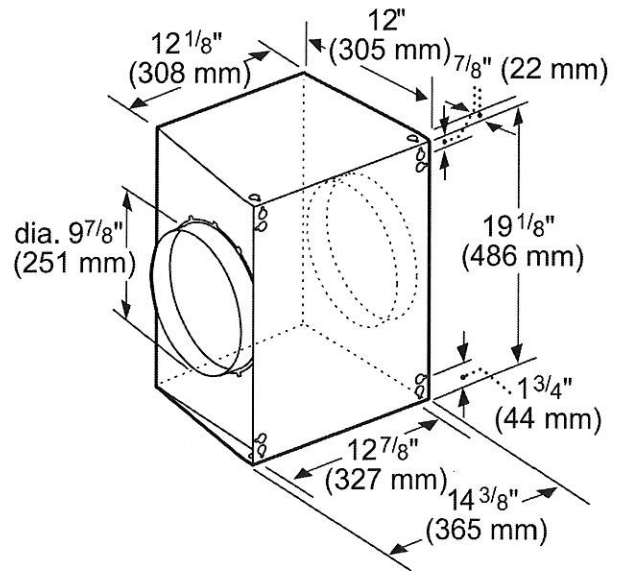

measurements in inches and mm


INTEGRATED BLOWERS (MOUNTED IN HOOD)

VTN630N-600 CFM

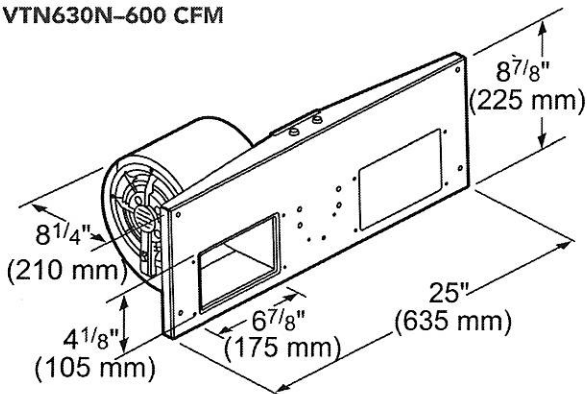

measurements in inches and mm

VTN1030N-1000 CFM

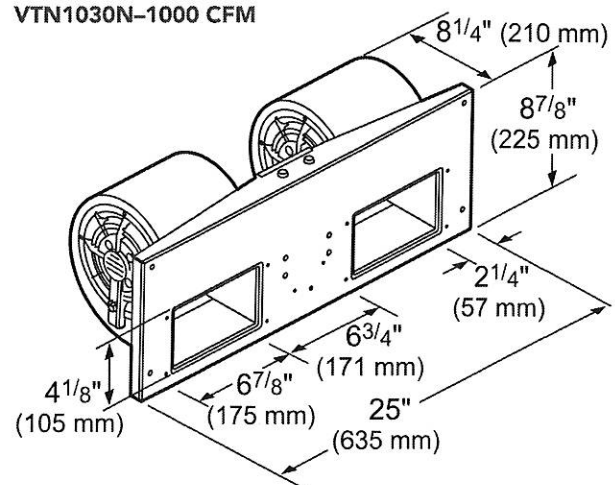

PH36GS


27-INCH DEPTH WALL HOOD (36-INCH WIDTH)

PROFESSIONAL SERIES




REMOTE BLOWER ACCESSORIES

ROOFPLATE-RFPLT600P

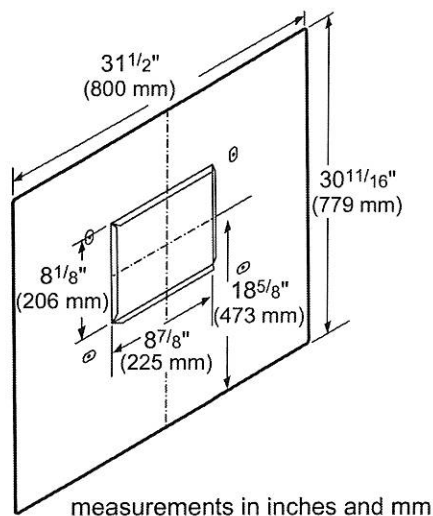

ROOFPLATE-RFPLT1000P

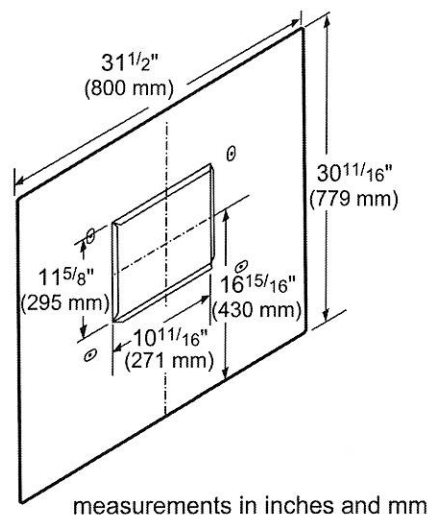


EXTNCB25


25 ft. Blower Connector Cable for use with the following Inline and Remote blowers: VTR630P, VTR1030P, VTR1330P, VT1610P, VT11010P

ROOF JACK & TRANSITION

ROOF JACK-RJ310




TRANSITION

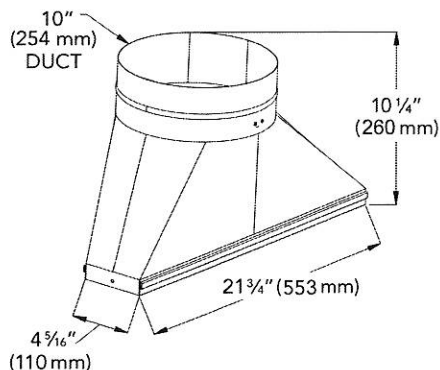

WALL CAPS

10-INCH WALL CAP-WC10

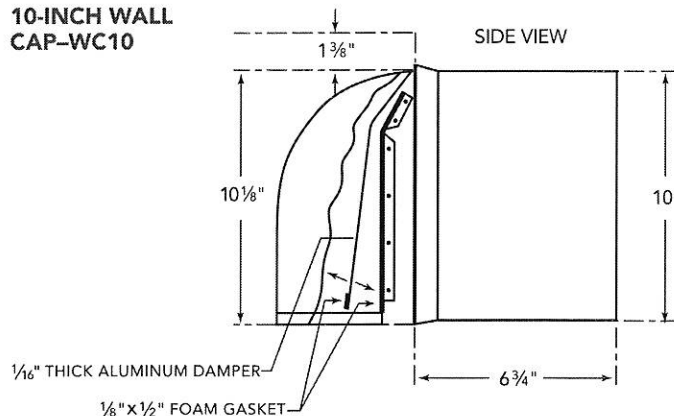

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.