

KitchenAid®

FOR THE WAY IT'S MADE.®

PRODUCT MODEL NUMBERS

KRFC302E *SS*

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.




Water: A cold water supply with water pressure of between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

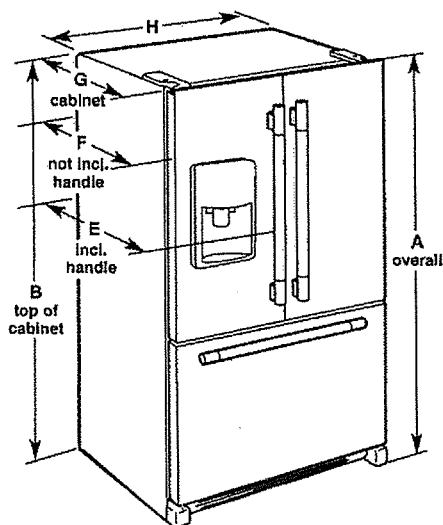

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
21.9	72" (182.9 cm)	71 1/8" (181.3 cm)	44 1/8" (112.1 cm)	45 1/4" (114.9 cm)	30 1/4" (76.8 cm)	27 3/4" (70.5 cm)	24 5/8" (62.5 cm)	35 1/4" (90.8 cm)

LOCATION REQUIREMENTS

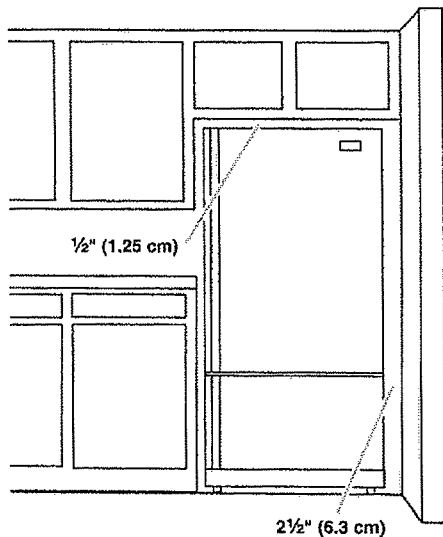

IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

KitchenAid® 30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

KSGB900ESS KSGG700E

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



A. Gas supply line
B. Shutoff valve "open" position
C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

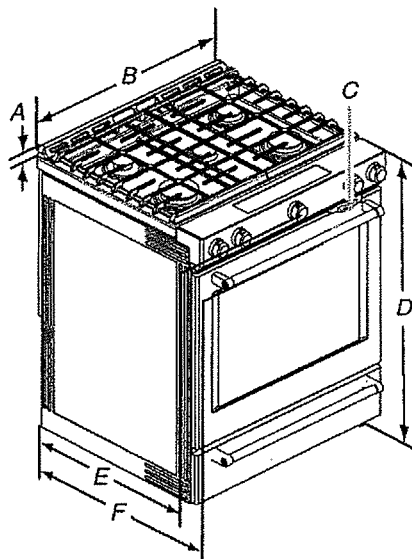

A. $1\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent

B. $29\frac{1}{8}$ " (75.9 cm)

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*

E. $28\frac{3}{4}$ " (71.9 cm) max. depth from front of console to back of range.

F. $28\frac{7}{8}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

This range is design-certified by CSA International for use with Natural gas or, after proper conversion, for use with LP gas.

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

*TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.

KitchenAid®

FOR THE WAY IT'S MADE.

KDTE204ESS

Undercounter Dishwasher

PRODUCT MODEL NUMBERS

KDFE204E, KDTE104E, KDTE204E, KDTE254E, KDTM354E, KDTM384E, KDTM404E, KDTM504E, KDTM704E, KDTM804E

Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded three-prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use $\frac{3}{8}$ " O.D. copper tubing with compression fitting or flexible braided water supply line

Note: $\frac{1}{2}$ " minimum plastic tubing is not recommended.


Use a 90° elbow with $\frac{3}{4}$ " hose connection with rubber washer (part number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or




floor.

Use $\frac{1}{2}$ " (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

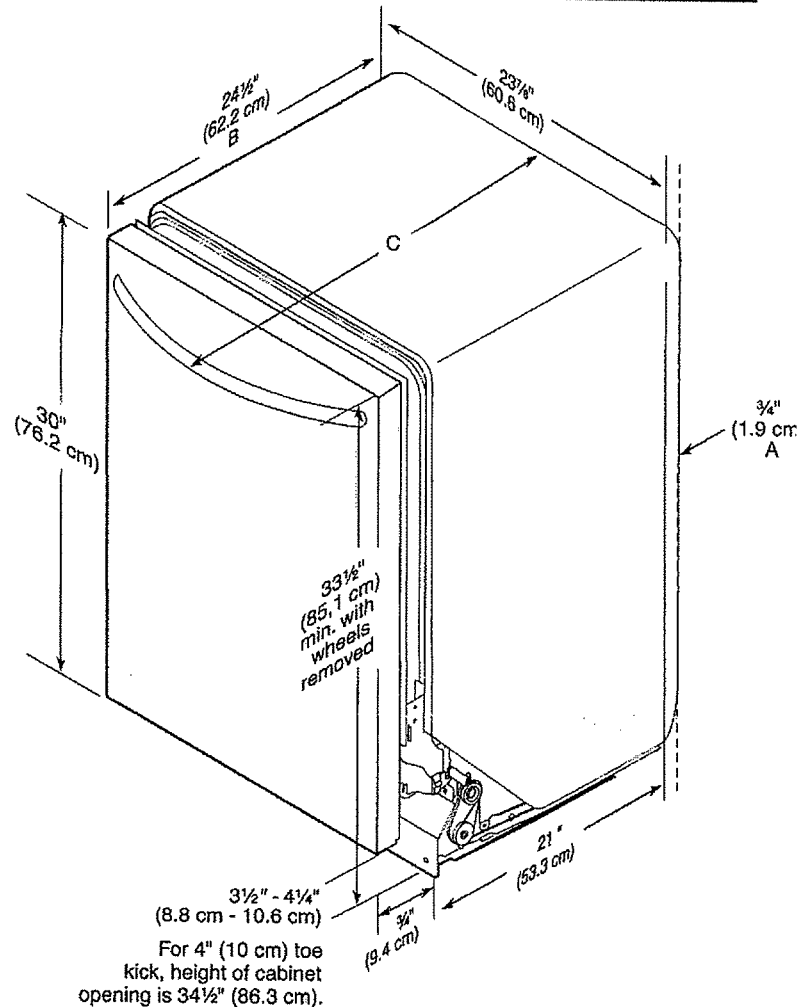

- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the $\frac{3}{4}$ " (1.9 cm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher; varies by model.

KitchenAid®

FOR THE WAY IT'S MADE.™

30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVWB600DS S KVWB606D

Electrical: A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations


If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting

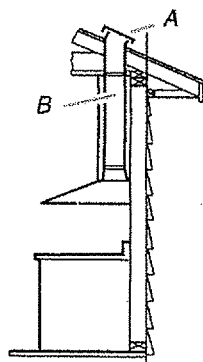


A. Roof cap
B. 6" (15.2 cm)
round vent

Wall Venting



A. Wall cap
B. 6" (15.2 cm)
round vent

Non-Vented (Recirculating)



A. Diverter
B. 6" (15.2 cm)
round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece 6" (15.2 cm) Round

45° elbow 2.5 ft
(0.8 m)




90° elbow 5.0 ft
(1.5 m)



Maximum equivalent vent length is 35 ft (10.7 m).


Example Vent System

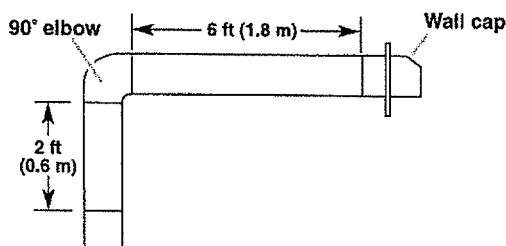

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow	= 5.0 ft (1.5 m)
1 - wall cap	= 0.0 ft (0.0 m)
8 ft (2.4 m) straight	= 8.0 ft (2.4 m)
Length of system	= 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

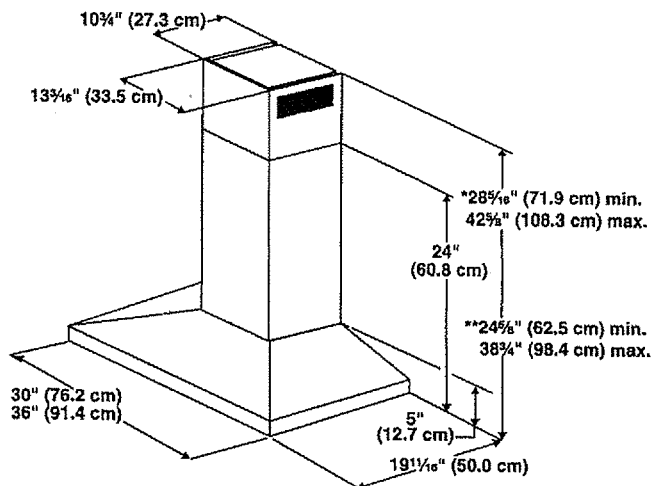

*For non-vented (recirculating) installations

**For vented installations

TG Appliance Group Inc.

7975 Heritage Rd. Unit #1
Brampton, ON L6Y 5X5
Phone: (289) 748-0320
Fax: (289) 236-3958
HST #: 105167993

--Invoice--

INVOICE #: H000005854

Date Ordered: 4/20/17
Date Finished:
Date Purchased:
Reference #:
PO #: francie's cousin
Job #: E
Page: 1 LEE
Date Printed: Apr 20, 2017
3:17:29PM

Bill To: 4166976159
PICCOLO, REMO
5162 ELMRIDGE DRIVE
MISSISSAUGA, ON L5M 5A3

Ship To: 4166976159
PICCOLO, REMO
5162 ELMRIDGE DRIVE
MISSISSAUGA, ON L5M 5A3

Phone: (416) 697-6159

Phone: (416) 697-6159

Tax Exemption #'s: HST:			
Delivery Date:	March-17-18	Map/Zone:	/ GTA
Payment Type:	2 WKS PRIOR	Inv Type:	TG HOUSE SALE
Salesperson:	LEE SALTER	Tax Code:	HST COLLECTED
Description	Qty	Unit Cost	Extended Cost
KSGB900ESS FNT CTRL RANGE,GAS,6.5 CU. FT.AQUALIFT S/C,TRU CN	1	2,500.00	2,500.00
KITCHENAID, RANGE, GAS, FREE-STANDING, STAINLESS			
KRFC302ESS 22 CU FT,72 TALL,CNTR DEPTH,LED LT,ELEC CTRL,INT	1	2,500.00	2,500.00
KITCHENAID, REFRIGERATOR, FRENCH 3-DOOR, C, STAINLESS STEEL			
KDTE204ESS 46DB,6CYC,6OPT,3RD RCK,14 PL STNG,UPR STN GLD RK	1	1,021.15	1,021.15
KITCHENAID, DISHWASHER, INTEGRATED, COLOUR. STAINLESS			
PART# W10574777 REQUIRED FOR INSTALLATION (EXTRA CHARGE).			
KVWB600DSS 30WALL MOUNT,600CFM,4SPD W/LCD,AUTO SNS	1	1,200.00	1,200.00
KITCHENAID, HOOD, WALL MOUNT, STAINLESS			
P-DELIVERY \$5,000-9,999	1	120.00	120.00
P- ADD BRAND/MODEL/COMPETITOR	1	-350.00	-350.00
KSB5000OB TORRENT BLENDER ONYX BLACK	1	649.00	649.00
KITCHENAID COUNTERTOP, COUNTER-TOP APPLIANCES, ONYX BLACK			
This special order product requires a 50% deposit & is considered FINAL SALE. x			
PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.			
P-GPS0317-KITBLEN	1	-649.00	-649.00
Sub Total			6,991.15
13% HST tax on		6,991.15	908.85
Invoice Total			7,900.00
Payment			0.00
Balance			7,900.00

TG Appliance Group Inc.

7975 Heritage Rd. Unit #1
Brampton, ON L6Y 5X5
Phone: (289) 748-0320
Fax: (289) 236-3958
HST #: 105167993

--Invoice--

INVOICE #: H000005854

Date Ordered: 4/20/17
Date Finished:
Date Purchased:
Reference #:
PO #: francie's cousin
Job #: E
Page: 2 LEE
Date Printed: Apr 20, 2017
3:17:29PM

Bill To: 4166976159
PICCOLO, REMO
5162 ELMRIDGE DRIVE
MISSISSAUGA, ON L5M 5A3

Ship To: 4166976159
PICCOLO, REMO
5162 ELMRIDGE DRIVE
MISSISSAUGA, ON L5M 5A3

Phone: (416) 697-6159

Phone: (416) 697-6159

Tax Exemption #'s: HST:			
Delivery Date:	March-17-18	Map/Zone:	/ GTA
Payment Type:	2 WKS PRIOR	Inv Type:	TG HOUSE SALE
Salesperson:	LEE SALTER	Tax Code:	HST COLLECTED
Description	Qty	Unit Cost	Extended Cost
*= HST Exempt			