


dot 254

KitchenAid

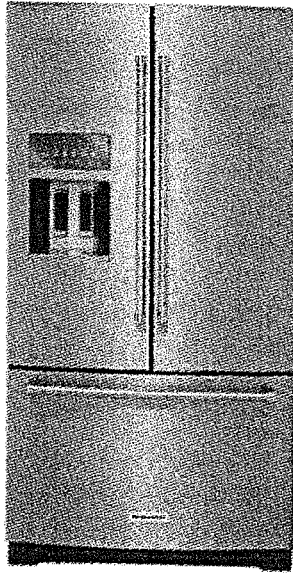

NEW

26.8 cu.ft. 36-Inch Width Standard
Depth French Door Refrigerator,
Exterior Ice/Water Platinum Interior

3.7

214 Reviews Write a Review

Experience a fresh design that complements the freshness of your sensitive ingredients. This French door refrigerator features the Preserve® Food Care System. Three distinctive features include an ethylene-absorption cartridge that helps keep produce fresher longer. The Platinum interior design features an industry exclusive silver, glossy walls. The refined interior design features Undershelf LED lighting, and metallic accents add a touch of elegance.

AVAILABLE COLOR OPTIONS

Stainless Steel - KRFY707ESS

FEATURES

Preserve® Food Care System

Two independent cooling systems provide a dedicated refrigeration unit to help keep food fresh longer, and a separate system for frozen food. The FreshFlow™ Air Filter helps minimize odors while the two Produce Preservers help delay over-ripening.

Platinum Interior Design

This exclusive colour provides a premium look with silver glossy walls that complement the metallic accents found inside the refrigerator.

Undershelf Lighting

Puts light right where you need it, making it easy to find items no matter where they are inside the refrigerator.

Additional Features

3-Tier Freezer Drawer with Storage Divider

Gives you easy access to frozen items with a three-level drawer, plus a divider in the lower basket to help you keep smaller items readily at hand.

Electronic Temperature-Controlled Pantry

Optimizes freshness for specialized items by providing precise settings for meats, deli items, party platters, and wine.

SatinGlide® Crispers and Pantry

Add a smooth experience to the crispers and pantry drawers. The rollers allow effortless in-and-out movement even when fully loaded.

Star-K Certified

STAR-K KOSHER CERTIFICATION for use on the Jewish Sabbath and other religious holidays.

LED Lighting

Professionally-Inspired Design

A bold blend of professionally-inspired styling and sleek touches for the home. This refrigerator features Satin Textured Handles with iconic KitchenAid Brand Medallions, a beautiful chrome frame surrounding the exterior water and ice dispenser and the KitchenAid® Badge.

Metallic Accents on Shelf Trim, Pantry and Crisper Drawers

Are satisfying to the touch, highlight the interior of the refrigerator and complement the high gloss finish of the walls.

Through-the-Door Ice and Water Dispenser

Provides quick and easy access to chilled water and ice.

Adjustable Door Bins with Removable Inserts

Keep condiments and other items organized for food prep and serving.

Humidity Controlled Crispers

Provide a dedicated storage option with adjustable humidity levels to keep fresh food in an optimal environment.

Measured Water Fill

Displays and automatically dispenses water in ounces, cups, or liters. It can be programmed to pour a measured amount, helping make food prep easier. It can even be set up to fill essential items on a daily basis like a coffee pot or a water bottle.

Light-Touch Controls

Provides easy operation with touch-pad controls for all refrigerator functions.

Bottom Mount Refrigerator

Net 154

PRODUCT MODEL NUMBERS

KRFF507E KRFF607E
KRFF707E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

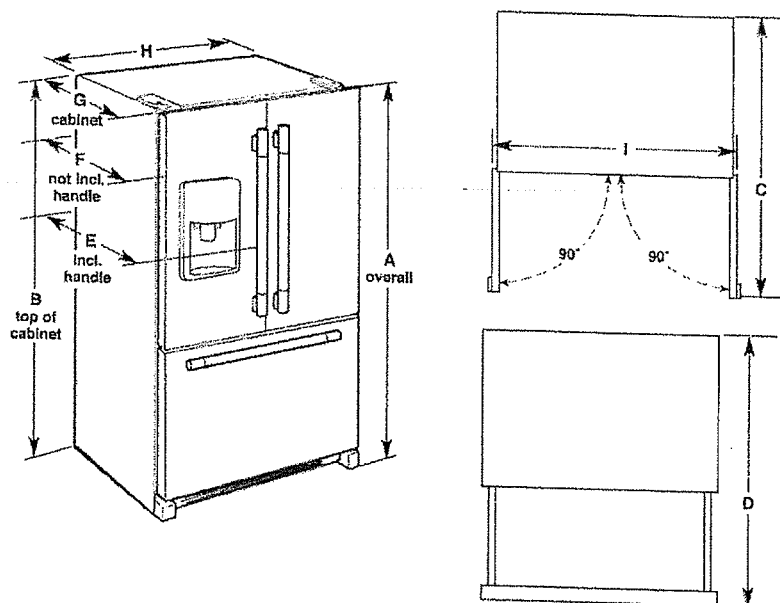

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
28.8	70 3/4"	68 3/4"	49"	54 3/4"	36 3/4"	34"	29 3/4"	35 3/4"	33 3/4"

LOCATION REQUIREMENTS

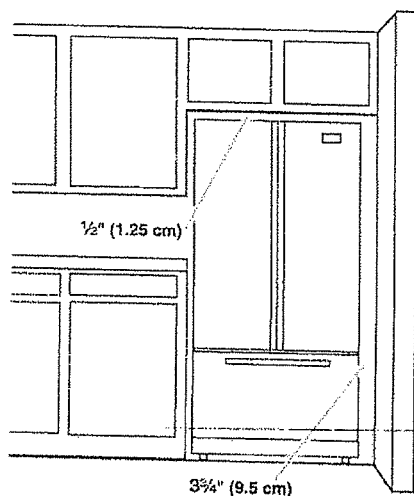


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Ref 254

KitchenAid®

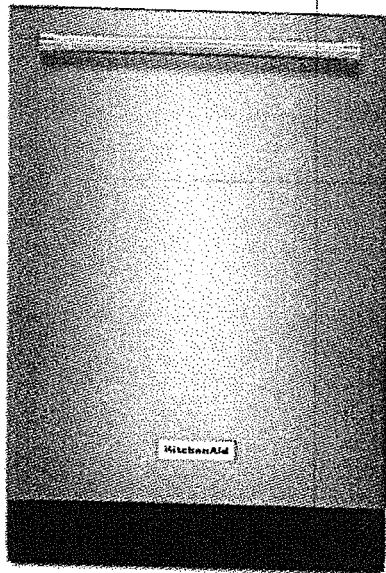

NEW

KitchenAid® 46 dBA Dishwasher with ProScrub™ Option

4.3

54 Reviews Write a Review

This powerful top control dishwasher features the ProScrub™ Option, offering superior cleaning with 40 targeted spray jets. The jets make quick work of the most stubborn messes. It has a Third Level Rack that's perfect for long, flat items and frees additional space on the other racks. It also features the ProWash™ Cycle, which determines the ideal cycle based on load size and soil level.

AVAILABLE COLOR OPTIONS

■ ■ □

Stainless Steel - KDTE204ESS

FEATURES

ProScrub® Option

Helps eliminate soaking or pre-scrubbing with 40 targeted spray jets that help remove stubborn messes like seared or baked-on foods.

Third Level Rack

Makes it easy to clean hard-to-place items such as spatulas, serving utensils and measuring cups, freeing up space in the lower two racks.

Professionally-Inspired Design

Combines a bold blend of professionally-inspired styling with sleek touches for the home. This beautiful console dishwasher features the KitchenAid® Badge, a symbol of uncompromised quality.

Additional Features

ProWash™ Cycle

Determines the ideal cycle for washing dishes based on soil level and then makes real-time adjustments to achieve the best cleaning performance.

Fold-Down Tines in Lower Rack

Can be adjusted in one of three positions so water can clean inside deep or wide dishes.

Fold-Down Shelf with Stemware Holder

Provides extra room in the upper rack that's perfect for additional cups, wine glasses, or longer items like utensils and spatulas.

Filter Based Wash System

Provides exceptionally quiet and efficient wash performance with stainless steel wash arms that optimize water pressure to key areas of the dishwasher for exceptional cleaning.

Heat Dry Option

Engages a recessed heating element during the dry cycle to ensure dry dishes.

SatinGlide® Max Rail® (Upper Rack)

Creates a smooth, premium feeling when pulling out the upper rack, particularly with heavy loads.

Express Wash Cycle

Quickly and effortlessly handles the heaviest soils, even stubborn baked and seared-on messes in less time.

Sani-Rinse Option

Heats the final rinse water to 155°F, eliminating 99.99% of food soil bacteria.

KitchenAid®

FOR THE WAY IT'S MADE.®

Undercounter Dishwasher

Lot 259

PRODUCT MODEL NUMBERS

KDFE104D, KDFE304D, KDTE204D, KDTE404D, KDTE704D, KDTM354D, KDFE204E, KDFE454C, KDTE104E, KDTE204E, KDTE254E, KDTM354E, KDTM384E, KDTM404E, KDTM504E, KDTM704E, KDTM804E

Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line.

Note: 1/2" minimum plastic tubing is not recommended.

Use a 90° elbow with 3/4" hose connection with rubber washer (Part Number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part Number 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.


Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

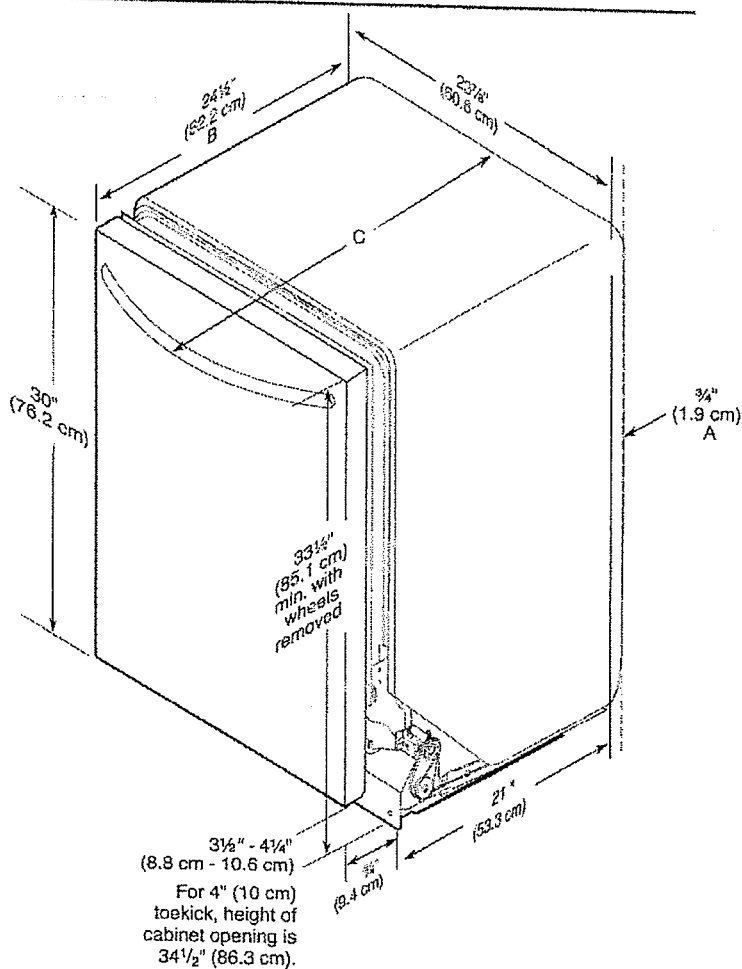

A. Insulation may be compressed (not used on all models).

B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 3/4" (1.9 cm) custom door panel.

C. Door handles may protrude forward of the face of the dishwasher; varies by model.


CABINET CUTOUT DIMENSIONS

Let 254

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to $33\frac{1}{2}"$ (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

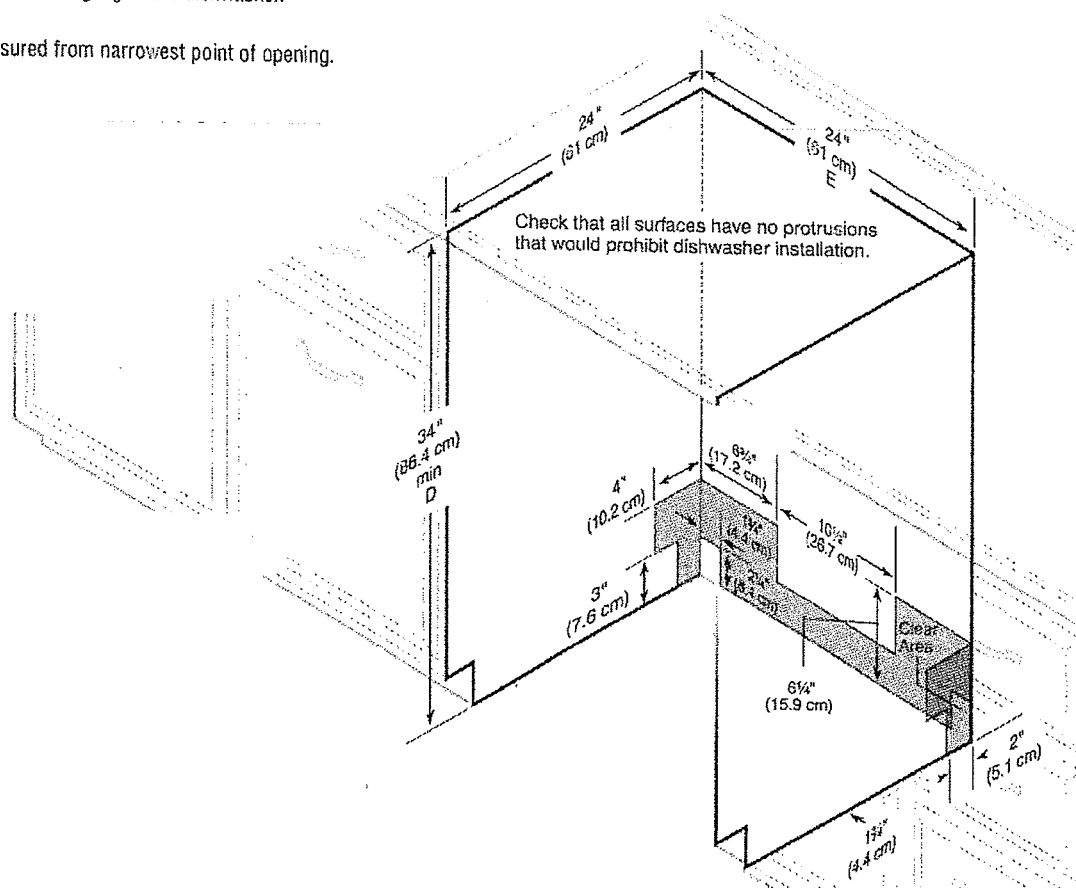

Lot 254


KitchenAid®

NEW

KitchenAid® 36" 5-Burner Gas Cooktop

4.4

192 Reviews [Write a Review](#)

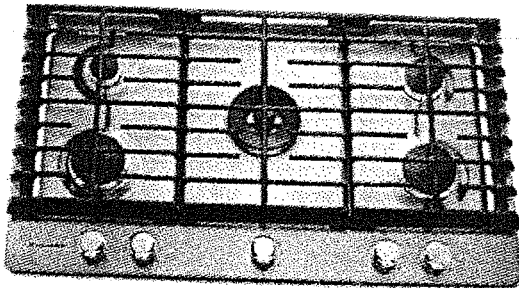

If you love to experiment and push culinary limits, you'll appreciate the power and versatility of this 36-inch cooktop. Five individual burners includes a powerful 20K BTU Dual Ring Burner that is among the most powerful in the industry. The eye-catching design includes Multi-Finish Knobs and the scratch-resistant CookShield Finish help protect the surface against stains that may occur with high-temperature cooking.

AVAILABLE COLOR OPTIONS

☒ Stainless Steel - KCGS556ESS

FEATURES

20K BTU Professional Dual Ring Burner

Allows you to go from one small flame for precise simmering to a dual flame for powerful boiling, all on the same burner.

6K BTU Even-Heat™ Simmer Burner

A diffuser plate allows more control of the flame at the lowest setting, for more precise simmering and melting.

CookShield Finish

Protects the cooktop from stains that may occur with high temperature cooking. The permanent finish makes it easy to wipe clean without harsh chemicals so it looks clean, bright and beautiful even longer.

Additional Features

Electronic Ignition

Automatically lights burners so no standing pilot light is needed.

Metal Control Knobs

Have a premium look and feel that reflects the quality that is built into the cooktop.

Full-Width Cast-Iron Grates

Enhances the beautiful look of the cooktop and allow easy movement of cookware around the entire cooking surface.


LP Conversion Kit Included

Allows you to convert the cooktop so it can be used with LP gas.

PRODUCT DIMENSIONS


lot 254

KCGS550ESS and KCGS950ESS Models

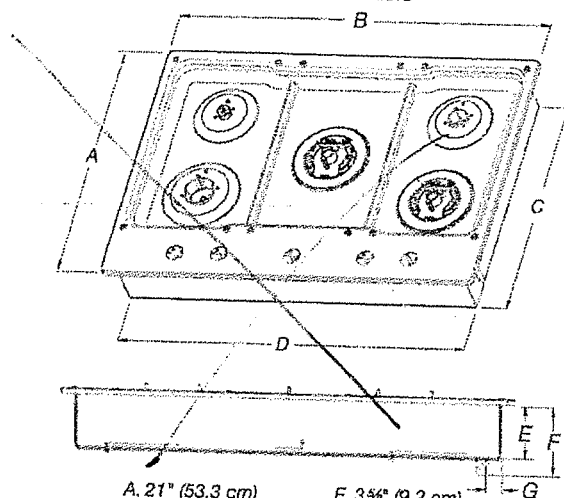


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 19 3/8" (49.2 cm)
- D. 28 3/8" (72.1 cm)
- E. 3 3/8" (9.2 cm)
- F. 4 3/8" (11.6 cm)
- G. 1 3/8" (3.4 cm)

KCGS556ESS and KCGS956ESS Models

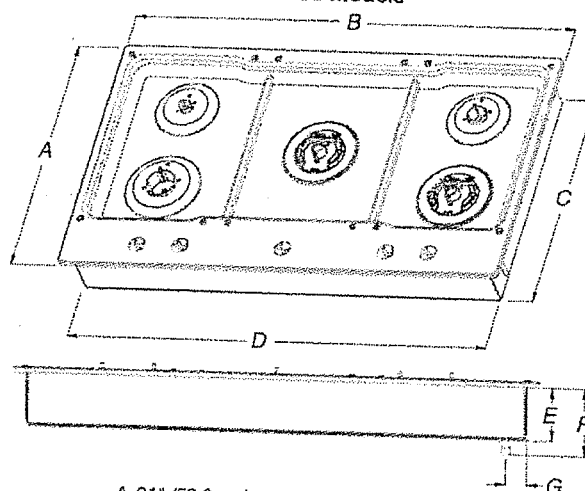


- A. 21" (53.3 cm)
- B. 36 1/4" (92.0 cm)
- C. 19 3/8" (49.2 cm)
- D. 34 3/8" (88.1 cm)
- E. 3 3/8" (9.2 cm)
- F. 4 3/8" (11.6 cm)
- G. 1 7/8" (3.6 cm)

All Other 30" (76.2 cm) Models

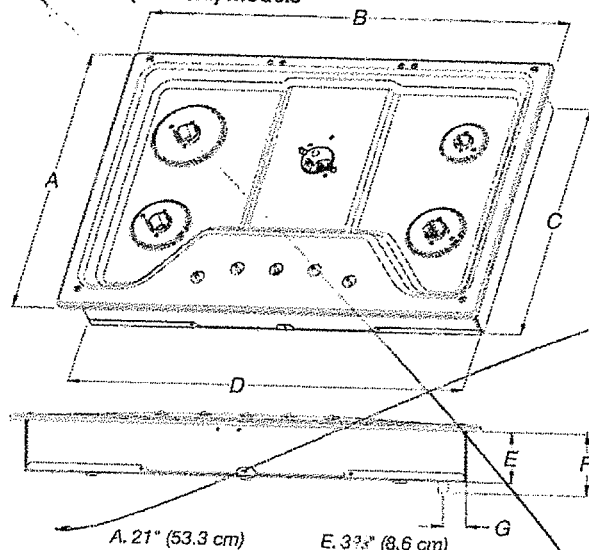


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 18 7/8" (48.0 cm)
- D. 28 3/8" (72.1 cm)
- E. 3 3/8" (8.6 cm)
- F. 4 1/8" (10.5 cm)
- G. 1 1/2" (3.8 cm)


All Other 36" (91.4 cm) Models

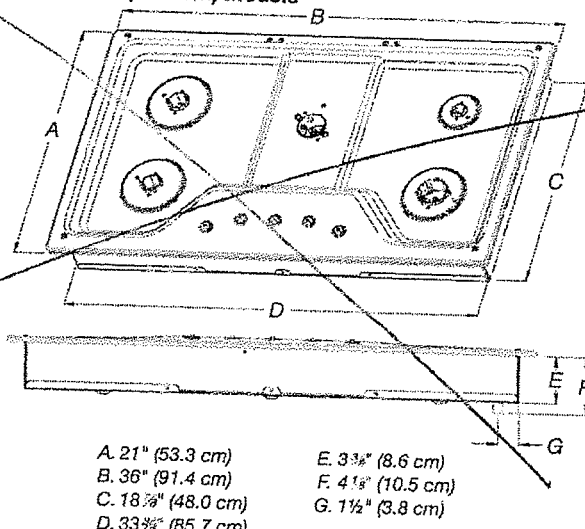

- A. 21" (53.3 cm)
- B. 36" (91.4 cm)
- C. 18 3/8" (48.0 cm)
- D. 33 3/8" (85.7 cm)
- E. 3 3/8" (8.6 cm)
- F. 4 1/8" (10.5 cm)
- G. 1 1/2" (3.8 cm)

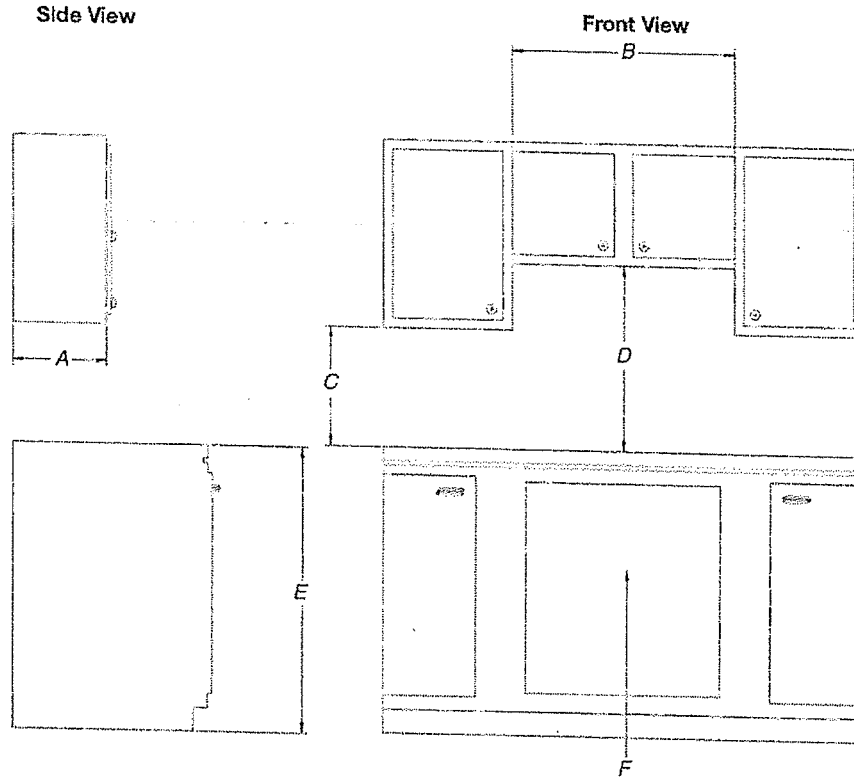

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 36" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 3/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.
- E. 36" (91.4 cm) top of countertop to floor.
- F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

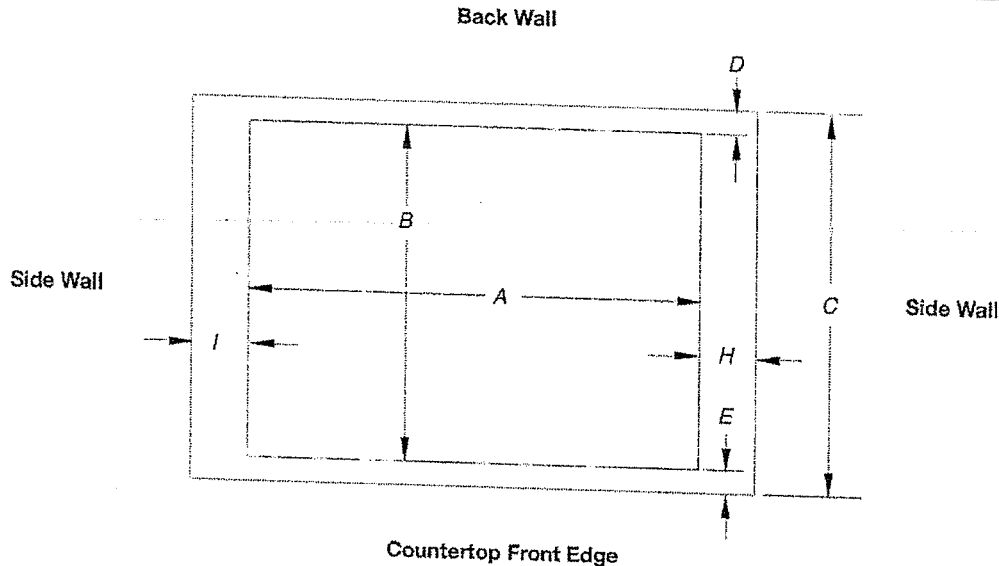

Cutout (Product Opening) Dimensions						
30" (76.2 cm) Models						
Models	A			B		
	Min	Recommended	Max	Min	Recommended	Max
KCGS550 and KCGS950	28 1/2" (72.4 cm)	28 7/8" (73.4 cm)	29 1/8" (74.3 cm)	19 1/2" (49.5 cm)	19 1/8" (50.2 cm)	20" (50.8 cm)
All Other 30" (76.2 cm) Models	28 1/8" (72.4 cm)	28 7/8" (73.4 cm)	29 1/8" (74.3 cm)	19 1/2" (49.5 cm)	19 1/8" (50.2 cm)	20" (50.8 cm)
36" (91.4 cm) Models						
KCGS556 and KCGS956	34 7/8" (88.4 cm)	35 3/8" (89.4 cm)	35 7/8" (90.3 cm)	19 1/2" (49.5 cm)	19 1/8" (50.2 cm)	20" (50.8 cm)
All Other 36" (91.4 cm) Models	33 7/8" (86.0 cm)	34 3/8" (87.6 cm)	35 1/8" (89.5 cm)	19 1/2" (49.5 cm)	19 1/8" (50.2 cm)	20" (50.8 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS356, MGC9536, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more.

Back Wall and Countertop Front Dimensions			
Models	C	D	E
KCGS550 and KCGS950	25" (63.5 cm)	2 1/8" (7.3 cm)	2 3/4" (6.9 cm)
All Other Models			3 1/8" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

det 254

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas

Natural Gas:

- This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing literature. The model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector:


- If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.



- A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the cooktop.

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



A. Gas supply line
B. Shutoff valve "open" position
C. To cooktop

TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.

ELECTRICAL REQUIREMENTS

- A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

lot 254

KitchenAid



NEW

30" Single Wall Oven with Even-Heat™ True Convection

4.3

130 Reviews Write a Review

This 30" Single Wall Oven with Even-Heat™ True Convection provides consistent heating and even cooking. A unique bow-tie shaped design and convection fan helps ensure there're no burnt edges or undercooked centers. The Temperature Probe delivers accurate measurement of internal temperatures of meats, poultry, and casseroles without opening the oven door for perfectly cooked food. The oven's bold design details are the perfect balance of elegance and functionality.

AVAILABLE COLOR OPTIONS



Stainless Steel - KOSE500ESS

FEATURES

Even-Heat™ True Convection Oven

Produces flawless results. The unique bow-tie design and convection fan ensure the inside of the oven is heated to, and stays at, the perfect temperature.

Temperature Probe

Allows accurate measurement of internal temperature of meats, poultry, and casseroles without having to open the oven door.

Professionally-Inspired Design

Combines a bold blend of professionally-inspired styling with sleek touches for the home. This beautiful built-in wall oven features Satin Textured Handles, Precision Touch Controls, a stunning Chrome Inlaid Frame, the KitchenAid® Badge and Brand Medallion.

Additional Features

FIT System Guarantee

Allows for customization of wall oven installation to match the height of existing cabinets through flexible design elements.

EasyConvect™ Conversion System

Takes guesswork out of convection cooking by ensuring you can get exceptional results when experimenting with new or familiar recipes.

5.0 Cu. Ft. Capacity

Provides an extra-large cooking capacity that's unsurpassed among 30" wall ovens and is perfect for large turkeys and roasts. It can even make multiple dishes at once.

SatinGlide™ Roll-Out Extension Rack

Allows easy roll-out for loading and unloading and features an easy-grip handle, giving confidence to cook with large or heavy dishes.

Even-Heat™ Preheat

Helps remove cold spots to help ensure even baking because the entire oven, including the walls and racks, are heated to the correct temperature.

Glass-Touch Display with Control Lock Function

Gives an intuitive glass touch screen experience that's easy to wipe clean.

Self-Cleaning Cycle

Uses high temperature to power through soot in the oven cavity, requiring only a quick wipe down at the end of the cycle.

dot 259


27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN

PRODUCT MODEL NUMBERS

KODE300E	KODT100E	KOST100E
KODE307E	KODT107E	KOST107E
KODE500E	KOSE500E	KEBS109E
KODE507E	KOSE507E	KEBS209E
		KEBS207E


Electrical: To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located under the control panel on single ovens and under the control panel on the upper oven cavity on double ovens. See the following illustrations.



Single Oven

A. Model/serial number plate



Double Oven

A. Model/serial number plate


- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 20-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - Connect a section of solid copper wire to the ends of the flexible conduit leads.
 - Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models KOST107E, KOST100E, KOSE507E, KOSE500E, KODE307E, KODE300E, KODE507E, KODE500E, KODT100E and KODT107E, refer to the following table.

Voltage	Single Thermal	Single Convect	Double Thermal	Double Convect	Double Convect/Thermal
240 VAC	4100 W	4100 W	8163 W	8300 W	8300 W
208 VAC	3100 W	3100 W	6300 W	6300 W	6300 W
240 VAC	17.2 A	17.2 A	34.2 A	34.2 A	34.2 A
208 VAC	15.0 A	15.0 A	29.9 A	29.9 A	29.9 A

PRODUCT DIMENSIONS

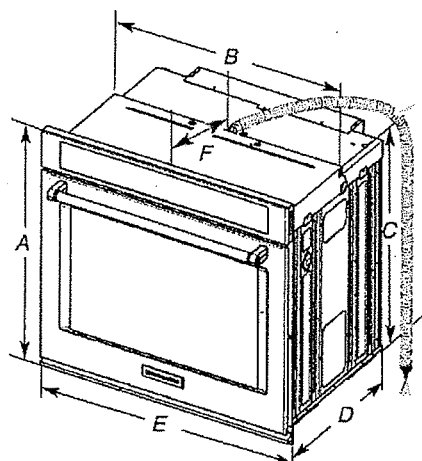


27" (68.6 cm) models

- A. 28 3/4" (72.8 cm) max. overall height
- B. 25 7/16" (64.6 cm) max. recessed width
- C. 26 3/4" (67.9 cm) recessed height
- D. 23 1/4" (59.1 cm) max. recessed depth
- E. 27" (68.6 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 48" (121.9 cm) flexible conduit length

30" (76.2 cm) models

- A. 28 3/4" (72.8 cm) max. overall height
- B. 28 1/2" (72.4 cm) max. recessed width
- C. 26 3/4" (67.9 cm) recessed height
- D. 23 1/4" (59.1 cm) max. recessed depth
- E. 30" (76.2 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 48" (121.9 cm) flexible conduit length

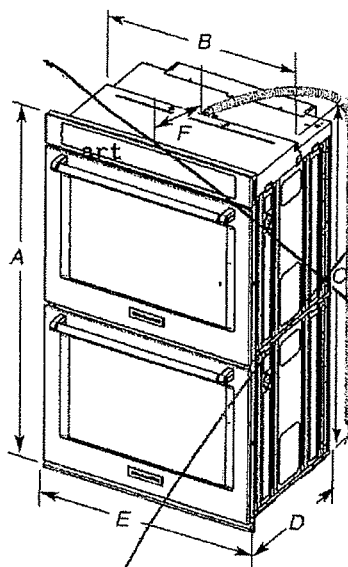

27" (68.6 cm) models

- A. 51 7/16" (130.0 cm) max. overall height
- B. 25 7/16" (64.6 cm) max. recessed width
- C. 48 3/16" (124.0 cm) recessed height
- D. 23 1/4" (59.1 cm) max. recessed depth
- E. 27" (68.6 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 66" (167.6 cm) flexible conduit length


30" (76.2 cm) models

- A. 51 7/16" (130.0 cm) max. overall height
- B. 28 1/2" (72.4 cm) max. recessed width
- C. 48 3/16" (124.0 cm) recessed height
- D. 23 1/4" (59.1 cm) max. recessed depth
- E. 30" (76.2 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 66" (167.6 cm) flexible conduit length

lot 254

CABINET DIMENSIONS - SINGLE OVENS


Single Oven Undercounter (without cooktop installed above)

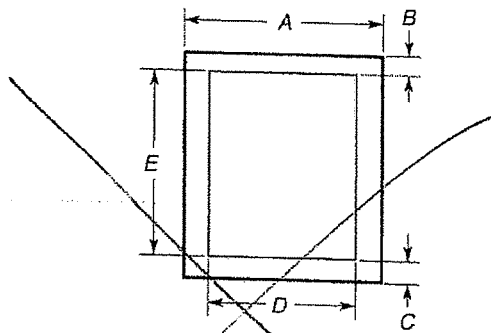

- 27" (68.6 cm) models**
 A. 27" (68.6 cm) min. cabinet width
 B. 1 1/2" (3.8 cm) min. top of cutout to underside of countertop
 C. 5 1/4" (13.3 cm) bottom of cutout to floor
 D. 25 1/2" (64.8 cm) cutout width
 E. 28" (71.2 cm) min. cutout height

- 30" (76.2 cm) models**
 A. 30" (76.2 cm) min. cabinet width
 B. 1 1/2" (3.8 cm) min. top of cutout to underside of countertop
 C. 5 1/4" (13.3 cm) bottom of cutout to floor
 D. 28 1/2" (72.4 cm) cutout width
 E. 28" (71.2 cm) min. cutout height

Single Ovens Installed in Cabinet

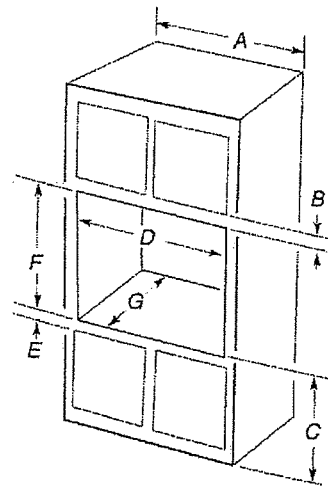


- 27" (68.6 cm) models**
 A. 27" (68.6 cm) min. cabinet width
 B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 C. 32" (81.3 cm) bottom of cutout to floor
 D. 25 1/2" (64.8 cm) cutout width
 E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
 F. 28" (71.2 cm)* recommended cutout height
 G. 24" (60.7 cm) cutout depth

- 30" (76.2 cm) models**
 A. 30" (76.2 cm) min. cabinet width
 B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 C. 32" (81.3 cm) bottom of cutout to floor
 D. 28 1/2" (72.4 cm) cutout width
 E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
 F. 28" (71.2 cm)* recommended cutout height
 G. 24" (60.7 cm) cutout depth

***NOTE:** The cutout height can be between 26 15/16" (68.4 cm) and 29 7/16" (74.8 cm) for single ovens.

CABINET DIMENSIONS - SINGLE OVENS

Double Ovens Installed in Cabinet

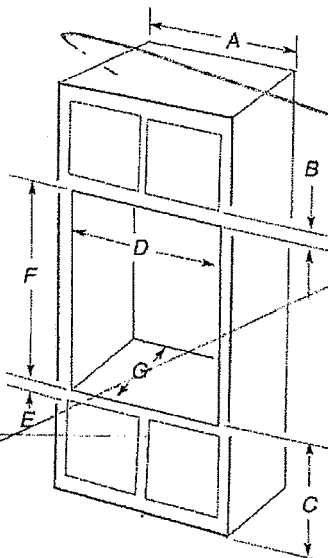

- 27" (68.6 cm) models**
 A. 27" (68.6 cm) min. cabinet width
 B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 C. 14 3/4" (37.5 cm) bottom of cutout to floor is recommended. 4"-14 3/4" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
 D. 25 1/2" (64.8 cm) cutout width
 E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
 F. 50 1/4" (127.6 cm)* recommended cutout height
 G. 24" (60.7 cm) cutout depth

- 30" (76.2 cm) models**
 A. 30" (76.2 cm) min. cabinet width
 B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 C. 14 3/4" (37.5 cm) bottom of cutout to floor is recommended. 4"-14 3/4" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
 D. 28 1/2" (72.4 cm) cutout width
 E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
 F. 50 1/4" (127.6 cm)* recommended cutout height
 G. 24" (60.7 cm) cutout depth

***NOTE:** The cutout height can be between 48 7/8" (124.1 cm) and 52 3/16" (132.6 cm) for double ovens.

det 254

KitchenAid®

NEW

KitchenAid® 30" Built In Microwave Oven with Convection Cooking

4.0

53 Reviews Write a Review



This convection microwave oven can quickly and thoroughly defrost, melt or cook your favourite foods. The EasyConvect™ Conversion System takes the guesswork out of convection cooking, ensuring exceptional results. And its chrome inlaid frame, satin cross-hatched handles, stainless steel oven cooking cavity and touch controls are the perfect balance of elegance and functionality.

AVAILABLE COLOR OPTIONS

Stainless Steel - KMBP100ESS

FEATURES

Convection Cooking

Circulates heat around the oven cavity with a 1600-watt convection element that allows baking at temperatures up to 450° F

EasyConvect™ Conversion System

Takes the guesswork out of convection cooking by ensuring exceptional results when experimenting with new recipes or familiar favourites.

Professionally-Inspired Design including handle, badge, graphics, chrome chamber

A bold blend of professionally-inspired styling with sleek touches for the home. This stunning microwave oven features Satin Textured Handles, Precision Touch Controls, a Chrome inlaid Frame, the KitchenAid® Badge and KitchenAid Brand Medallion

Additional Features

Broil Element

Combines the high power and even coverage needed to achieve results similar to outdoor grilling results.

Sensor Steam Cycle with Steamer Container

Features a microwave sensor that triggers a cycle that precisely steams food based on type and selected doneness. It includes a steamer container to help achieve the best cooking results.

Crispwave™ Technology and Crisper Pan

Allows the microwave oven to be used for grilling, frying and convection cooking in the microwave. The specially designed crisp pan can be used to brown, crisp, and pan-fry foods.

1.4 Cu. Ft. Capacity

Provides large cooking capacity while complementing your convection oven.

KitchenAid®

27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Convection Microwave Oven

Let 25.


PRODUCT MODEL NUMBERS

KMBP100E

KMBP107E

ELECTRICAL CONNECTION

- Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial/rating plate is located underneath the control panel, along the oven vent.




A. Model/serial/rating plate

- The microwave oven rated 120/240 volt, 20-amp, has 4 wires (L1, L2, N and G) in the flex conduit and should be connected to a 20-amp maximum rated circuit, overcurrent protected on both the L1 and L2 circuits.
- A time-delay fuse or circuit breaker is recommended.

PRODUCT DIMENSIONS

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

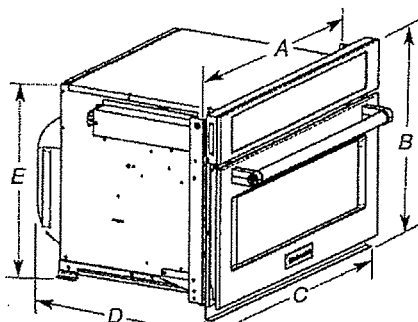


27" (68.6 cm) models

- A. 25 1/4" (64.5 cm)
- B. 18 1/8" (47.3 cm) overall height
- C. 26 1/4" (67.9 cm) overall width
- D. 21 1/2" (54.6 cm)
- E. 17 3/4" (44.1 cm)

30" (76.2 cm) models

- A. 28 3/8" (72.1 cm)
- B. 18 1/8" (47.3 cm) overall height
- C. 29 3/4" (75.6 cm) overall width
- D. 21 1/2" (54.6 cm)
- E. 17 3/4" (44.1 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit

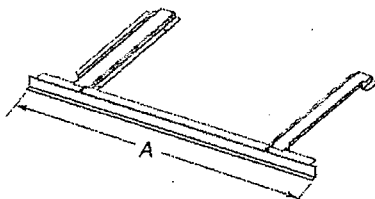

27" (68.6 cm) models

- A. 26 1/4" (67.9 cm) overall width

30" (76.2 cm) models

- A. 29 3/4" (75.6 cm) overall width

NOTE: The microwave oven spacer kit will allow the microwave oven to be installed in a 17 3/4"-17 1/2" (44.1-45.1 cm) maximum cutout height.

A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19"-19 13/16" (48.3-50.2 cm) maximum cutout height. Match the oven size to the following kits:


- 27" (68.6 cm) Stainless Steel - Model W10469901
- 30" (76.2 cm) Stainless Steel - Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

CABINET DIMENSIONS

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

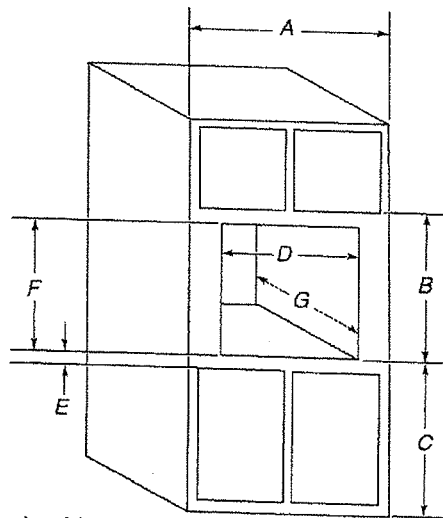

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 18 1/8" (47.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 25 1/2" (64.8 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 3/4" (44.7 cm) recommended cutout height (will fit cutout height from 16 1/2" (41.9 cm) to 17 3/4" (45.1 cm))
- G. 21 1/4" (55.5 cm) min. cutout depth


30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 18 1/8" (47.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 28 1/2" (72.4 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 3/4" (44.7 cm) recommended cutout height (will fit cutout height from 17 3/4" (45.1 cm) to 17 3/4" (45.1 cm))
- G. 21 1/4" (55.5 cm) min. cutout depth

MINIMUM INSTALLATION CLEARANCES

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

Installation Above Single Built-In Oven

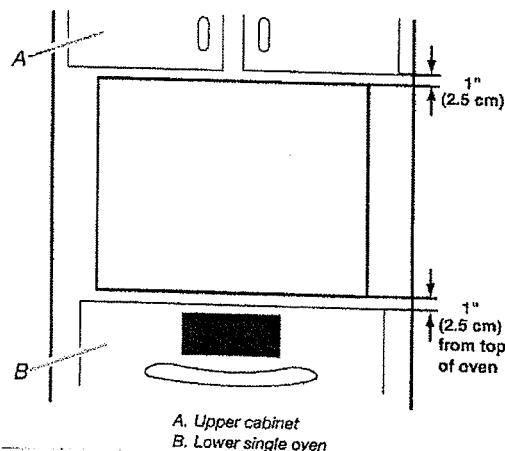

A. Upper cabinet
B. Lower single oven

Approved models: KMBP100E and KMBP107E.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10725730B
2/10/15