

Cristina Marques

From:
Sent:
To: Cristina Marques; 'Green Valley Bayview Wellington Homes'
Subject: Invoice HB00016023 From Goemans Vaughan
Attachments: HB00016023.pdf; HB16023 - SPECS.pdf

Hi ladies, please see attached for specifications for:

ILIE, CIPRIAN & CLAUDIA
TBA
LOT # 127
BRADFORD, ON TBA

****a few things to NOTE:**

42" built in fridge with ice and water

48" range dual fuel, will require gas and electric

48" pro hood fan with 10" ducting. Please make sure you check out the specs. Its 18" tall hood fan, with a 17.5" transition. if the total of 35.5" cant be accommodated. The 17.5 transition can be removed but a 6" and 8" hole (both) will be required.

Please touch base with me for any questions. Let the customer know and let me know if everything is ok.

Jay

JASON NG

Our Mission :

Character Matters. All of our actions are driven by our unwavering commitment to our core principles of **knowledge, integrity, and respect.**

The information in this email and subsequent attachments may contain confidential information that is intended solely for the attention of the named addressee(s). This message or any part thereof must not be disclosed, copied, distributed or retained by any person without authorization from the Company.

GOEMANS APPLIANCES

167 Chrislea Rd. Unit #1-6, Vaughan ON L4L 8N6
 Delivery/Install/Service: (877) 463-6267

INVOICE #	HB00016023
Terms:	2 WKS PRIOR
Purchase Date:	Apr 29, 2017
Delivery/Pickup Date:	Dec 01, 2017
Last Edited:	May 03, 2017 04:01 PM
Salesperson:	JASON NG
(905) 264-1771	jason.ng@goemans.com

Bill To: 4164596642

ILIE, CIPRIAN & CLAUDIA
 TBA
 LOT # 127
 BRADFORD, ON TBA
 TEL# (416) 459-6642
 ilieciprian12@gmail.com
 Directions: 6TH LINE & SIMCOE ROAD

Ship To: 4164596642

ILIE, CIPRIAN & CLAUDIA
 TBA
 LOT # 127
 BRADFORD, ON TBA
 TEL# (416) 459-6642
 ilieciprian12@gmail.com
 BUS# (416) 779-6642

QTY	MODEL #	DESCRIPTION	PRICE	TOTAL
1	ZISP420DKSS	42 SIDE BY SIDE, DISPENSER, ENERGY STAR, SS, PRO G.E. MONOGRAM, REFRIGERATOR, SIDE-BY-SIDE, BU STAINLESS	11,499.00	11,499.00
1		P-CMON-1701-S1250	-1,250.00	-1,250.00
1		P-CMON-1701-D1250	-1,250.00	-1,250.00
1	ZDP486NDPSS	NATURAL GAS,6 SEALED BRNR,GRIDDLE,DBL OVEN G.E. MONOGRAM, RANGE, DUAL FUEL, PROFESSIONAL STAINLESS	15,499.00	15,499.00
1		P-CMON-1701-S1250	-1,250.00	-1,250.00
1		P-CMON-1701-D1250	-1,250.00	-1,250.00
1	ZDT975SPJSS	24 PRO, 3RD RACK, SILVERWARE JETS, E-STAR, INTERIO G.E. MONOGRAM, DISHWASHER, INTEGRATED, PANEL STAINLESS	2,499.00	2,499.00
1		P-CMON-1701-S250	-250.00	-250.00
1		P-CMON-1701-D250	-250.00	-250.00
-1		P-CMON-1701-10PER MIN \$20k	2,399.70	-2,399.70
1		C-VAUGHAN SALES ALLOWANCE	-22.50	-22.50
1	PRH18-348SS	PRO,48WX24DX18H,900CFM,HALOGEN VENT-A-HOOD, HOOD, WALL MOUNT STAINLESS	1,900.00	1,900.00
1	VP562	MULTI-BLOWER TRANSITION FROM 6 & 8 TO 10 ROUND VENT-A-HOOD, ACCESSORY, HOOD	100.00	100.00
1		P-DELIVERY \$20,000-29,999	225.00	225.00
1	VHOODPRO	Pro hoods larger than 42"-60" Mounting of hood and basic venting connection of up to 4ft.	350.00	350.00
1	INSTALL DISCOUNT	SALES INSTALLATION ALLOWANCE 6500 CREDIT CARD, REMAINING TO BE PAID BY CHEQUE CUSTOMER AGREED TO PAY FINAL BALANCE BY CASH OR CHEQUE, 2 WEEKS PRIOR TO DELIVERY. IF CHANGING FROM CASH TO CREDIT CARD ANY CASH DISCOUNTS WILL BE FORFEITED AND APPLIED TO THE INVOICE ACCORDINGLY. YOUR DELIVERY DATE IS TENTATIVE UNTIL BALANCE OF INVOICE IS PAID IN FULL.	-350.00	-350.00
	Payment	VISA	3,500.00	3,500.00

GOEMANS APPLIANCES

167 Chrislea Rd. Unit #1-6, Vaughan ON L4L 8N6
Delivery/Install/Service: (877) 463-6267

INVOICE #	HB00016023
Terms:	2 WKS PRIOR
Purchase Date:	Apr 29, 2017
Delivery/Pickup Date:	Dec 01, 2017
Last Edited:	May 03, 2017 04:01 PM
Salesperson:	JASON NG
(905) 264-1771	jason.ng@goemans.com

QTY	MODEL #	DESCRIPTION	PRICE	TOTAL

All orders require a 25% deposit before any product is ordered. Customer to confirm final payment method. **Final payment method may not be changed without prior approval of GOEMANS APPLIANCES.**

☐ CASH, DEBIT CARD ☐ ONLINE BANKING (Acc #: 4164596642)

☐ CERTIFIED FUNDS ☐ OTHER

Note: Must allow a minimum of 5 business days for wire transfers and internet banking. Please check your limit for debit card payments. Cheques made payable to **GOEMANS APPLIANCES**

SUB TOTAL	23,799.80
HST	3,093.97
TOTAL	26,893.77
DEPOSIT	3,500.00
BALANCE	23,393.77

GOEMANS APPLIANCES

167 Chrislea Rd. Unit #1-6, Vaughan ON L4L 8N6
Delivery/Install/Service: (877) 463-6267

INVOICE #	HB00016023
Terms:	2 WKS PRIOR
Purchase Date:	Apr 29, 2017
Delivery/Pickup Date:	Dec 01, 2017
Last Edited:	May 03, 2017 04:01 PM
Salesperson:	JASON NG
(905) 264-1771	jason.ng@goemans.com

Y	N	(Please check below)
<input type="checkbox"/>	<input type="checkbox"/>	Extended Warranty options have been presented to customer.
<input type="checkbox"/>	<input type="checkbox"/>	Installation options have been presented to customer.
<input type="checkbox"/>	<input type="checkbox"/>	Appliance removal: this is at the owner's risk and all appliances must be disconnected prior to delivery. If a return visit is required additional fees will apply.
<input type="checkbox"/>	<input type="checkbox"/>	I give permission for Goemans Appliances to send me information concerning upcoming sales and events.

Other Terms and Conditions

- ORDERS MUST BE PAID IN FULL 2 WEEKS PRIOR TO SCHEDULED DELIVERY DATE
- Delivery and/or removal access is the customer's responsibility. The location must be ready and safe for delivery to take place.
- All product is sold with a manufacturer's warranty and customer agrees to accept service in accordance with the terms of this warranty.
- Any and all payments are refundable only at Goemans Appliances' discretion.
- A 25% minimum restocking charge will apply on cancellations and returns.
- Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.
- **Goemans Appliances assumes no liability for product specifications.**
- Portions of your personal information may be shared with manufacturers and distributors in order to validate the product warranty and/or ensure the proper maintenance of your products.
- All product remains the property of Goemans Appliances until paid in full.
- Interest of 18% per annum will be charged on overdue accounts.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

Customer Signature

Print Name

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016023

Salesperson:	JASON NG
Purchase Date:	4/29/17
Invoice Finished Date:	
Delivery/Pickup Date:	Dec 01, 2017
Invoice Type:	VBL
Date Printed:	May 03, 2017
Page:	1

ONLINE BANKING ACCOUNT

BILL TO: 4164596642

ILIE, CIPRIAN & CLAUDIA

TBA

LOT # 127

BRADFORD, ON TBA

TEL# (416) 459-6642 BUS# (416) 779-6642

SHIP TO: 4164596642

ILIE, CIPRIAN & CLAUDIA

TBA

LOT # 127

BRADFORD, ON TBA

TEL# (416) 459-6642 BUS# (416) 779-6642

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		ZISP420DKSS		STAINLES	MON, RESB: REFRIGERATOR, SIDE-BY-SIDE, BU 42 SIDE BY SIDE, DISPENSER, ENERGY STAR, SS, PRO
1		P-CMON-1701-S1250			
1		P-CMON-1701-D1250			
1		ZDP486NDPSS		STAINLES	MON, RADP: RANGE, DUAL FUEL, PROFESSIONAL NATURAL GAS, 6 SEALED BRNR, GRIDDLE, DBL OVEN
1		P-CMON-1701-S1250			
1		P-CMON-1701-D1250			
1		ZDT975SPJSS		STAINLES	MON, DISI: DISHWASHER, INTEGRATED, PANEL 24 PRO, 3RD RACK, SILVERWARE JETS, E-STAR, INTERIO
1		P-CMON-1701-S250			
1		P-CMON-1701-D250			
-1		P-CMON-1701-10PER MIN \$20k			
1		C-VAUGHAN SALES ALLOWANCE			
1		PRH18-348SS		STAINLES	VEN, HOWC: HOOD, WALL MOUNT PRO, 48WX24DX18H, 900CFM, HALOGEN
1		VP562			VEN, AHO: ACCESSORY, HOOD MULTI-BLOWER TRANSITION FROM 6 & 8 TO 10 ROUND
1		P-DELIVERY \$20,000-29,999			
1		VHOODPRO	UNASSIGNED		Pro hoods larger than 42"-60"
			INSTALLER		

Mounting of hood and basic venting connection of up to 4ft.

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016023

Salesperson: JASON NG
Purchase Date: 4/29/17
Invoice Finished Date:
Delivery/Pickup Date: Dec 01, 2017
Invoice Type: VBL
Date Printed: May 03, 2017
Page: 2

ONLINE BANKING ACCOUNT

BILL TO: 4164596642

ILIE, CIPRIAN & CLAUDIA

TBA

LOT # 127

BRADFORD, ON TBA

TEL# (416) 459-6642

BUS# (416) 779-6642

SHIP TO: 4164596642

ILIE, CIPRIAN & CLAUDIA

TBA

LOT # 127

BRADFORD, ON TBA

TEL# (416) 459-6642

BUS# (416) 779-6642

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		INSTALL DISCOUNT	UNASSIGNED		SALES INSTALLATION ALLOWANCE
			INSTALLER		
		6500 CREDIT CARD, REMAINING TO BE PAID BY CHEQUE			
		CUSTOMER AGREED TO PAY FINAL BALANCE BY CASH OR CHEQUE, 2 WEEKS PRIOR			
		TO DELIVERY. IF CHANGING FROM CASH TO CREDIT CARD ANY CASH DISCOUNTS			
		WILL BE FORFEITED AND APPLIED TO THE INVOICE ACCORDINGLY.			
		YOUR DELIVERY DATE IS TENTATIVE UNTIL BALANCE OF INVOICE			
		IS PAID IN FULL.			
		Payment		VISA	


- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY


PINK GOEMANS COPY

MONOGRAM 42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

ZISP420DKSS

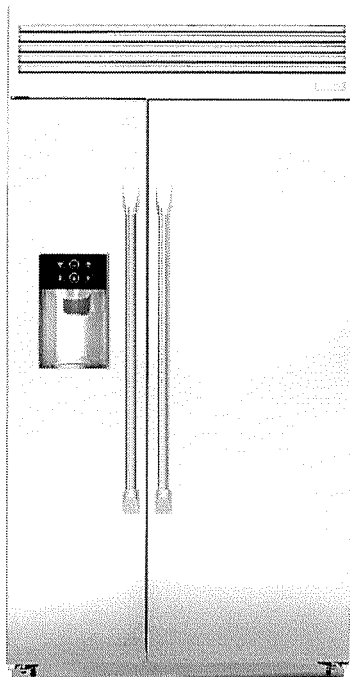

OVERALL DIMENSIONS

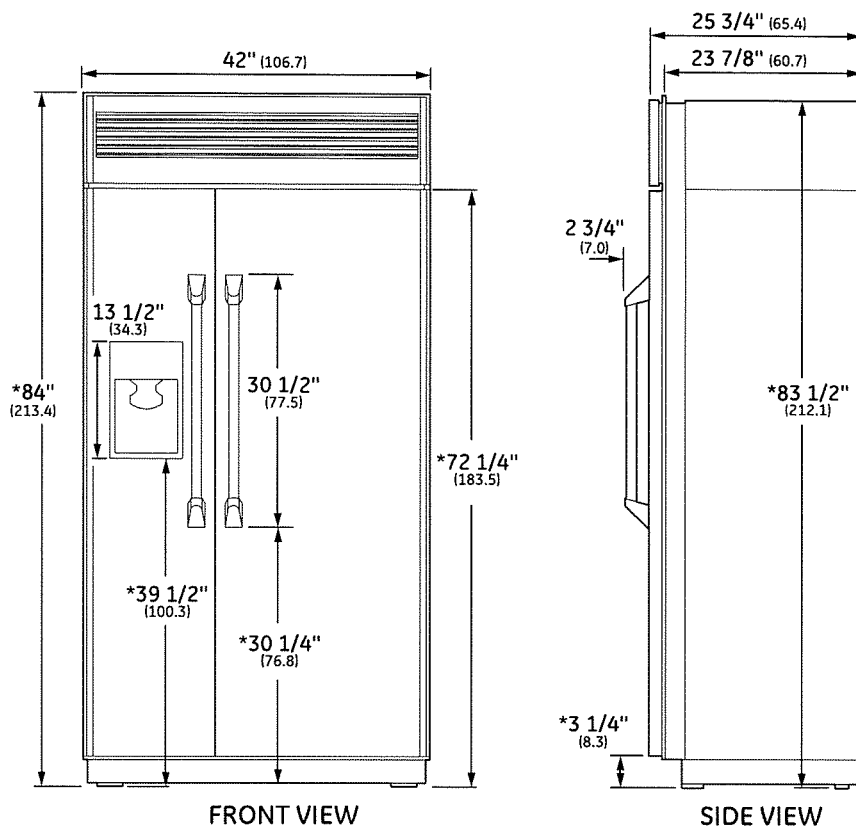


* Shipping height. Use leveling legs and wheels for maximum 1" height adjustment from shipping height.

SPECIFICATIONS

Overall Width	42" (91.44 cm)
Overall Height	84" (213.4 cm)
Overall Depth	25 3/4" (65.41 cm)
Door Clearance	26 5/8" (67.6 cm)
Cutout Width	41 1/2" (105.4 cm)
Cutout Height	83 1/2" - 84 1/2" (212.1 - 214.6 cm)
Cutout Depth	24" (61 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	750 lb

ATTENTION ELECTRICIAN:

A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

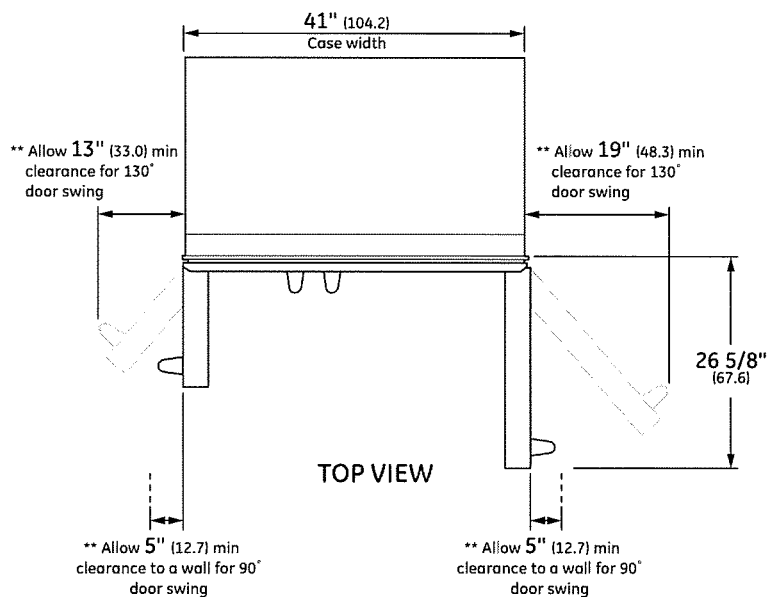

** These refrigerators are equipped with a 2-position door stop. The factory-set 130° door swing can be adjusted to 90° if clearances to adjacent cabinets or walls is restricted. Allow full 130° door swings for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted.

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimension may vary due to manufacturing tolerances.


MONOGRAM

Product Specification Revised 10/16

MONOGRAM 42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

ZISP420DKSS

STANDARD INSTALLATION

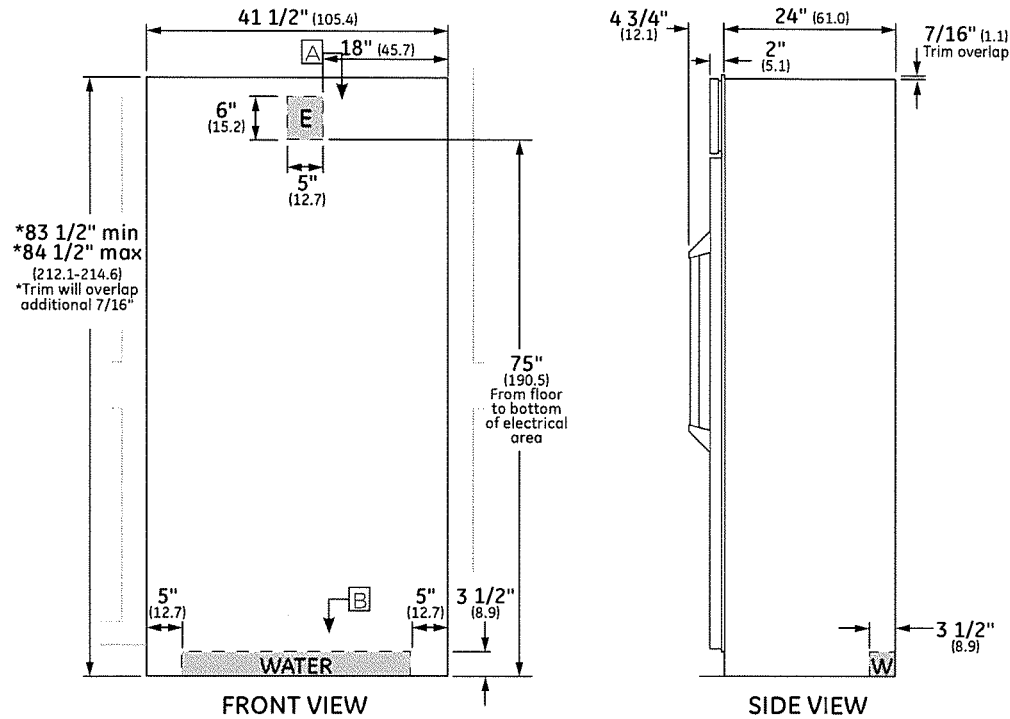

The refrigerator will project forward, slightly beyond adjacent cabinetry.

NOTES

- A** Mounting the junction box in this location will also allow for front accessibility through access panel.
- B** Water supply area.

⚠ WARNING:

The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions.

Determine your installation construction and required anti-tip configuration:

C Installed Under Soffit

After installing unit into installation opening, raise grille panel and screw metal case sides to adjacent cabinet. When installed under a soffit, the soffit cannot exceed 24" deep. The top case trim overlaps the bottom of the soffit.

D Wooden Wall Studs and No Soffit

- Cut a 2" x 4" block and secure to brackets provided.
- Secure brackets to back wall of opening at 84" or your installation height from the floor.


E Metal Wall Studs and No Soffit

This method requires securely fastened cabinets on both sides and a 3/4" minimum wood brace above unit, with it's front surface 24" from back wall.

- After installing unit into opening, raise grille panel and attach metal case top trim to 3/4" minimum wood brace.
- The brace spanning the enclosure must be securely fastened to cabinets on both sides.


See Installation Instructions for detailed instructions.

ANTI-TIP BRACKET

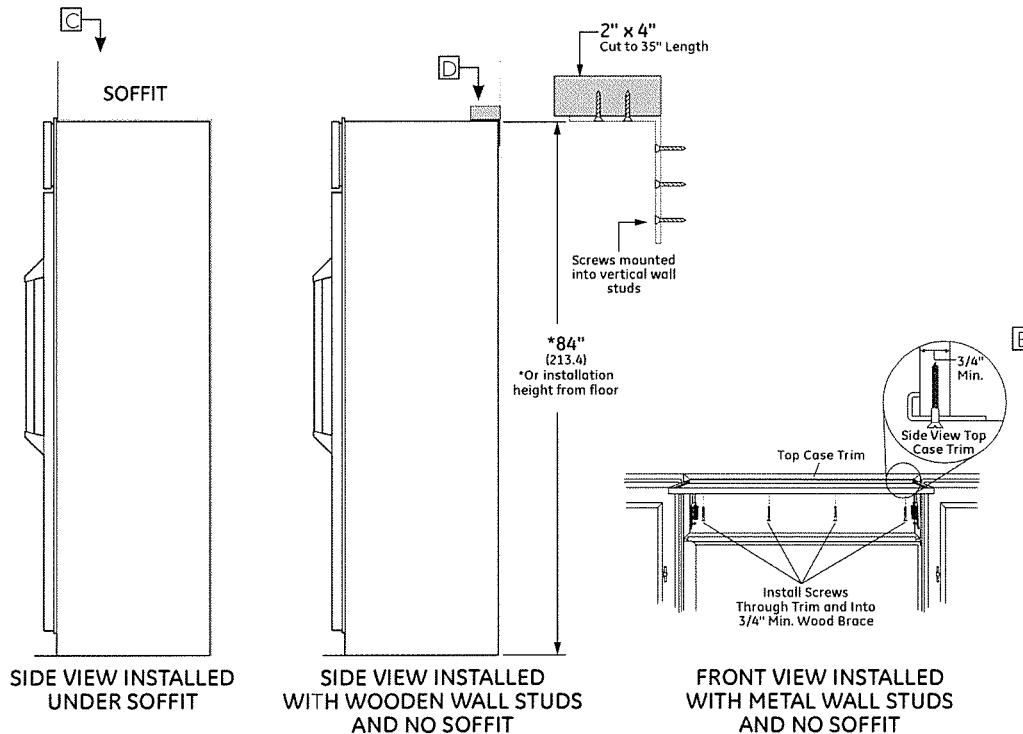

MONOGRAM

CUSTOM SIDE PANELS

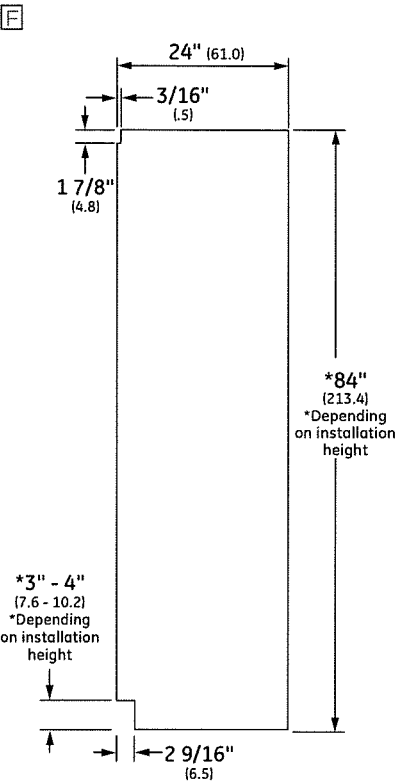

NOTES

- F** Side panels must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Secure the panels to the refrigerator with stick-on hook and loop fastener strips. Order the side panels from the cabinet manufacturer.

MONOGRAM 42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

ZISP420DKSS

FEATURES AND BENEFITS

ADVANCED TEMPERATURE MANAGEMENT SYSTEM WITH MULTI-SHELF BRUSHED ALUMINUM AIR TOWER
Provides even distribution of air throughout the refrigerator

CLIMATE-CONTROL DRAWER
Allows you to express-chill beverages, express-thaw meats and select specific temperatures for perishable foods

WIFI CONNECT
Enjoy the convenience and freedom of wirelessly controlling functions from your smartphone

LED LIGHTING
Light columns in the freezer and fresh food compartments extend the full length of the interior and LED lighting located inside the vegetable and climate-control drawers illuminate contents without compromising space

COLOR-MATCHED DISPENSER WITH PROXIMITY SENSOR
Designed to accommodate glassware of all sizes, from pitchers to tumblers; control graphics light up as you approach and automatically switch off when you walk away

GE® WATER FILTER
Has been moved from the fresh food compartment to the overhead cabinet, where it is discreetly out of sight

DELI DRAWER ON FULL-EXTENSION SLIDES
Keeps meats, cheeses and other everyday foods within easy reach

HUMIDITY-CONTROLLED VEGETABLE DRAWER
Helps preserve the freshness of foods


ADJUSTABLE GLASS SHELVES
Easily accommodate party trays and platters

GALLON-SIZE DOOR BIN
Holds milk containers, two-liter bottles and pitchers

ADJUSTABLE DOOR BINS
Can be moved to one of two positions in seven locations

DAIRY BIN WITH CENTER DIVIDER
Has a unique magnetic seal that locks in freshness

FILTER-CHANGE INDICATOR LIGHT
Located on the upfront control panel, provides a visual reminder when it's time to replace the filter for the water dispenser

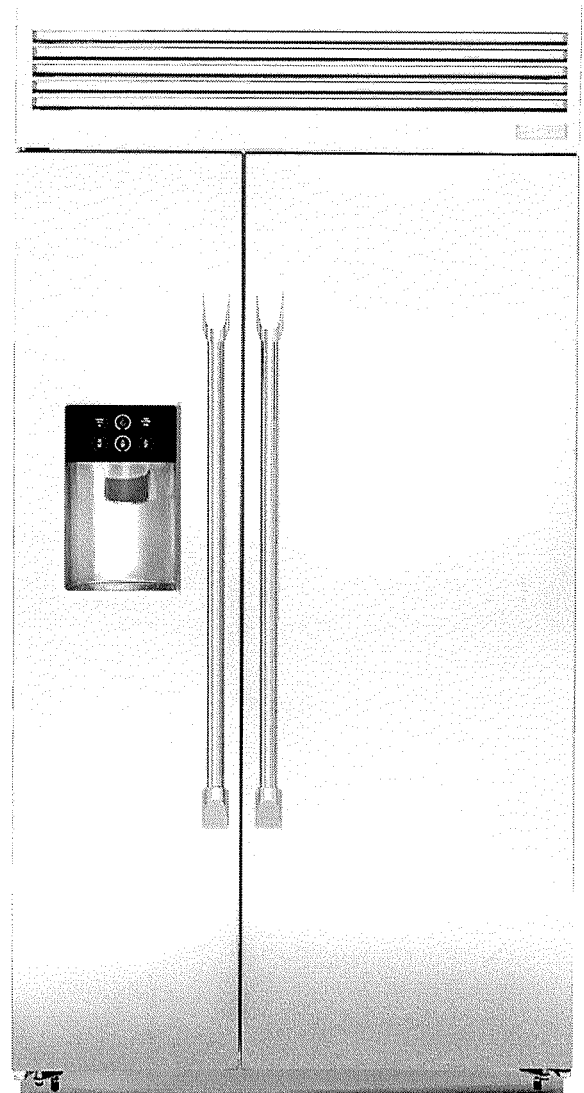

 **Made in
AMERICA**
70 to 99% U.S. content. Product content details at Monogram.com/US



MONOGRAM

Product Specification Revised 10/16

ZDP486NDPSS (Natural Gas) ZDP486LDPSS (Liquid Propane) GE Monogram® 48" Dual-Fuel Professional Range with 6 Burners and Griddle

Dimensions and Installation Information (in inches)

Professional ranges offer a number of choices in size and cooktop configurations.

All Professional Ranges are factory set for natural or liquid propane gas. The correct model should be ordered for the installation situation.

Note: Conversion kits are included with the range if the wrong gas type was ordered. High Altitude kit, WB28K10553 for operation above 3,000 feet (for Natural and LP gas models), is also available. The kits must be installed by a qualified service technician at additional cost.

Installation Information

Before installing, consult installation instructions packed with product or online at Monogram.com for current dimensional data.

A 48" or 54" wide professional vent hood with a minimum 1200 CFM is recommended for installation over this range.

Advance Planning



Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.

- Working areas adjacent to the range should have 18" minimum clearance between countertop and cabinet bottom.
- Clearance between range and side wall or combustible material must be at least 12" on each side.
- Installation must conform with local codes. In the absence of local codes, the range must comply with the National Fuel Gas Code, ANSI Z223.1-1990.

⚠ WARNING:

Installations without a hood require 48" minimum to combustibles. A custom hood installation with exposed horizontal combustible surfaces must have an Auto-On feature. Refer to hood installation instructions for specific hood clearances.

The surface of the entire back wall above the range and below the hood must be covered with a non-combustible material such as metal, ceramic tile, brick, marble or other stone.

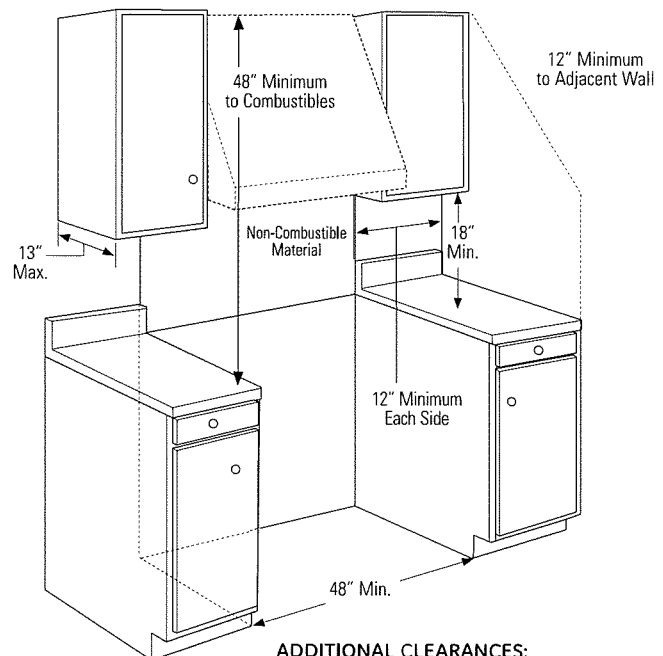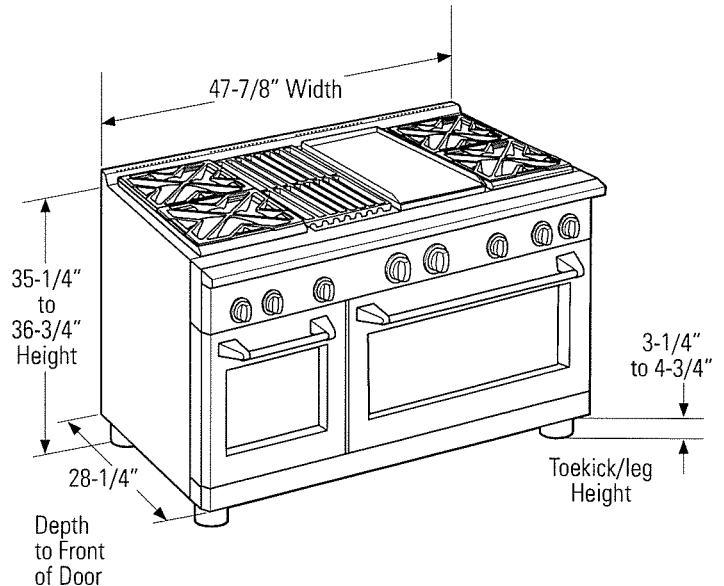

ADDITIONAL CLEARANCES:

Allow 12" minimum clearance to an adjacent wall on each side.

Working areas adjacent to the rangetop should have 18" minimum clearance between countertop and the bottom of the wall cabinet.

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by
Underwriters
Laboratories



ZDP486NDPSS (Natural Gas)

ZDP486LDPSS (Liquid Propane)


GE Monogram® 48" Dual-Fuel Professional Range with 6 Burners and Griddle

Dimensions and Installation Information (in inches)

Electrical Requirements

Ranges must be supplied with 208/240V, 60Hz, and connected to an individual, properly grounded branch circuit protected by a circuit breaker or time-delay fuse. Install a 50-amp circuit for 48" ranges. The receptacle must be a NEMA 14-50R device to accept the four-prong plug on the range.

Universal Utility Locations

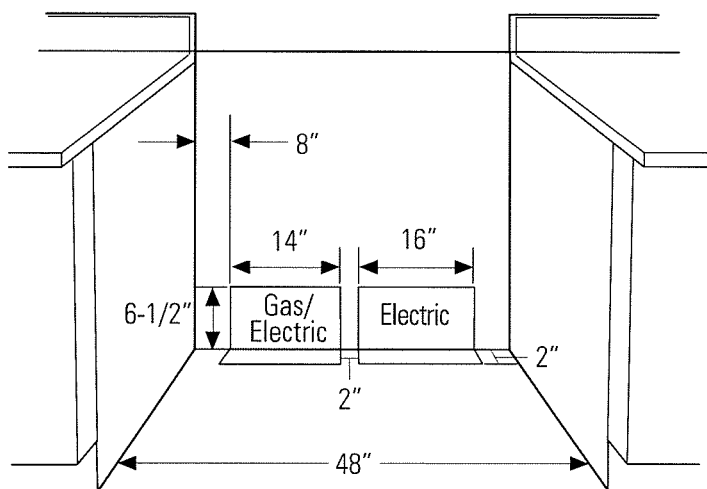

Locate gas and electric as shown

Gas Supply

- The natural gas models are designed to operate at 5" water column pressure. For proper operation, the pressure of the natural gas supplied to the regulator must be between 7" and 13" water column.
- The LP models are designed to operate at 10" water column pressure. For proper operation, the pressure of the LP gas supplied to the regulator must be between 11" and 13" water column.

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.

Optional Backsplash Accessories


The range requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used

Order one with a 48"-wide range backsplash

ZX12B48PSS-12" backsplash

ZXADJB48PSS-30"-36" adjustable-height backsplash with warming shelf

Side View with a Backsplash

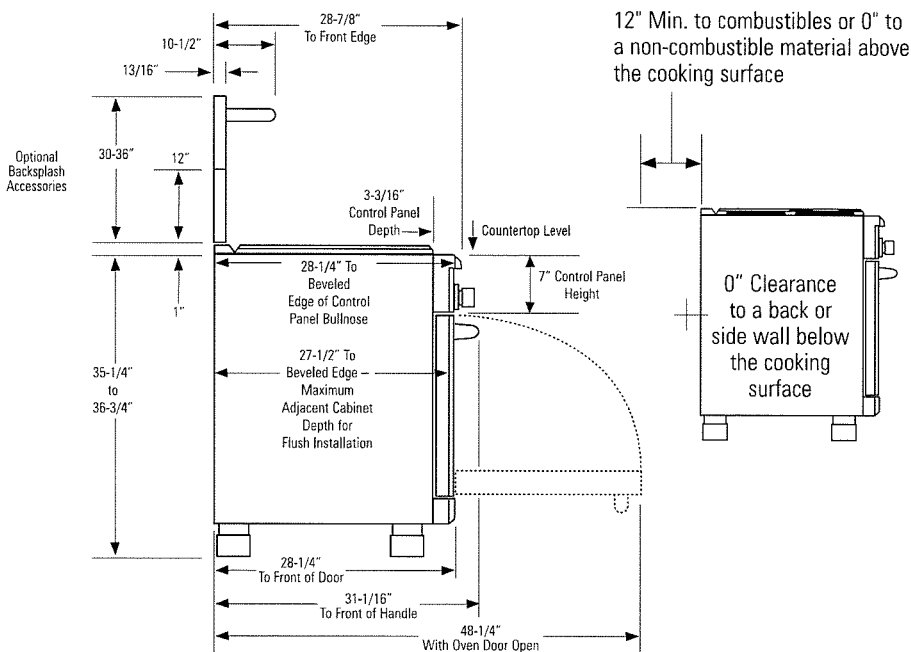

imagination at work



Listed by
Underwriters
Laboratories




ZDP486NDPSS (Natural Gas)

ZDP486LDPSS (Liquid Propane)

GE Monogram® 48" Dual-Fuel Professional Range with 6 Burners and Griddle

Features and Benefits

- Authentic Professional appearance with premium-grade, 304 stainless steel with smoothly finished edges, large electronic control knobs and heavy duty handles
- Sealed, dual-flame stacked burners deliver a full spectrum of heat settings, from an ultra-low 140°F simmer to an intense 18,000 BTUs*
- Monogram Professional oven system combines European, Reverse-Air convection technology and six heating elements in each oven to provide superb baking results
- Heavy-duty, full-extension racks glide smoothly in and out on stainless steel ball bearings for easy access, and are designed to remain in the oven during the self-clean cycle
- LED task lights below the bullnose provide a functional and theatrical touch
- Stainless steel and aluminum-clad griddle offers 18,000 BTUs* of cooking power, allowing fast and consistent heating across the entire cooking surface
- Reversible burner grates are flat on one side and uniquely contoured on the other to accommodate round-bottom woks
- A caterer's oven is uniquely sized to accommodate three full-size sheet trays
- Everyday oven is just the right size for 9" x 13" casserole dishes
- Model ZDP486NDPSS - Natural Gas*
- Model ZDP486LDPSS - Liquid Propane

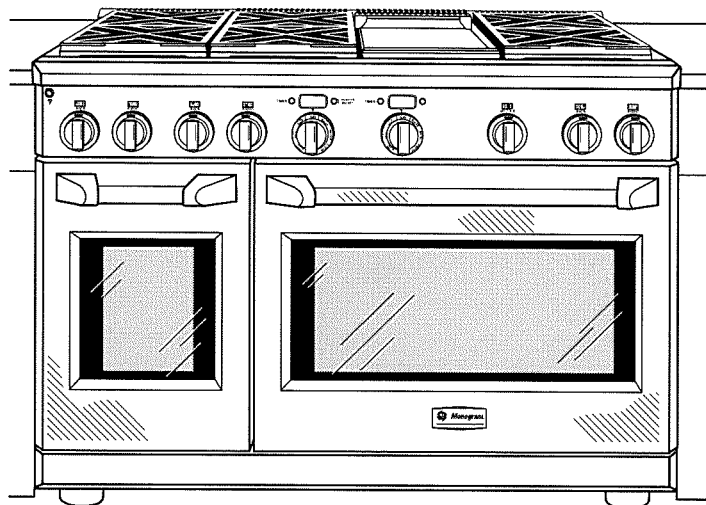


For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.






imagination at work

MONOGRAM 24" FULLY INTEGRATED DISHWASHER

ZDT975SPJSS

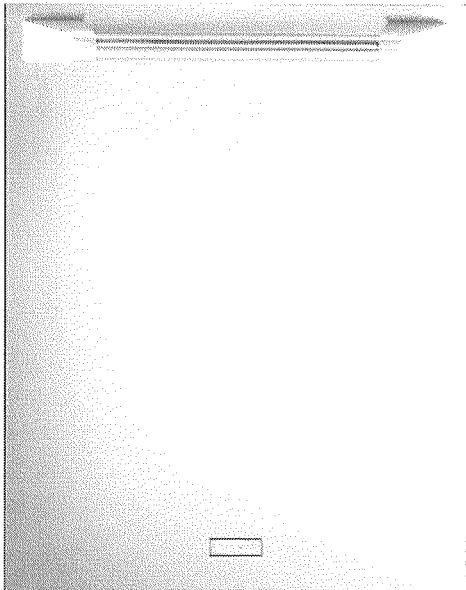

OVERALL DIMENSIONS

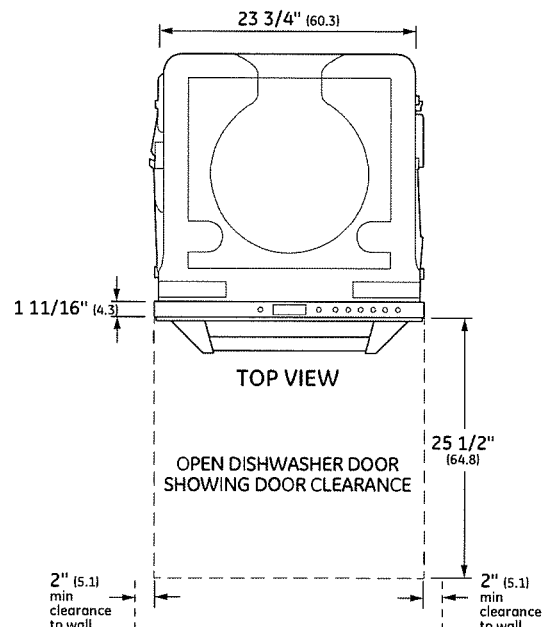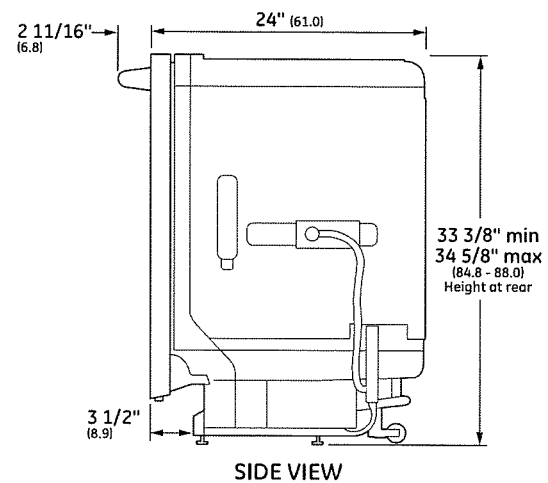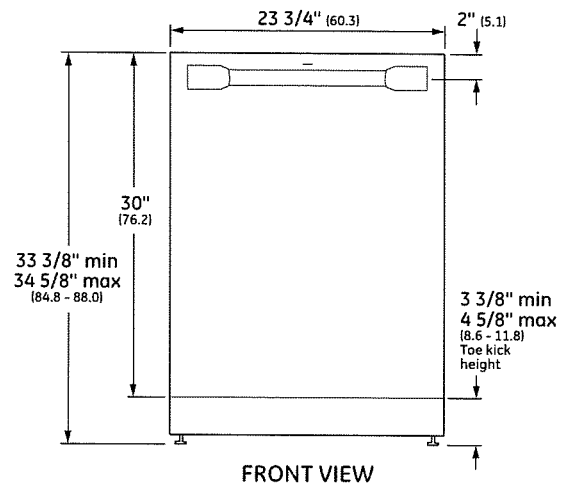


SPECIFICATIONS

Overall Width	23 3/4" (60.3 cm)
Overall Height	33 3/8" (84.8 cm) Min 34 5/8" (88.0 cm) Max
Overall Depth	24" (61 cm)
Door Clearance	25 1/2" (64.8 cm)
Overall Dishwasher Capacity	16 Place Settings
Minimum Cabinet Width	24" (61 cm)
Minimum Cabinet Depth	24" (61 cm)
Cutout Width	24" (61 cm)
Cutout Height	33 1/2" (85.1 cm) Min 34 3/4" (88.3 cm) Max
Electrical Requirements	9.0 A
Hose Length	No more than 12' (3.7 m)
Voltz/Hertz/Amps	115 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	139 lb (63 kg)

Dimensions in parentheses are in centimeters unless otherwise noted.

MONOGRAM


INSTALLATION

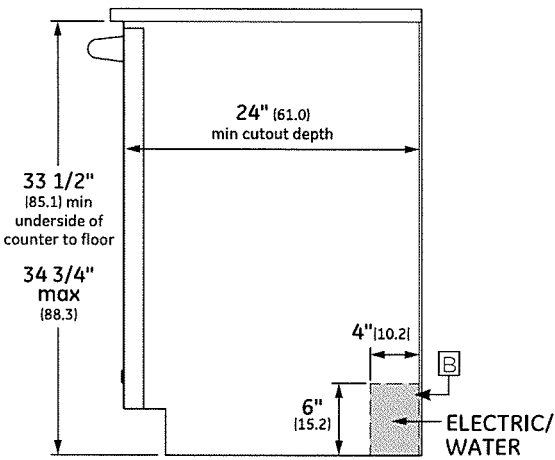

FLUSH CUTOUT INSTALLATION

NOTES

- A** The dishwasher drain hose must be no more than 12 feet in length for proper drainage.
- B** Electrical connections are at the right front of the dishwasher and water connections are on the left. The hot water line should extend forward 30" to 40" from the rear wall. The electrical must extend forward at least 24" to reach the junction box.
- C** To prevent siphoning, an air gap or high drain loop must be used.

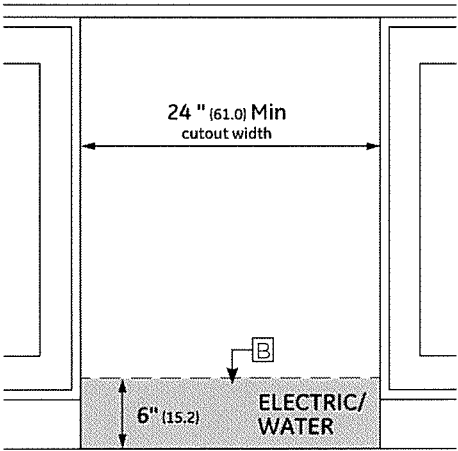

INSTALLATION CUTOUT FRONT VIEW

MONOGRAM 24" FULLY INTEGRATED DISHWASHER

ZDT975SPJSS

FEATURES AND BENEFITS

MOST ADVANCED WASH SYSTEM WITH MORE THAN 140 CLEANING JETS

Achieve the ultimate clean from an industry-leading number of jets that deliver complete washing coverage to every corner of the dishwasher

FULL-EXTENSION, SMOOTH-GLIDE, ADJUSTABLE THIRD RACK

Functions as a utensil drawer for cleaning of an entire flatware collection, along with carving knives, soup ladles, tongs and other cooking/serving tools

DEEP CLEAN SILVERWARE JETS

Powerful jets blast away stuck-on food for silverware that's always spotless

BOTTLE JETS

Hard-to-reach areas inside tall items get completely clean with four dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

LED LIGHTING

Illuminates the entire interior, leaving no question as to whether or not dishes have been cleaned

39 DBA WITH LED STATUS INDICATOR ON DOOR

A dishwasher this quiet has a status indicator to tell you if the dishwasher is Washing, Drying or Clean

FLUSH INSTALLATION CAPABILITY


Enables the dishwasher to be installed flush, even with inset cabinetry, without any additional parts

WIFI CONNECT

Monitor performance and check cycle status using your mobile device

EASY TOUCH ADJUSTABLE UPPER RACK WITH 2 STEM SAFE WINE GLASS HOLDERS

Quickly adjust the upper rack 2 inches up or down to accommodate tall glassware and 10-1/2" plates with plenty of room in the bottom rack for large platters and cookie sheets

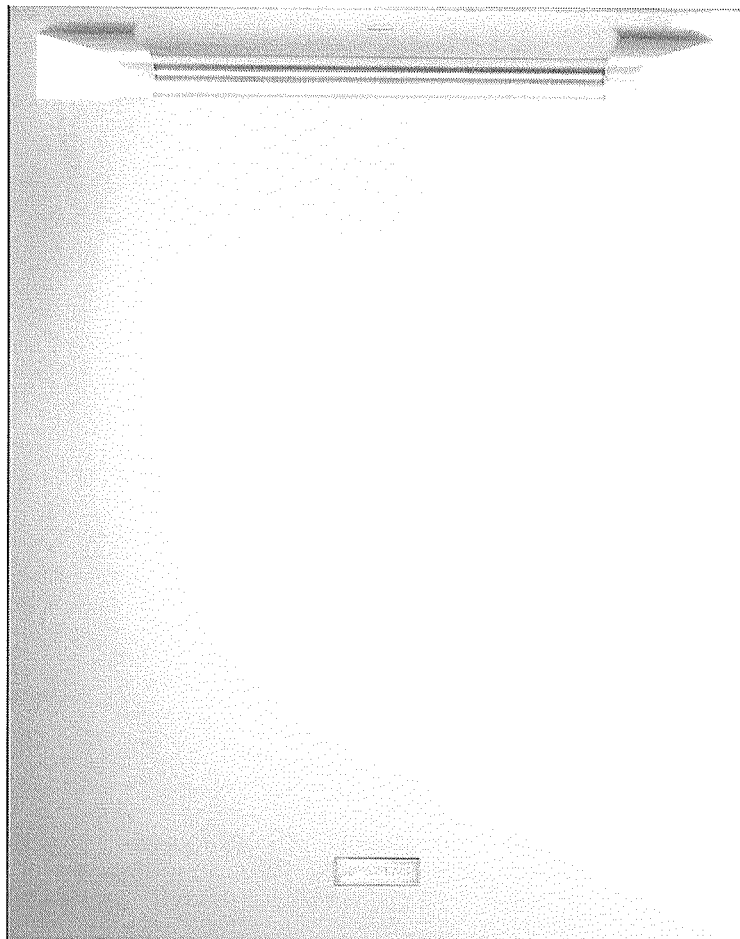


Residential


MONOGRAM

Model Number: B200-B100-040
Special Notes: LED lights. WBAR warming light bar is available on selected models.



WIDTH:	48"
DEPTH:	24"
HEIGHT:	18"
CFM:	900
SONES:	6.3
AMPS:	6.0
# LIGHTS:	3

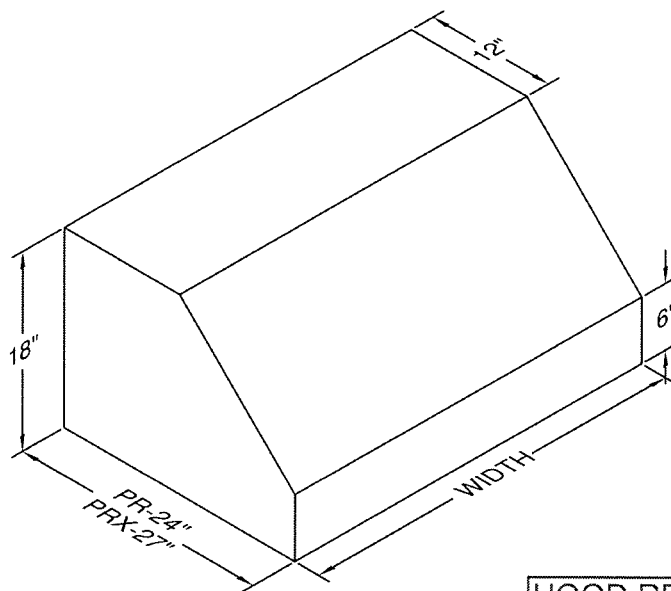

CONNECTION DIAGRAM

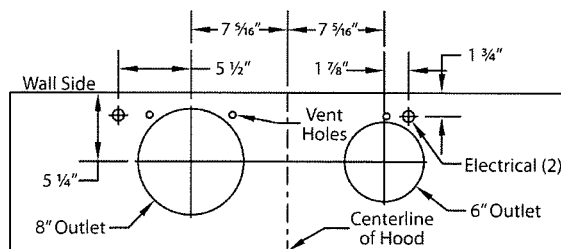


900 CFM B200 Dual & B100 Single Blower (Top View)

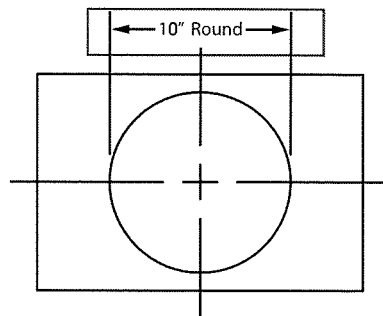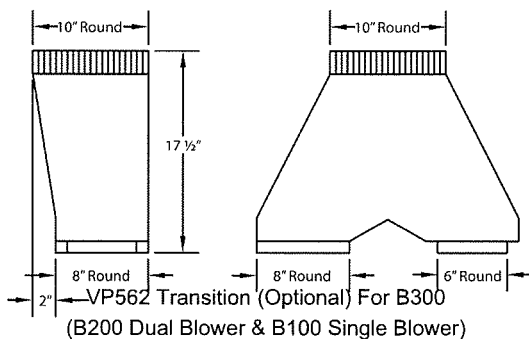

VP562 transition
centers outlet
over top of hood.

HOOD REQUIRES A
10" DUCT, 18" TALL
HOOD WITH 17.5
TRANSITION OR A
6" AND 8" HOLE

REC. MOUNTING HEIGHT*

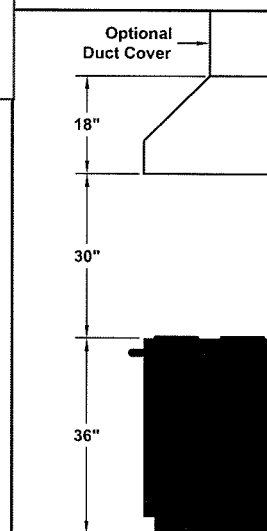

* Exceeding recommended
mounting height may compromise
performance.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS+	HZ	RPM	CFM SP@0.0"	EQUIV CFM\$	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	MIN. ROUND DUCT SIZE	SONES#
B200 Dual & B100 Single	115	6.0	60	1550	900	1350	804	725	655	10" (79 sq. in.)	6.3

+ Add 2.5 amps for each warming light. This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").

\$ Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.