

GOEMANS APPLIANCES

1-877-463-6267

IST # 105167993 WWW.GOEMANS.COM
find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016125

Salesperson: JASON NG
Purchase Date: 5/17/17
Invoice Finished Date:
Delivery/Pickup Date: Feb 26, 2018
Invoice Type: VBL
Date Printed: May 17, 2017
Page: 1

ONLINE BANKING ACCOUNT

BILL TO: 2899261780

MAKARENKO, SAMANTHA & NATHAN
TBA INVERNESS AVE
LOT # 104
BRADFORD, ON TBA

TEL# (289) 926-1780 BUS# (289) 926-6718

Directions: 6TH LINE & SIMCOE ROAD

SHIP TO: 2899261780

MAKARENKO, SAMANTHA & NATHAN
TBA INVERNESS AVE
LOT # 104
BRADFORD, ON TBA

TEL# (289) 926-1780 BUS# (289) 926-6718

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		OR30SDPWIX1		STAINLES	FIS, RAIP: RANGE, INDUCTION, PROFESSIONAL 30 RANGE, INDUCTION, S/C, CONV., 4B, 3.6CUFT
1		DD24DDFTX7		STAINLES	FIS, DISD: DISHWASHER, DRAWER DBL DRWR, TALL TUB, FLAT DOR, 13 PLATE, 163 DEG F SNT
1		HC30PHTX1			FIS, HOWC: HOOD, WALL MOUNT 30 PYRAMID VENTILATION
-1		P-CFIS-1701-VENT			
1		NNSD786S		STAINLES	PAN, MICT: MICROWAVE, COUNTER-TOP 1.6CUFT, 1200W, GENIUS PRESTIGE, INVERTER, DIAL
1		WM3770HVA		Graphite	LGE, WAFL: WASHER, FRONT LOAD, LARGE CAPA 5.2 CUFT, STEAM, HTR, 1200RPM, 12 WASH/10 OPT
1		MUST PURCHASE OPTIONAL HOSES DLEX3570V		GRAPHITE	LGE, DREFL: DRYER, ELECTRIC - TO MATCH LAR 27W, 7.3CUFT, STEAM, LED DISPLAY
2		HOSE LNDRY 6FT 48			REL, AWA: ACCESSORY WASHER 1X 6 FT WASH HOSE, 3/4, STAINLESS STEEL BRAID
1		P-DELIVERY \$10,000-19,999			
-1		SALES DELIVERY ALLOWANCE			
1		VHOOD2CHMY	UNASSIGNED INSTALLER		Chimney style hood install up to 36" model
Mounting of hood to wall, and vent connection up to 4ft in length. No hole cutting.					

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

IST # 105167993

WWW.GOEMANS.COM

find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00016125

Salesperson: JASON NG
Purchase Date: 5/17/17
Invoice Finished Date:
Delivery/Pickup Date: Feb 26, 2018
Invoice Type: VBL
Date Printed: May 17, 2017
Page: 2

ONLINE BANKING ACCOUNT

BILL TO: 2899261780

MAKARENKO, SAMANTHA & NATHAN

TBA INVERNESS AVE

LOT # 104

BRADFORD, ON TBA

TEL# (289) 926-1780

BUS# (289) 926-6718

SHIP TO: 2899261780

MAKARENKO, SAMANTHA & NATHAN

TBA INVERNESS AVE

LOT # 104

BRADFORD, ON TBA

TEL# (289) 926-1780

BUS# (289) 926-6718

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
		BUILDER ORDER, NEED TO SHIP UP AND INSTALL THE HOOD FAN 1 WEEK PRIOR TO CLOSING FOR PDI			
		Payment		MASTER CARD	

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY



Cutout dimensions – flush to edge of door (mm / inches)

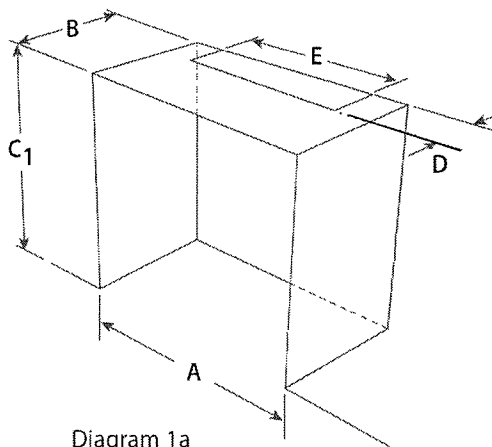


Diagram 1a
Cabinet at floor level

Installation diagrams for illustration purposes only

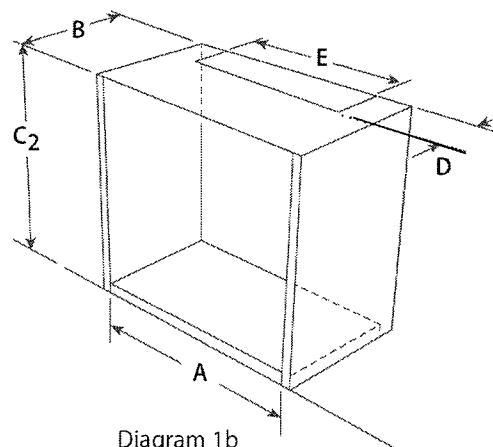


Diagram 1b
Cabinet above toe kick

Diagram 1

A	width	1467 (57 3/4")
B	depth*	700 (27 5/8")
C1	height**	1790 (70 1/2")
C2	height***	1806 (71 1/8")

D	air vent depth	200 (8")
E	air vent width	1162 (45 3/4")


* Depth is a minimum requirement

** Height is without 16mm MDF packer

*** Height is with 16mm MDF packer

N.B. The trim kit must be supported (in a module cabinet)
independently from the adjoining cabinets

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us,
may be incomplete or may change without notice

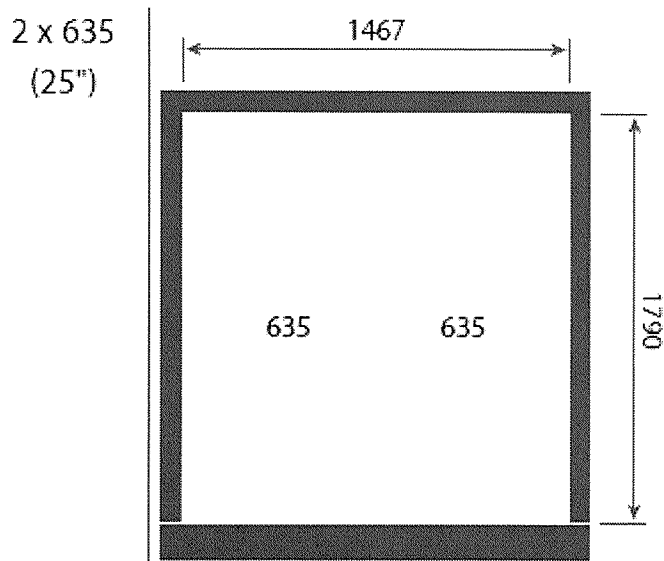

Cut Out Dimensions		
Width A	Depth B*	Height C**
1467mm	700mm	1790mm
57 ³ / ₄ "	27 ⁹ / ₁₆ "	70 ¹ / ₂ "

* Depth is a minimum requirement

** Height is without 16mm MDF packer

TRIM INSTALLATION

The bottom trim is designed to cover the front edge of the floor base panel of the cabinet. This trim can be installed on a raised toe kick (diagram 1a) or toe kick below the refrigerator (diagram 1b)

Remembering that if this trim is to be used with the refrigerator at floor level the cut out dimensions will need to have 16mm (⁵/₈") added to its height to allow for the bottom trim to be fitted. Note this trim is optional on this type of installation. If used with a raised toe kick the 16mm packer should be part of the base (diagram 5). Therefore 16mm is not required to be added to the height dimension.

1. If used place the 16mm (⁵/₈") piece of plywood or with bottom trim fitted into the cavity (diagram 5 or 6). Note the piece should be the same size as the base of the cavity.

2. Remove protective coating film from surround trim.

3. To install the surrounds, first clip in the top surround. Ensure the locator strips at the rear of the top brackets clip into the rear of the top trim.

4. Clip both side trims into place starting from the front cabinet edge.

16mm (⁵/₈ inch)
plywood or MDF
board insert

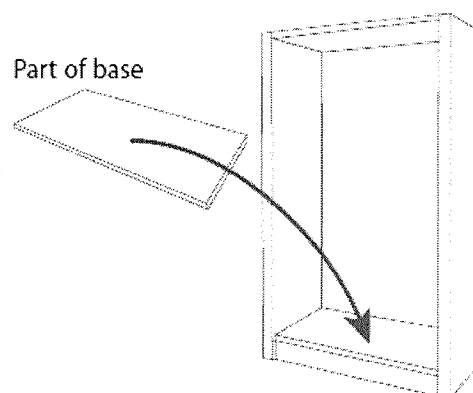


Diagram 5

Fisher & Paykel

#24470




Installation instructions

Dimensions and clearances

- The cooker must be installed no less than 2" (50 mm) away from any side walls which exceed the height of the cooktop.
- The cabinetry surrounding the cooker must be made of heat-resistant material and must be able to withstand temperatures of 150 °F (65 °C) above room temperature.
- Do not install the cooker near flammable materials (eg curtains).
- If you stand the cooker on a pedestal, make sure you provide safety measures to keep it in place.


Locating the area for electrical connection

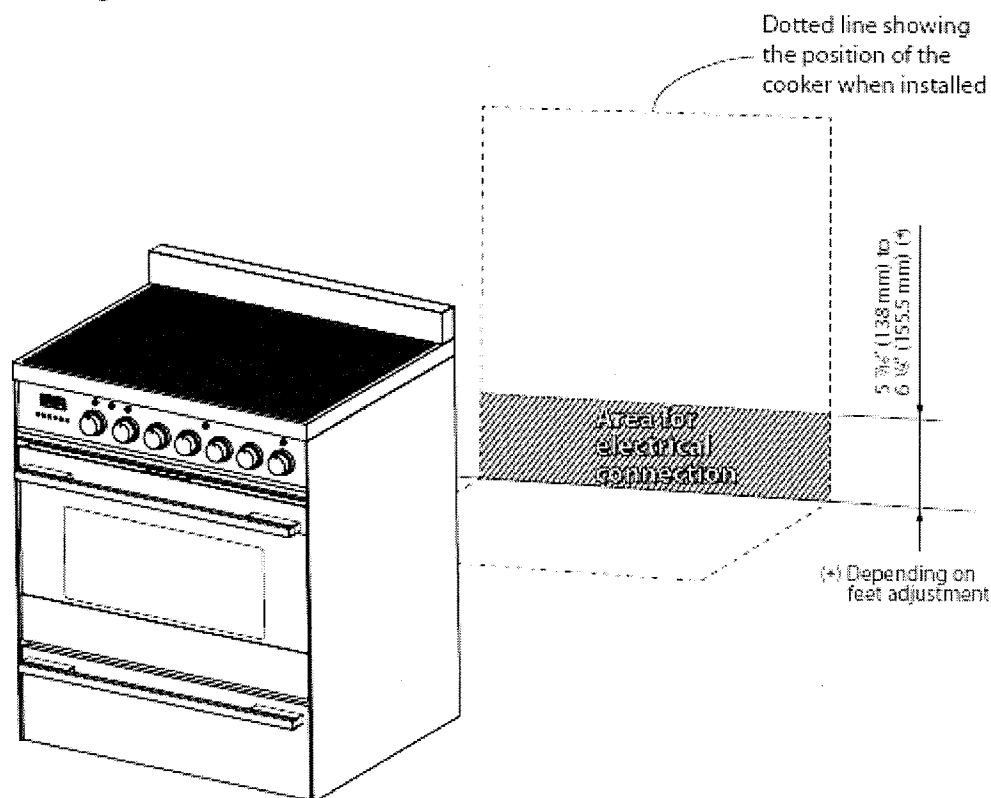

Grounded outlet: should be located from the left to the right side of the range; from 5" 7/16 (138 mm) to 6" 1/8 (155.5 mm) [depending on feet regulation] from the floor.

The electric cord with 4-prong ground plug (NEMA 14-50P) shall have a minimum length of 48" (1220 mm) beyond the back of the appliance.

Installation instructions

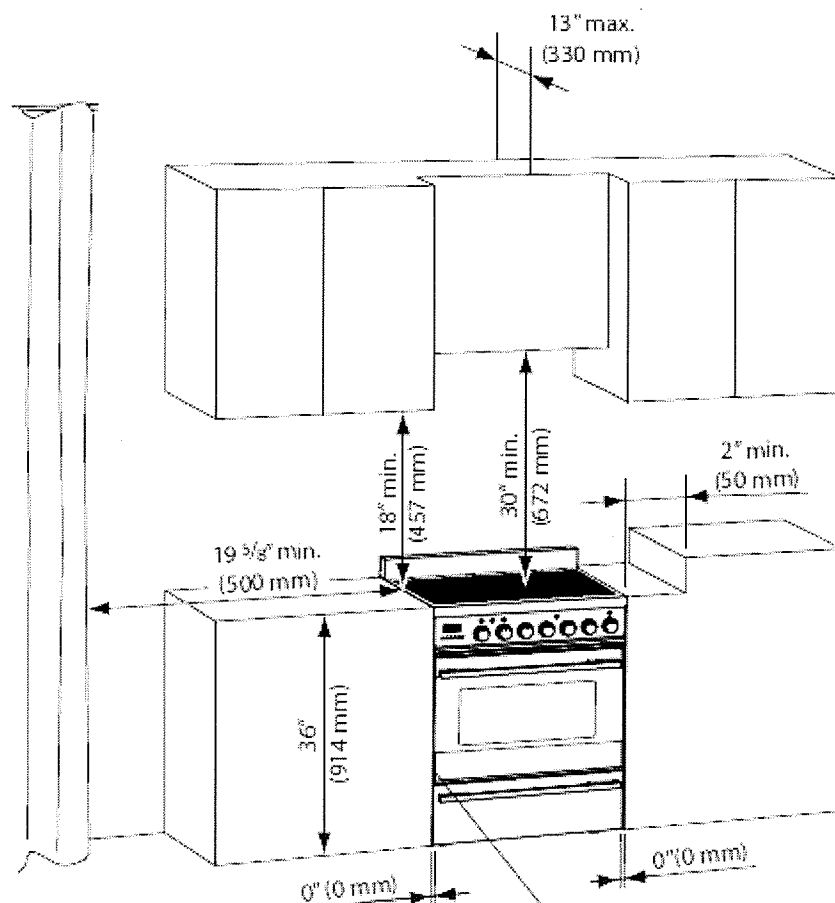

The range CANNOT be installed directly adjacent to sidewalls, tall cabinets, tall appliances, or other side vertical surfaces above 36" (914 mm) high.

There must be a minimum of 2" (50 mm) side clearance from the range to such combustible surfaces TO THE RIGHT above the 36" (914 mm) high countertop; or there must be a minimum of 2" (50 mm) side clearance from the range to such combustible surfaces TO THE LEFT above the 36" (914 mm) high countertop.

Important!

One side (left or right) above the 36" (914 mm) high countertop must always be kept clear.


The maximum upper cabinet depth recommended is 13" (330 mm).

Any wall cabinet above the range must be a minimum of 30" (762 mm) above the countertop with a minimum width of 30" (762 mm) and must be centered with the range.

Side wall cabinets above the range must be a minimum of 18" (457 mm) above the countertop.

Cooker overall dimensions [mm]

- height (without backguard):
MIN 35 21/32" (906 mm) -
MAX 36 11/32" (923 mm)
- product width:
29 7/8" (759 mm)
- depth:
24 13/64" (615 mm)
- backguard (height):
3" (76 mm)

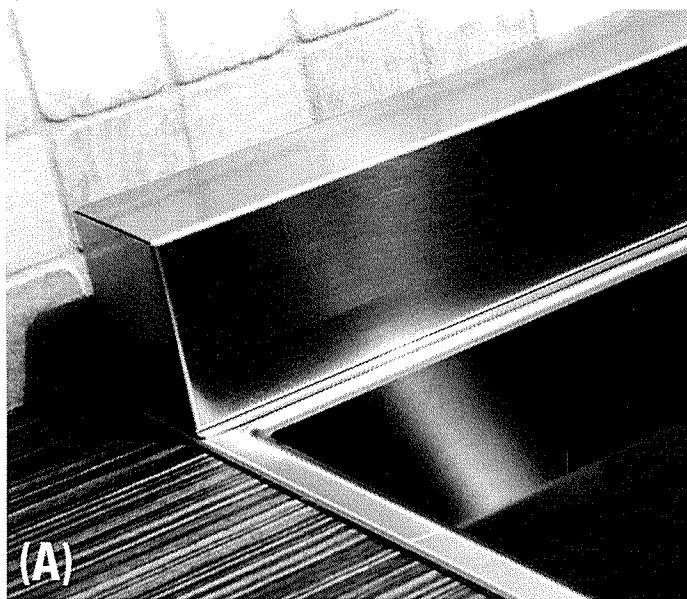

Island Trim


FIT30SS


FISHER & PAYKEL's OR30 ranges are equipped with a 2 inches backguard installed during production. (A)

For aesthetic reasons and/or when installed in a central island, it is now possible to replace this backguard by a decorative trim in stainless steel. (B)

This Island Trim is sold as an option.

IMPORTANT : If installed on a gas range against the wall, make sure that the wall is covered with a non-combustible material.

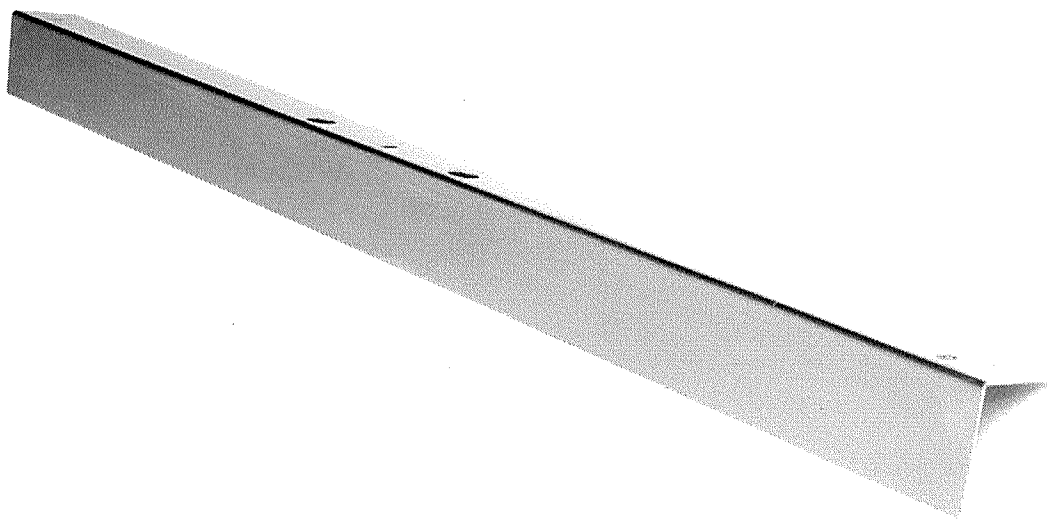

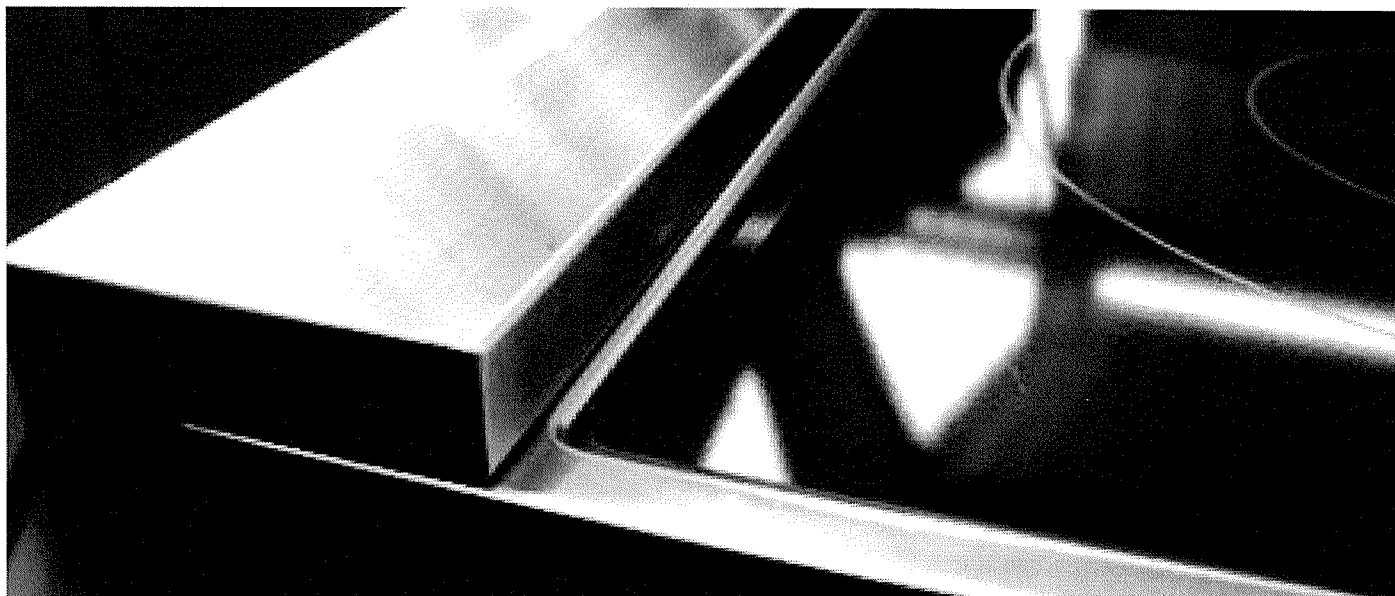


Fisher & Paykel


Complementary Trim


(3 1/8" depth X 7/8" height)

#88667

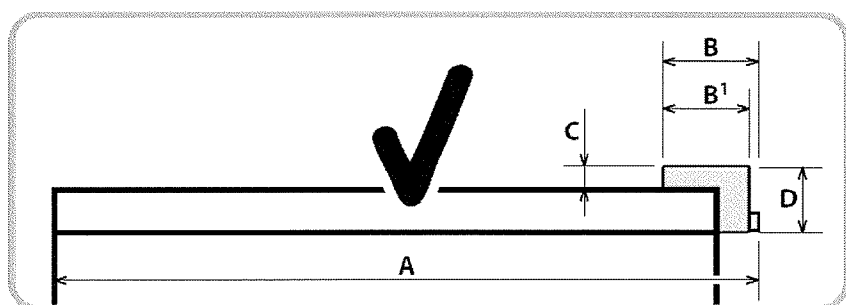

- A = 641mm (25 1/4")
- B = 84.5mm (3 21/64")
- B' = 79.5mm (3 1/8")
- C = 22mm (7/8")
- D = 62mm (2 7/16")

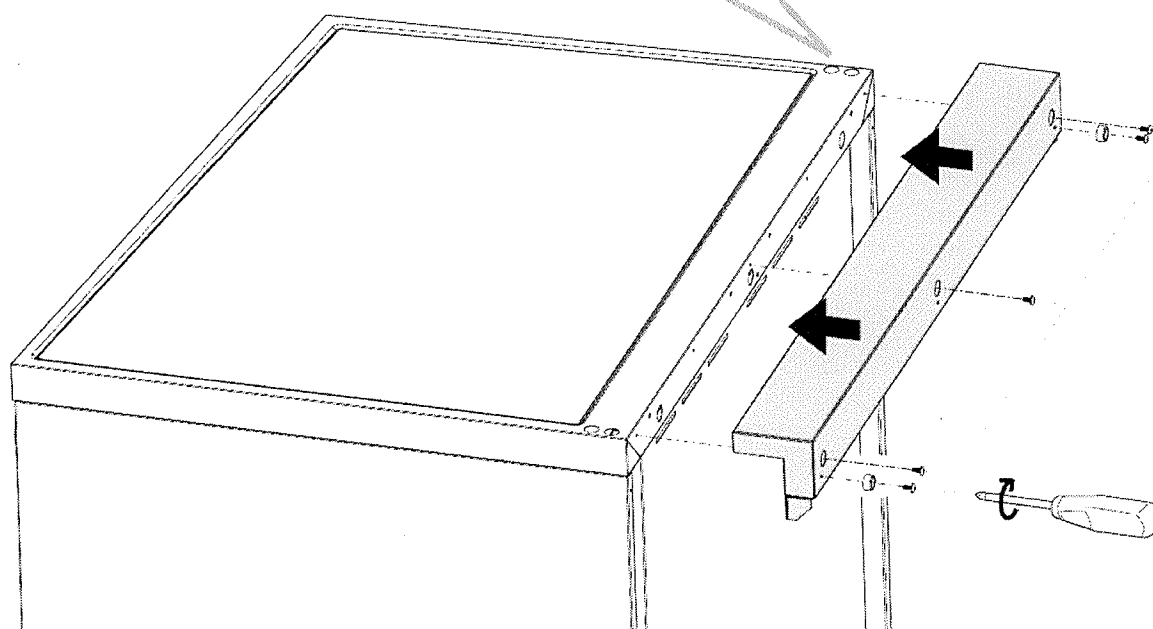


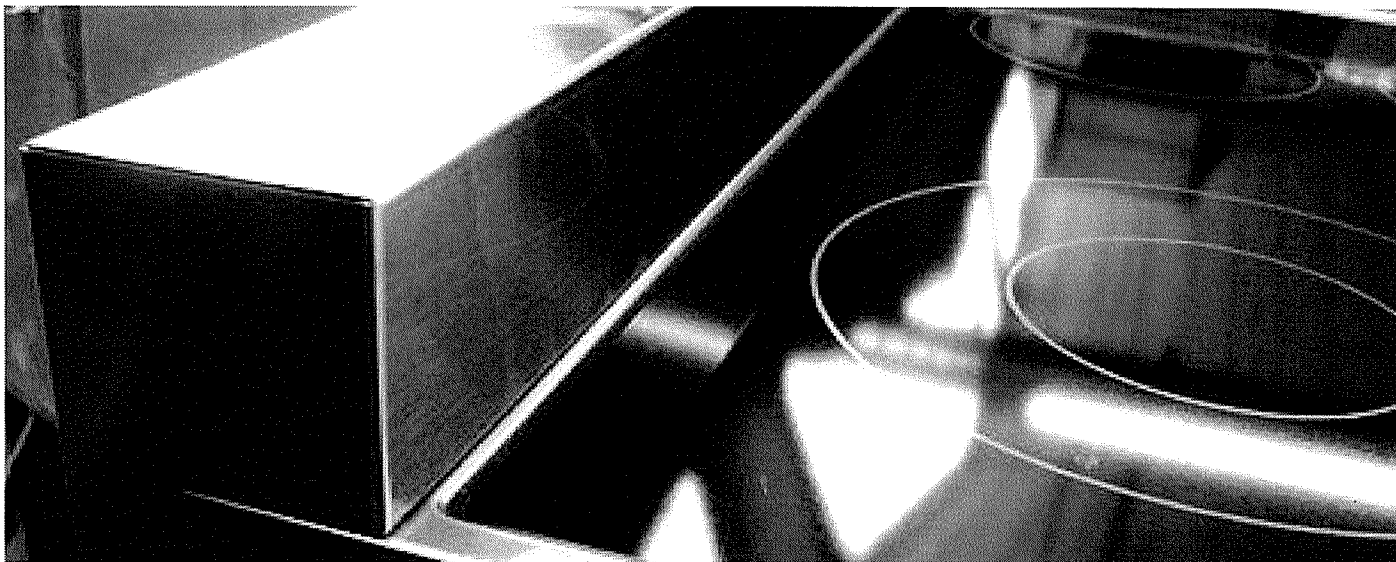


Fisher & Paykel


Complementary Trim (3 1/8" depth X 3" height)

#88668

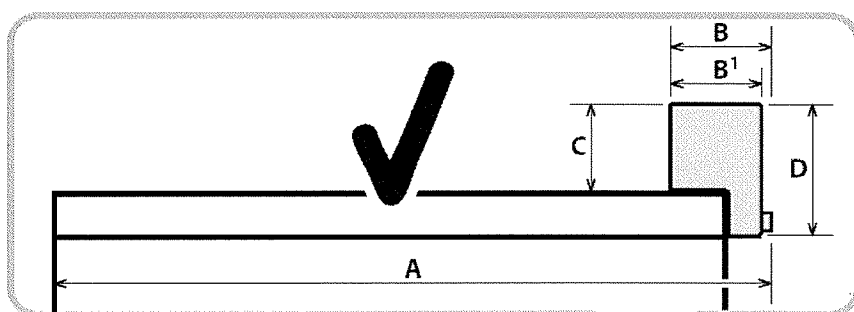


- A = 641mm (25 1/4")
- B = 84.5mm (3 21/64")
- B' = 79.5mm (3 1/8")
- C = 76mm (3")
- D = 116mm (4 9/16")

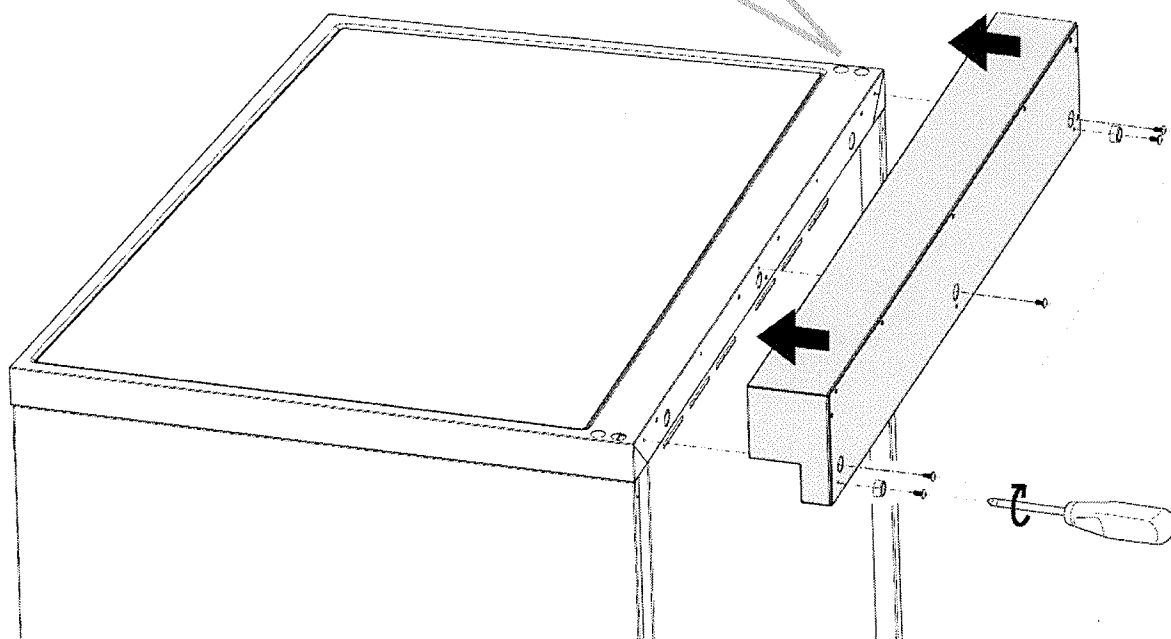

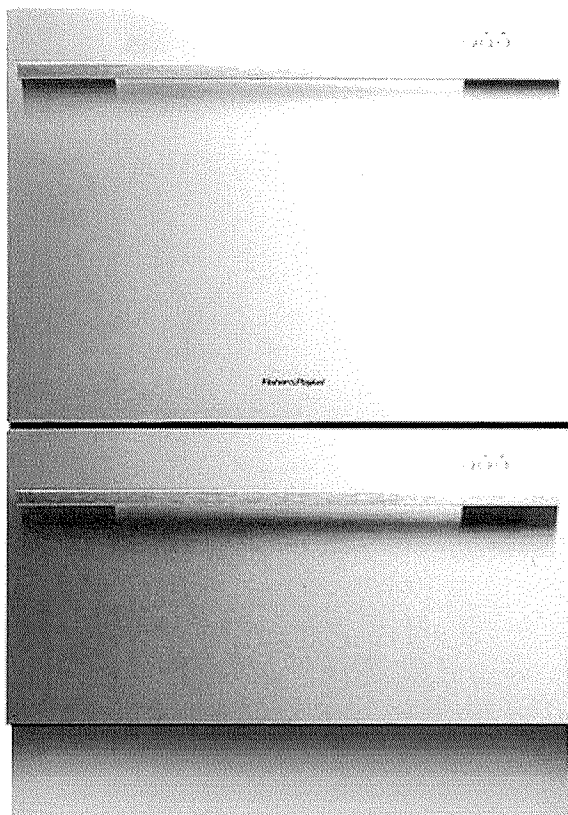

Features	
Place Settings	14 (7 per drawer)
Tub	Carbon Polymer
Audible End-of-Cycle Signal	Yes
Control Type	Digital Control
Rinse Aid Dispenser	With indicator
Wash System	
Independant Washing Drawers	Yes
Automatic Temperature Control	Yes
Variable Water Pressure	Yes
Wash System	SmartDrive™
Eco options	Optional on all cycles
Cycles	
Wash Cycles	9
Exterior Appearance	
Appearance	Integrated with Fisher&Paykel handle
Color	EZKleen™; Stainless Steel
Racking	
Support with Adjustable Storage Interval (near or distanced)	Yes
Flexible utility shelf system	4 adjustable
Flexible Folding Rods (per Drawer)	2
Rack Coating	Nylon with graphite color
Maximum Plate Height	13" (Upper Drawer) and 11 ½" (Bottom Drawer)
DryIndex	
Fan-Assist Dry	Yes
Heating Element	Multi-Wattage
Economical / Quiet	
Energy Star Qualified	Yes
Direct Drive Motor	Yes
Water Consumption	Uses as little as 1.95 gallon of water per drawer
Options	
Start / Pause / Reset	Yes
Delay Start	Yes - Up to 12 hours
Child lock	Yes
Automatic Child Lock Once Started	Yes
Electrical Requirements	
Volts; Hertz; Amps	120V / 60 Hz / 10.6 amp
Energy Consumption	ENERGY STAR 276 kWh per year
Dimensions	
Overall Height (in.)	34 - 36 3/8"
Overall Width (in.)	23 9/16"
Closed Door Depth (in.), Excluding Handle	22 1/2"
Opened Drawer Depth (in.), Excluding Handle	43 15/16"
Warranty	
1 Year Full Warranty	Entire appliance; parts and labour, in-home service

PRODUCT DIMENSIONS

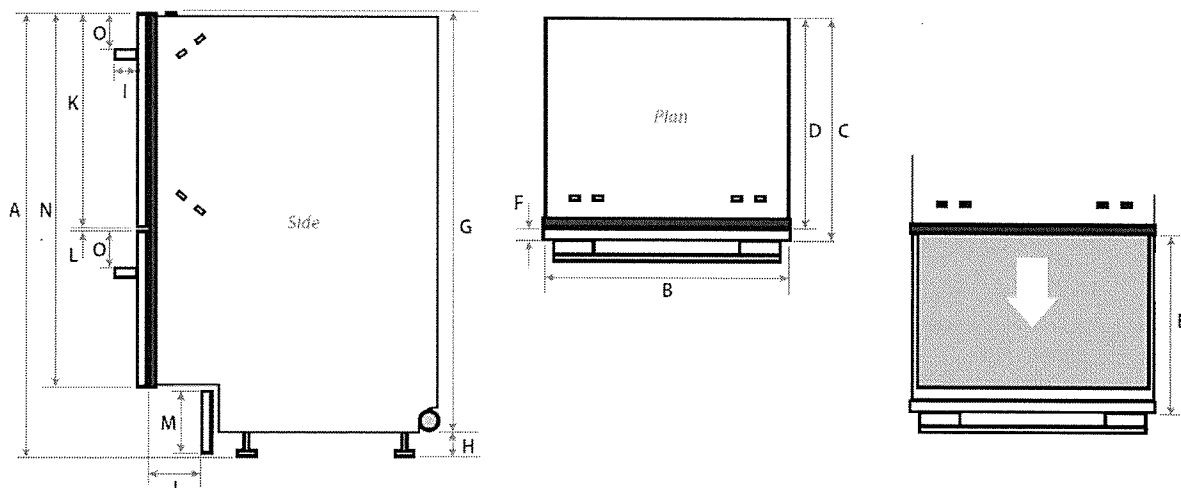

Product dimensions inches (mm)

TALL HEIGHT MODELS

		Designer
A	overall height ¹ of product	34 - 36 ³ / ₈ " (864-924) ²
B	overall width of product	23 ⁹ / ₁₆ " (599)
C	overall depth of product (excl. handle)	22 ¹ / ₂ " (571)
D	depth of chassis (to back of front panel)	21 ³ / ₄ " (553)
E	maximum extension of drawer (excl. handle)	21 ⁷ / ₁₆ " (545)
F	depth of front panel (excl. handle)	1 ¹ / ₁₆ " (18)
G	height ¹ of chassis	33 ¹¹ / ₁₆ " (855)
H	height of levelling feet	³ / ₈ - 2 ¹ / ₁₆ " (9-69) ²
I	depth of handle	1 ⁵ / ₈ " (41)
J	depth of toekick recess (to back of front panel) ⁴	1 ³ / ₁₆ - 3 ⁵ / ₈ " (30-92)
K	height of upper front panel	17 ³ / ₈ " (442)
L	ventilation gap between front panels	⁵ / ₁₆ " (8)
M	height of toekick panel (adjustable)	2 ³ / ₄ - 4 ³ / ₄ " (70-120)
N	height of drawer fronts	29 ¹⁵ / ₁₆ " (760)


¹includes ¹/₈" (2mm) high bracket slots

²depending on adjustment of leveling feet


⁴adjustable to match toekick recess on adjoining cabinetry

CABINETRY DIMENSIONS

7

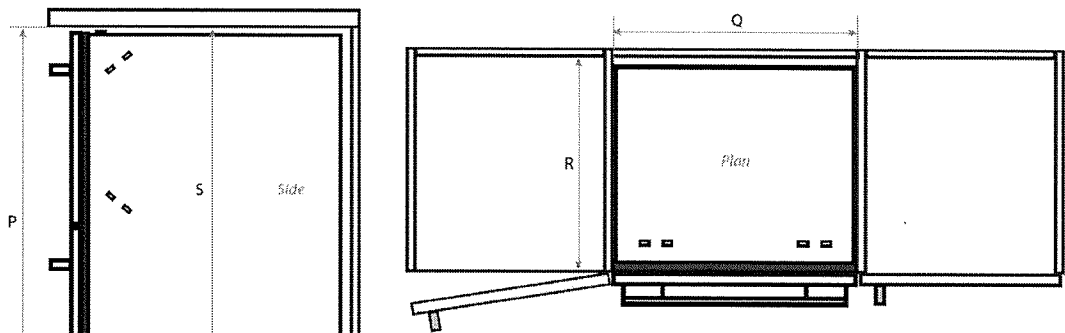

Minimum clearances from adjacent cabinetry

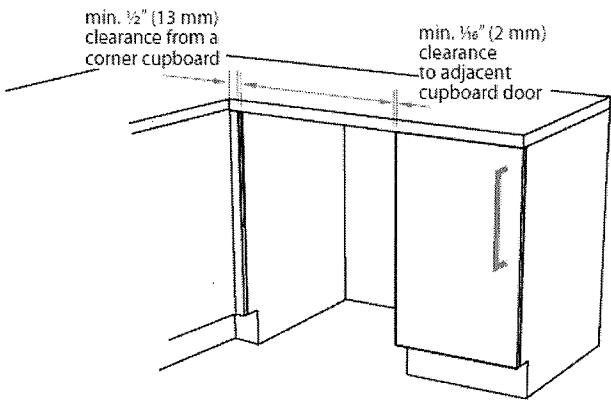


Cabinetry dimensions inches (mm)

	Designer
P inside height of cavity*	min. 34"(864)
Q inside width of cavity	23 5/8"(600)
R inside depth of cavity	min. 22 1/8"(560)
S recommended height of adjacent cabinet space	30"(762)
T height of toekick space*	3 15/16 - 6 5/16"(100-160)
*depending on adjustment of leveling feet	


The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

CAVITY PREPARATION

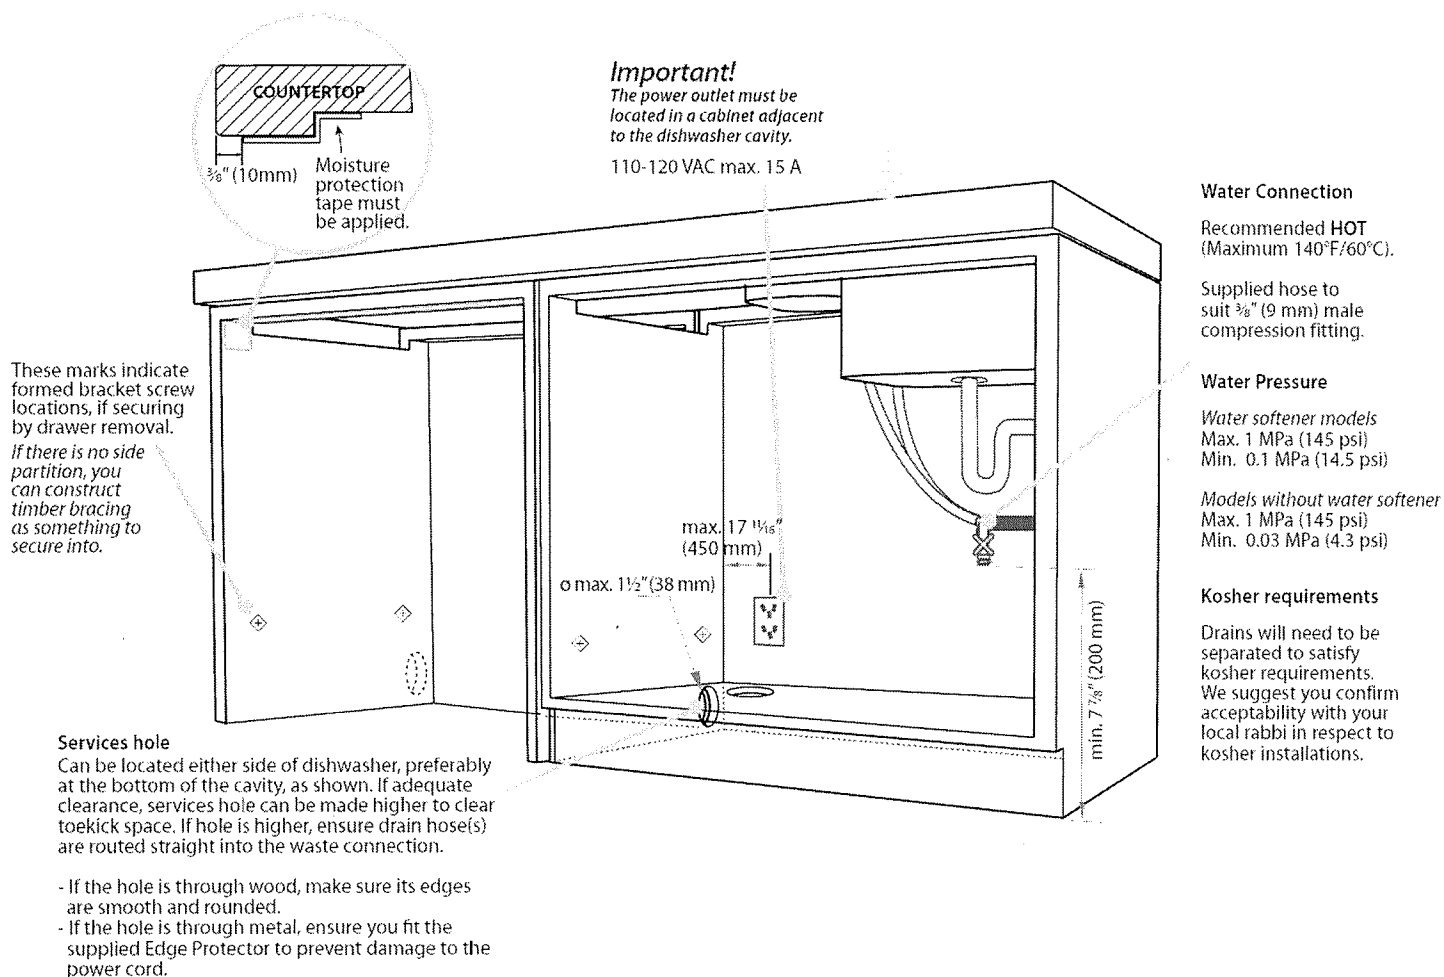

IMPORTANT!


Minimum distance from the ground to provide for connecting the drain hose

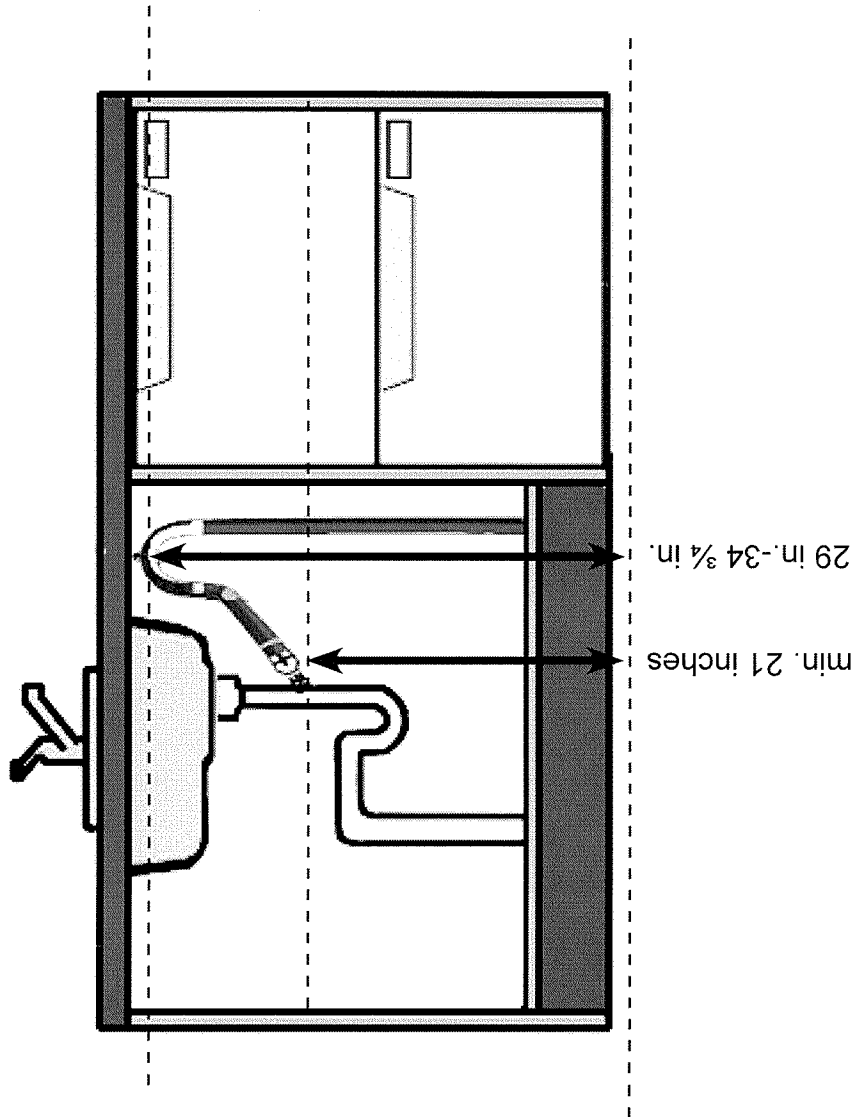

Please note: These instructions are complementary to your installation guide. Please refer installation guide given with your appliance in order to get all required instructions.

Dishwasher using sink trap with drain hose joiner

If space is limited for fixing, push hose through drain hose support to required height

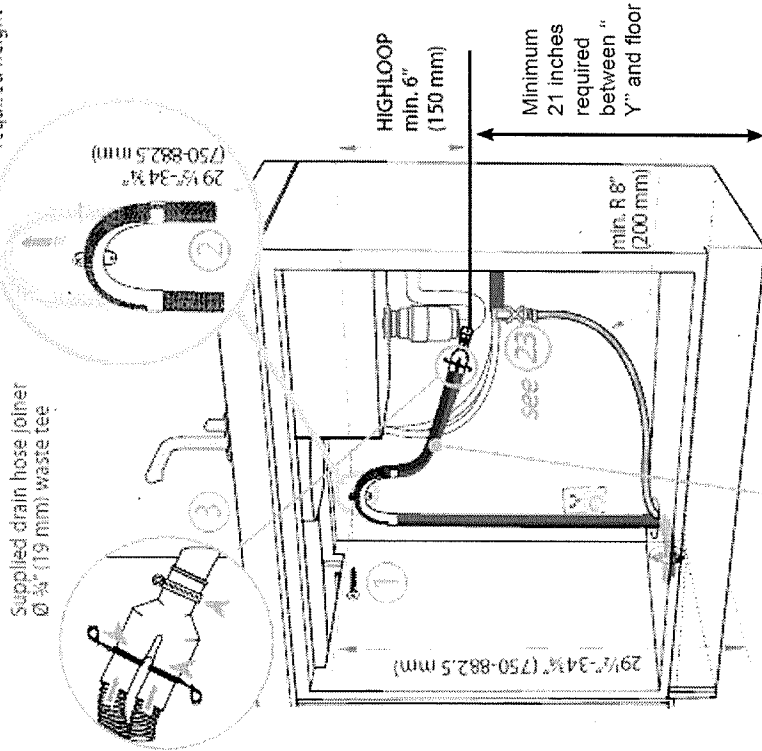

Ensure drain hose is routed straight to joiner. Remove excess drain hose material if necessary. Do not shorten the inlet hose.

Important!
Ensure that drain connection will comply with local plumbing regulations.

INTRODUCTION


2020
F&P
001

Thank you for purchasing a Fisher & Paykel product.

Thousands of hours go into the design, engineering, testing and perfecting of each Fisher & Paykel appliance. The care and attention given to creating these beautiful products doesn't stop once it has found its home with you.


This use and care manual will answer most of your questions about the set-up, use and on-going maintenance of your Fisher & Paykel product; however if you require further information about your product and its use please consult our website for solutions and further contact information to discuss with a service representative.

To ensure you receive all relevant product updates and the best service possible, please register your Fisher & Paykel products through our website.

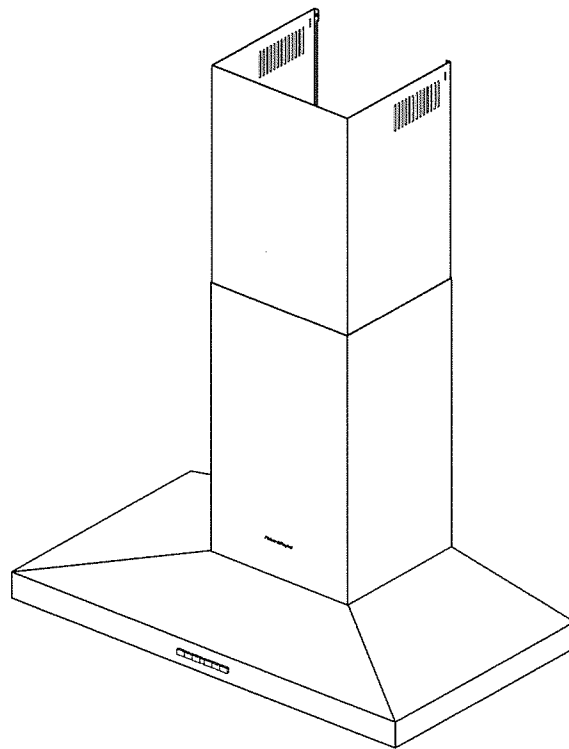

INSTALLATION INSTRUCTIONS

Product dimensions

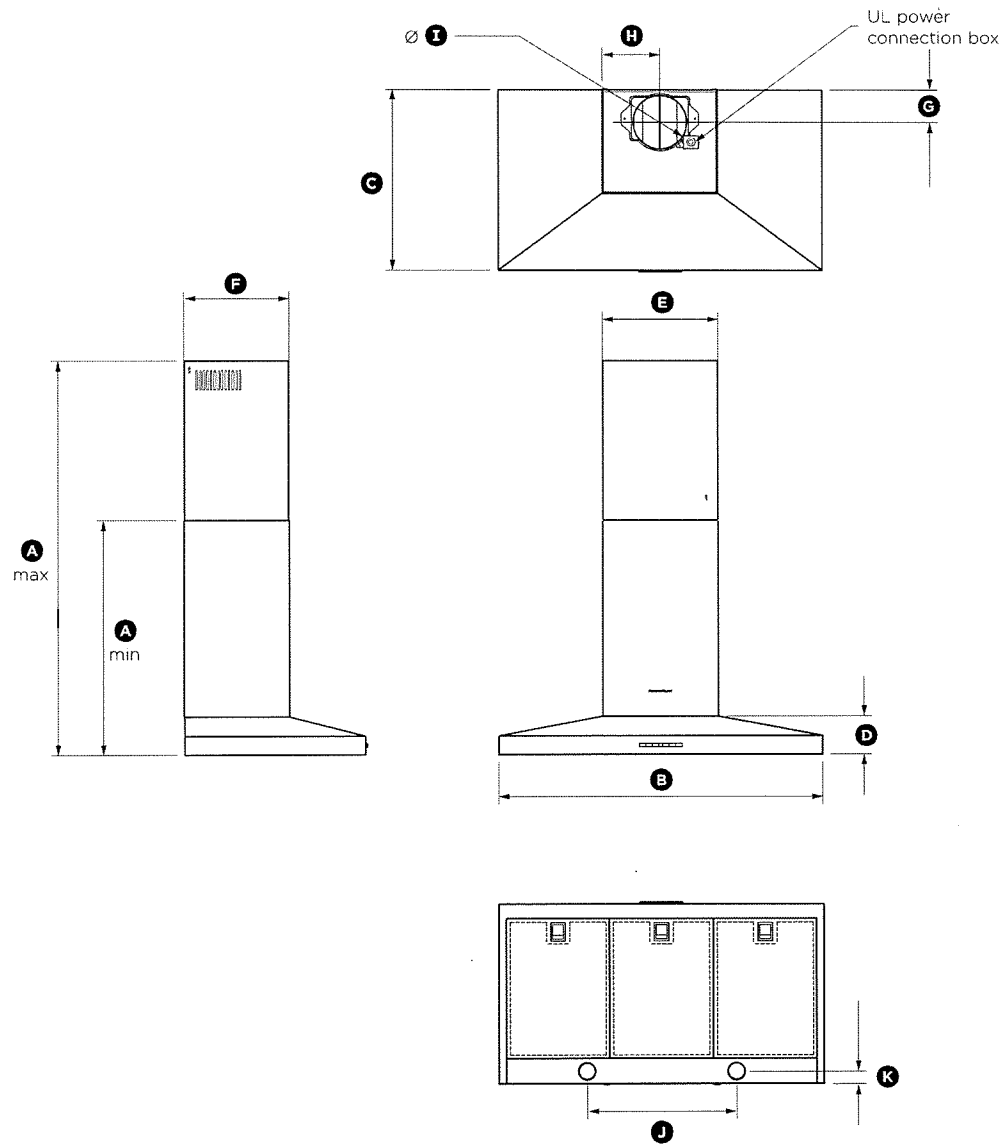

Please read the entire instructions before installing the ventilation hood.

INSTALLATION INSTRUCTIONS

EN


PRODUCT DIMENSIONS	HC24PHTX1	HC30PHTX1	HC36PHTX1
	inches (mm)	inches (mm)	inches (mm)
(A) Min overall height of product	25 ²⁵ / ₃₂ " (655)	25 ²⁵ / ₃₂ " (655)	25 ²⁵ / ₃₂ " (655)
(A) Max overall height of product	43 ¹ / ₁₆ " (1094)	43 ¹ / ₁₆ " (1094)	43 ¹ / ₁₆ " (1094)
(B) Overall width of product	23 ¹⁷ / ₃₂ " (598)	29 ²³ / ₃₂ " (755)	35 ¹ / ₃₂ " (898)
(C) Overall depth of product	19 ¹ / ₁₆ " (500)	19 ¹ / ₁₆ " (500)	19 ¹ / ₁₆ " (500)
(D) Height of product	4 ¹ / ₂ " (114)	4 ¹ / ₂ " (114)	4 ¹ / ₂ " (114)
(E) Width of chimney	12 ¹⁹ / ₃₂ " (320)	12 ¹⁹ / ₃₂ " (320)	12 ¹⁹ / ₃₂ " (320)
(F) Depth of chimney	11 ¹³ / ₃₂ " (290)	11 ¹³ / ₃₂ " (290)	11 ¹³ / ₃₂ " (290)
(G) Distance from center of ducting outlet to back of product	3 ³ / ₄ " (95)	3 ³ / ₄ " (95)	3 ³ / ₄ " (95)
(H) Distance from center of ducting outlet to side of chimney	6 ⁵ / ₁₆ " (160)	6 ⁵ / ₁₆ " (160)	6 ⁵ / ₁₆ " (160)
(I) Diameter of ducting outlet	5 ²⁹ / ₃₂ " (150)	5 ²⁹ / ₃₂ " (150)	5 ²⁹ / ₃₂ " (150)
(J) Distance between center of lights	16 ¹ / ₄ " (413)	16 ¹ / ₄ " (413)	16 ¹ / ₄ " (413)
(K) Distance between center of lights and back of product	1 ²¹ / ₃₂ " (42)	1 ²¹ / ₃₂ " (42)	1 ²¹ / ₃₂ " (42)

IMPORTANT!

Actual product dimensions may vary by $\pm \frac{3}{32}$ " (2 mm).


INSTALLATION INSTRUCTIONS

Height of ventilation hood

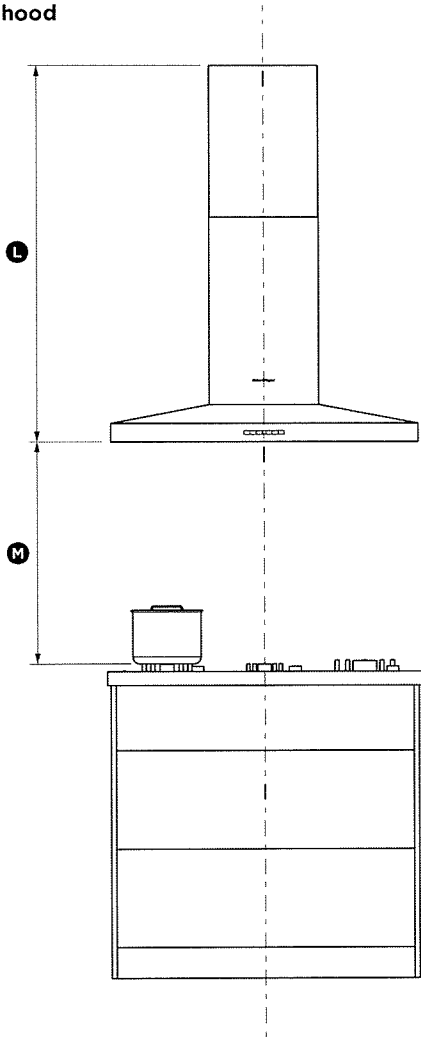

INSTALLATION DIMENSIONS	inches (mm)
Ⓛ Installation height	
Ducted	min. 26 ²⁵ / ₃₂ " - max. 43 ¹ / ₈ " (min. 680 - max. 1094)
Recirculation	min. 29 ¹ / ₈ " - max. 43 ¹ / ₈ " (min. 740 - max. 1094)
Ⓜ Height top of cooktop to base of product	min. 26" - max. 30" (min. 660 - max. 762)

Ventilation hood installation height above the cooktop is the user's preference. Lower installation heights will improve the efficiency of capturing cooking odors, grease, and smoke. This ventilation hood must be installed between the minimum and maximum dimensions indicated in the table above.



Microwave Ovens

Cyclonic Inverter™

Countertop NN-SD786S

MODEL & SIZE	Model Number	NN-SD786S
	Type	Full Size
	Installation	Counter Top or Built-in
	Oven Capacity	1.6 cu. ft.
	Cooking Power	1,200 Watt
	Turntable Diameter	15"
PANASONIC TECHNOLOGY	Panasonic Inverter®	Inverter®
	Sensor	Prestige® Genius®
DESIGN	Colour	Fingerprint Resistant Stainless Steel
	Control Panel	"Flashing Blue" Ring Dial with Button Panel
	Display Panel	"Blue" 6-Digit Expanded Display
	Cooking Options	Microwave Cooking
STYLE	Door Front	Stainless Steel
	Door Window	Reflective Mirror Finish
	Exterior Wrap	Stainless Steel
	Door Release	Push Button
	Oven Interior	Epoxy
PERFORMANCE	Power Settings	10 levels
	Multi-stage Cooking	5 stages
	Automatic Turntable	Revolving & Removable
	Menu Action Screen	Interactive Multi-Lingual
PROGRAMMABLE FEATURES	Sensor Cook	Sensor 18 Menu Items

		Sensor Reheat	yes
		More / Less Control	yes
		Inverter [®] Turbo Defrost	yes
		Keep Warm Button	yes
		Popcorn Button	yes
		Quick Minute	yes
		Delay Start	yes
		Delay Timer	yes
SPECIFICATIONS		Power Requirements	120 V 60 Hz; 12.7 A, 1,460 Watt; AC only
		Cavity Dimensions (W x D x H)	418 × 470 × 229 mm 16.4 x 18.5 x 9 inch
		Unit Dimensions (W x D x H)	556 × 506 × 303 mm 21.9 x 19.9 x 12 inch
		Carton Dimensions (W x D x H)	625 × 533 × 375 mm (24-5/8" × 21" × 14-3/4")
		Net Weight	Approx. 14.3 kg (32 lb)
		Gross Weight	17.7 kg (39 lb)
ACCESSORIES	TRIM KITS	27" Model Number	NN-TK729SF (stainless)
		30" Model Number	NN-TK739SF (stainless)

Copyright ©Panasonic Canada Inc.

FRONT LOAD WASHERS

WM3770HVA

Performance

- 5.2 cu.ft. Ultra Large Capacity with NeveRust™ Stainless Steel Drum (IEC)
- DirectDrive™ Motor for the Ultimate in Durability and Reliability with 10 Year Warranty
- 10° TiLTub™ for Easy Reach into the Rear of the Drum
- 1300 RPM Powerful Spin for Efficient Water Extraction

Intelligent Fabric Care


- TurboWash™ Technology
- Steam Technology
- ASC Certified Allergiene™ Cycle
- NSF Certified Sanitary Cycle
- ColdWash™ Technology
- 6Motion™ Technology
- NFC Tag On
- SmartDiagnosis™
- TrueBalance™ Anti-Vibration System
- Magnet Ventilation
- SenseClean™ System for Intelligent Fabric Care
- 12 Washing Programs and 5 Temperature Settings
- Delay Wash up to 19 hours for Washing Convenience

Style and Design



- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

Technology Benefits

- LoDecibel™ Quiet Operation
- Highly Energy and Water Efficient



Graphite Steel

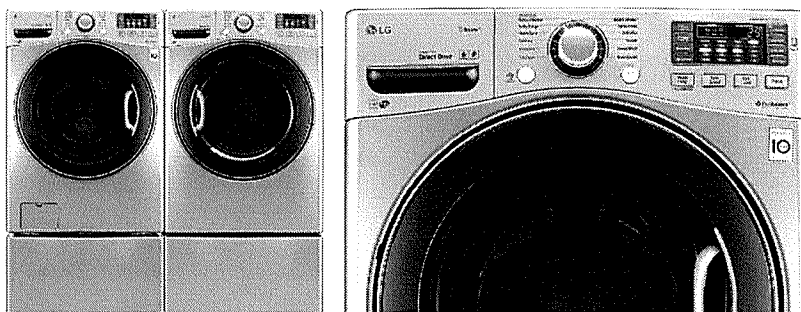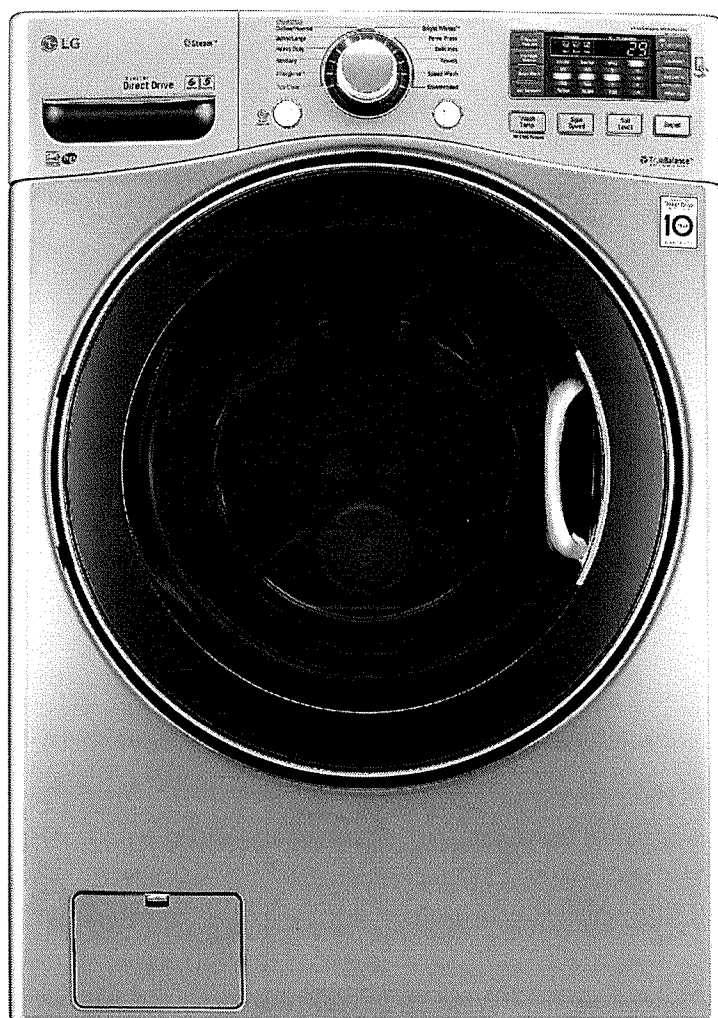

Fast Forward your Laundry

Tired of spending hours on end finishing your family's laundry? Now, those days are gone. LG's revolutionary TurboWash™ Technology allows you to save 20 minutes on larger loads, with outstanding cleaning performance! It's like pressing the fast forward button on your laundry.

Deep Clean with Steam

LG Steam Technology penetrate fabric to remove soil and enhance cleaning results, it also removes common household allergens. The Allergiene™ cycle gently removes over 95% of common household allergens, like dust mites and pet dander from even the most delicate fabrics. It's so effective it's certified by the Asthma Society of Canada (ASC).

More Free Time

Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The ultra large capacity (5.2 cu.ft.) washer lets you do more laundry in fewer loads. That's time well saved.

Count On It

When you buy a washer, you don't want to worry that it won't last. Because the DirectDrive™ Motor uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a 10-year warranty.

NFC Tag On

Easily change and customize cycles with a simple tap of a smart phone app. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

All the Right Moves

With 6Motion™ Technology, each wash cycle combines up to 6 different wash motions to provide a revolutionary cleaning experience and ultimate fabric care.

PRODUCT FEATURES

TYPE		
Front Loader	•	
Design Lock	Front Control	
Intelligent Electronic Controls with Dual LED Display	•	
Dial-A-Cycle™	•	
Capacity	IEC 5.2 cu.ft.	
TYPE		
Energy Star	•	
WASH PROGRAMS		
12 Programs	Cotton/Normal, Bulky/Large, Perm. Press, Delicates, Download, Speed Wash, Tub Clean, Sanitary, Allergiene™, Heavy Duty, Towels, Bright Whites™	
10 Options	Prewash, Rinse+Spin, TurboWash™, Extra Rinse, Child Lock, ColdWash™, Steam, FreshCare™, Delay Wash (up to 19 hours), Add Garment	
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)	
5 Spin Speeds	Extra High (1300 max), High, Medium, Low, No Spin	
No. of Water Levels	Automatically adjusts to the size of load	
No. of Soil Levels	5	
FABRIC CARE FEATURES		
TurboWash™	•	
Steam	•	
Allergiene™ Cycle	•	
ColdWash™	•	
6Motion™	•	
SenseClean™ System		
CONVENIENCE FEATURES		
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	
TrueBalance™ Anti-Vibration System	•	
NFC Tag On	•	
SmartDiagnosis™	•	
Load Sense	•	
Status Indicator(s)	•	
End of Cycle Signal	•	
Child Lock	•	
Auto Suds Removal	•	
Forced Drain System	•	
Internal Water Heater	•	
Easy Loading Tilt™	•	
Leveling Legs	4 Adjustable Legs	
LoDecibel™ Quiet Operation	•	
MOTOR AND AGITATOR		
Motor Type / Motor Speed / Axis	Direct Drive / Variable / Horizontal	
MATERIALS AND FINISHES		
NeveRust™ Stainless Steel Drum	•	
Cabinet	Painted Steel	
Control Panel	Plastic	
Top Plate	Painted	
Transparent Glass Door	•	
Door Rim	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover	
Available Colours	Graphite Steel (V)	
POWER SOURCE		
Ratings / Electrical Requirements / Type	UL Listed / 120V, 10 Amps / Electric	
OPTIONS		
Pedestal	WDP4V	
Pedestal (WxHxD)	27" x 13 3/5" x 25 2/5"	
Stacking Kit	KSTK1	
DIMENSIONS		
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (51" D with door open)	
Carton (WxHxD)	29 1/2" x 43 5/16" x 31 5/16"	
Weight (Product/Carton)	202.8 lbs/224.8 lbs	
UPC CODES		
WM3770HVA (Washer)	772454 067594	
WDP4V (Pedestal)	772454 052866	
KSTK1 (Stacking Kit)	772454 059896	
WARRANTY		
	1 Year Parts and Labour	
	5 Years Part on Drum	
	10 Years Part on DirectDrive™ Motor	



LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6

Tel. 647-253-6300 | LG.com

Customer Service & Parts

1-888-542-2623


Design, features and specifications are subject to change without notice.

Non-metric weights and measurements are approximate.

All trademarks are property of their respective owners.

Printed in August 2016

ELECTRIC DRYERS

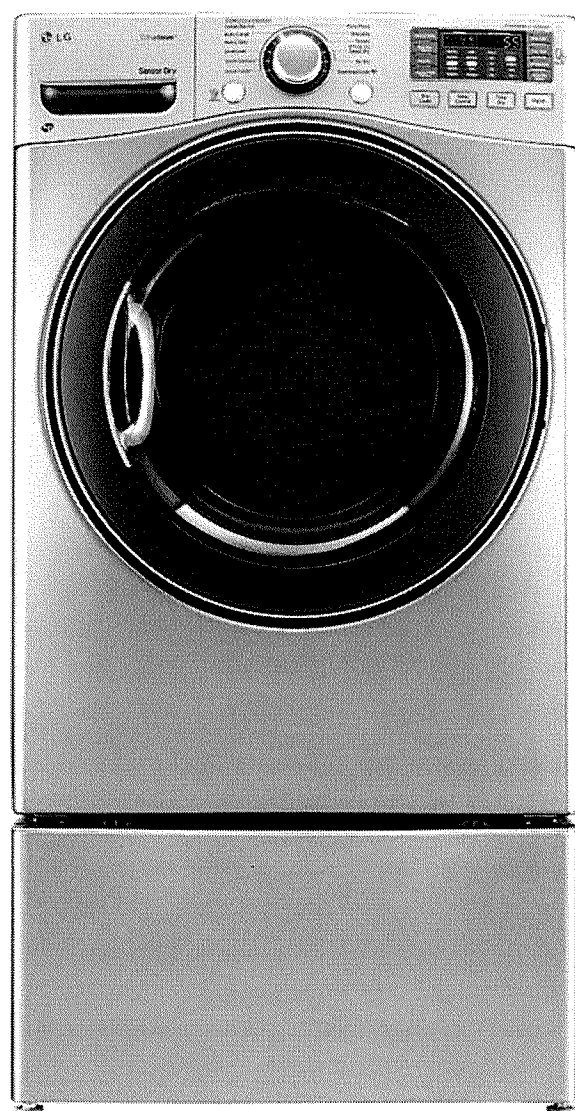

DLEX3570V

Performance

- 7.4 cu.ft. Ultra Large Capacity with Aluminized Alloy Steel Drum (Alcosta)

Intelligent Fabric Care



- TrueSteam™ Technology
- SteamFresh™ Cycle
- SteamSanitary™ Cycle
- ReduceStatic™ Option
- EasyIron™ Option
- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- NFC Tag On
- SmartDiagnosis™
- 12 Drying Programs
- 5 Temperature Settings
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Drying Rack
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Custom Program
- Damp Dry Signal

Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover

Technology Benefits

- LoDecibel™ Quiet Operation

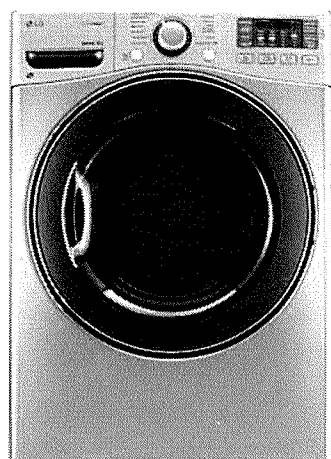

ELECTRIC DRYERS

Harness the Power of Steam

LG's **TrueSteam™ Technology** uses a steam generator to produce real steam right into the dryer giving you unique cycle options that remove wrinkles, odours, static and allergens.

The Quick Fix

Late for the party and no time to iron your favourite outfit? The **SteamFresh™ Cycle** refreshes and reduces wrinkles in up to five garments at a time with one 20-minute dryer cycle.

Refresh and Sanitize

SteamSanitary™ Cycle refreshes and sanitizes dry items in the steam dryer. The SteamSanitary™ Cycle kills bacteria on your clothes and is great for decorative pillows and other non-washable items.

Dry Big Loads

Accurately dry big and bulky loads with **7.4 cu.ft. ultra large capacity**. Less time in laundry room, more time for life.

NFC Tag On


Easily change and customize cycles with a **simple tap of a smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

Accurate Drying

LG's **Sensor Dry System** measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.

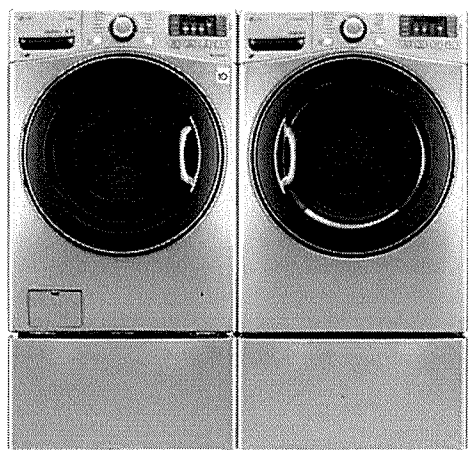

LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X6
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623


DLEX3570V	
TYPE	
Front Loader	•
Design Look	Front Control
Intelligent Electronic Controls with Dual LED Display	•
Dial-A-Cycle™	•
Capacity	7.4 cu.ft
Dry Linen Capacity	>10.2 kg
DRYING PROGRAMS	
12 Programs	Sensor Dry, SteamFresh™, SteamSanitary™, Towels, Perm Press, Cotton/Normal, Heavy Duty, Delicates, Small load, Bulky/Large, Anti-Bacterial Manual Dry, Speed Dry, Air Dry
10 Options	More Time, Less Time, ReduceStatic™, Easyiron™, Custom Program, Wrinkle Care, Rack Dry, Child Lock, Damp Dry Signal, Signal ON/OFF
5 Temperature Settings	High, Medium High, Medium, Low, Ultra Low
5 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
SteamFresh™ Cycle	•
SteamSanitary™ Cycle	•
ReduceStatic™ Option	•
Easyiron™ Option	•
Sensor Dry	•
Precise Temperature Control and Variable Heater	•
CONVENIENCE FEATURES	
NFC Tag On	•
SmartDiagnosis™	•
FlowSense™ Duct Clogging Indicator	•
Wrinkle Care Option	•
Remaining Time Display/Status Indicator(s)	•
End of Cycle Signal	•
Child Lock	•
Drying Rack	•
Drum Light	•
Reversible Door	•
Leveling Legs	4 Adjustable Legs
Venting Option	4 Way Venting
3 Minute Installation Check	•
LoDecibel™ Quiet Operation	•
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum (Aicosta)	•
Cabinet	Painted Steel
Control Panel	Plastic
Top Plate	Painted
Transparent Glass Door	•
Door Rim	Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	240V, 30 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4V
Pedestal (WxHxD)	27" x 13 3/5" x 28 2/5"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 38 11/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product/Carton)	134.1 lbs/144 lbs
UPC CODES	
DLEX3570V	772454 063268
WDP4V	772454 052866
KSTK1	772454 059896
WARRANTY	
1 year parts and labour	

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate
All trademarks are property of their respective owners

2. Installation Diagram

2. Schéma d'installation

2. Diagrama de instalación

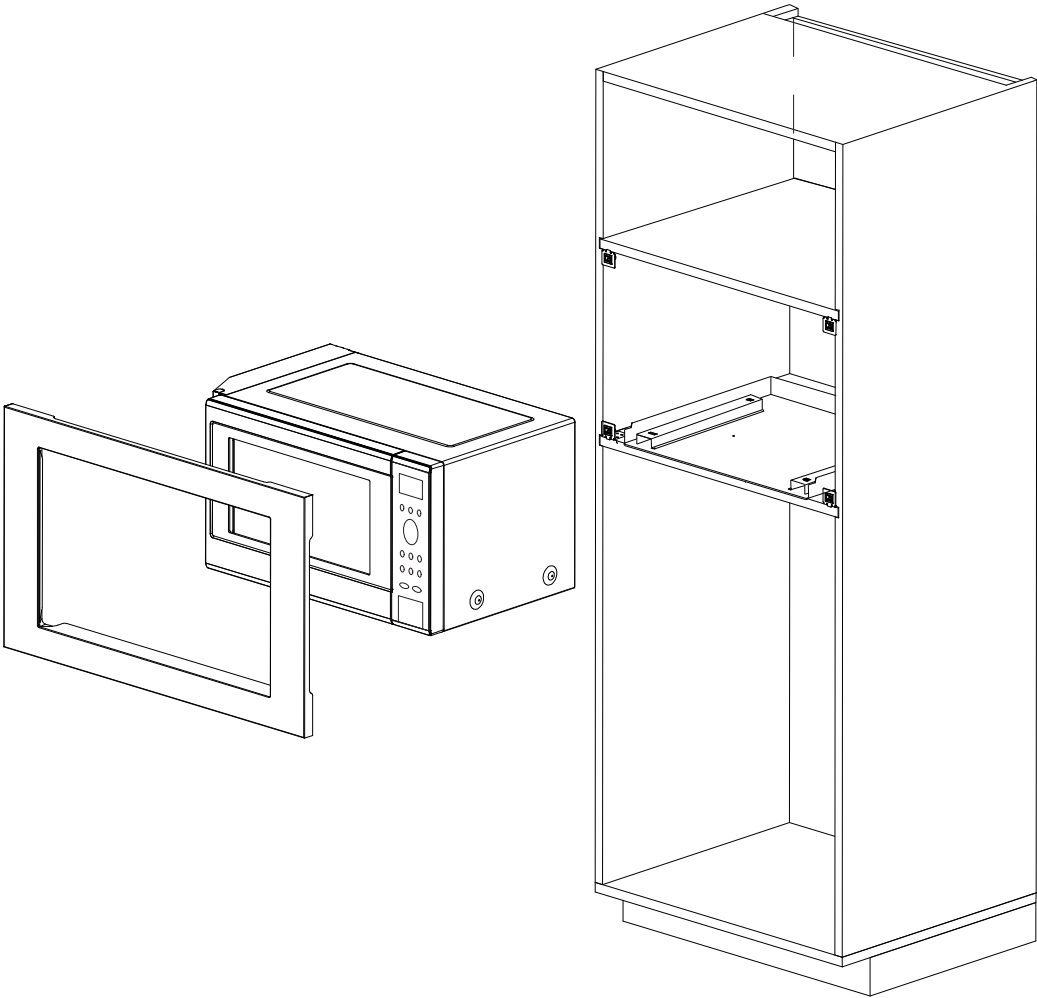

Trim Kit Dimensions	
Width	596 mm (23 1/2")
Height	410 mm (16 1/8")
Depth (Thickness)	20 mm (3/4")

Dimensions du nécessaire d'encastrement	
Largeur	596 mm (23 1/2 po)
Hauteur	410 mm (16 1/8 po)
Profondeur (épaisseur)	20 mm (3/4 po)

Dimensiones del juego de acabados	
Ancho	23 1/2" (596 mm)
Altura	16 1/8" (410 mm)
Profundidad (grosor)	3/4" (20 mm)

3. Cabinet Diagram and Dimensions

3. Schéma de l'armoire et dimensions

3. Dimensiones y diagrama del gabinete

fig 1.

