# **GOEMANS APPLIANCES**

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

### **PACKING SLIP**

# HB00016909 Salesperson: JASON NG Purchase Date: 7/29/17 Invoice Finished Date: Delivery/Pickup Date: Mar 02, 2018 Invoice Type:

Aug 01, 2017

#### ONLINE BANKING ACCOUNT #

BILL TO: 6478650717

WANG, YAHAN & YIMING

TBA

LOT #110

BRADFORD, ON TBA

TEL# (647) 865-0717

BUS# (416) 312-9895 **SHIP TO:** 6478650717

WANG, YAHAN & YIMING

**TBA** 

LOT #110

BRADFORD, ON TBA

TEL# (647) 865-0717 BUS# (416) 312-9895

Date Printed:

Page:

Directions: 6TH LINE & SIMCOE ROAD

TION
P, SS
H POLY BASE
F

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

### 30" Speed Combination Oven

**General Properties** 

Cooking

modes -

upper cavity

800 Series - Stainless Steel HBL8752UC



\* CUSTOMER WANTS FLUSH INSTALLATION. PLEASE **FOLLOW THE FLUSH SPECS** JAY

Dimensions & Weight	
Overall appliance dimensions (HxWxD)(in)	49" x 29 3/4" x 24 1/2"
Required cutout size – Standard (HxWxD) (in)	48 5/8" x 28 1/2" x 23 1/2"
Required cutout size – Flush (HxWxD) (in)	49 1/8" x 30" x 24 1/2"
Oven cavity size – upper	1.6 cu. ft.
Overall upper oven interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – Metal Max. Cookware – upper	12 3/4" dia.
Turntable – Ceramic Max. Cookware – upper	12 1/2" dia.
Rack – Rectangular Cookware Max. – upper	15" x 12"
Oven cavity size – lower	4.6 cu. ft.
Overall lower oven interior dimensions (HxWxD) (in)	17 13/16" x 24 1/8" x 18"
Usable lower oven interior dimensions (HxWxD) (in)	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	259 lbs
Assessaries Included	

#### Accessories-Included

Upper Oven: Metal Turntable, Square rack, Ceramic Cooking Tray

Lower Oven: 1 Telescopic and 2 Standard

Oven Racks, Meat Probe

#### Accessories—Optional



30" Telescopic Rack



**HBL8752UC** Stainless Steel

The Bosch speed combination oven allows for faster cooking results and features a QuietClose® door.

### **Features & Benefits**

Cooks faster than a traditional oven and can be used as a microwave.

Dampened hinges softly and quietly guide the QuietClose® door shut.

A full-extension telescopic rack offers safe access to the oven cavity.

The wall oven is designed to be installed flush with cabinetry.

Lo Broil, European Convection, Keep Warm, Frozen Foods			
Cooking modes – lower cavity	Bake, Variable Broil (hi & low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, Temperature Probe, Fast Preheat		
Cleaning type – lower		Self Clean	
Telescopic ra	ack	1	
Illumination type		Halogen (Upper and Lower)	
Interior light	S	1 Upper / 2 Lower	
Oven Performance			
Microwave p upper cavity	ower –	1000 W	
Bake / broil element wattages – upper cavity		600 / 1,750 W	
Convection element wattages – upper cavity		1,700 W	
Bake / broil element wattages – lower cavity		2,400 / 3,800 W	
Convection element wattages – lower cavity		2,000 W	
Technical Details			
Watts (W)		9,600 W	
Circuit break	ker (A)	40 A	
Volts (V); Fre	equency (Hz)	240 / 208 V; 60 Hz	
Power cord length (in)		50"	
Plug type		Hardwired 240 V	

Speed oven; 12 Auto Programs

(including Auto Defrost, Melt Butter, Soften Ice Cream, Pizza),

9 Sensor Cook Programs, 9 SpeedChef™ Programs, Hi &





#### For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Energy source

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.


Electric


### 30" Speed Combination Oven

800 Series - Stainless Steel HBL8752UC



#### **Installation Details**

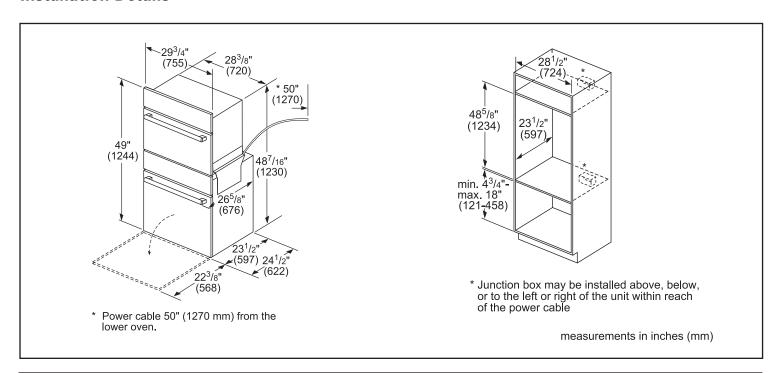

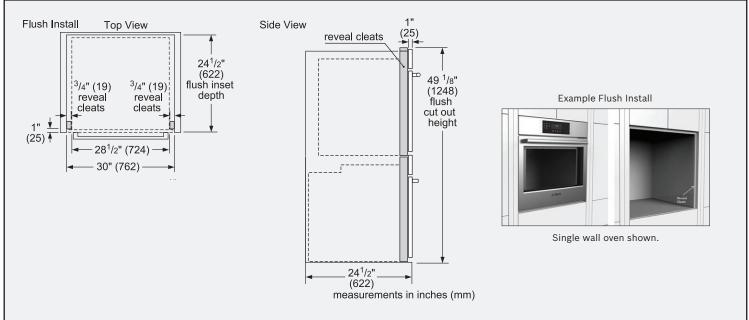

#### For help and assistance with Bosch accessoriesplease call 1-800-944-2904 Mon-Fri 8am to 6pm EST


Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

### 30" Speed Combination Oven


800 Series - Stainless Steel HBL8752UC



#### **Installation Details**

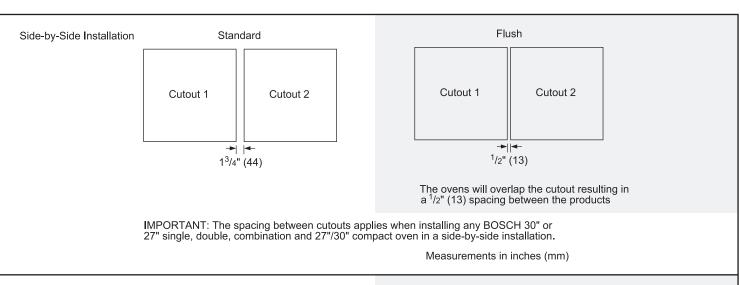


#### Standard Installation Combination Oven over Storage or Warming Drawer



- \*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.
- \*\*Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

Measurements in inches (mm)

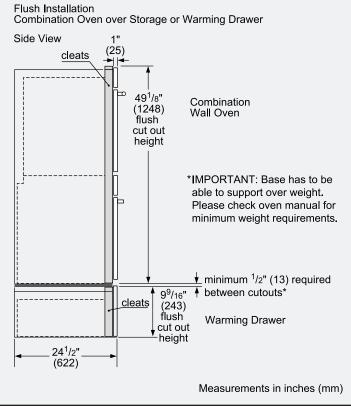

#### For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

## 36" Gas Cooktop

800 Series - Stainless Steel NGM8655UC





#### **NGM8655UC**

Also available in:

Black NGM8665UC

Bosch cooktops are engineered to perform, offering high heat burners for optimal cooking results.

#### **Features & Benefits**

Powerful 18,000 BTU center burner speeds cooking time.

Heavy-duty metal knobs for a premium look and feel.

Distinctive red LED light indicates burners are on.

General Properties	
·	Matal
Knob material	Metal
Sealed burners	Yes
Grate material	Cast iron
Element Performance	
Total BTU load (NG / LP)	59,500 / 47,300
Power of front left burner (NG / LP)	12,000 / 9,100
Power of back left burner (NG / LP)	12,000 / 9,100
Power of center burner (NG / LP)	18,000 / 15,000
Power of back right burner (NG / LP)	5,500 / 5,000
Power of front right burner (NG / LP)	12,000 / 9,100
Technical Details	
Watts	360 W
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3 prong
Power cord length	60"
Energy source	Gas
Convertible to LP (kit required)	Yes

Dimensions & Weight		
Overall appliance dimensions (HxWxD)	3 13/16" x 37" x 21 1/4"	
Required cutout size (HxWxD)	3 13/16" x 34 15/16" x 19 1/8"	
Minimum distance from counter front	1 7/8"	
Minimum distance from rear wall	3"	
Net weight	39 lbs	
Accessories-Included		
Included	LP conversion kit	




For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST


Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.


800 Series - Stainless Steel NGM8655UC



#### **Installation Details**

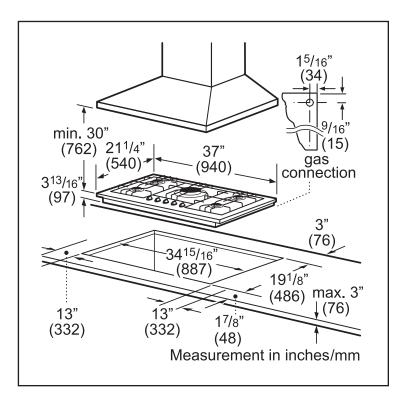

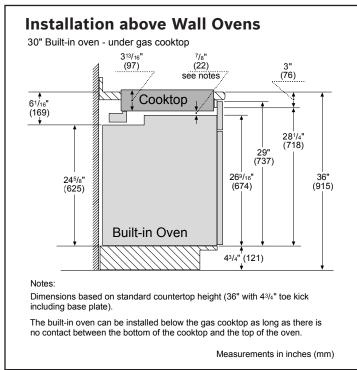

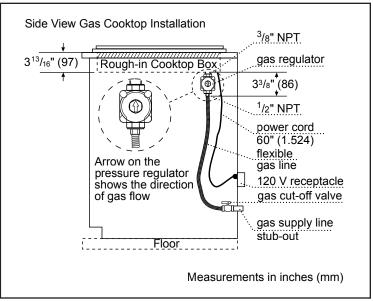

#### For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

### 24" Recessed Handle Dishwasher

Ascenta® Series – Stainless Steel SHE3AR75UC





#### SHE3AR75UC Stainless Steel

Also available in:

White SHE3AR72UC Black SHE3AR76UC

Bosch dishwashers incorporate 18 unique sound-reducing technologies, to make Bosch the quietest dishwasher brand in the US.

#### **Features & Benefits**

50 dBA: Quietest dishwasher brand.

Height adjustment upper rack.

Stainless steel tall tub with polypropylene bottom delivers durability.

Sanitize option eliminates bacteria and enhances drying results.

24/7 Overflow Protection System® helps prevent water leaks.

General Properties	
Number of wash cycles	6
Number of options	2
dBA	50
Third rack	No
Rack adjustability	Manual
Tub material	Stainless steel/ polypropylene
Control type	Buttons
Concealed heating element	Yes
Leak protection system	24/7 Overflow Protection
Water softener	No
Five-level wash	Yes
ChildLock	Yes
Special features	N/A
Efficiency	
Water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	688
Capacity	



Number of place settings 14



Technical Details		
Watts (W)	1400 W	
Current (A)	12 Amps	
Volts (V)	120 V	
Frequency (Hz)	60 Hz	
Power cord length	N/A	
Minimum water pressure (lb/sin)	15	
Length inlet hose (in)	N/A	
Length outlet hose (in)	90 1/2"	
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"	
Required cutout size (HxWxD) (in)	33 7/8" x 24" x 24"	
Adjustable feet	Yes	
Net weight (lbs)	69 lbs	
Accessories-Optional		
Dishwasher Drain Hose Extension 76 3/4"	SGZ1010UC	
Dishwasher 3-Prong Power Cord 55 1/4"	SGZPC001UC	
Dishwasher Accessory Kit	SGZ1052UC	
DoubleFlex Silverware Basket	SMZ4000UC	



#### For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST


Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.


### 24" Recessed Handle Dishwasher


Ascenta® Series - Stainless Steel SHE3AR75UC





#### **Installation Details**

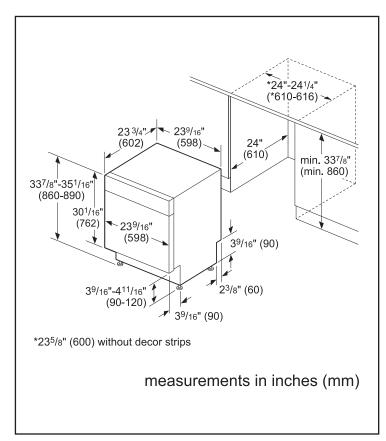

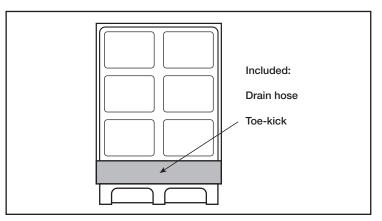

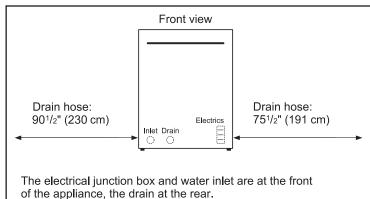

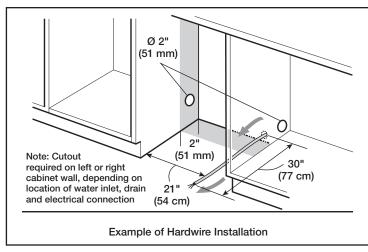

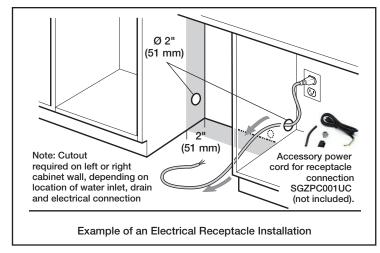

#### For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage to the finish) of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.


#### For more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904


## 24" Recessed Handle Dishwasher

Ascenta® Series - Stainless Steel SHE3AR75UC



#### **Installation Details**





Note: Plumbing installations will vary - refer to local codes. Drain hose included is  $90\,^{1}/^{2}$ " (230 cm) and can be extended to a maximum of  $168\,^{1}/^{2}$ " (428 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 20" (50 cm) and max. 43" (110 cm) above the cabinet floor.

#### For help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.



Motor: 600 cfm

Aluminium die-cast motor housing

Pressure: 480 Pa

Noise level: 63 dBA/4.9 sones



Lighting: 2x20W halogen lamps



Control panel: 4 speed push-button + timer + light switch

grease filter: anodized aluminium (5+1 layers)

Stainless steel: AISI 430

\*REQUIRES 6" **DUCTING** JAY

