

lot 335

RF23J9011SR

22.5 cu. ft. Counter Depth 4-Door Refrigerator with CoolSelect Plus

Features


- 4-Door Counter-Depth Design
- Large Capacity – 22.5 cu. ft.
- CoolSelect Plus®
- Triple Cooling System
- Ice Master Ice Maker in the Refrigerator
- ENERGY STAR® Compliant
- High-Efficiency LED Lighting
- Stainless-Look Display
- Stainless Steel Accents on Interior Shelving and Door Bins
- Fingerprint-Resistant Coating
- Tempered Glass Spill-Proof Shelves
- Flip-Up Shelf
- Gallon Door Bins
- Two Clear Crispers

Convenience

- Door Alarm
- Water Filter Indicator



Clean, Modern Design

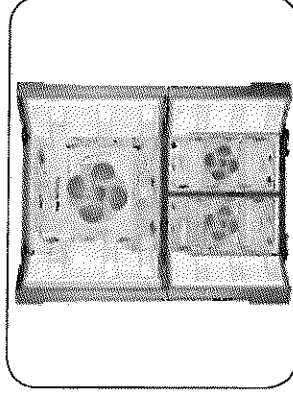

Triple Cooling System

Available Colour:



Stainless Steel

Signature Features

CLEAN, MODERN DESIGN

- Artful and symmetric design expresses individuality.
- Beautifully appointed stainless steel body and interior trim.


COUNTER DEPTH

- More capacity, smaller floor space.
- Our 22.5 cu. ft. capacity French Door has enough room to fit up to 22 bags of groceries.¹
- Stylish counter-depth design allows for more workable space in the kitchen.

¹Grocery comparison based on each cubic foot of usable space equalling one paper bag.

COOLSELECT PLUS

- Versatile bottom-right door can be a fridge or freezer, maximizing fresh food storage space.
- Fresh food storage space available at 18.05 cu. ft., when CoolSelect Plus is used as a refrigerator.
- Four customizable temperature settings available: Freezer at -23°C – -18°C, Soft Freeze at -5°C, Chilli at -1°C and Cool at 5°C.



Ranked “Highest in customer satisfaction with French Door refrigerators, in a tie.”*

—J.D. Power

SAMSUNG


RF23J9011SR

22.5 cu. ft. Counter Depth 4-Door Refrigerator with CoolSelect Plus


Installing Your Refrigerator

1. Measure the height, width and depth of the opening, making sure to include baseboards, moulding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where the handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cut-out information is for planning purposes only. For complete installation details consult manual packed with product, or download manual online at samsung.com.

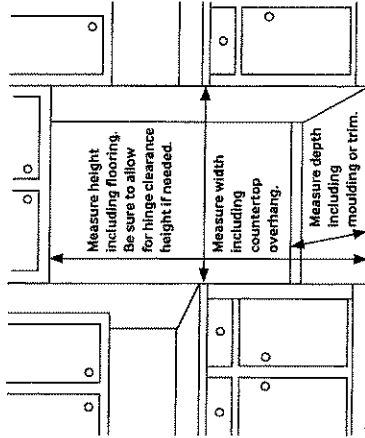

Dimensions

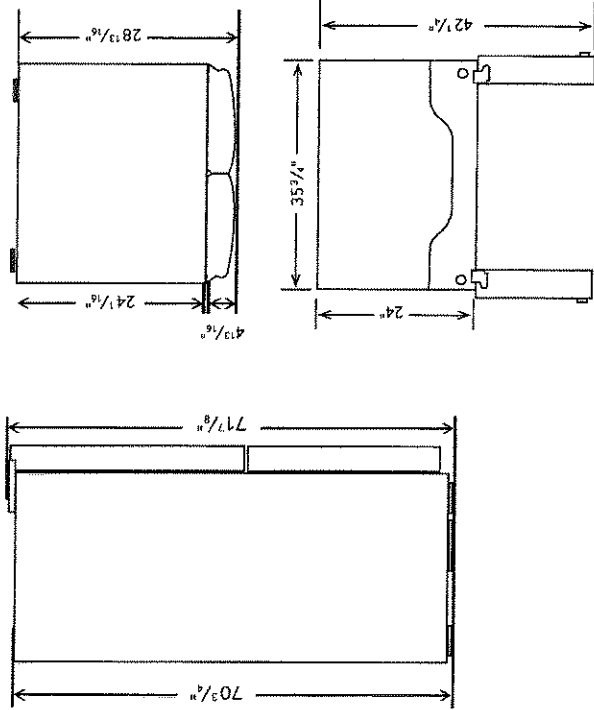

Total Capacity: 22.5 cu. ft.

Refrigerator: 13.6 cu. ft.

- Premium External Filtered Water and Ice Dispenser (Crushed or Cubed Ice)
- Ice Master Ice Maker
- High-Efficiency LED Lighting
- 2 Clear Crispers
- 5 Tempered Glass Spill-Proof Sheives
 - 1 Slide-in & fold-up
 - 1 Flip-Up
 - 3 Fixed

CoolSelect Plus: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Drawers
- 4 Temperature Zones:
 - 5°C
 - -1°C
 - -5°C
 - -23°F – -18°F
- High-Efficiency LED Lighting

Freezer: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Freezer Drawers
- High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labour on Refrigerator
Five (5) Years Parts and Labour on Sealed Refrigeration System Only*
Ten (10) Years Parts and Five (5) Years Labour on Digital Inverter Compressor

*Compressor, evaporator, condenser, drier, connecting tubing

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):
35 3/4" x 71 7/8" x 28 7/8"

Dimensions (WxHxD without hinges and door):
35 3/4" x 70 3/4" x 24 1/16"

Dimensions (WxHxD with hinge and door, no handle):
35 3/4" x 71 7/8" x 28 7/8"

Weight: 352.7 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 5/16" x 78" x 31 5/16"

Weight: 385.8 lbs.

Colour **Model#** **UPC Code**
Stainless Steel RF23J9011SR/AA 887276088969

SAMSUNG

*Samsung received the highest numerical score for French door refrigerators in the proprietary J.D. Power 2014 Kitchen Appliance Study. Study based on 15,340 total responses measuring 10 French door refrigerator brands and measures opinions of consumers about their new appliance purchases in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.



Actual colour may vary. Design specifications and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. Clearance requirements are the recommended minimum only. Check the equivalent and codes in your area for any additional requirements.

© 2015 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. used with permission.

Miele

**Futura Series
Pre-Finished Dishwashers**

CLASSIC	G 4228 U, G 4228 SCU
CLASSIC PLUS	G 4948 U, G 4948 SCU
CRYSTAL	G 6625 U, G 6625 SCU
DIMENSION	G 6745 SCU

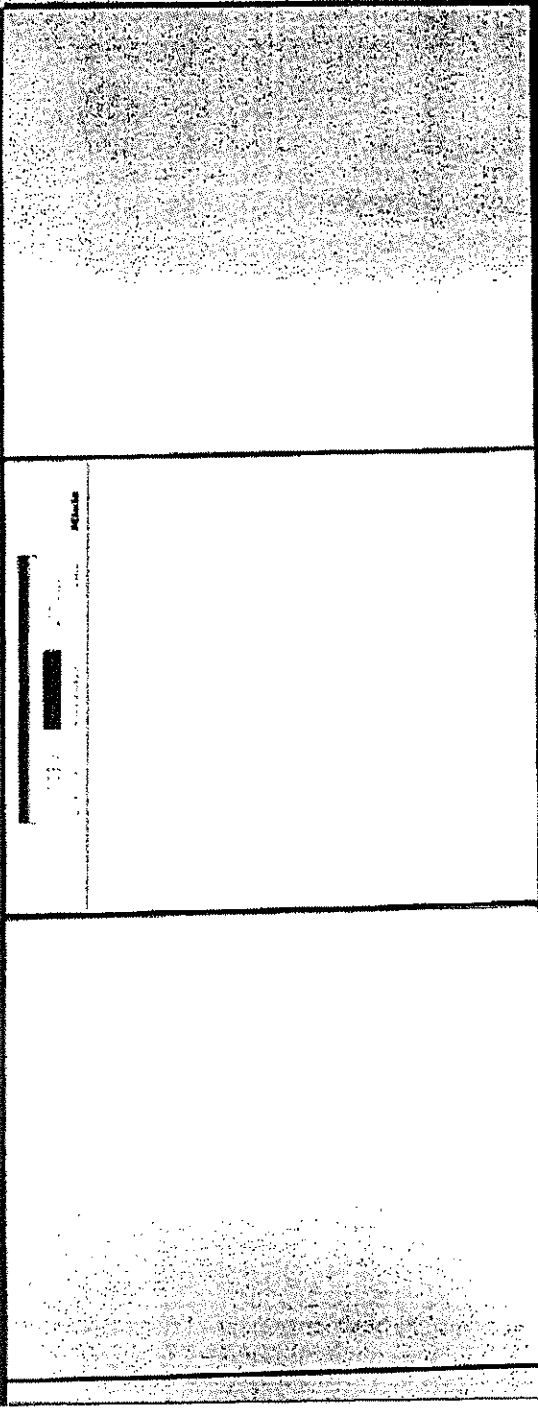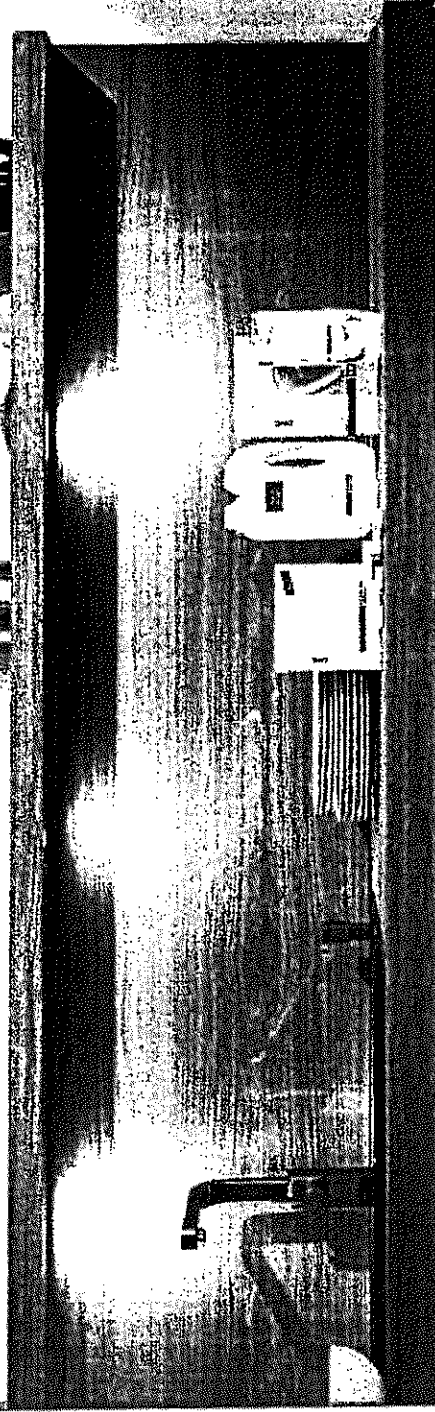

miele.ca
Specification Sheets TMS 03062016

Futura Series
Pre-Finished Dishwashers




SPECIFICATIONS	
Overall Unit Width	23 7/16" (598mm)
Overall Unit Height	33 11/16" - 36 1/4" (855 - 920mm)
Overall Unit Depth	22 7/16" (570mm)
Niche	
Minimum Cabinet Opening Width	23 7/16" (600mm)
Minimum Cabinet Opening Height	33 7/16" (857mm)
Minimum Cabinet Opening Depth	22 7/16" (570mm)
Plumbing	
Water Supply Requirements	
May be connected to a cold or hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/8" compression. The water shut-off valve must be accessible after installation. The water pressure must be between 4.35 psi (0.3 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed.	
Water Connection Line	4' 11" (1.5m) flexible water intake hose is supplied with a 3/8 compression connection.
Drain Hose	4' 11" (1.5m) flexible drain hose is supplied.
Electrical	
Electrical Requirements - Volts/Amps	110V / 120V, 60Hz, 15 Amps
Power Cord - Plug and length	Yes - NEMA 5-15 plug, 5' 6" (1.7m), Convertible to Hardwire
Shipping	
Shipping Weight	118 lbs (53.5 kg)
Support	
Call Miele	800.565.6435
Miele Website	-@www.miele.ca

Futura Series

Pre-Finished Dishwashers



INSTALLATION SPECIFICATIONS

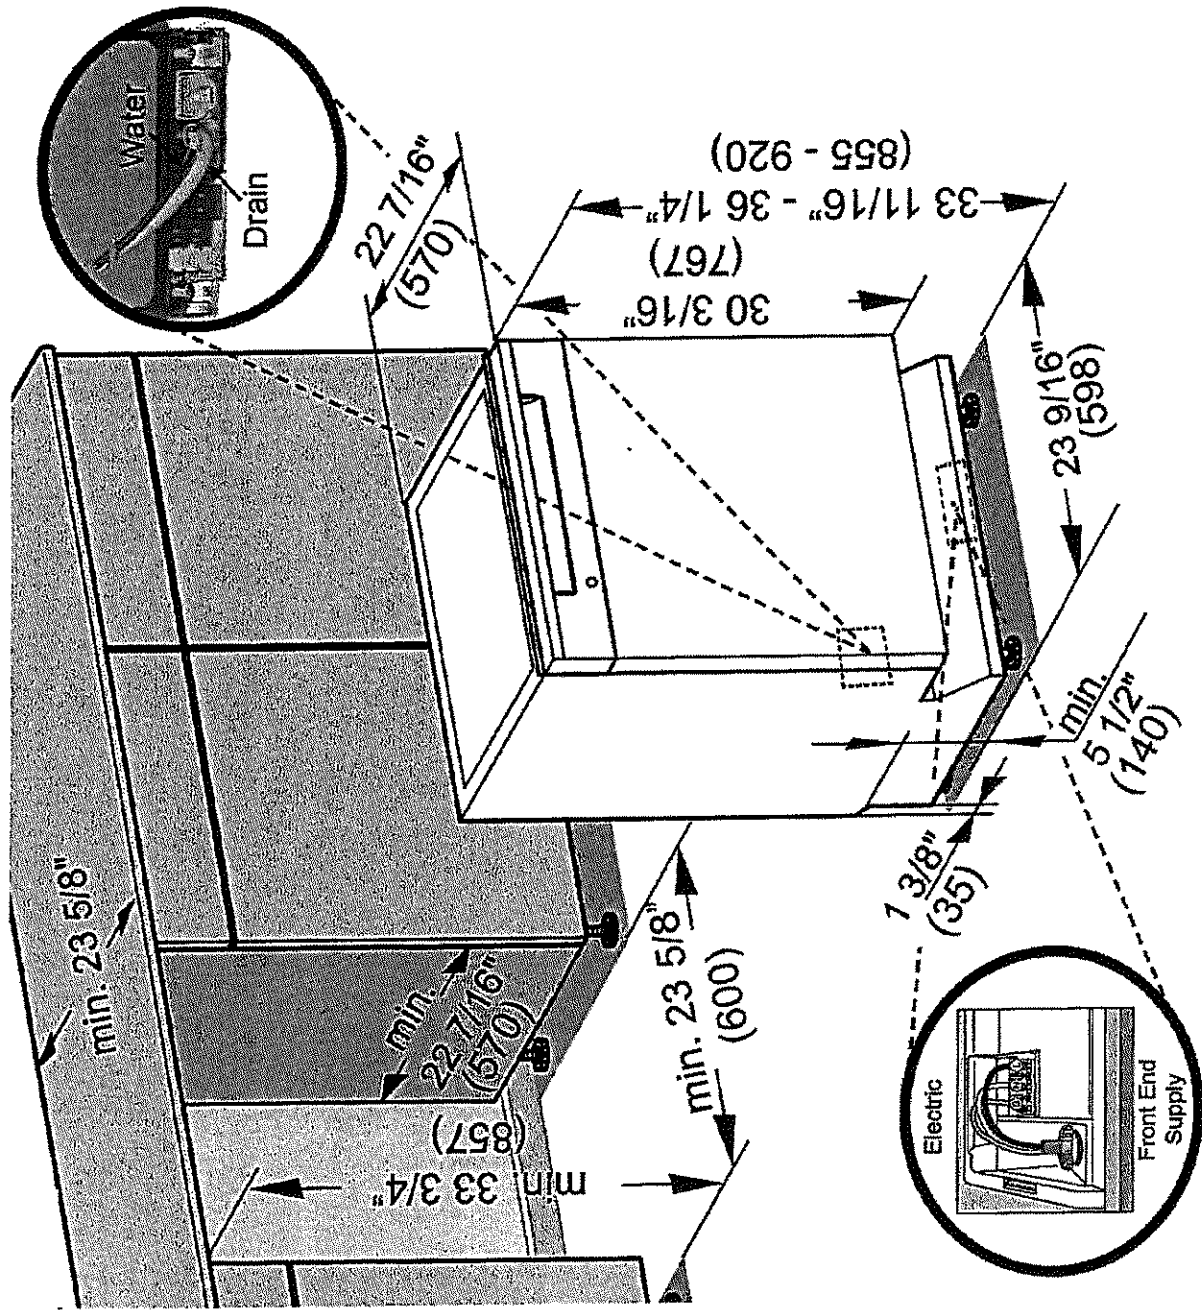


- | | |
|-------------------|--|
| Drain - | 4 ft 11 in (1.5 m) flexible drain hose.
(Connects from lower center rear) |
| Water - | 4 ft 11 in (1.5 m) flexible water intake hose with $\frac{3}{8}$ " compression fitting.
(Connects from lower center rear) |
| Electric - | 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply. (Connects via Front End Supply or may be hardwired) |

Futura Series

Pre-Finished Dishwashers



Panel Specification

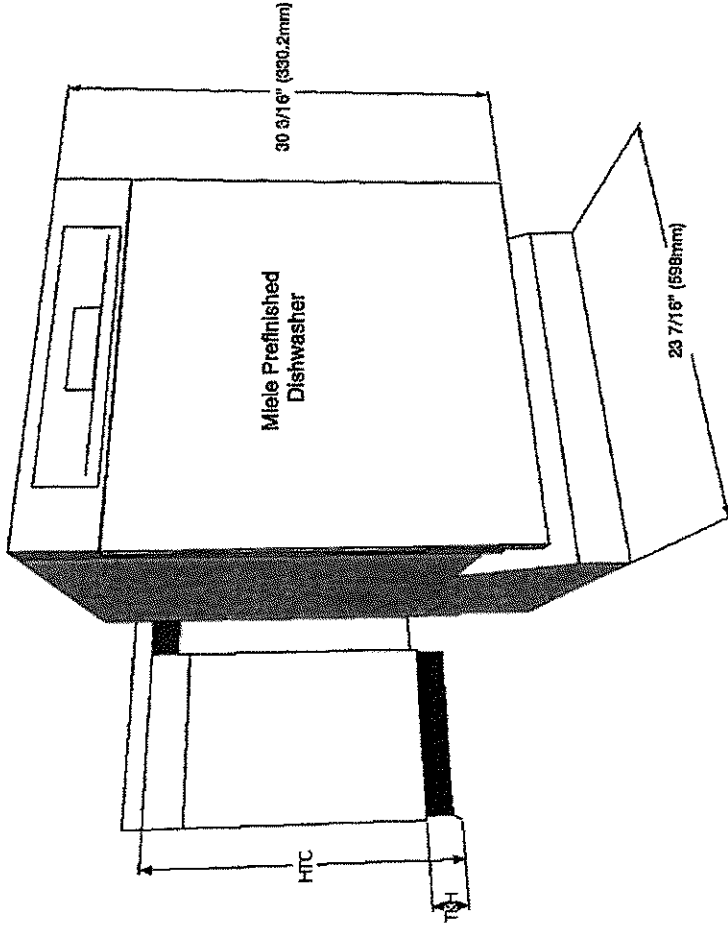

Panel and Control Prefinished

Width: 23 7/16" (595 mm)
Thickness: 3/4" (19 mm)
Height: 30 3/16" (767 mm)


Calculating the toe kick height:
30 3/16" - HTC = TKH

HTC = Height to underside of countertop
TKH = Toe kick height

Futura Series
Pre-Finished Dishwashers



Acceptable Installation Heights

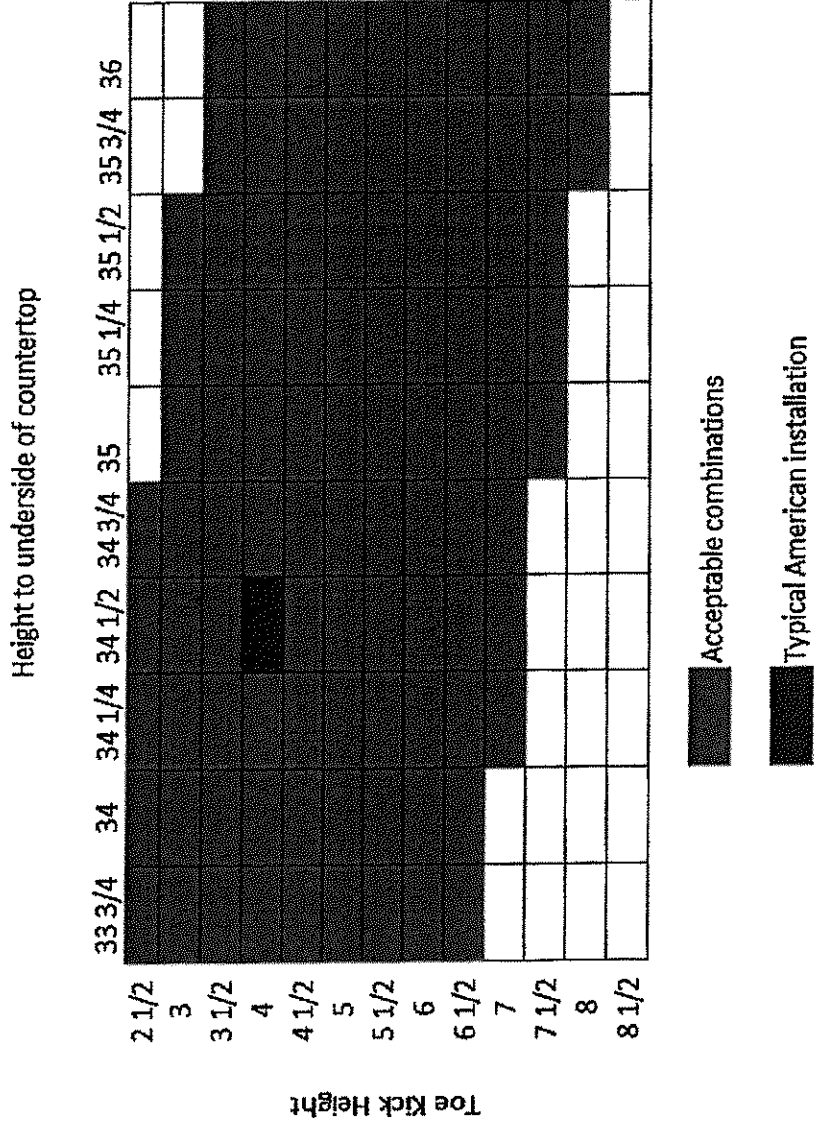


JENN-AIR® DETAILED PLANNING DIMENSIONS

36" INDUCTION COOKTOP


JIC4536X – 36^{5⁄16}" x 4^{1⁄8}" x 21^{3⁄16}"

PRODUCT DIMENSIONS

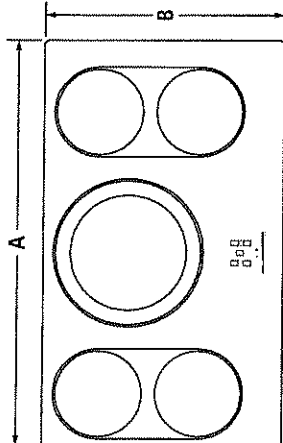


TOP VIEW

MODEL #		JIC4536X	
		in	cm
A	Overall width	36 ^{5⁄16}	92.0
B	Overall depth	21 ^{3⁄16}	54.1
C	Width of recessed cooktop	32 ^{1⁄2}	82.6
D	Height of recessed cooktop	3 ^{1⁄8}	8.0
E	Recessed height including front flange	3 ^{7⁄8}	9.8
F	Height of cooking surface		
	Euro-Style Stainless (including trim)	1⁄4	0.6
	Floating Glass	1⁄8	0.4
G	Depth of recessed cooktop	18 ^{1⁄8}	47.9
H	Recessed height including electrical conduit	4 ^{1⁄8}	10.5



FRONT VIEW



SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


JENN-AIR® DETAILED PLANNING DIMENSIONS

2 of 2

36" INDUCTION COOKTOP

JIC4536X – 36⅞" x 4⅛" x 21⅞"

OPENING/CLEARANCE DIMENSIONS

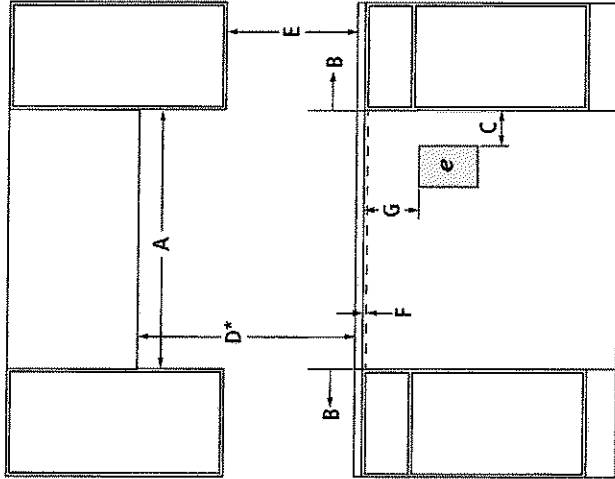

FRONT VIEW

MODEL #	JIC4536X	
	in	cm
A	33⅞	84.0
B	1	2.5
C	10	25.4
D*	30	76.2
E	18	45.7
F	¾	0.5
G	12	30.5
H	13	33.0
I	1	2.5
J	33⅞	84.0
K	19⅞	49.0
L	2	5.1
e	Recommended electrical access location	

*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.


If installing a hood or microwave hood combination above the cooktop, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

ELECTRICAL REQUIREMENTS


240 volt, 60 Hz, AC only, 50-amp fused, grounded circuit is required. A dedicated circuit is recommended. The length of conduit provided is for serviceability to the cooktop.

LOCATION REQUIREMENTS

- To ensure cooktop base clearance, cabinet side walls need to be wider than the cutout.
- If cabinet has a drawer, allow a 5⅞" (13.0 cm) minimum clearance between countertop and top of drawer.

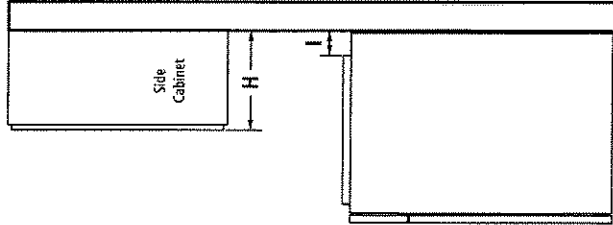

SIDE VIEW

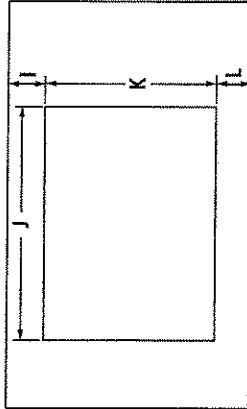

TOP VIEW – CUTOUT

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8640dzw1215


JENN-AIR® DETAILED PLANNING DIMENSIONS

1 of 4


30" SINGLE WALL OVENS

JJW3430D, JJW2430D – 30" x 29 7/8" x 25 3/8"

PRODUCT DIMENSIONS

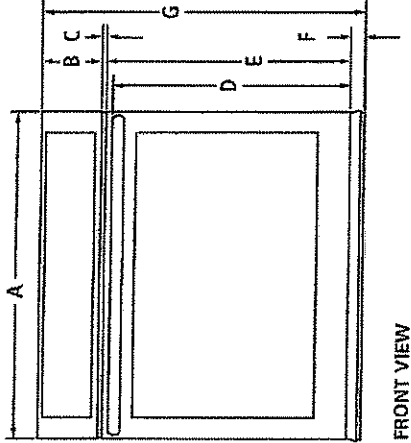

FRONT VIEW

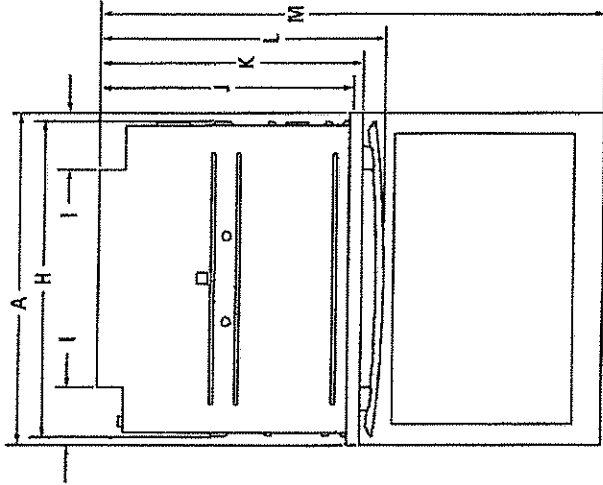

TOP VIEW

MODEL #	JJW3430D JJW2430D	
	in	cm
Overall width		
A	Pro-Style® Stainless or Euro-Style Stainless	30 76.2
	Floating Glass	29 7/8 76.1
B	Height of control panel	5 1/2 14.0
C	Space between control panel and door	7/8 1.1
Height to top of handle		
D	Pro-Style® Stainless	21 1/8 55.0
	Euro-Style (color-coordinating)	21 7/8 54.4
E	Height of door	22 1/8 56.2
F	Height of trim	1 11/16 4.3
G	Overall height	29 7/8 75.8
H	Width of recessed oven	28 7/8 72.2
I	Width of conduit channel	3 3/8 8.8
J	Depth of recessed oven	23 3/8 58.7
K	Depth with door	24 3/8 61.8
Depth with handle		
L	Pro-Style® Stainless	26 7/8 66.9
	Euro-Style (color-coordinating)	25 3/8 64.3
M	Depth with door fully open	45 3/8 115.3

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


JENN-AIR® DETAILED PLANNING DIMENSIONS

2 of 4

30" SINGLE WALL OVENS

JJW3430D, JJW2430D – 30" x 29^{7/8}" x 25^{3/4}"

DIMENSIONS AS INSTALLED

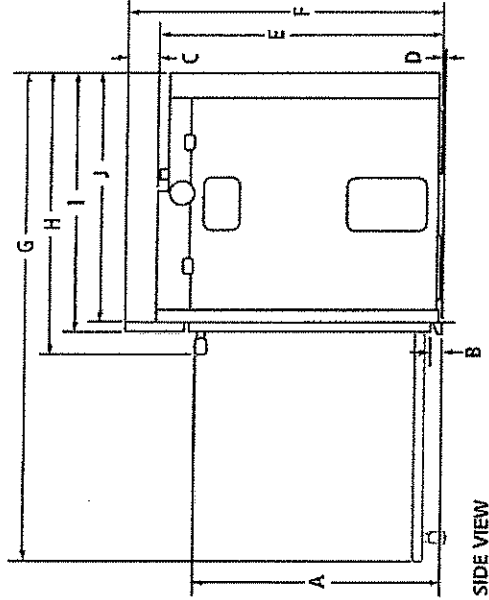

MODEL #	JJW3430D JJW2430D	
	in	cm
A	Height to top of handle Pro-Style® Stainless	22 ^{3/4} 57.8
	Euro-Style (color-coordinating)	22 ^{3/4} 57.3
B	Height of trim extending below cutout	1 ^{1/8} 2.9
C	Height from top of recessed oven to top of control panel JJW3430D	2 ^{1/2} 6.3
	JJW2430D	2 ^{15/16} 7.4
D	Height from bottom of recessed oven foot to bottom of oven vent	3/16 0.5
E	Height of recessed oven	26 ^{3/4} 67.9
F	Height to top of control panel	29 ^{7/8} 75.8
G	Depth with door fully open	45 ^{3/8} 115.3
H	Depth with handle Pro-Style® Stainless	26 ^{3/16} 66.9
	Euro-Style (color-coordinating)	25 ^{3/16} 64.3
I	Depth with door	24 ^{3/4} 61.8
J	Depth of recessed oven	23 ^{1/16} 58.6

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8660BdZw1015


JENN-AIR® DETAILED PLANNING DIMENSIONS

3 of 4

30" SINGLE WALL OVENS

JJW3430D, JJW2430D – 30" x 29½" x 25⅝"

OPENING/CLEARANCE DIMENSIONS

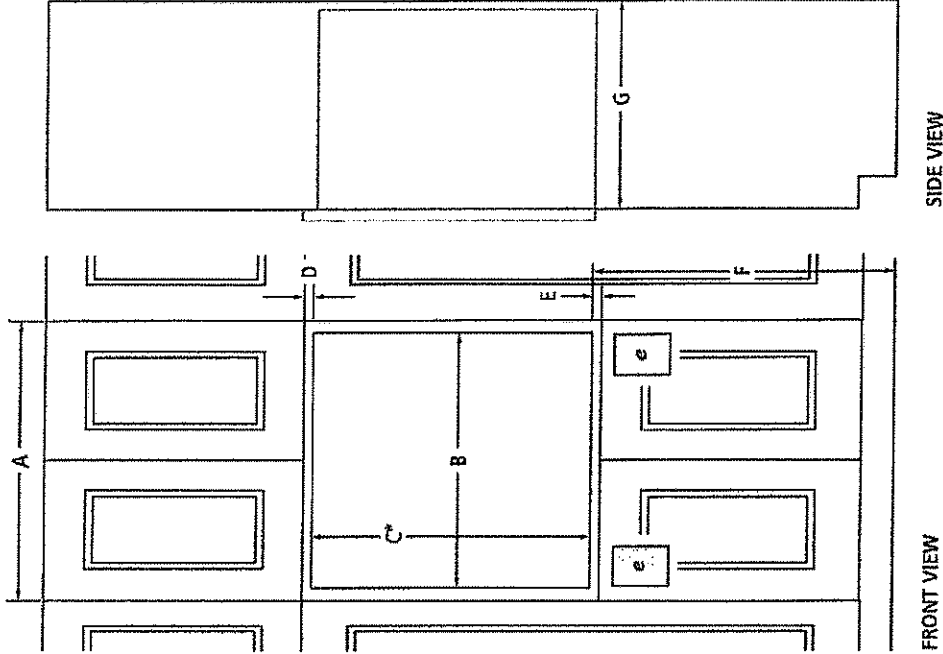

MODEL #	JJW3430D JJW2430D	
	in	cm
A	Width of cabinet (min.)	30 76.2
B	Width of cutout	28⅞ 72.4
C*	Height of cutout (recommended)	28 71.2
D	Top of cutout to bottom of upper cabinet door (min.)	2⅞ 5.5
E	Bottom of cutout to top of lower cabinet door (min.)	1¼ 3.8
F	Bottom of cutout to floor	32 81.3
G	Depth of cutout (min.)	24 61.0
H	Top of countertop to bottom of cutout (min.)	30⅞ 76.7
I	Top of cutout to underside of countertop (min.)	1½ 3.8
J	Bottom of cutout to floor	4⅞ 11.0
e	Recommended junction box location	

*Will fit cutout height from 26⅞" (68.4 cm) to 29⅞" (74.8 cm).

ELECTRICAL REQUIREMENTS


240 volt, 20-amp fused, grounded circuit is required. A dedicated circuit is required.

The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located 3" (7.6 cm) maximum below the support surface. Drill a 1" (2.5 cm) minimum diameter hole in the right rear or left rear corner of the support surface for access to the junction box.


NOTE: For under counter installation, the junction box should be located in the adjacent right or left cabinet. Drill a 1" (2.5 cm) minimum diameter hole in an upper corner of the side wall for access to the junction box.

CABINET REQUIREMENTS

NOTE: When using under counter installation, check cabinet manufacturer's specifications to verify fit.

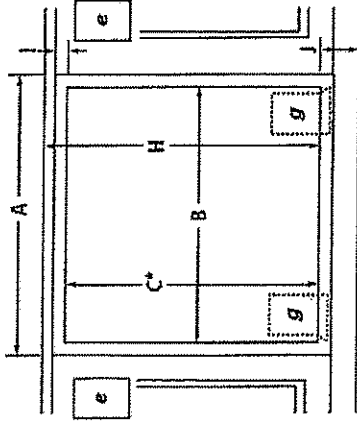

UNDER COUNTER INSTALLATION
(without cooktop installed above)



BACK VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.