

www.goemans.com

PACKING SLIP

Invoice #	HB00016426-1
-----------	--------------

Delivery Date:

Purchase Date:	18-Apr-18
-----------------------	-----------

Salesperson: JASON NG

Printed Date: 18-Apr-18

SUBRAMANIAM, RAJAKUMAR
232 INVERNESS WAY
LOT# 120
BRADFORD, ON L3Z 0W6

(647) 388-9495
rajawildwing@gmail.com

SUBRAMANIAM, RAJAKUMAR
232 INVERNESS WAY
LOT# 120
BRADFORD, ON L3Z 0W6

(647) 388-9495
rajawildwing@gmail.com

Delivery / Special Instructions: SIMCOE ROAD & 6TH LINE

QTY	MODEL #	MISC	LOC	DESCRIPTION	SERIAL#
		Payment		VISA	

- WARRANTY TERM STARTS FROM DATE OF DELIVERY
- All products remain the property of GOEMANS until paid in full.
- All authorized returned products will be subject to a restocking charge.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.

WHITE-Customer Copy

YELLOW-GOEMANS Copy


Thank You For Your Business

36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NXFXDE – 35¾" x 83⅞" x 24" (without door/handles)

PRODUCT DIMENSIONS

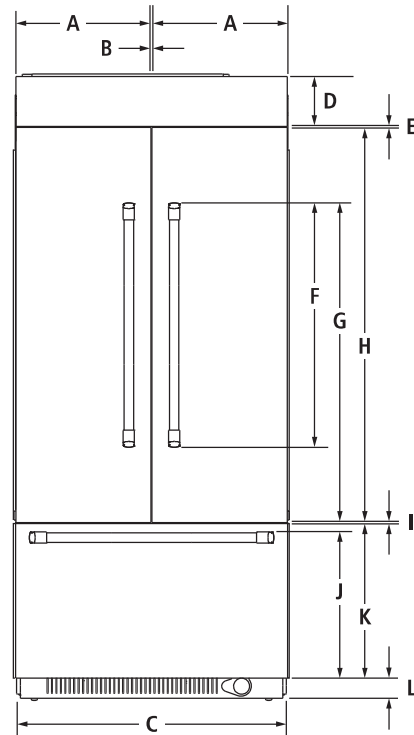

FRONT VIEW

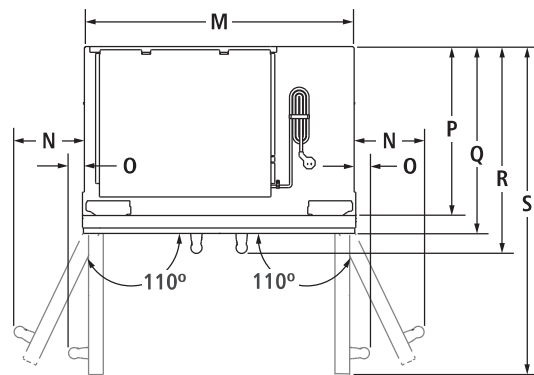

TOP VIEW

MODEL #		JF36NXFXDE	
		in	cm
A	Width of each door	17⅞	44.8
B	Space between doors	⅛	0.3
C	Overall width	35¾	90.8
D	Height of top grille and bracket	6½	16.5
E	Space between doors and top grille	⅜	0.8
F	Height of door handles		
	Pro-Style® Stainless	32⅜	82.2
	Euro-Style Stainless	37⅞	96.0
G	Height to top of door handles		
	Pro-Style® Stainless	42⅜	107.6
	Euro-Style Stainless	44⅞	114.0
H	Height of doors	52⅜	133.0
I	Space between doors and drawer	⅛	0.3
J	Height to top of drawer handle		
	Pro-Style® Stainless	19⅜	49.2
	Euro-Style Stainless	19¼	48.7
K	Height of drawer	20½	52.1
L	Height of bottom grille	3	7.6
M	Width of recessed refrigerator	35	88.9
N	Width from side of refrigerator to handle – door fully open 110°		
	Pro-Style® Stainless	7	17.8
	Euro-Style Stainless	6½	16.5
O	Width from side of refrigerator to handle – door open 90°		
	Pro-Style® Stainless	2	5.1
	Euro-Style Stainless	1½	3.9
P	Depth without door panel kit	24	61.0
Q	Depth with doors		
	Pro-Style® Stainless panel kit	24¾	62.9
	Euro-Style Stainless panel kit	24¾	62.9
	Custom panel (¾"/1.9 cm)	24¾	62.9
R	Depth with handles		
	Pro-Style® Stainless	27⅜	69.5
	Euro-Style Stainless	26⅞	68.3
S	Depth with doors open 90°	41	104.1

IMPORTANT: Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8109AdZw714

36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NFXDE – 35¾" x 83⅞" x 24" (without door/handles)

DIMENSIONS AS INSTALLED

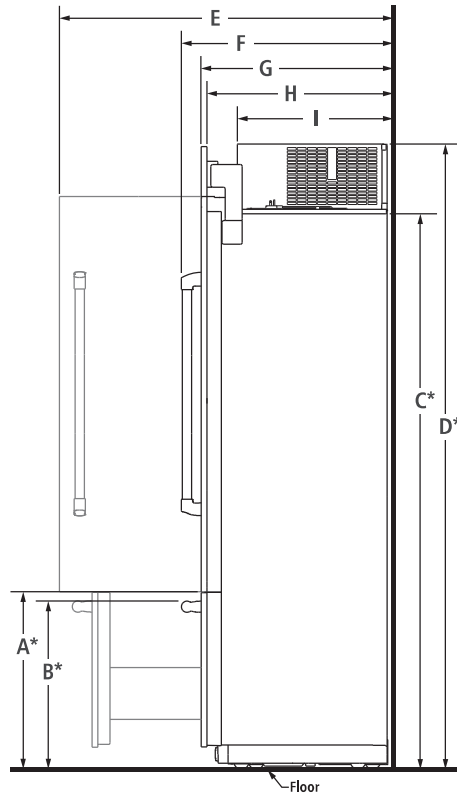

SIDE VIEW

MODEL #		JF36NFXDE	
		in	cm
A*	Height to top of drawer (min.)	23½	59.7
	Height to top of drawer handle (min.)		
B*	Pro-Style® Stainless	22⅜	56.8
	Euro-Style Stainless	22¼	56.3
C*	Height to top of doors (min.)	74⅜	188.9
D*	Height to top of grille and bracket (min.)	83⅞	211.1
E	Depth with door open 90° (min.)	41	104.1
	Depth with handles (min.)		
F	Pro-Style® Stainless	27⅜	69.5
	Euro-Style Stainless	26⅞	68.3
G	Depth with doors (min.)		
	Pro-Style® Stainless panel kit	24¾	62.9
	Euro-Style Stainless panel kit	24¾	62.9
	Custom panel (¾"/1.9 cm)	24¾	62.9
H	Depth without door panel kit (min.)	24	61.0
I	Depth of compressor (min.)	19⅞	50.5

*Add 1¼" (3.2 cm) to the height dimension when leveling legs are fully extended.

IMPORTANT: Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8109AdZw714


36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF36NXFXDE – 35 $\frac{3}{4}$ " x 83 $\frac{1}{8}$ " x 24" (without door/handles)

3 STYLES FOR DOOR PANEL INSTALLATION


STANDARD INTEGRATED GRILLE INSTALLATION

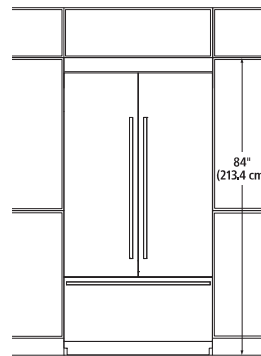

FRONT VIEW

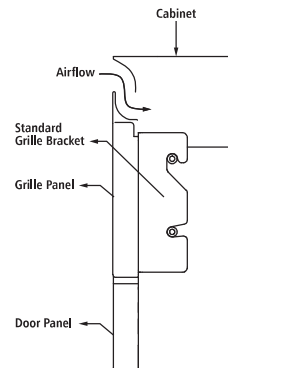


SIDE VIEW – STAINLESS STEEL
PANEL KIT

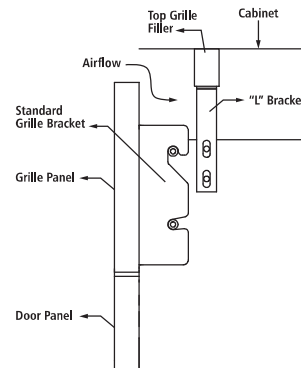


SIDE VIEW – CUSTOM PANEL

- Attach the standard custom grille with the standard grille bracket provided with the refrigerator.
- The standard grille panel height allows for an air gap critical to refrigerator performance.


FULLY INTEGRATED GRILLE INSTALLATION

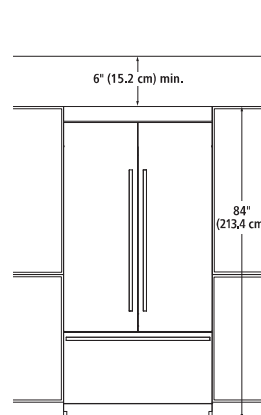

FRONT VIEW – OPEN TO CEILING
(OPTION 1)

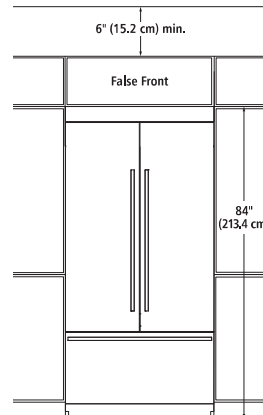


FRONT VIEW – FALSE FRONT
(OPTION 2)

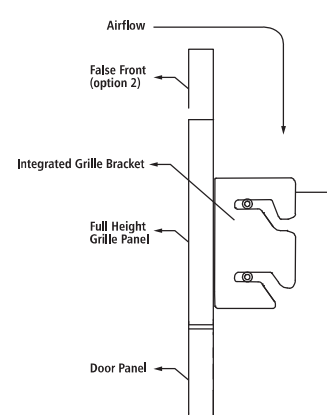


SIDE VIEW – CUSTOM PANEL
(OPTION 2)

- Attach the full-height grille with the integrated grille bracket provided with the refrigerator.
- Requires a minimum of 6" (15.2 cm) of open space above the refrigerator, which must not be blocked in any way, including soffits.


ARMOIRE-STYLE INSTALLATION*

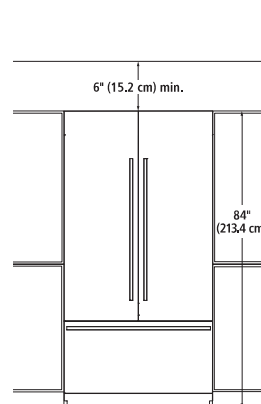

FRONT VIEW – OPEN TO CEILING
(OPTION 1)

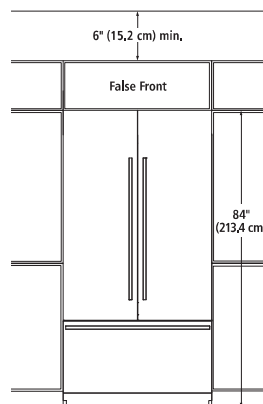

FRONT VIEW – FALSE FRONT
(OPTION 2)

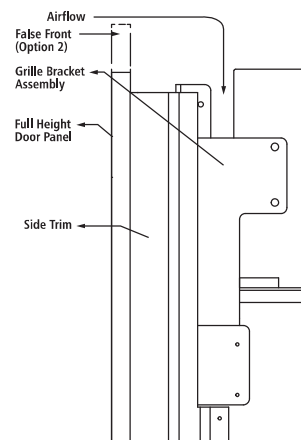

SIDE VIEW – CUSTOM PANEL

- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit.
- Requires a minimum of 6" (15.2 cm) of open space above the refrigerator, which must not be blocked in any way, including soffits.

* Refer to the Armoire Kit installation instructions for additional dimensions and installation details.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.



All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF36NXXFXDE – 35¾" x 83⅞" x 24" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

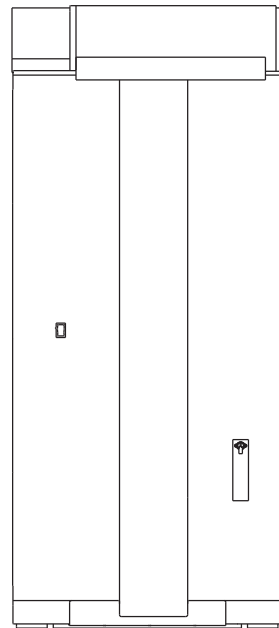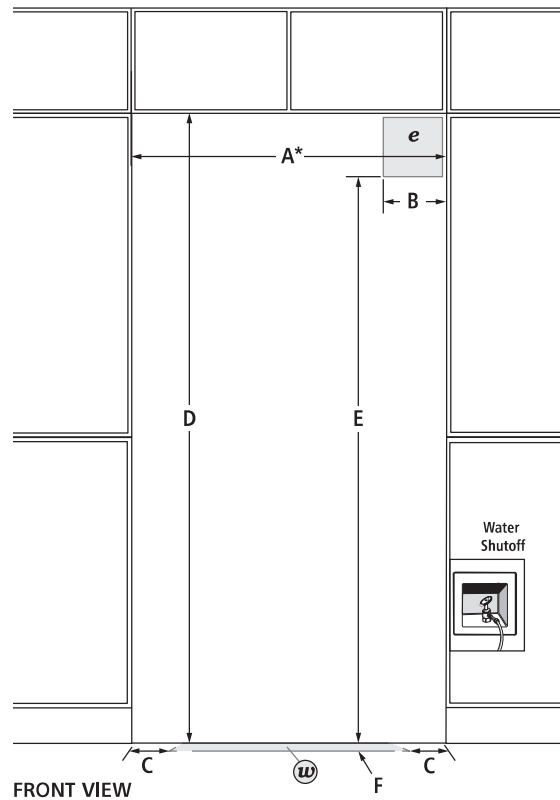

MODEL #		JF36NXXFXDE	
		in	cm
A*	Width (min.)	36	91.4
B	Width of recommended electrical location	4	10.2
C	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

*Minimum width must extend behind the face of the cabinet for at least 2" (5.1 cm).

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8109AdZw714


48"/36"/30" PRO-STYLE™ WALL-MOUNT HOODS

JXW9048WP – 48" x 19³/₈" x 25"JXW9036WP – 36" x 19³/₈" x 25"JXW9030WP – 30" x 19³/₈" x 25"

PRODUCT DIMENSIONS

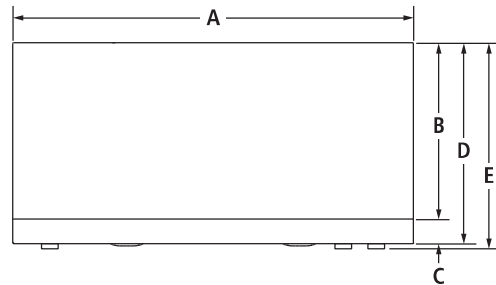


FRONT VIEW

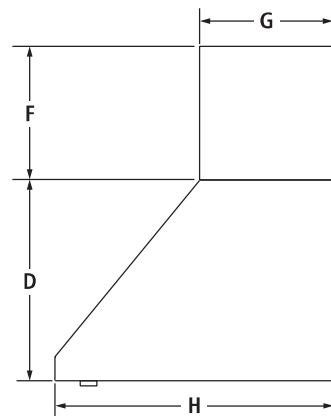

SIDE VIEW

(shown with optional duct cover)

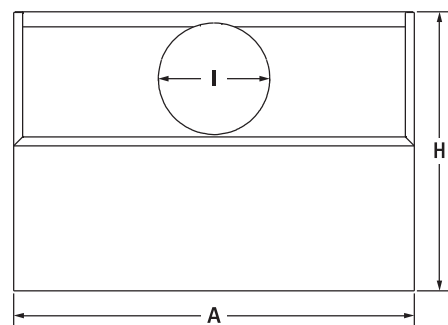

TOP VIEW

MODEL #		JXW9048WP		JXW9036WP		JXW9030WP	
		in	cm	in	cm	in	cm
A	Overall width	48	121.9	36	91.4	30	76.2
B	Height without trim	15 ³ / ₄	40.0	15 ³ / ₄	40.0	15 ³ / ₄	40.0
C	Height of trim	2 ¹ / ₄	5.7	2 ¹ / ₄	5.7	2 ¹ / ₄	5.7
D	Height without controls	18	45.7	18	45.7	18	45.7
E	Height with controls	19 ³ / ₈	49.1	19 ³ / ₈	49.1	19 ³ / ₈	49.1
F	Height of optional duct cover	12	30.5	12	30.5	12	30.5
G	Depth of optional duct cover	12	30.5	12	30.5	12	30.5
H	Depth of hood	25	63.5	25	63.5	25	63.5
I	Vent collar diameter	9 ⁷ / ₈	25.1	9 ⁷ / ₈	25.1	9 ⁷ / ₈	25.1

IMPORTANT: Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8562CdZw815

48"/36"/30" PRO-STYLE™ WALL-MOUNT HOODS

JXW9048WP – 48" x 19 $\frac{3}{8}$ " x 25"JXW9036WP – 36" x 19 $\frac{3}{8}$ " x 25"JXW9030WP – 30" x 19 $\frac{3}{8}$ " x 25"

OPENING/CLEARANCE DIMENSIONS

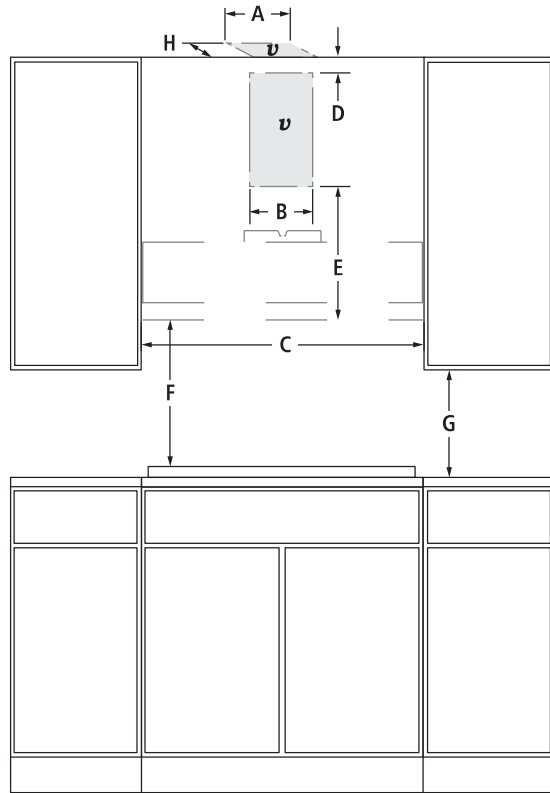

FRONT VIEW

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. The knockout into the back of the terminal box is located on the right side.

VENTING REQUIREMENTS

The hood is factory set for venting through the roof or wall. Do not terminate the vent in an attic or other enclosed area.

LOCATION REQUIREMENTS

The minimum height from the floor to the top of the vent hood is 7' (2.1 m). The minimum height from the floor to the top of the optional duct cover is 8' (2.4 m).

MODEL #		JXW9048WP		JXW9036WP		JXW9030WP	
		in	cm	in	cm	in	cm
A	Width of vent entry location – ceiling option	12	30.5	12	30.5	12	30.5
B	Width of vent entry location – wall option	12	30.5	12	30.5	12	30.5
C	Width of cabinet opening (min.)	48	121.9	36	91.4	30	76.2
D	Height from vent entry location to ceiling – wall option (min.)	2	5.1	2	5.1	2	5.1
E	Height from hood to vent entry location – wall option (min.)	24	61.0	24	61.0	24	61.0
F	Height from hood to cooking surface (min.-max.)	30-36	76.2-91.4	30-36	76.2-91.4	30-36	76.2-91.4
G	Height from upper cabinet to countertop (min.)	18	45.7	18	45.7	18	45.7
H	Depth of vent entry location – ceiling option	12	30.5	12	30.5	12	30.5
v	Recommended vent entry location						

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8562CdZw815


UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN

JMD2124W – 23¾" x 15⅜" x 24½"


PRODUCT DIMENSIONS

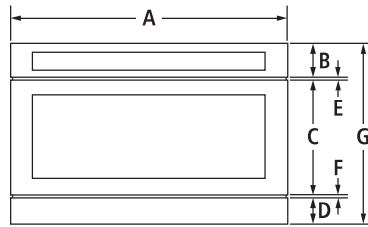

FRONT VIEW

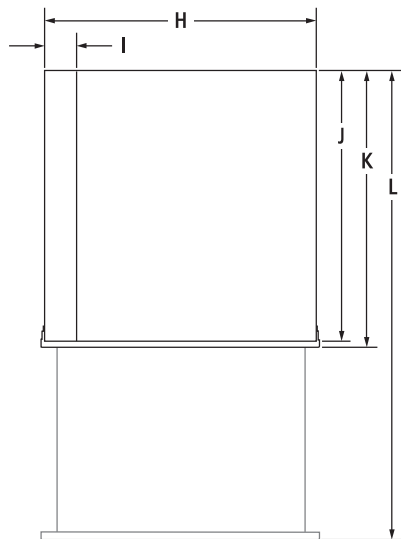

TOP VIEW

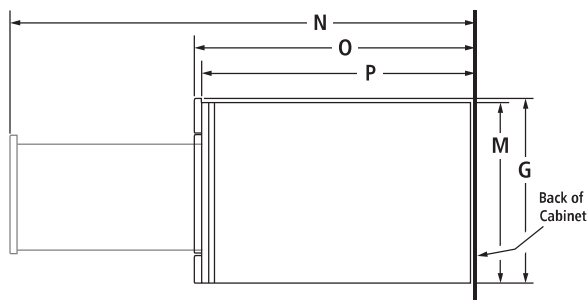


SIDE VIEW

MODEL #		JMD2124W	
		in	cm
A	Overall width	23¾	60.4
B	Height of control panel	2½	6.2
C	Height of drawer	10½	26.6
D	Height of trim	2	5.1
E	Space between control panel and drawer	⅛	0.4
F	Space between drawer and trim	¼	0.5
G	Overall height	15⅜	39.1
H	Recessed width	21⅝	54.9
I	Width of conduit channel	4⅝	11.9
J	Depth without drawer	23½	59.7
K	Depth with drawer	24½	62.4
L	Depth with drawer fully open	39½	100.5
M	Recessed height	14⅝	37.1
N	Depth with drawer fully open Flush receptacle	39½	100.5
	Non-flush receptacle	44	111.9
O	Depth with drawer Flush receptacle	24½	62.4
	Non-flush receptacle	29	73.8
P	Depth without drawer Flush receptacle	23½	59.7
	Non-flush receptacle	28	71.1

UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN

JMD2124W – 23¾" x 15⅜" x 24½"

OPENING/CLEARANCE DIMENSIONS

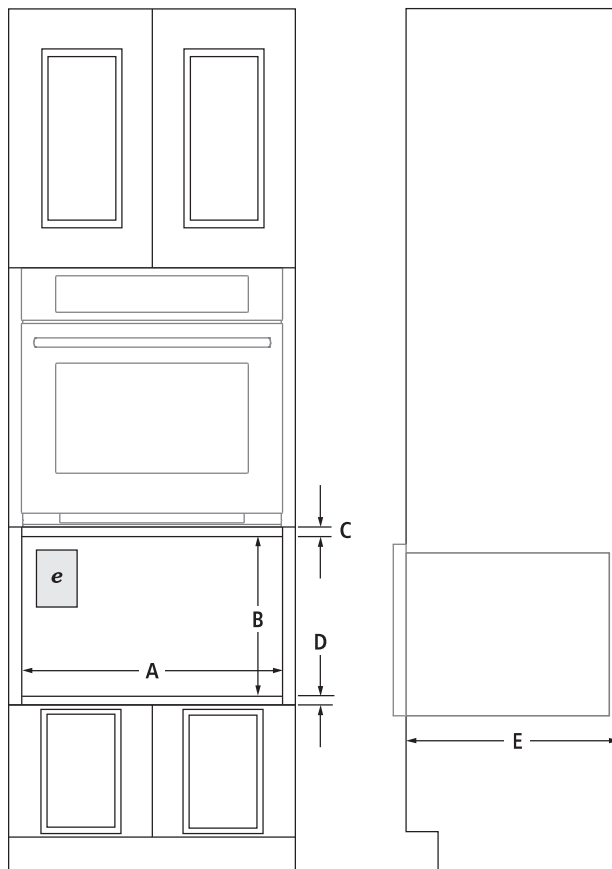

FRONT VIEW – INSTALLATION UNDER SINGLE OVEN

SIDE VIEW


MODEL #		JMD2124W	
		in	cm
A	Width of cutout	22⅛	56.2
B	Height of cutout	14⅞	37.6
C	Top of cutout to bottom of oven (min.)	2	5.1
	Top of cutout to bottom of countertop (min.)	2	5.1
D	Bottom of cutout to top of cabinet door (min.)	2	5.1
E	Depth of cutout (min.) with flush receptacle	23½	59.7
	with non-flush receptacle	28	71.1
e	Recommended electrical connection location		

ELECTRICAL REQUIREMENTS


120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

LOCATION REQUIREMENTS

Support structure must be able to support 100 lb (45.4 kg) including microwave oven and contents.

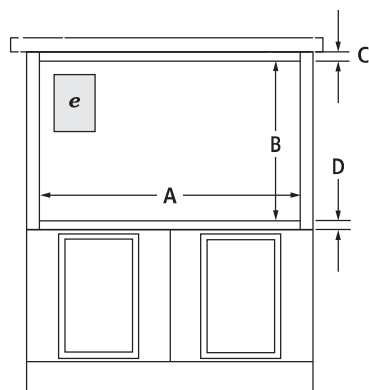

FRONT VIEW – INSTALLATION UNDER COUNTERTOP




BACK VIEW


DISHWASHERS

JDB9800CW, JDB9200CW, **JDB9000CW** – 23¾" x 33⅞" x 26⅞" (including handle)


PRODUCT DIMENSIONS

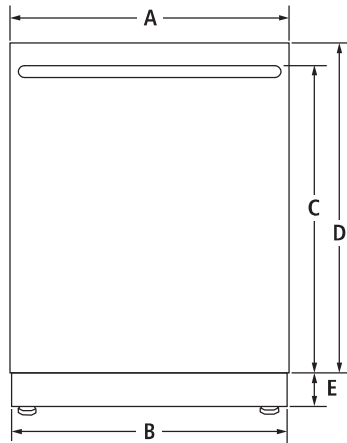

FRONT VIEW



ADJUSTABLE TOE KICK

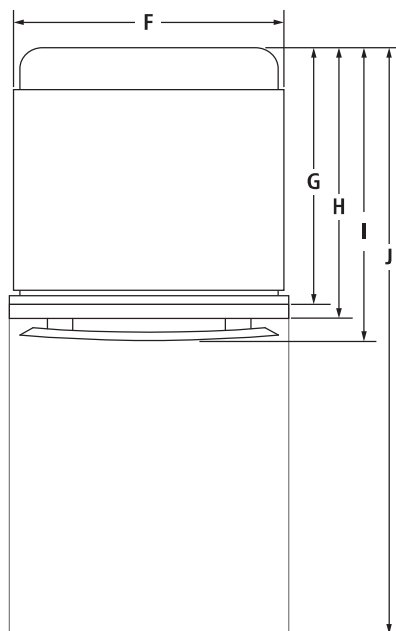

TOP VIEW

MODEL #		JDB9800CW JDB9200CW JDB9000CW	
		in	cm
A	Width of door	23½	59.7
B	Width of toe kick	23½	59.7
C	Height to top of handle Pro-Style® Stainless	27⅞	70.8
	Euro-Style (color-coordinating)	27⅞	70.8
	Floating Glass	27⅞	70.8
D	Height of door Pro-Style® Stainless	30	76.3
	Euro-Style (color-coordinating)	30	76.3
	Floating Glass	30	76.3
E	Height of adjustable toe kick (min.-max.)	3½-4⅞	8.9-10.5
F	Width of recessed dishwasher	23¾	60.4
G	Depth with tub flange	22⅝	57.4
H	Depth with door Pro-Style® Stainless	24⅝	62.6
	Euro-Style (color-coordinating)	24⅝	62.6
	Floating Glass	25	63.5
I	Depth with handle Pro-Style® Stainless	27⅞	70.8
	Euro-Style (color-coordinating)	26⅞	68.3
	Floating Glass	27⅞	70.8
J	Depth with door fully open	49¾	126.3


IMPORTANT: Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

DISHWASHERS

JDB9800CW, JDB9200CW, JDB9000CW – 23¾" x 33⅞" x 26⅞" (including handle)

DIMENSIONS AS INSTALLED

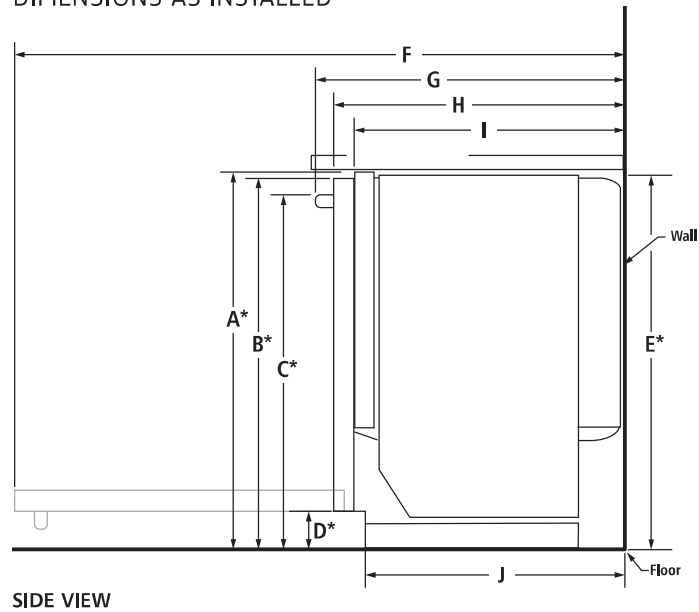

MODEL #		JDB9800CW JDB9200CW JDB9000CW	
		in	cm
A*	Height to top of tub flange (min.)	33⅞	86.0
B*	Height to top of door (min.)	33¾	85.7
C*	Height to top of handle (min.) Pro-Style® Stainless	31½	80.1
	Euro-Style (color-coordinating)	31½	80.1
	Floating Glass	31½	80.1
D*	Height to bottom of door	3⅞	9.4
E*	Height of recessed dishwasher (min.)	33⅝	85.5
F	Depth with door fully open (min.)	49¾	126.3
G	Depth with handle (min.) Pro-Style® Stainless	27⅞	70.8
	Euro-Style (color-coordinating)	26⅞	68.3
	Floating Glass	27⅞	70.8
H	Depth with door (min.)	24⅝	62.6
I	Depth with tub flange (min.)	22⅝	57.4
J	Depth with toe kick (min.)	20⅞	52.9

*With wheels removed. Add up to ⅞" (1.6 cm) to height with wheels and leg levelers fully extended.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8768CdZw416


DISHWASHERS

JDB9800CW, JDB9200CW, JDB9000CW – 23¾" x 33⅞" x 26⅞" (including handle)


OPENING/CLEARANCE DIMENSIONS

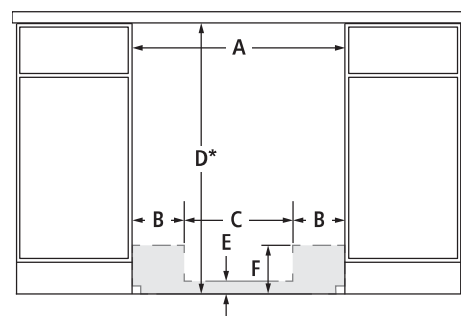

FRONT VIEW

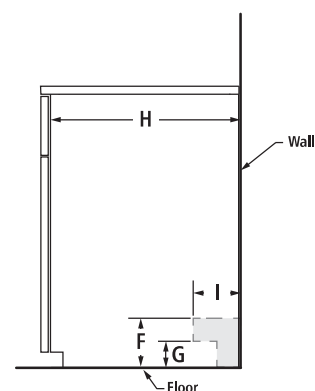

SIDE VIEW



BACK VIEW

MODEL #		JDB9800CW JDB9200CW JDB9000CW	
		in	cm
A	Width (min.)	24	61.0
B	Width of possible utility installation area (back wall)	6¾	17.2
C	Width of clear area (back wall)	10½	26.7
D*	Height with wheels removed (min.)	33⅞	86.0
E	Height of possible utility installation area (back wall)	2½	6.4
F	Height of possible utility installation area (back/side wall)	6¾	15.9
G	Height of clear area (side wall)	3	7.6
H	Depth (min.)	24	61.0
I	Depth of utility location (side wall)	4	10.2

Electrical, water and drain connections may be installed in shaded areas

Recommended drain connection location – closest to sink	1½ dia. 3.8 dia.
Recommended electrical connection location – right-hand side or back wall	1½ dia. 3.8 dia.
Recommended water connection location – left-hand side or back wall	½ dia. 1.3 dia.

*Measured from the lowest point on the underside of countertop.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER SUPPLY REQUIREMENTS

120°F (49°C) hot water supply with water pressure between 20 and 120 psi (138 and 862 kPa) is required. If you have questions about your water pressure, call a licensed, qualified plumber.

DRAIN REQUIREMENTS

Connect drain hose to waste tee or disposer inlet above drain trap. Maximum drain hose length 12' (3.7 m).

LOCATION REQUIREMENTS

Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8768CdZw416

36" PRO-STYLE® GAS RANGES


JGRP536WP, JLRP536WP, JGRP436WP, JLRP436WP – 35⁷/₈" x 38³/₄" x 29¹/₄"

PRODUCT DIMENSIONS

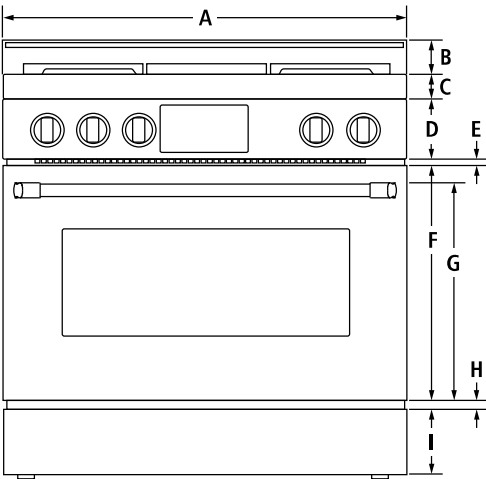

FRONT VIEW

MODEL #		JGRP536WP JLRP536WP JGRP436WP JLRP436WP	
		in	cm
A	Overall width	35 ⁷ / ₈	91.1
B	Height of island trim backsplash	3	7.6
C	Height of bullnose	2 ¹ / ₄	5.5
D	Height of control panel	5 ³ / ₈	13.5
E	Space between door and control panel	7 ⁷ / ₈	2.0
F	Height of door	20 ³ / ₄	52.5
G	Height to top of handle	19 ³ / ₈	49.0
H	Space between door and lower panel	1	2.5
I	Height of lower panel	5 ¹ / ₂	14.0
J	Depth with control panel overhang	27 ³ / ₈	69.5
K	Depth with handle	29 ¹ / ₄	74.2
L	Depth with door fully open	45 ³ / ₄	116.2

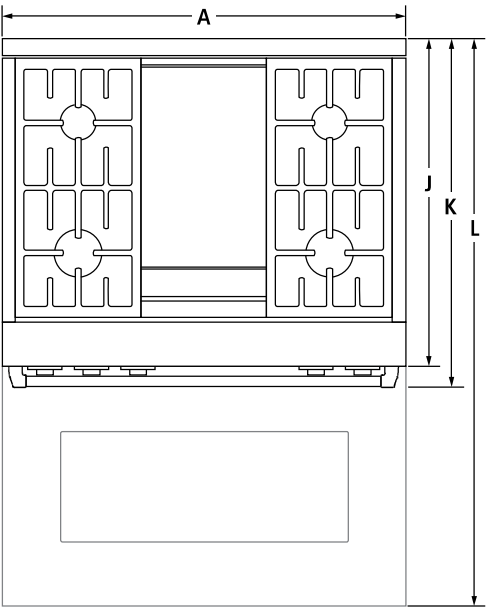

TOP VIEW


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



36" PRO-STYLE® GAS RANGES

JGRP536WP, JLRP536WP, JGRP436WP, JLRP436WP – 35⁷/₈" x 38³/₄" x 29¹/₄"

DIMENSIONS AS INSTALLED

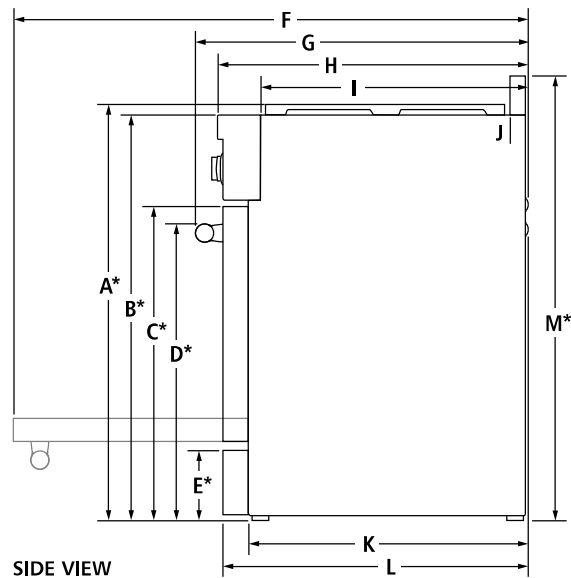

MODEL #		JGRP536WP JLRP536WP JGRP436WP JLRP436WP	
		in	cm
A*	Height to top of grates (min.)	36 ³ / ₄	93.3
B*	Height to top of cooking surface (min.)	35 ³ / ₄	90.8
C*	Height to top of door (min.)	27 ³ / ₈	69.5
D*	Height to top of handle (min.)	25 ⁷ / ₈	65.7
E*	Height to top of lower panel (min.)	5 ⁵ / ₈	14.9
F	Depth with door fully open	45 ³ / ₄	116.2
G	Depth with handle	29 ¹ / ₄	74.2
H	Depth with control panel overhang	27 ³ / ₈	69.5
I	Depth without control panel	23 ¹ / ₂	59.5
J	Depth of island trim backsplash	2 ¹ / ₄	5.7
K	Depth without door	24 ⁵ / ₈	62.5
L	Depth with door	26 ³ / ₄	68.0
M*	Height to top of island trim backsplash (min.)	38 ³ / ₄	98.4

*Add 1³/₄" (4.4 cm) to the height dimension when leveling legs are fully extended.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8781FdZw0516


36" PRO-STYLE® GAS RANGES

JGRP536WP, JLRP536WP, JGRP436WP, JLRP436WP – 35⁷/₈" x 38³/₄" x 29¹/₄"


OPENING/CLEARANCE DIMENSIONS

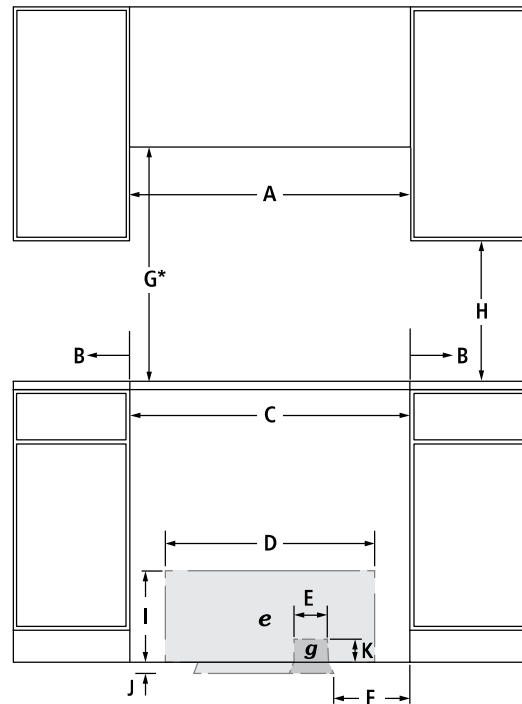

FRONT VIEW

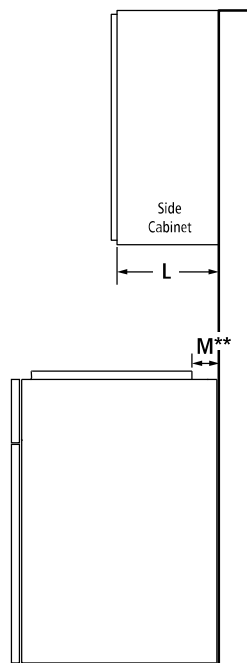

SIDE VIEW



BACK VIEW

MODEL

JGRP536WP
JLRP536WP
JGRP436WP
JLRP436WP

		in	cm
A	Width of combustable area above cooking surface (min.)	36	91.4
B	Width from range to fixed wall or other combustable material (min.)	6	15.2
C	Width of opening (min.)	36 ¹ / ₄	92.1
D	Width of electrical installation area	28	71.1
E	Width of gas installation area	14	35.5
F	Width from side cabinet to gas installation area	6	15.2
G*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	42	106.7
H	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
I	Height of electrical installation area	15	38.1
J	Depth of electrical and gas installation area	5	12.7
K	Height of gas installation area	3	7.6
L	Depth of upper cabinet (max.)	13	33.0
M**	Depth to wall (min.)	6	15.2
N	Width to electrical conduit	9 ¹ / ₈	23.0
O	Width to gas inlet	14 ³ / ₈	36.5
e	Recommended electrical access location		
g	Recommended gas supply line location		

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

**If back wall is constructed of a combustable material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, grounded circuit is required. A dedicated circuit is recommended.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8781FdZw0516