



UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN

JMD2124W – 23¾" x 15⅜" x 24½"


PRODUCT DIMENSIONS

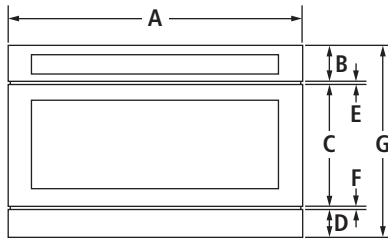

FRONT VIEW

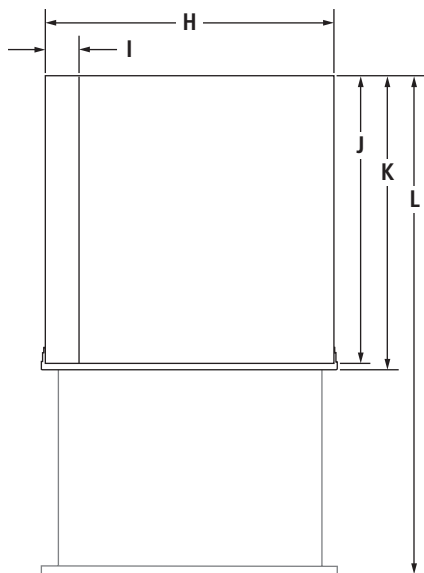

TOP VIEW

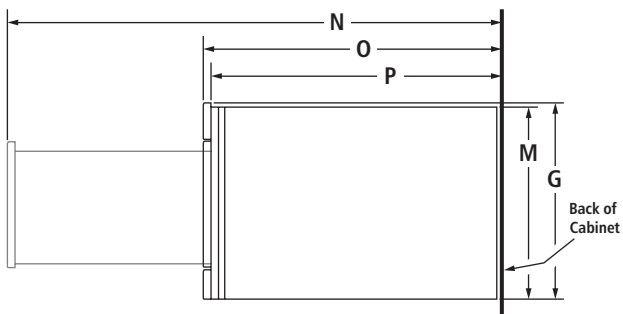


SIDE VIEW

MODEL #		JMD2124W	
		in	cm
A	Overall width	23¾	60.4
B	Height of control panel	2½	6.2
C	Height of drawer	10½	26.6
D	Height of trim	2	5.1
E	Space between control panel and drawer	⅛	0.4
F	Space between drawer and trim	¼	0.5
G	Overall height	15⅜	39.1
H	Recessed width	21⅝	54.9
I	Width of conduit channel	4⅝	11.9
J	Depth without drawer	23½	59.7
K	Depth with drawer	24½	62.4
L	Depth with drawer fully open	39½	100.5
M	Recessed height	14⅝	37.1
N	Depth with drawer fully open Flush receptacle	39½	100.5
	Non-flush receptacle	44	111.9
O	Depth with drawer Flush receptacle	24½	62.4
	Non-flush receptacle	29	73.8
P	Depth without drawer Flush receptacle	23½	59.7
	Non-flush receptacle	28	71.1

UNDER COUNTER MICROWAVE OVEN WITH DRAWER DESIGN


JMD2124W – 23¾" x 15⅜" x 24½"

OPENING/CLEARANCE DIMENSIONS

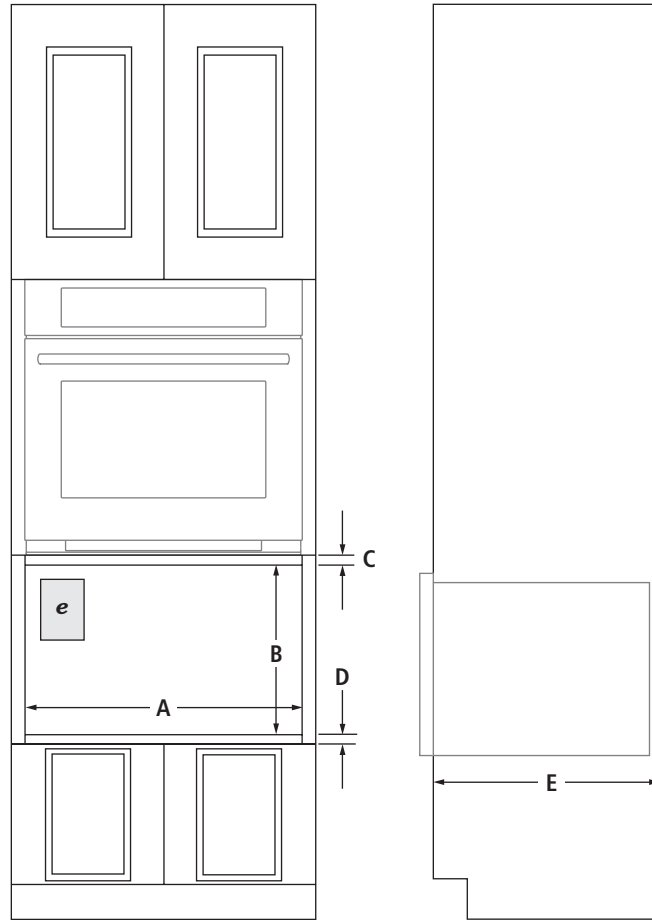


FRONT VIEW – INSTALLATION UNDER SINGLE OVEN

SIDE VIEW

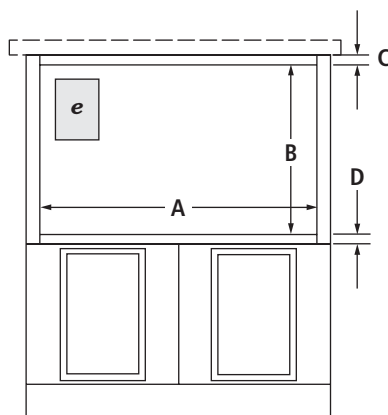

FRONT VIEW – INSTALLATION UNDER COUNTERTOP



BACK VIEW

MODEL #		JMD2124W	
		in	cm
A	Width of cutout	22⅛	56.2
B	Height of cutout	14⅞	37.6
C	Top of cutout to bottom of oven (min.)	2	5.1
	Top of cutout to bottom of countertop (min.)	2	5.1
D	Bottom of cutout to top of cabinet door (min.)	2	5.1
E	Depth of cutout (min.) with flush receptacle	23½	59.7
	with non-flush receptacle	28	71.1
e	Recommended electrical connection location		

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A time-delay fuse or dedicated circuit is recommended. Do not use an extension cord.

LOCATION REQUIREMENTS

Support structure must be able to support 100 lb (45.4 kg) including microwave oven and contents.