

NOTE: ALL LYL'S SUPPORTING FLOOR LOADS ARE TO BE SPECIFIED BY FLOOR TRUSS MANUFACTURER.

NOTE: FLOOR FRAMING INFO REFER TO SHOP DRAWINGS FOR ALL TRUSS-JOIST INFORMATION AND DETAILS. UNLESS OTHERWISE NOTED.

NOTE J1: PROVIDE SOLID BLOCKING @ 24" O.C. WHERE FLOOR JOISTS ARE PARALLEL TO FOUNDATION WALL (TYP.)

	UNINSULATED OPEN	NGS (PER OB	C. SB-12,3.1.1	UNINSULATED OPENINGS (PER OBC. SB-12,3.1.1(7))						
	SD25-4 COR LOT 154 ELEV C WOD	ENERGY E	FFICIENCY - O	3C SB12	SD25-4 COR LOT 154 ELEV C WOD	ENERGY E	ENERGY EFFICIENCY - OBC SB12			
	ELEVATION	WALL AREA S.F.	OPENING S.F.	PERCENTAGE	ELEVATION	WALL AREA S.F.	OPENING S.F.	PERCENTAGE		
	FRONT	445 S.F.	101.661 S.F.	22.85 %	FRONT	445 S.F.	101.661 S.F.	22.85 %		
	LEFT SIDE	1153 S.F.	194.667 S.F.	16.88 %	LEFT SIDE	1153 S.F.	194.667 S.F.	16.88 %		
	RIGHT SIDE	1153 S.F.	0 S.F.	0.00 %	RIGHT SIDE	1153 S.F.	0 S.F.	0.00 %		
	REAR 4-8R WOD COND	526 S.F.	105.167 S.F.	19.99 %	REAR 9R AND MORE WOD COND	526 S.F.	113.5 S.F.	21.58 %		
	* OPENINGS OMITTED AS PER SB-12 3.1.1.9(4) MAX 19.9 S.F. REFER TO ELEVATION FOR LOCATION		0 S.F.	Model Make and appropriate	* OPENINGS OMITTED AS PER SB-12 3.1.1.9(4) MAX 19.9 S.F. REFER TO ELEVATION FOR LOCATION		0 S.F.			
	TOTAL SQ. FT.	3277.00 S.F.	401.50 S.F.	12.25 %	TOTAL SQ. FT.	3277.00 S.F.	409.83 S.F.	12.51 %		
	TOTAL SQ. M.	304.44 S.M.	37.30 S.M.	12.25 %	TOTAL SQ. M.	304.44 S.M.	38.07 S.M.	12.51 %		
under	tioned has reviewed and takes responsibility for this design						<del></del>			

9			
8			·
7			
6			
5	•		
4	•		
3	REVISED AS PER ENG'S COMMENTS	JAN 03-18	RC
2	REVISED AS PER FLOOR AND ROOF LAYOUTS	SEP 15-17	RC
1	REVISED FOUNDATION WALL TO BE 10"	NOV 30/16	SB
no.	description	date	by

Bosteste 25591 BCIN registration information VA3 Design Inc. 42658 Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be scated. 255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782

va3design.com

BRADFORD EAST, ON. SEPT. 2016


SD25-4 SONOMA 4 LOT 154


16023


9C


PARTIAL PLAN WOD COND drawn by RC 3/16" = 1'-0" 16023-SD25-4 COR LOT 154 RICHARD - H:\ARCHINE\WORKING\2016\16023.BW\Units\25' Semi\16023-S025-4 COR LOT 154.dwg - Wed - Jan 10 2018 - 12:22 PM

nts and design are the copyright property of VA3 DESIGN. Rep

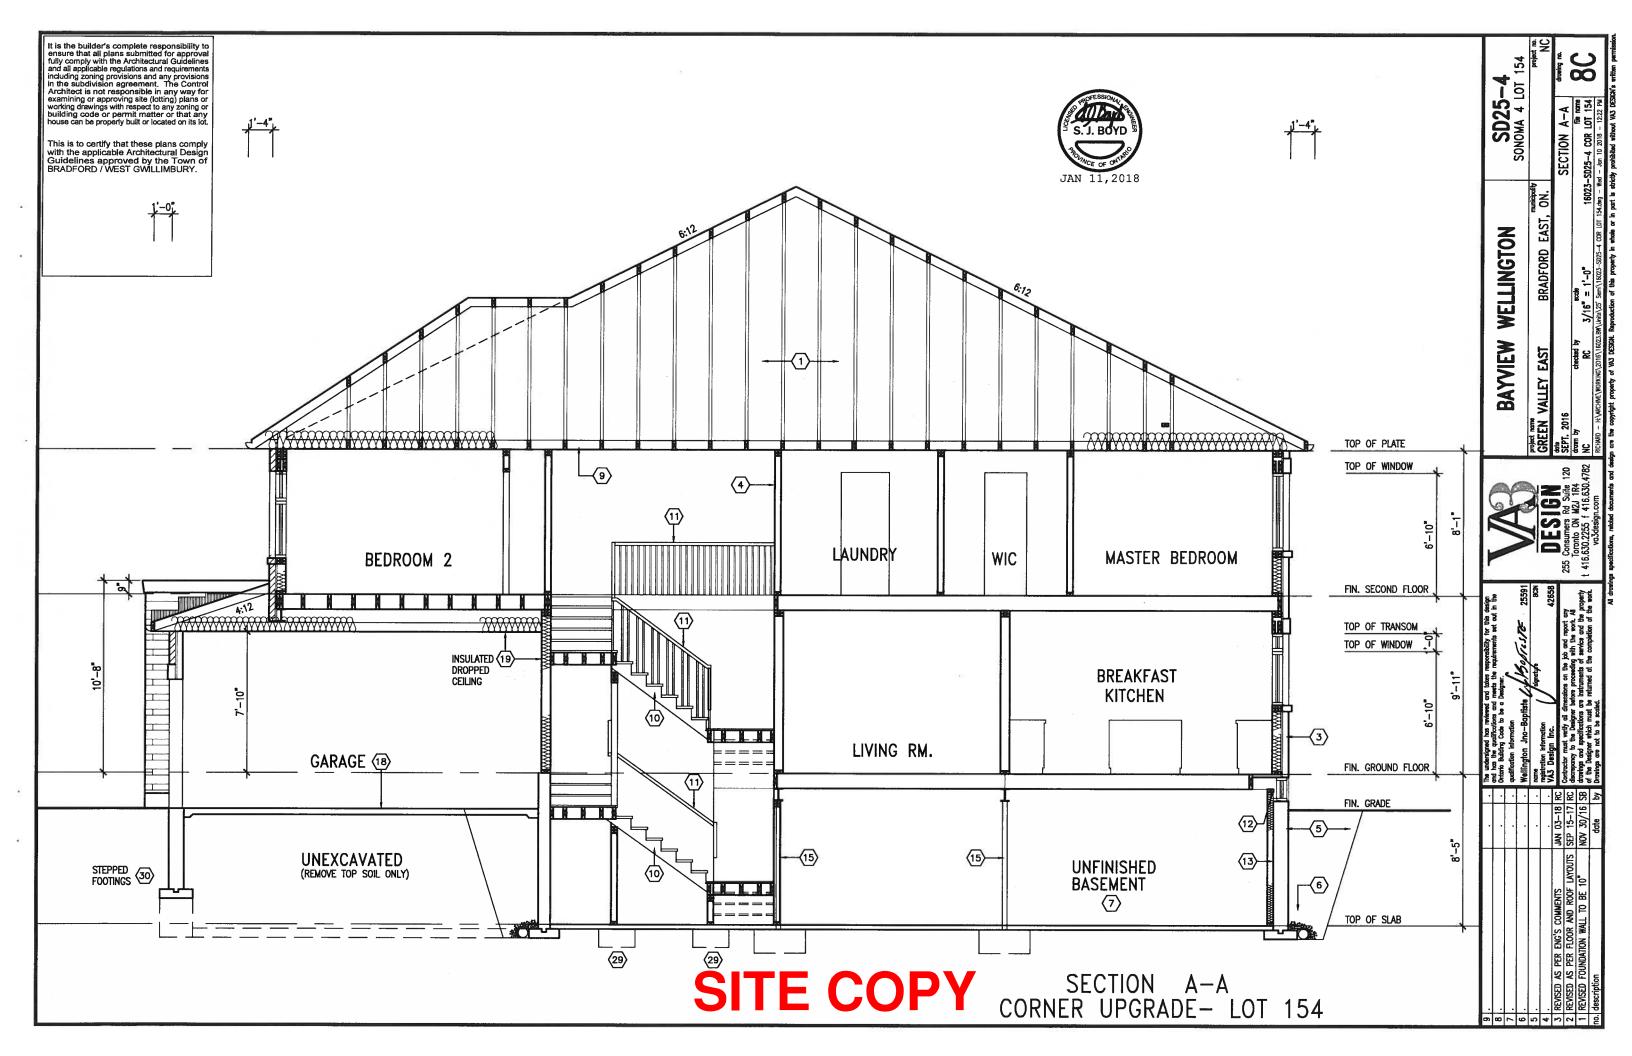

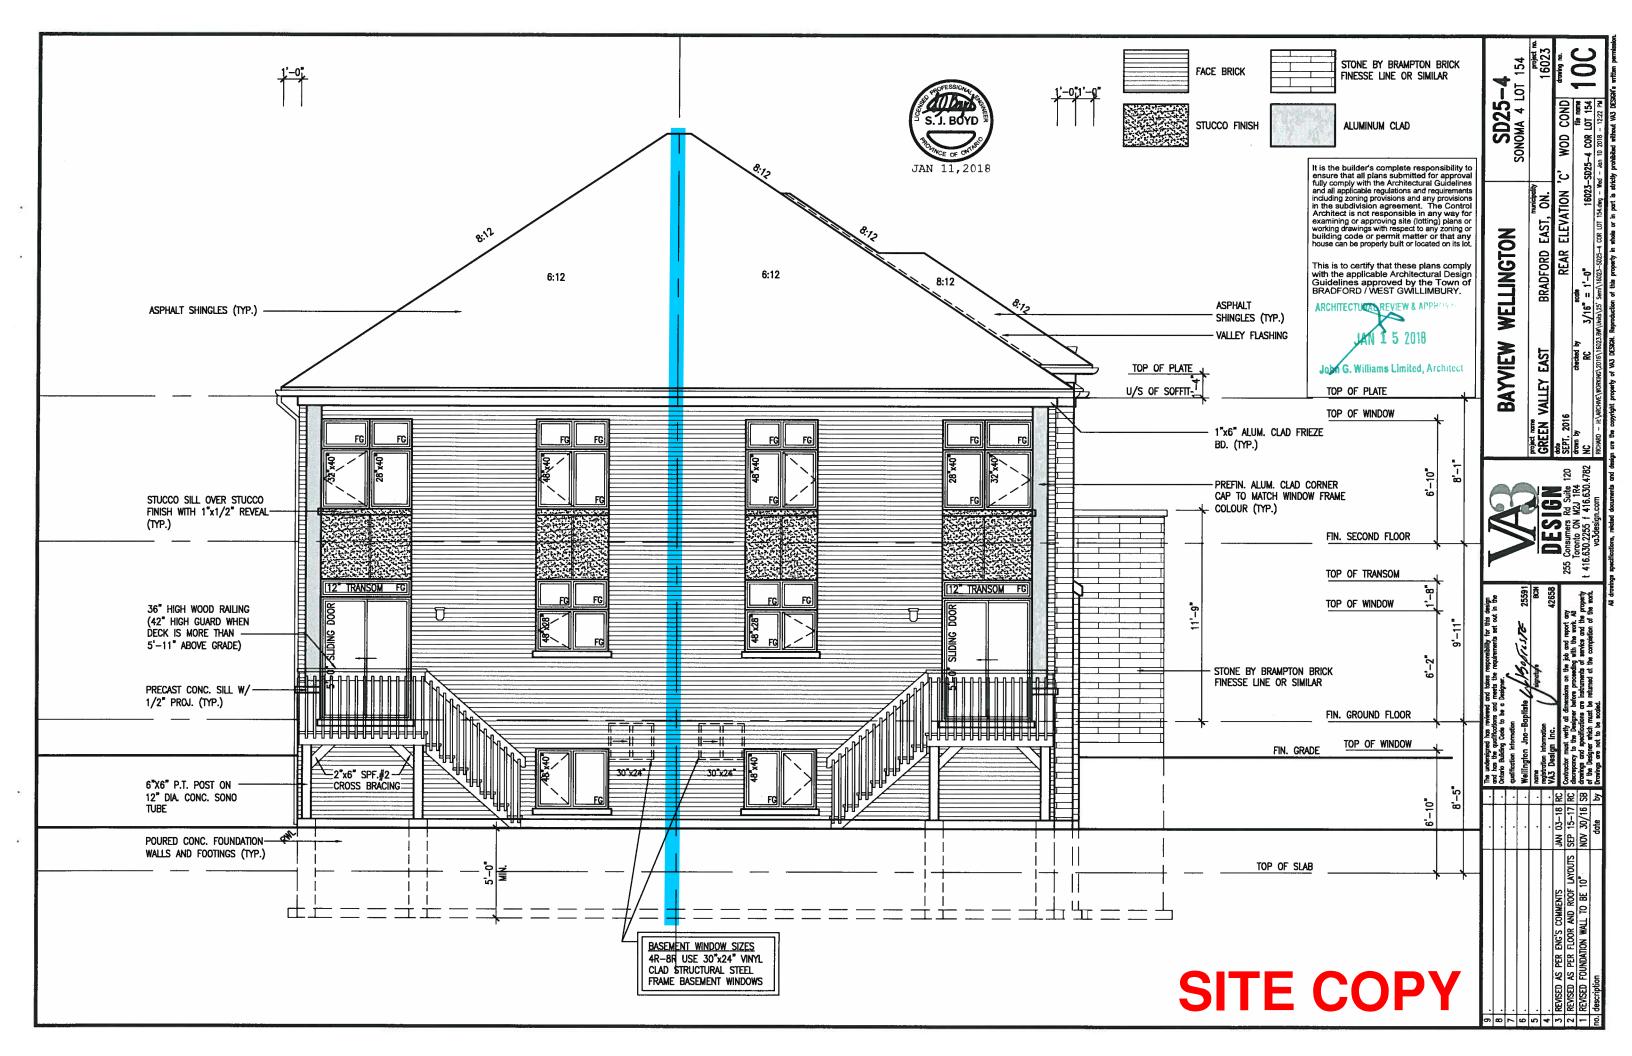

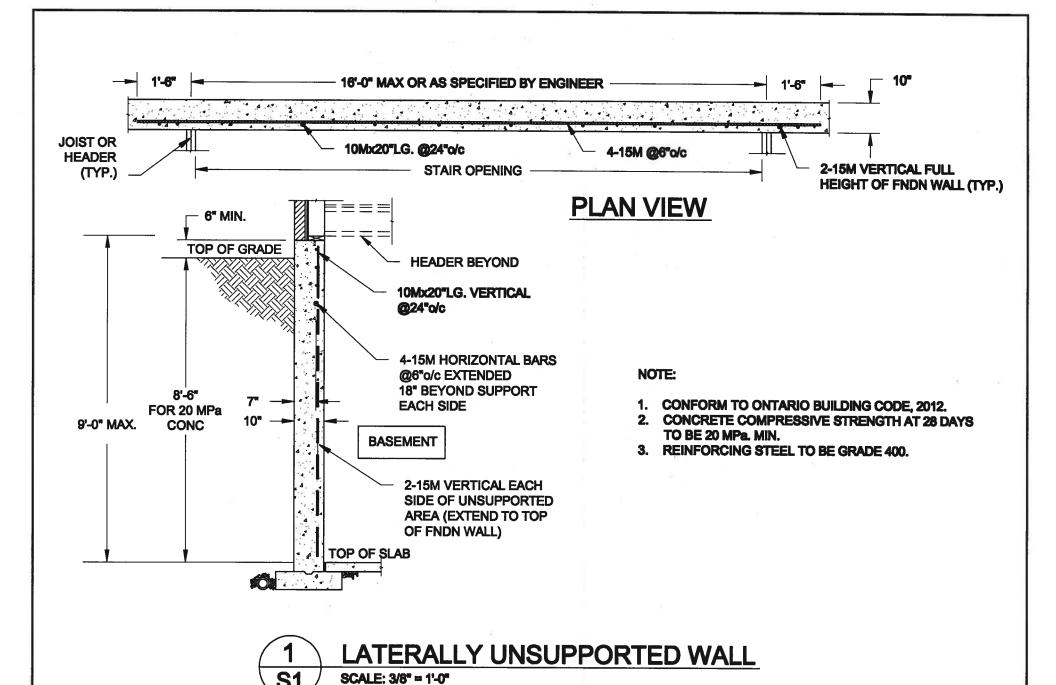

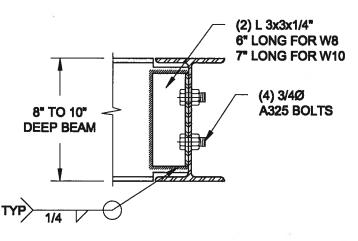



12" TO 14"

**DEEP BEAM** 


(2) L 3x3x1/4" 9" LONG FOR W12

(6) 3/4Ø

angunita Samuritan mang A325 BOLTS

**10" LONG FOR W14** 



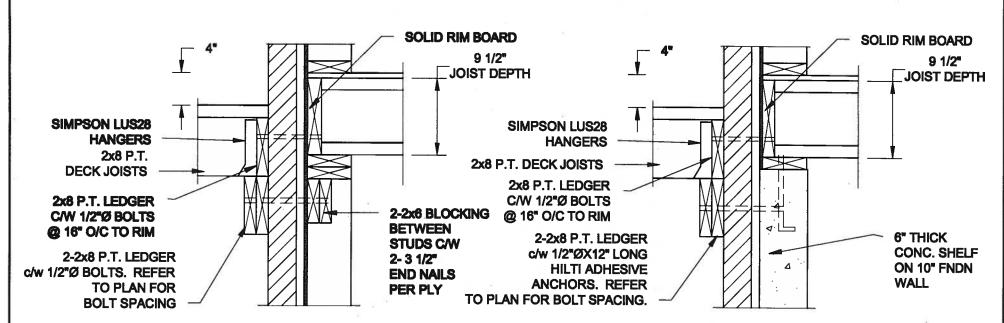


**DECK FASTENING DETAIL** SCALE: 1" = 1'-0"

**DECK FASTENING DETAIL** SCALE: 1" = 1'-0"


NOTE: 1.

WHERE BACKFILL HEIGHT < 4'-7", PROVIDE 2x6 @ 16" o/c KNEEWALL ON 10" THICK CONC FNDN WALL WHERE BACKFILL HEIGHT > 4'-7", PROVIDE 6" CONC SHELF FOR BRICK VENEER ON 10" THICK CONC FNDN WALL 2.

3. FOOTING TO BE 22"x6" THICK UNLESS NOTED OTHERWISE ON PLAN.

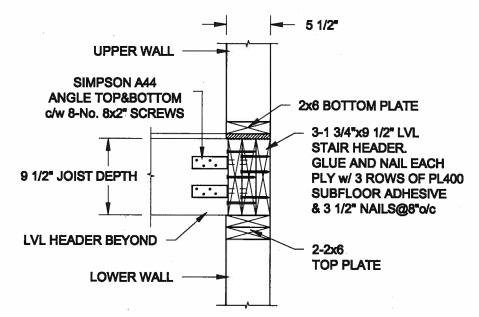

STAIR HEADER @ EXTERIOR WALL SCALE: 1" = 1'-0"

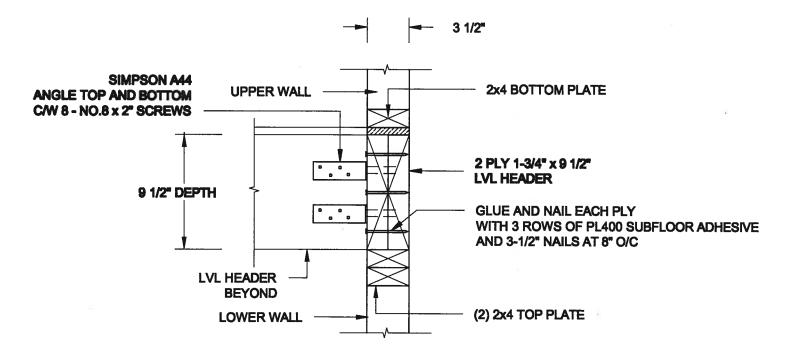

STAIR HEADER @ PARTYWALL SCALE: 1 1/2" = 1'-0"

Scale: Enchoor's Sock Project: QUAILE ENGINEERING LTD. DAYVINY WILLINGTON ROMES - GREEN VALLEY REALES - SE **AS NOTED** BRADFORD, ONTARIO Dale: 38 Parkside Drive, UNIT 7 S. J. BOYD TYPICAL STRUCTURAL DETAILS Newmarket, ON JAN-00-2010 T: 905-853-8547 Drawit Checks Project No.: Drawing No.: E: qualle.eng@rogers.com JAN 11,2018 SC SJB 17-194 **S2** 

PC/ScinC48/2017/17-194 EAYVIIW WELLINGTON GREEN VALLEY SEMINJ7-PALGING

CONSTRUCTION NOTES (Unless otherwise noted) ALL CONSTRUCTION TO ADHERE TO THESE PLANS AND SPEC'S AND TO CONFORM TO THE ONTARIO BUILDING CODE AND ALL OTHER APPLICABLE CODES AND AUTHORITIES HAVING JURISDICTION. THESE REQUIREMENTS ARE TO BE TAKEN AS MINIMUM SPECIFICATIONS. ONT. REG. 332/12-2012 OBC 1. ROOF CONSTRUCTION NO.210 (10.25kg/m2) ASPHALT SHINGLES, 10mm (3/8") PLYWOOD SHEATHING WITH "H" CLIPS, APPROVED WOOD TRUSSES @ 600mm (24") O.C. MAX, APPROVED EAVES PROTECTION TO EXTEND 900mm (3'-0") FROM EDGE OF ROOF AND MIN, 300mm (12") BEYOND INNER (3-U) FROM EDGE OF ROOF AND MIN, 300mm (12") BEYOND INNER FACE OF EXTERIOR WALL (EAVES PROTECTION NOT REQ'D FOR ROOF SLOPES 8:12 OR GREATER) 38x89 (2"x4") TRUSS BRACING @ 1830mm (6"-0") O.C. AT BOTTOM CHORD, PREFIN, ALUM, EAVESTROUGH, FASCIA, RWL & VENTED SOFFIT, PROVIDE ICE & WATER SHIELD TO ALL ROOF/WALL SURFACES SUSCEPTIBLE TO ICE DAMMING. ROOF SHEATHING TO BE FASTENED 150 (6") C/C ALONG EDGES & INTERMEDIATE SUPPORTS WHEN TRUSSES SPACED GREATER THAN 400 (1.4") ATIO, CENTURATED AT 100 CE SIGNING AT THE STANDARD AND A STANDA

AREA WITH MIN. 25% AT EAVES & MIN. 25% AT RIDGE (OBC 9.19.1.2.) FRAME WALL CONSTRUCTION (2"x6") (SB-12-TABLE 3.1.1.2.A)
SIDING AS PER ELEV.. 19x38 (1"x2") VERTICAL WOOD FURRING,
CONTIN. SHEATHING MEMBRANE, 9.5mm (3/8") EXT. TYPE SHEATHING,
38x140 (2"x6") STUDS @ 400mm (16") O.C., RSI 3.87 (R22) INSULATION
AND APPR. VAPOUR BARRIER AND APPR. CONTIN. AIR BARRIER,
13mm (1/2") INT. DRYWALL FINISH. SIDING TO BE MIN. 200mm (8")
ABOVE FINISH GRADE. REFER TO OBC SB-12, CHAPTER 3 FOR ADDITIONAL THERMAL INSULATION REQUIREMENTS.

THAN 406 (16"), ATTIC VENTILATION 1:300 OF INSULATED CEILING

(2A) RESERVED

PRAME WALL CONSTRUCTION (2"x4")— GARAGE WALLS SIDING AS PER ELEV. 19x38 (1"x2") VERTICAL WOOD FURRING, CONTIN. SHEATHING MEMBRANE. 9.5mm (3/8") EXT. TYPE SHEATHING, 38x89 (2"x4") STUDS @ 400mm (16") O.C. (MAX. HEIGHT 3000mm (9'-10"), WITH APPR. DIAGONAL WALL BRACING, SIDING TO BE MIN. 200mm (8") ABOVE FINISH GRADE.

(2C) RESERVED

2D STUCCO WALL CONSTRUCTION (2"x4") -GARAGE WALLS
STUCCO CLADDING SYSTEM CONFORMING TO O.B.C. 9.27.1.1.(2) & 9.28 THAT EMPLOY A MINIMUM 10mm AIR SPACE BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLIED PER MANUFACTURERS SPECIFICATIONS OVER 25mm (1") MIN. EXPANDED OR EXTRUDED RIGID POLYSTYRENE ON APPROVED AIR/MOISTURE BARRIER ON 13mm (1/2") EXT. TYPE SHEATHING ON 38x89 (2"x4") STUDS @ 400 (16") O.C., STUCCO TO BE MIN. 200 (8")

WALLS ADJACENT TO ATTIC SPACE — NO CLADDING

9.5mm (3/8") EXT. TYPE SHEATHING, 38x140 [2"x6"] STUDS @ 400mm

(1/6") O.C., RSI 3.87 (R22) INSULATION AND APPR. VAPOUR BARRIER
AND APPR. CONTIN. AIR BARRIER, 13mm [1/2") INTERIOR DRYWALL
FINISH. MID-HEIGHT BLOCKING REQ'D. IF NO SHEATHING APPLIED. REFER TO OBC SB-12, CHAPTER 3 FOR ADDITIONAL THERMAL

BRICK VENEER CONSTRUCTION (2"x6") (SB-12-TABLE 3.1.1.2.A)
90mm (4") FACE BRICK, 25mm (1") AIR SPACE, 22x180x0.76mm
(7/6"x7"x0.03") GALV. METAL TIES @ 400mm (16") O.C. HORIZONTAL 600mm (24") O.C. VERTICAL APPROVED SHEATHING PAPER, 9.5mm (3/8") EXT. TYPE SHEATHING, 38x1 40 (2'x6") STUDS @ 400mm (16") O.C., RSI 3A7 (R22) INSULATION & APPR, VAPOUR BARRIER WITH APPR. CONTIN. AIR BARRIER. 13mm (1/2") INTERIOR DRYWALL FINISH. PROVIDE WEEP HOLES © 800mm (32") O.C. BOTTOM COURSE AND OVER OPENINGS. PROVIDE BASE FLASHING UP MIN. 150mm (6") BEHIND BUILDING PAPER. REFER TO OBC SB-12, CHAPTER 3 FOR ADDITIONAL THERMAL INSULATION REQUIREMENTS. BRICK TO BE MIN. 150mm (6") ABOVE FINISH GRADE

(3A) RESERVED



BRICK VENEER CONSTRUCTION (2"x4")— GARAGE WALLS
90mm (4") FACE BRICK, 25mm (1") AIR SPACE, 22x180x0.76mm
(7/8'x7'x0.03") GALV. METAL IESE & 400mm (16") O.C. HORIZONTAL
600mm (24") O.C. VERTICAL APPR. SHEATHING PAPER. 9.5mm (3/8")
EXT. TYPE SHEATHING, 38x89 [2"x4"] STUDS @ 400mm (16") O.C. [MAX.
HEIGHT 3000mm 9'-10") WITH APPR. DIAGONAL WALL BRACKING.
PROVIDE WEEP POLES @ 800mm (32") O.C. BOTTOM COURSE AND
OVER OPENINGS. PROVIDE BASE FLASHING UP MIN. 150mm (6")
BEHIND BUILDING PAPER.
BRICK VENEER CONSTRUCTION (5") ABOVE FINISH GRADE BRICK TO BE MIN. 150mm (6") ABOVE FINISH GRADE.

STUCCO WALL CONSTRUCTION (2":46") (SB-12-TABLE 3.1.1.2.A)
STUCCO CLADDING SYSTEM CONFORMING TO O.B.C. 9.27.1.1.(2) &
9.28 THAT EMPLOYS A MINIMUM 10mm AIR SPACE BEHIND THE
CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR AND APPLIED
PER MANUFACTURERS SPECIFICATIONS OVER 25mm (1") MIN.

EXTRUDED OR EXPANDED RIGID POLYSTYRENE ON APPR. CONTIN. AIR/MOISTURE BARRIER ON 13mm (1/2") EXT. TYPE SHEATHING ON 38x140 (2"x6") STUDS @ 400mm (16") O.C., RS1 3.87(R22) INSULATION APPROVED VAPOUR BARRIER, 13mm (1/2") GYPSUM WALLBOARD INTERIOR FINISH. REFER TO OBC SB-12, CHAPTER 3 FOR ADDITIONAL THERMAL INSULATION REQUIREMENTS, STUCCO TO BE MIN. 200 (8") BOVE FINISH GRADE,

INTERIOR STUD PARTITIONS
FOR BEARING PARTITIONS 38x89 (2"x4") @ 400mm (16") O.C. FOR 2 STOREYS AND 300mm [12"] O.C. FOR 3 STOREYS, NON-BEARING PARTITIONS 38x89 (2"x4") @ 600mm (24") O.C. PROVIDE 38x89 (2"x4") BOTTOM PLATE AND 2/38x89 (2/2"x4") TOP PLATE. 13mm (1/2") INT. DRYWALL BOTH SIDES OF STUDS, PROVIDE 38x140 (2"x6") STUDS/PLATES WHERE NOTED.

FOUNDATION WALL/FOOTINGS: (9.15.3, 9.15.4, 9.13.2, 9.14.2.1.(2))
250mm (10") POURED CONC. FDTN. WALL 30MPG (4350psi) WITH
BITUMENOUS DAMPPROOFING AND DRAINAGE LAYER. DRAINAGE
LAYER REQ'D. WHEN BASEMENT INSUL. EXTENDS 900 (2-11") BELOW FIN. GRADE, DRAINAGE LAYER IS NOT REQ'D. WHEN FOTH, WALL IS WATERPROOFED. MAXIMUM POUR HEIGHT 2820 [9"-3"] ON 560x155 (22"x6") CONTINUOUS KEYED CONC. FTG. BRACE FDTN. WALL PRIOR TO BACKFILLING. ALL FOOTINGS SHALL REST ON NATURAL UNDISTURBED SOIL OR COMPACTED ENGINEERED FILL, WITH MIN.

BEARING CAPACITY OF 150kPg OR GREATER. IF SOIL BEARING DOES NOT MEET MINIMUM CAPACITY, ENGINEERED FOOTINGS ARE

-SEE OBC 9.15.3

MAXIMUM FLOOR LIVE LOAD OF 2.4kPa. (50psf.) PER FLOOR, AND MAX, LENGTH OF SUPPORTED FLOOR JOISTS IS 4.9m (16'-1") -REFER TO SOILS REPORT FOR SOIL CONDITIONS AND BEARING

STRIP FOOTING SUPPORTING EXTERIOR WALLS (FOR W.O.B.)
-ASSUMING MASONRY VENEER CONSTRUCTION, MAX. FLOOR LIVE LOAD OF 2.4kPg. (50psf.) PER FLOOR, AND MAX, LENGTH OF SUPPORTED FLOOR JOISTS IS 4.9m (16'-1"). THE STRIP FOOTING SIZE IS AS FOLLOWS: 2 STOREY WITH WALK-OUT BASEMENT 545x175 (22"x7")

FOUNDATION DRAINAGE OBC. 9.14.2. & 9.14.3.

100mm (4") DIA. FOUNDATION DRAINAGE TILE 150mm (6") CRUSHED STONE OVER AND AROUND DRAINAGE TILES.

BASEMENT SLAB ORC. 9.3.1.6.(1)(b). 9.16.4.5.(1). 9.25.3.3.(15)
80mm (3")MIN. 25MPa (3600p3i) CONC. SLAB ON 100mm (4")
COARSE GRANULAR FILL OR 20MPa. (3000p3i) CONC. WITH
DAMPPROOFING BELOW SLAB. UNDER SLAB INSULATION PER SB-12.

ALL SLAB JOINTS & PENETRATIONS TO BE CAULKED. EXPOSED FLOOR TO EXTERIOR (SB-12-TABLE 3,1,1,2A)
PROVIDE RSI 5.46 (R31) INSULATION, APPROVED VAPOUR BARRIER
AND CONTINUOUS AIR BARRIER, FINISHED SOFFIT.

ATTIC INSULATION (SB-12-TABLE 3.1.1.2.A) (SB-12-3.1.1.8) RSI 10.56 (R60) BLOWN IN ROOF INSULATION AND APPROVED VAPOUR BARRIER, 16mm (5/8") INT. DRYWALL FINISH OR APPROVED EQUAL. RSI 3.52 (R20) MIN. ABOVE INNER SURFACE OF EXTERIOR WALL

(10) ALL STAIRS/EXTERIOR STAIRS -OBC. 9.8.-UNIFORM RISE -5mm (1/4") MAX BETWEEN ADJACENT TREADS OR LANDINGS -10mm (1/2") MAX BETWEEN TALLEST & SHORTEST RISE IN FLIGHT

= 200 (7-7/8") = 210 (8-1/4") = 235 (9-1/4") MIN. RUN MIN, TREAD MAX. NOSING MIN. HEADROOM = 25 (1") = 1950 (6'-5") PAIL @ LANDING RAIL @ STAIR = 865 (2'-10") to 965 (3'-2")

MAX RISE

HTOW STAIR WIDTH = 860 (2'-10") FOR CURVED STAIRS MIN. RUN MIN. AVG. RUN = 200 (8")

MIN. AVG. KUN - 40 (c),

HANDRAILS - OBC. 9.8.7.
FINISHED RAILING ON PICKETS SPACED MAXIMUM 100mm (4")

BETWEEN PICKETS. CLEARANCE BETWEEN HANDRAIL AND SURFACE

TO BE 50 (2"I MIN. HANDRAILS TO BE CONTINUOUS

37)

EXCEPT FOR NEWEL POST AT CHANGES OF DIRECTION INTERIOR GUARDS: 900mm (2'-11") MIN. HIGH

POTENTIAL STATES OF THE STATES

SILL PLATE — OBG. 9.23.7,

38x89 (2'x4") SILL PLATE WITH 13mm (1/2") DIA. ANCHOR BOLTS

200mm (8") LONG, EMBEDDED MIN. 100mm (4") INTO CONC. @

2400mm (7"-10") C.C., CAULKING OR 25 (1") MIN. MINERAL WOOL

BETWEEN PLATE AND TOP OF FDTN. WALL. USE NON-SHRINK GROUT TO LEVEL SILL PLATE WHEN REQUIRED.

BASEMENT INSULATION (SB-12-3.1.17). 9.75.2.3. 9.13.2.6)
FOUNDATION WALLS ENCLOSING HEATED SPACE SHALL BE
INSULATED FROM THE UNDERSIDE OF THE SUBFLOOR TO NOT MORE
THAN 200mm (8") ABOVE THE FINISHED FLOOR & NO CLOSER THAN
50mm (2") OF THE BASEMENT SLAB. RSI3.52ci (R20ci) BLANKET INSULATION TO HAVE APPROVED VAPOUR BARRIER, RECOMMEND DAMPPROOF WITH BUILDING PAPER BETWEEN THE FOUNDATION WALL AND INSULATION UP TO GRADE LEVEL. NOTE: FULL HEIGHT INSULATION AT COLD CELLAR WALLS. AIR BARRIER TO BE SEALED TO FOUNDATION WALL WITH CAULKING. CONTINUOUS INSULATION (ci) IS NOT TO BE INTERRUPTED BY FRAMING.

BEARING STUD PARTITION
38x89 [27x4"] STUDS @ 400mm [16"] O.C. 38x89 [27x4"] SILL PLATE ON
DAMPPROOFING MATERIAL, 13mm [11/2"] DIA. ANCHOR BOLTS
200mm [8"] LONG, EMBEDDED MIN. 100mm [4"] INTO CONC. @
2400mm [7"-10"] O.C. 100mm [4"] HIGH CONC. CURB ON 350x155
[14"x0"] CONC. FOOTING. ADD HORIZ, BLOCKING AT MID-HEIGHT IF WALL IS UNFINISHED.

STEEL BASEMENT COLUMN (SEE O.B.C. 9.15.3.3) 89mm(3-1/2") DIA x 3.0mm(0.118) SINGLE WALL TUBE TYPE 2 89mm(3-1/27) DIA x 3.0mm(0.118) SINGLE WALL TUBE 17PE 2 ADJUSTABLE STL. COL. W/ MIN. CAPACITY OF 71.2kN (16,000lbs.) AT A MAX. EXTENSION OF 2318mm (7-7 1/2") CONFORMING TO CAN/CGSB-7.2-94, AND WITH 150x150x9.5 (6'x6'x3/8") STL. PLATE TOP & BOTTOM. 870:870:410 [34\*34\*16\*] CONC. FOOTING ON UNDISTURBED SOIL OR ENGINEERED FILL CAPABLE OF SUSTAINING PRESSURE OF 150 Kpa. MINIMUM AND AS PER SOILS REPORT.

STEEL BASEMENT COLUMN (SEE O.B.C. 9.15.3.3)
89mm(3-1/27) DIA x 4.78mm(.188) FIXED STL COL. WITH 150x150x9.5
(4%-6%-3/8") STL. TOP & BOTTOM PLATE ON 1070x1070x460
(42%-42%18"). CONC. FOOTING ON UNDISTURBED SOIL OR ENGINEERED FILL CAPABLE OF SUSTAINING A PRESSURE OF 150 Kpg. MIN. AND AS PER SOILS REPORT.

STEEL COLUMN 90mm(3-1/2") DIA x 4.78mm(.188) NON-ADJUSTABLE STL. COL. TO BE ON 150x150x9.5 (6"x6"x3/8") STEEL TOP PLATE, & BOTTOM PLATE. BASE PLATE 120x250x12.5 (4 1/2"x10"x1/2") WITH 2-12mm DIA. x 300mm LONG x50mm HOOK ANCHORS (2-1/2'x12'x2') FIELD WELD COL. TO BASE PLATE.

BEAM POCKET OR 300x150 (12'x6") POURED CONC. NIB WALLS. MIN. BEARING 90mm (3-1/2")

17) 19x64 (1"x3") CONTINUOUS WOOD STRAPPING BOTH SIDES OF STEEL BEAM.

GARAGE SLAB 100mm (4") 32MPa (4640psi) CONC. SLAB WITH 5-8% AIR ENTRAINMENT ON OPT. 100 (4") COARSE GRANULAR FILL WITH COMPACTED SUB-BASE OR COMPACTED NATIVE FILL. SLOPE TO FRONT.

GARAGE CEILINGS/INTERIOR WALLS
13mm (1/2") GYPSUM BOARD ON WALL AND CEILING BETWEEN HOUSE AND GARAGE. TAPE AND SEAL ALL JOINTS AIRTIGHT PER O.B.C. 9.10.9.16. WALLS (R22), CEILINGS (R31), REFER TO SB-12, TABLE 3.1.1.2.A. FOR REQUIRED THERMAL INSULATION.

DOOR AND FRAME GASPROOFED. DOOR EQUIPPED WITH SELF CLOSING DEVICE AND WEATHERSTRIPPING PER OBC 9.10.13.15.

PRECAST CONCRETE STEP OR WOOD STEP WHERE NOT EXPOSED TO WEATHER. MAX. RISE 200mm (7-7/8") MIN. TREAD 250mm (9-1/2"). SEE OBC. 9.8.9.2., 9.8.9.3. & 9.8.10.

DRYER EXHAUST (OBC-6.2.3.6.(7) & 6.2.4.11.)
CAPPED DRYER EXHAUST VENTED TO EXTERIOR.

(USE 100mm (4") DIA. SMOOTH WALL VENT PIPE) INSULATED ATTIC ACCESS (OBC-9.19.2.1. & SB12-3.1.1.8)
ATTIC ACCESS HATCH WITH MIN. DIMENSION OF 545x610mm ( 1/2'x24") & A MIN. AREA OF 0.32 SQ.M. (3.44 SQ.FT.) WITH WEATHERSTRIPPING. RSI 3.52 (R20) RIGID INSUL. BACKING.

FIREPLACE CHIMNEYS OBC. 9.21.

TOP OF FIREPLACE CHIMNEY SHALL BE 915mm (3'-0") ABOVE THE HIGHEST POINT AT WHICH IT COMES IN CONTACT WITH THE ROOF AND 610mm (2'-0") ABOVE THE ROOF SURFACE WITHIN A HORIZ.

DISTANCE OF 3050mm (10'-0") FROM THE CHIMNEY LINEN CLOSET, 4 SHELVES MIN. 350mm (14") DEEP.

MECHANICAL EXHAUST FAN, VENTED TO EXTERIOR AS REQUIRED BY

STEEL BEARING PLATE FOR MASONRY WALLS 280x280x16 [11"x11"x5/8"] STL. PLATE FOR STL BEAMS AND 280x280x12 [11"x11"x1/2"] STL. PLATE FOR WOOD BEAMS BEARING ON CONC. BLOCK PARTYWALL, ANCHORED WITH 2-19mm (3/4") x 200mm (8") LONG GALV. ANCHORS WITHIN SOLID BLOCK COURSE. LEVEL WITH NON-SHRINK GROUT.

OR
SOLID WOOD BEARING FOR WOOD STUD WALLS
SOLID BEARING TO BE AT LEAST AS WIDE AS THE SUPPORTED MEMBER. SOLID WOOD BEARING COMPRISED OF BUILT-UP WOOD STUDS TO BE CONSTRUCTED IN ACCORDANCE WITH OBC

RESERVED

BEARING WOOD POST (BASEMENT) (OBC 9.17.4.)
3-38x140 (3-2'x6") BUILT-UP-POST ON METAL BASE SHOE ANCHORED TO CONC. WITH 12.7 DIA. BOLT, 610x610x300 (24"x24"x12") CONC.

MIN. HORIZ. STEP = 600mm (24").

MAX. VERT. STEP = 600mm (24").

SLAR ON GRADE
MIN. 100mm (4") CONCRETE SLAB ON GRADE ON 100mm (4")
COARSE GRANULAR FILL REINFORCED WITH 6x6-W2.9xW2.9 MESH
PLACED NEAR MID-DEPTH OF SLAB. CONC. STRENGTH 32 MPa (4640 psi) WITH 5-8% AIR ENTRAINMENT ON COMPACTED SUB-GRADE, WHERE REQUIRED, REFER TO OBC SB-12, TABLE 3.1.1.2.A. FOR REQUIRED MINIMUM INSULATION UNDER SLAB.

DIRECT VENTING GAS FURNACE / H.W.T VENT
DIRECT VENTING GAS FURNACE AIN. 900mm (36") FROM A GAS
REGULATOR. MIN. 300mm (12") ABOVE FIN. GRADE, FROM ALL OPENINGS EXHAUST AND INTAKE VENTS HPV INTAKE TO BE A MIN OF 1830mm (6-0") FROM ALL EXHAUST TERMINALS. REFER TO GAS UTILIZATION CODE.

DIRECT VENTING GAS FIREPLACE VENT
DIRECT VENT GAS FIREPLACE, VENT TO BE A MINIMUM 300mm (12")
FROM ANY OPENING AND ABOVE FIN. GRADE, REFER TO GAS UTILIZATION CODE.

SUBFLOOR. JOIST STRAPPING AND BRIDGING
16mm (5/8") T & G SUBFLOOR ON WOOD FLOOR JOISTS, FOR
CERAMIC TILE APPLICATION (\* SEE OBC 9.30.6. \*) 6mm (1/4") PANEL TYPE UNDERLAY UNDER RESILIENT & PARQUET FLOORING. (\* SEE FLOOR JOISTS WITH SPANS OVER 2100mm (6'-11") TO BE BRIDGED

WITH 38x38 (2'x2") CROSS BRACING OR SOLID BLOCKING @ 2100mm (6'-11") O.C. MAX. AND WHERE SPECIFIED BY JOIST TABLES A-1 OR A-2 STRAPPING SHALL BE 19x64 (1"x3") @ 2100mm (6-11") O.C. UNIESS A PANEL TYPE CEILING FINISH IS APPLIED. (\* SEE OBC 9.23.9.4. \*)

EXPOSED BUILDING FACE OBC. 9.10.15. & SB-2-2.3.5.(2) EXTERIOR WALLS TO HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 45 min. WHERE LIMITING DISTANCE (LD) IS LESS THAN 1.2M (3-1)1"). WHERE THE LD IS LESS THAN 400mm (1-1)1" THE EXPOSING FACE SHALL BE CLAD IN NON-COMBUSTIBLE MATERIAL, SEE ELEVATIONS FOR ADDITIONAL NOTES. OFFENDING GARAGE WALLS INCLUDED.

COLD CELLAR PORCH SLAB (OBC 9.39.) FOR MAX. 2500mm (8'-2") PORCH DEPTH (SHÖRTEST DIM.), 125mm (5") 32MPG (4640psi) CONC. SLAB WITH 5-8% AIR ENTRAINMENT, REINF. WITH 10M BARS @ 200mm (7 7/8") O.C. EACH WAY IN BOTTOM THIRD OF SLAB, MIN. 30mm (1 1/4") COVER, 600x600 (23 5/8"x23 5/8") 10M DOWELS @ 600mm (23 5/8") O.C., ANCHORED IN PERIMETER FDTN. WALLS, SLOPE SLAB MIN. 1.0% FROM HOUSE WALL, SLAB TO HAVE MIN. 75mm (3") BEARING ON FOTN, WALLS, PROVIDE (L7) LINTEL OVER CELLAR DOOR WITH 100mm (4") END BEARING.
THE FDTN. WALL SHALL NOT BE REDUCED TO LESS THAN 90mm

(3-1/2") THICK TO A MAX, DEPTH OF 600mm (24") AND SHALL BE TIED TO THE FACING MATERIAL WITH METAL TIES SPACED 200mm (8") O.C. VERTICALLY AND 900mm (36") O.C. HORIZONTALLY. FILL SPACE BETWEEN WALL AND FACING SOLID WITH MORTAR.

CONVENTIONAL ROOF FRAMING (2.0Kpg. SNOW LOAD)
38x140 [27:6"] RAFTERS © 400mm [16"O.C.) FOR MAX 11"-7"
SPAN, 38x184 [27:8"] RIDGE BOARD, 38x89 [27:4"] COLLAR TIES AT MIDSPANS, CEILING JOISTS TO BE 38x89 (27x4") @ 400mm O.C. FOR MAX. 2830mm (9°-3") SPAN & 38x140 (2°x6") @ 400 (16") O.C. FOR MAX. 4450mm (14'-7") SPAN. RAFTERS FOR BUILT-UP ROOF TO BE 38x89 (2"x4") @ 600mm (24") O.C. WITH A 38x89 (2'x4") CENTRE POST TO THE TRUSS BELOW, LATERALLY BRACED @ 1800mm (6'-0") O.C. VERTICALLY.

GENERAL NOTES

WINDOWS:1) MINIMUM BEDROOM WINDOW -OBC. 9.9.10.1.-AT LEAST ONE BEDROOM WINDOW ON A GIVEN FLOO HAVE MIN. 0.35m2 UNOBSTRUCTED GLAZED OR OPEN AREA WITH MIN. CLEAR WIDTH OF 380 mm (1'-3").

2) WINDOW GUARDS -OBC. 9.8.8.1.(6). A GUARD IS REQUIRED WHERE THE TOP OF THE WINDOW SILL IS LOCATED LESS THAN 480mm [1-7] ABOVE FIN. FLOOR AND THE DISTANCE FROM THE FIN. FLOOR TO THE ADJACENT GRADE IS GREATER THAN 1800mm [5-117]

3) EXTERIOR WINDOWS

SHALL COMPLY WITH OBC DIV.-B 9.7.3. & 5B12-3.1.1.9

GENERAL: 1) MECHANICAL VENTILATION IS REQUIRED TO COMPLY WITH OBSC-DV. B. 6.2.2. SEE MECHANICAL DRAWINGS.

2) ALL DOWNSPOUTS TO DRAIN AMAY FROM THE BUILDING AS PER OBC 9.26.18.2. & 5.6.2.2.(3) AND MUNICIPAL STANDARDS.

ALL WINDOW WELLS TO DRAIN TO FOOTING LEVEL PER OBC 9.14.6.3. CHECK WITH THE LOCAL AUTHORITY. STUD WALL REINFORCEMENT FOR FUTURE GRAB BARS IN MAIN

BATHROOM
REINFORCEMENT OF STUD WALLS SHALL BE INSTALLED
ADJACENT TO WATER CLOSETS AND SHOWER OR BATHTUB IN
MAIN BATHROOM, REFER TO OBC. 9.5.2.3, 3.8.3.8.(1)[d] &
3.8.3.13.(1)[f]. SEE DETAIL.
ALL EXTERIOR DOORS TO COMPLY WITH THERMAL RESISTANCE
AS STATED IN O.B.C. SB-12-3.1.1.9.

ALL AIR BARRIER SYSTEMS ARE REQUIRED TO COMPLY WITH O.B.C., DIV.-8 9.25.3. ALL LUMBER SHALL BE SPRUCE NO.2 GRADE, UNLESS NOTED

STUDS SHALL BE STUD GRADE SPRUCE, UNLESS NOTED OTHERWISE

OTHERWISE.

LUMBER EXPOSED TO THE EXTERIOR TO BE SPRUCE No.2 GRADE

PRESSURE TREATED OR CEDAR, UNLESS NOTED OTHERWISE.

ALL LAMINATED VENEER LUMBER (L.V.L.) BEAMS, GIRDER TRUSSES, AND METAL HANGER CONNECTIONS SUPPORTING ROOF FRAMING TO BE DESIGNED & CERTIFIED BY TRUSS MANUFACTURER.

LVL BEAMS SHALL BE 2.0E -2950Fb MIN.. NAIL EACH PLY OF LVL WITH 89mm (3 1/27) LONG COMMON WIRE NAILS @ 300mm (127) O.C. STAGGERED IN 2 ROWS FOR 184, 240 & 300mm (7 1/47,9 1/27, 11 7/87) DEPTHS AND STAGGERED IN 3 ROWS FOR DIA. GALVANIZED BOLTS BOLTED AT MID-DEPTH OF BEAM @

PROVIDE FACE MOUNT BEAM HANGERS TYPE "SCL"
MANUFACTURED BY SIMPSON STRONG-TIE OR EQUAL
FOR ALL LYL BEAM TO BEAM CONNECTIONS UNLESS
OTHERWISE NOTED. REFER TO ENG. FLOOR LAYOUTS.

JOIST HANGERS: PROVIDE METAL HANGERS FOR ALL JOISTS AND BUILT-UP WOOD MEMBERS INTERSECTING FLUSH BUILT-UP

AND SOLEHOF WOOD MANABERS INTERSECTING FLOST BUILT-UP WOOD MEMBERS.
WOOD FRAMING NOT TREATED WITH A WOOD PRESERVATIVE, IN CONTACT WITH CONCRETE, SHALL BE SEPARATED FROM THE CONCRETE BY AT LEAST 2 mil. POLYETHYLENE FILM, No. 50 (45lbs.), ROLL ROOFING OR OTHER DAMPPROOFING MATERIAL, EXCEPT WHERE THE WOOD MEMBER IS AT LEAST 150mm [67] ABOVE THE GROUND.

STRUCTURAL STEEL SHALL CONFORM TO CAN/CSA-G40-21 GRADE 300W. HOLLOW STRUCTURAL SECTIONS SHALL CONFORM TO CAN-23-AC-04-24 CONFORM TO CSA-G40.21 GRADE 350W "STRUCTURAL QUALITY STEEL". OBC. B-9.23.4.3. REINFORCING STEEL SHALL CONFORM TO CSA-G30-18M GRADE 400R.

GRADE 400R.
ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE
BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE
EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BE GYPSUM
BASED. ALL STUCCO TO BE INSTALLED AS PER MANUFACTURERS
SPECIFICATIONS.

EXHAUST FAN

TO EXTERIOR

GFI DUPLEX OUTLET

HEAVY DUTY OUTLET (220 volt)

LIGHT FIXTURE (CEILING MOUNTED)

LIGHT FIXTURE (WALL MOUNTED)

DUPLEX OUTLET (HEIGHT A.F.F)

LEGEND 9 CLASS 'B' VENT DUPLEX OUTLET (12" ABOVE SURFACE) 0 WEATHERPROOF DUPLEX OUTLET

POT LIGHT

LIGHT FIXTURE (PULL CHAIN) SWITCH

SFLOOR DRAIN SINGLE JOIST DJ DOUBLE JOIST

TJ TRIPLE JOIST

HOSE BIB (NON-FREEZE) PRESSURE TREATED LUMBER GIRDER TRUSS BY ROOF TRUSS MANUF.

LAMINATED VENEER LUMBER POINT LOAD FROM ABOVE CA CURVED ARCH FLAT ARCH

MEDICINE CABINET (RECESSED) DOUBLE VOLUME CONCRETE BLOCK WALL SEE NOTE 39

SOLID WOOD BEARING (SPRUCE No. 2).
SOLID BEARING TO BE AS WIDE AS
SUPPORTED MEMBER OR AS DIRECTED BY
STRUCTURAL ENGINEER.
SOLID BEARING TO BE MINIMUM 2 PIECES. SOLID WOOD BEARING TO MATCH FROM ABOVE

ELECTRIC VEHICLE CHARGING SYSTEM (EVCS)
ROUGHIN FOR FUTURE ELECTRIC VEHICLE SUPPLY EQUIPMEN ₴₹ (CHARGING SYSTEM) TO BE INSTALLED. ROUGHHN SHALL INCLUDE:

A minimum 200 amp Panelboard Condult that is not less than 1 1/16" (27mm) trade size A square 4 11/16" (119mm) trade size electrical outlet Fumeproofed Electrical outlet box to be installed in

the Garage or carport or adjacent to drive REFER TO 2012 OBC. 9.34.4. SOIL GAS/ RADON CONTROL (OBC 9.1.1.7. & 9.13.4.) PROVIDE CONSTRUCTION TO PREVENT LEAKAGE OF SOIL GAS

INTO THE BUILDING IE PEQUIPED NTRACTOR MUST VERIFY ALL DI AND REPORT ANY DISCREPANCY TO VA3 DESIGN BEFORE PROCEEDING WITH THE WORK, ALL DRAWINGS AND SPECIFICATIONS ARE INSTRUMENTS OF SERVICE AND THE PROPERTY OF VA3 DESIGN WHICH IF REQUESTED, MUST BE RETURNED AT THE COMPLETION OF THE WORK, ALL

DRAWINGS TO BE USED FOR CONSTRUCTION ONLY AFTER

BUILDING PERMIT HAS BEEN ISSUED.

120

TWO STOREY VOLUME SPACES

-FOR A MAXIMUM 5490 mm (18-0") HEIGHT AND MAXIMUM SUPPORTED ROOF TRUSS LENGTH OF 6.0m, PROVIDE 2-38x140 (2-2'x6') SPR.#2 CONTIN. STUDS @ 300mm (12')
O.C. (TRIPLE UP AT EVERY THIRD DOUBLE STUD FOR BRICK
WALLS) CW 9. 6 (3/8') THICK EXT. PLYWOOD SHEATHING,
PROVIDE SOLID WOOD BLOCKING BETWEEN WOOD STUDS PROVIDE SOLID WOOD BLOCKING BETWEEN WOOD STUDS

9 1220 mm (4-07) O.C. VERIDCALLY. -FOR WALLS WITH
HORIZ. DISTANCES NOT EXCEEDING 2900 mm (9'-6"),
PROVIDE 38x140 (2'7x6") STUDS @ 400 (14") O.C. WITH
CONTINUOUS 2-38x140 (2-2"x6")TOP PLATES + 1-38x140
(1-2"x6") BOTTOM PLATE & MINIMUM OF 3-38x184 (3-2"x8")
CONT. HEADER AT GRND, CEILING LEVEL TOE-NAILED &
GLUED AT TOP, BOTTOM PLATES AND HEADERS.

"TYPICAL J. HOLIP BATCE PARTY WALLS."

TYPICAL 1 HOUR RATED PARTY WALL.
REFER TO DETAILS FOR TYPE AND SPECIFICATIONS.

FOUNDATION WALL (W.O.D./W.O.B.) WHERE GRADE TO T/O BASEMENT SLAB EXCEEDS 1200mm (3'-11") A 250mm (10") WIDE FOUNDATION WALL IS

EXTERIOR WALLS FOR WALK-OUT CONDITIONS THE EXTERIOR BASEMENT STUD WALL TO BE 38x140 (2'x6") STUDS @ 400mm (16") o.c. OR 38x89 (2'x4") STUDS @ 300mm

DRAIN WATER HEAT RECOVERY UNIT (DWHR) PER SB12-3.1.1.12., A DRAIN WATER HEAT RECOVERY (DWHR)
UNIT SHALL BE INSTALLED IN EACH DWELLING UNIT TO RECEIVE
DRAIN WATER FROM ALL SHOWERS OR FROM AT LEAST TWO
SHOWERS WHERE THERE ARE TWO OR MORE SHOWERS IN THE
DWELLING UNIT, DOES NOT APPLY IF THERE ARE NO SHOWERS
OR NO STOREY BENEATH ANY OF THE SHOWERS.

ONT. REG. 332/12-2012 OBC Amendment O. Reg. 139/17 JUNE 19, 2017 WOOD LINTELS AND BUILT-UP WOOD BEAMS 2/38 x 184 (2/2" x 8") SPR.#2 3/38 x 184 (3/2" x 8") SPR.#2 4/38 x 184 (4/2" x 8") SPR.#2 5/38 x 184 (5/2" x 8") SPR.#2 2/38 x 235 (2/2" x 10") SPR.#2 3/38 x 235 (3/2" x 10") SPR.#2 4/38 x 235 (4/2" x 10") SPR.#2 **B3** 2/38 x 286 (2/2" x 12") SPR.#2 3/38 x 286 (3/2" x 12") SPR.#2 4/38 x 286 (4/2" x 12") SPR.#2

LOOSE STEEL LINTELS 89 x 89 x 6.4L (3-1/2" x 3-1/2" x 1/4"L)
89 x 89 x 7.9L (3-1/2" x 3-1/2" x 5/16"L)
102 x 89 x 7.9L (4" x 3-1/2" x 5/16"L)
127 x 89 x 7.9L (5" x 3-1/2" x 5/16"L)
152 x 89 x 10.0L (6" x 3-1/2" x 3/8"L)
152 x 102 x 11.0L (6"x 4" x 7/16"L)
178 x 102 x 13.0L (7" x 4" x 1/2"L)

LAMINATED VENEER LUMBER (LVL) BEAMS LVL1A 1-1 3/4"x7 1/4" (1-45x184) LVL1 2-1 3/4\*x7 1/4" (1-45x184)
LVL1 2-1 3/4\*x7 1/4" (2-45x184)
LVL2 3-1 3/4\*x7 1/4" (3-45x184)
LVL3 4-1 3/4\*x7 1/4" (4-45x184)
LVL4 2-1 3/4\*x9 1/2" (1-45x240)
LVL5 3-1 3/4\*x9 1/2" (3-45x240)
LVL5 3-1 3/4\*x9 1/2" (4-45x240)
LVL5 4-1 3/4\*x9 1/2" (4-45x240) LVL6A 1-1 3/4\*x11 7/8\* (1-45x300) LVL6 2-1 3/4\*x11 7/8\* (2-45x300) LVL7 3-1 3/4\*x11 7/8\* (3-45x300)

4-1 3/4"x11 7/8" (4-45x300)

1. DOOR SCHEDULE
EXTERIOR 815 x 2030 x 45
DOOR (2'-8" x 6'-8" x 1-3/4")
INSULATED MIN. RSI 0.7 (R4) 1A EXTERIOR 865 x 2030 x 45 DOOR (2'-10" x 6'-8" x 1-3/4")

B EXTERIOR 915 x 2030 x 45 DOOR (3'-0" x 6'-8" x 1-3/4")

| DOOR | (3'-0' x 6'-6' x 1-3/4') |
| EXTERIOR 915 x 2438 x 45 |
| DOOR | (3'-0' x 6'-0' x 1-3/4') |
| EXTERIOR 800 x 2438 x 46 |
| DOOR | (2'-10' x 6'-0' x 1-3/4') |
| EXTERIOR 815 x 2030 x 35 |
| DOOR | (2'-8' x 6'-6' x 1-3/8') |
| DOOR | (2'-8' x 6'-6' x 1-3/8') |

2A DOOR 815 x 2030 x 45 DOOR (2'-8' x 8'-8" x 1-3/4") 20 MIN. RATED DOOR AND FRAME. WITH APPROVED SELF CLOSING

2D EXTERIOR 815 x 2438 x 45
DOOR (2'-6" x 6"-0" x 1-3/4") 20
MIN. RATED DOOR AND FRAME,
WITH APPROVED SELF CLOSING WITH APPROVED SELF CLUSH DEVICE. 760 x 2030 x 35 (2'-6" x 6'-8" x 1-3/8") INTERIOR DOOR

INTERIOR 710 x 2030 x 35 DOOR (2'-4" x 6'-8" x 1-3/8") INTERIOR 780 x 2438 x 35 DOOR (2'--6" x 8'-0" x 1-3/8") (3B)

INTERIOR 710 x 2438 x 35 DOOR (2'-4" x 8'-0" x 1-3/8") (3c)INTERIOR 610 x 2030 x 35 DOOR (2'-0" x 6'-6" x 1-3/8") (4.) INTERIOR 660 x 2030 x 35 DOOR (2'-2" x 6'-8" x 1-3/8") (4A)

INTERIOR 680 x 2436 x 35 DOOR (2'-2" x 8'-0" x 1-3/8") (4C) INTERSOR 460 x 2030 x 35 DOOR (1'-6" x 6'-8" x 1-3/8") (5.) 6. EXTERIOR 815 x 2030 x 45 DOOR (2"-8" x 6"-8" x 1-3/4") SOLID WOOD CORE

MECHANICAL SYMBOLS -40 HEAT PIPE WARM AIR RETURN AIR DUCT PLUMBING (TOILET) PLUMBING (BATH. SINK, SHOWER) SMOKE ALARM (REFER TO OBC 9.10.19)

PROVIDE 1 PER FLOOR, NEAR THE STAIRS CONNECTING THE FLOOR LEVEL AND ALSO 1 IN EACH BEDROOM NEAR HALL DOOR, ALARMS TO BE CONNECTED TO AN ELECTRICAL CIRCUIT AND INTERCONNECTED TO ACTIVATE ALL ALARMS IF 1 SOUNDS, BATTERY BACK-UP REQUIRED, SMOKE ALARMS TO INCORPORATE VISUAL SIGNALLING COMPONENT

ARBON MONOXIDE ALARMS (ORC 9.33.4.)
WHERE A FUEL-BURNING APPLIANCE IS INSTALLED IN A DWELLING UNIT,
A CARBON MONOXIDE ALARM CONFORMING TO CAN./CSA-6.19 OR UL2034 SHALL BE INSTALLED ADJACENT TO EACH SLEEPING AREA CARBON MONOXIDE DETECTOR(S) SHALL BE PERMANENTLY WIRED SO THAT ITS ACTIVATION WILL ACTIVATE ALL CARBON MONOXIDE DETECTORS AND BE EQUIPPED WITH AN ALARM THAT IS AUDIBLE WITHIN BEDROOMS WHEN THE INTERVENING DOORS ARE CLOSED, REFER TO MANUFACTURER FOR ADDDITIONAL REQUIREMENTS

REFER TO UNIT DRAWINGS OR PAGE CN-2 FOR SB-12 COMPLIANCE PACKAGE AT TO BE USED FOR THIS MODEL. The minimum thermal performance of building envelope and equipment shall conform to the selected package unless otherwise noted.

2018 VAS REFERENCE NUMBER

**CONST NOTE** 

16023

UPDATE TO 2018 JAN 11-18 RC 1 ISSUE FOR CLIENT REVIEW AUG 04-17 RC by

med has reviewed and takes responsibility for this design qualifications and meets the requirements set out in the ling Code to be a Designer.

Bostiste 25591 Wellington Jno-Baptiste VA3 Design Inc. 42658 Contractor must verify all dimensions on the job and report a discrepancy to the Designer before proceeding with the work. A drawings and specifications are instruments of service and the of the Designer which must be returned at the completion of the work.


Drawings are not to be scaled.




WELLINGTON GREEN VALLEY EAST MAY 2016 RC


BRADFORD CONSTRUCTION NOTES 3/16" = 1'-0" 16023-CN-A1

H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg secifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited eithout VA3 DESIGN's written

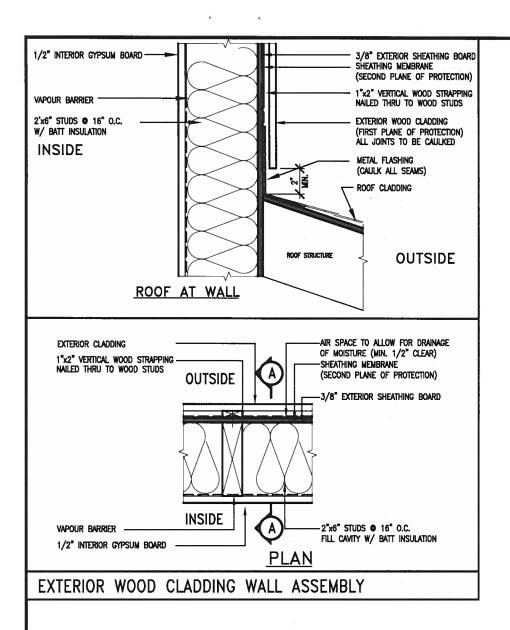


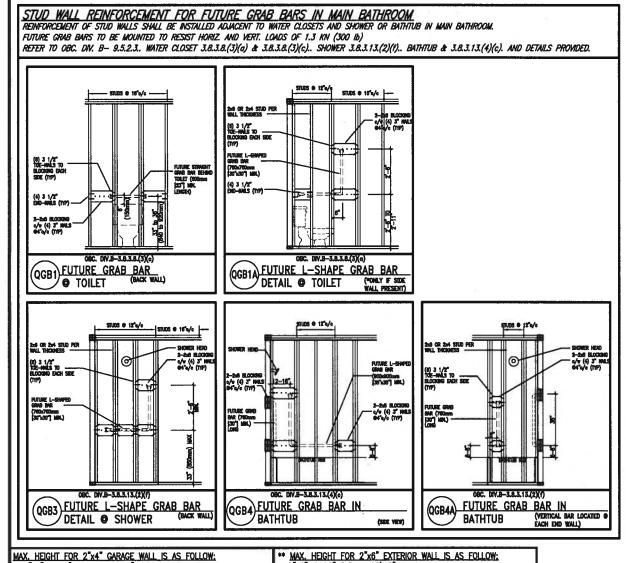





'CRIPPLE"

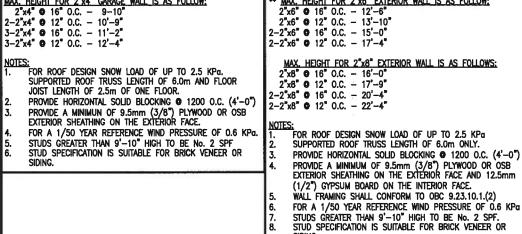

\*\* STUD INFORMATION TAKEN FROM OBC TABLE A-30


25591

BCB

42658

9				The undersigned has reviewed and takes responsibility for this design
8		Strain ex		and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.
7			•	qualification information
6	•			Wellington Jno-Baptiste WooficsTE 2559
5				nome , /eignature BCI
4	-		Ŀ	registration information VA3 Design Inc. 4265
3				Contraction and anti- of discourse on the lab and made an
2	UPDATE TO 2018	JAN 11-18	RC	
1	ISSUE FOR CLIENT REVIEW	AUG 04-17	RC	drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work.
Ю.	description	date	by	Drawings are not to be scaled.

no. description






**CONST NOTE** 

**CONSTRUCTION NOTES** 3/16" = 1'-0" RICHARD - H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu - Jon 11 2018 - 10:08 AM


16023-CN-A1

project no. 16023

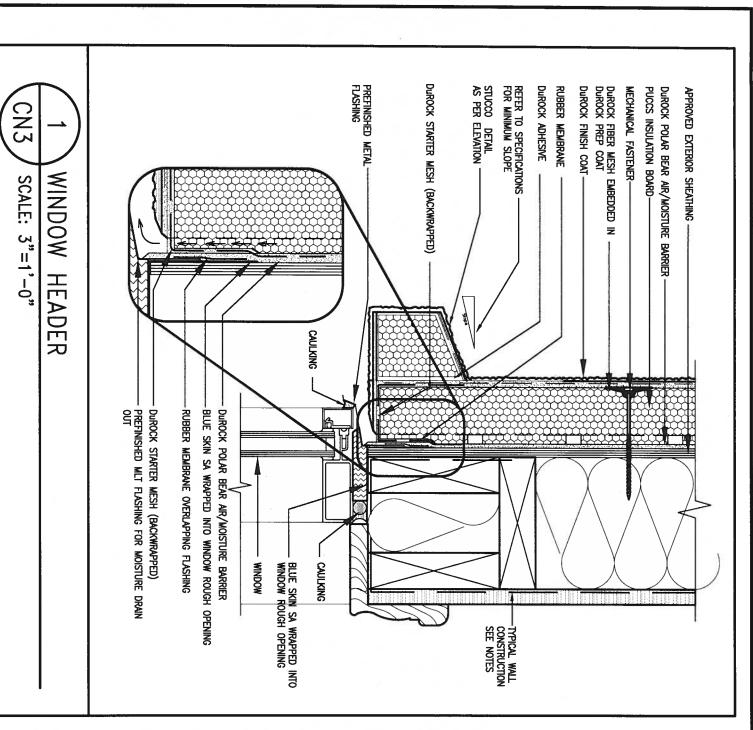


ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BE GYPSUM BASED. ALL STUCCO TO BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS.

DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

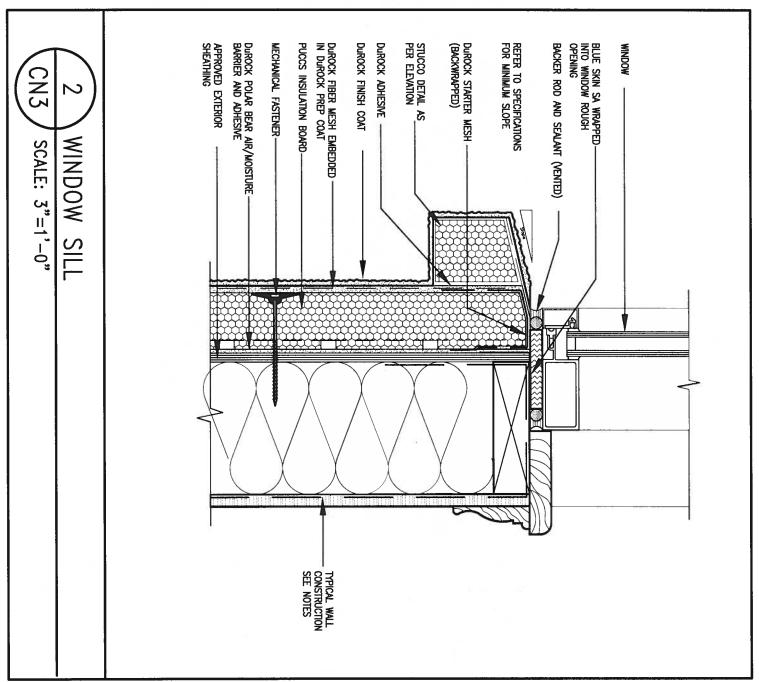


The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer. **CONST NOTE** 8 WELLINGTON 6 25591 16023 BCIN BRADFORD 42658 Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be scaled. MAY 2016 CONSTRUCTION NOTES 255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630,4782 2 UPDATE TO 2018 JAN 11-18 RC drawn by file non 3/16" = 1'-0" 1 ISSUE FOR CLIENT REVIEW AUG 04-17 RC 16023-CN-A1 va3design.com by date RICHARD - H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu - Jon 11 2018 - 10:09 AM no. description All drawings specifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN.

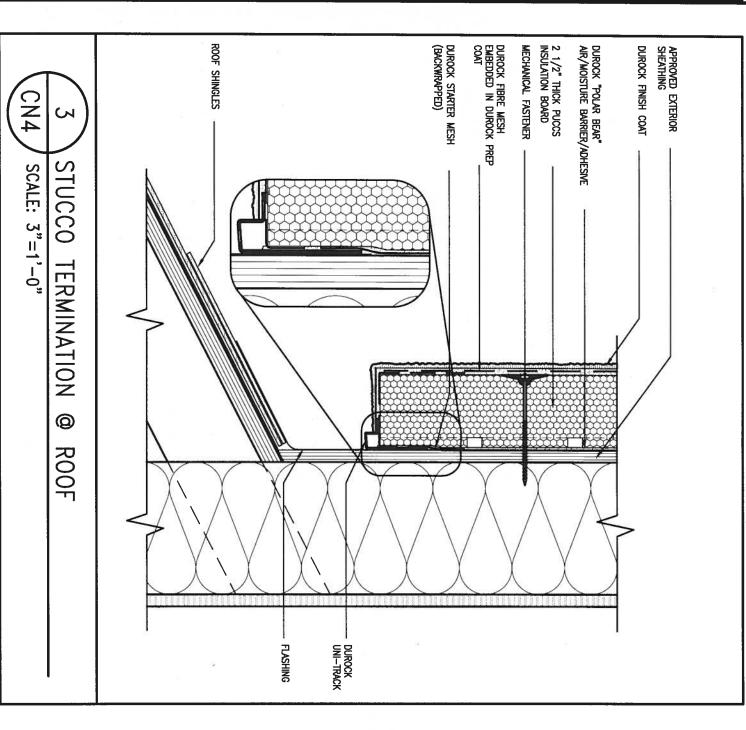

BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR. THE EXTERIOR SHEATHING MUST NOT BE GYPSUM BASED. ALL STUCCO TO BE INSTALLED AS PER MANUFACTURERS SPECIFICATIONS.

ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE

DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

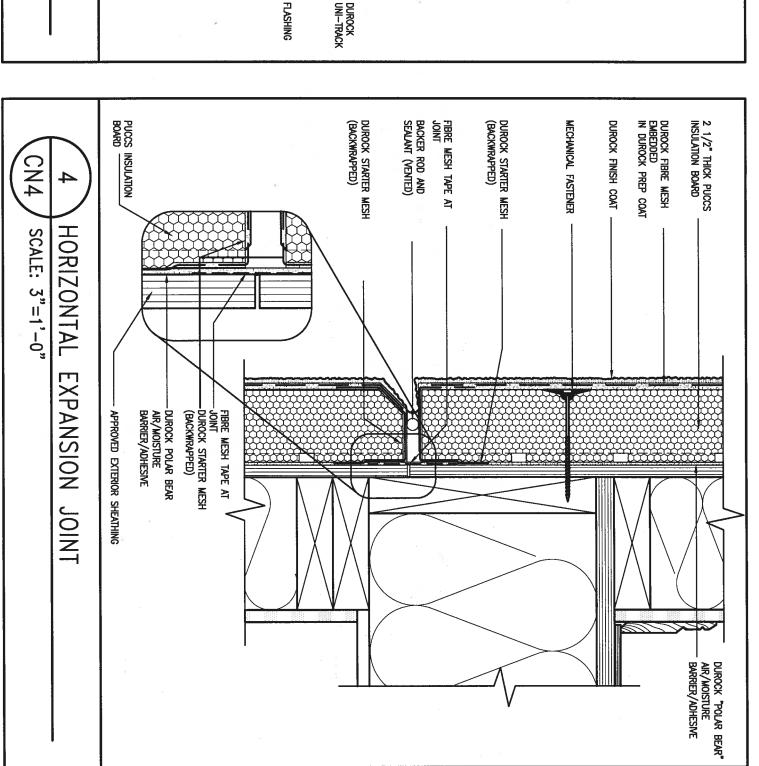

**CONST NOTE** BCIN BRADFORD 16023 42658 data MAY 2016 CONSTRUCTION NOTES Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be scaled. 255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782 2 UPDATE TO 2018 JAN 11-18 RC drawn by RC 3/16" = 1'-0" ISSUE FOR CLIENT REVIEW AUG 04-17 RC 16023-CN-A1 by RICHARD - H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu - Jon 11 2018 - 10:10 AM date no. description appecifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN's written permission APPROVED ECTEROR

STEATHAGE

WESTAMOUL FASTBURE

LINE MEST TOWN

(\*7) OVERLAPPING ON

BOTH SIDES


LINE

MANUFACTURERS SPECIFICATIONS.


DETAILS ARE BASED ON DUROCK PUCCS SYSTEM

BASED. ALL STUCCO TO BE INSTALLED AS PER

ALL STUCCO WALLS TO HAVE A MINIMUM 10mm AIR SPACE BEHIND THE CLADDING WITH POSITIVE DRAINAGE TO THE EXTERIOR SHEATHING MUST NOT BE GYPSUM

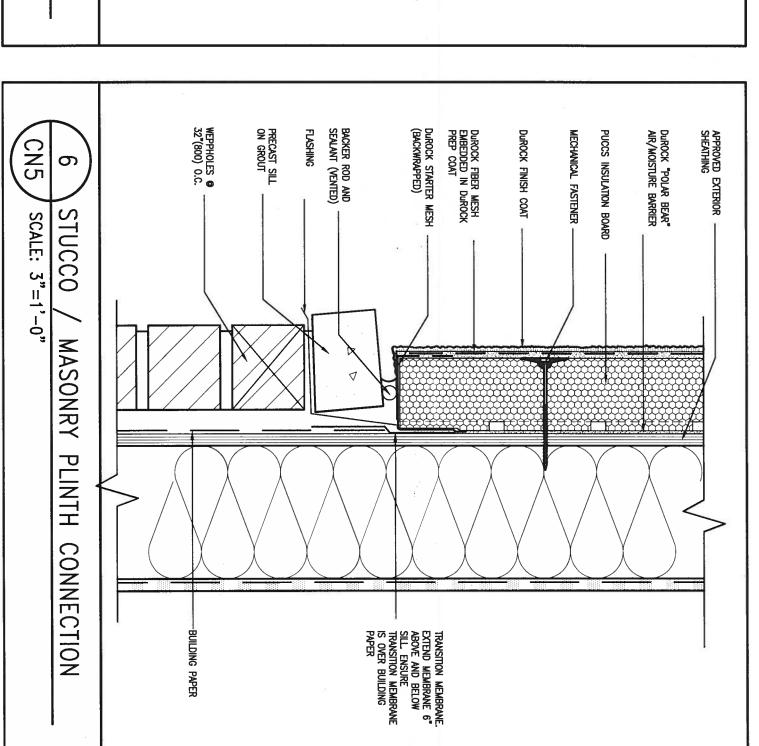

**CONST NOTE** WELLINGTON 25591 project no. 16023 BCI BRADFORD 42658 8 RC discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of by Drawings are not to be seciled. MAY 2016 CONSTRUCTION NOTES 255 Consumers Rd Suite 120 Toronto ON M2J 1R4 2 UPDATE TO 2018 JAN 11-18 RC drawn by RC file name t 416.630.2255 f 416.630.4782 va3design.com 1 ISSUE FOR CLIENT REVIEW AUG 04-17 RC 3/16" = 1'-0" 16023-CN-A1 date no. description RICHARD - H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu - Jon 11 2018 - 10:10 AM All drawings specifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN's written permission

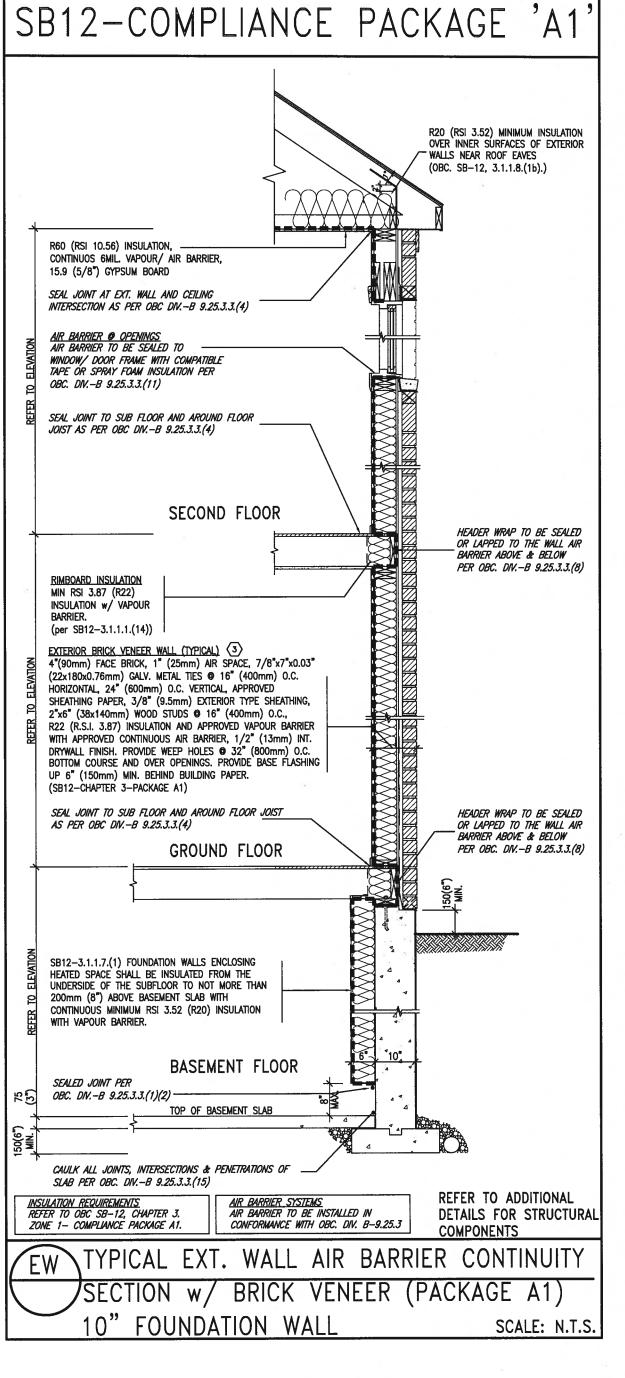

THE MINIMAL THERMAL PERFORMANCE OF BUILDING ENVELOPE AND EQUIPMENT SHALL CONFORM TO THE FOLLOWING SB-12 COMPLIANCE PACKAGE AS PER OBC SUPPLEMENTARY STANDARD SB-12. SECTION 3.1.1.1.


## USE SB-12 COMPLIANCE PACKAGE (A1): COMPONENT Notes: Ceiling with Attic Space R20 at inner face 10.56 Minimum RSI (R) value (R60) of exterior walls Ceiling without Attic Space 5.46 BATT or SPRAY Minimum RSI (R) value (R31 5.46 (R31 Exposed FLoor BATT or SPRAY Minimum RSI (R) value Walls Above Grade 3.87 (R22 6" R22 BATT Minimum RSI (R) value 3.52ci (R20ci Basement Walls OPTION TO USE Minimum RSI (R) value Edge of Below Grade Slab R12+R10ci. RIGID INSUL ≤600mm below grade Minimum RSI (R) value (R10) Windows & Sliding glass Doors 1.6 Maximum U-value Skylights 2.8U Maximum U-value Space Heating Equipment Minimum AFUE 96% Min. NATURAL GAS Hot Water Heater NATURAL GAS Minimum EF 75%

Minimum 1 OR Modimum 2 Required. Dependent on number of showers installed. Refer to SB12-3.1.1.12 for information ci- Denotes Continuous Insulation without framing interruption.




Minimum Efficiency

Drain Water Heat Recovery Unit (DWHR)

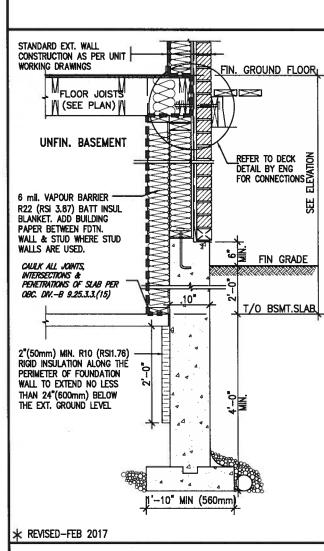


SECTION AT W.O.D/W.O.B.



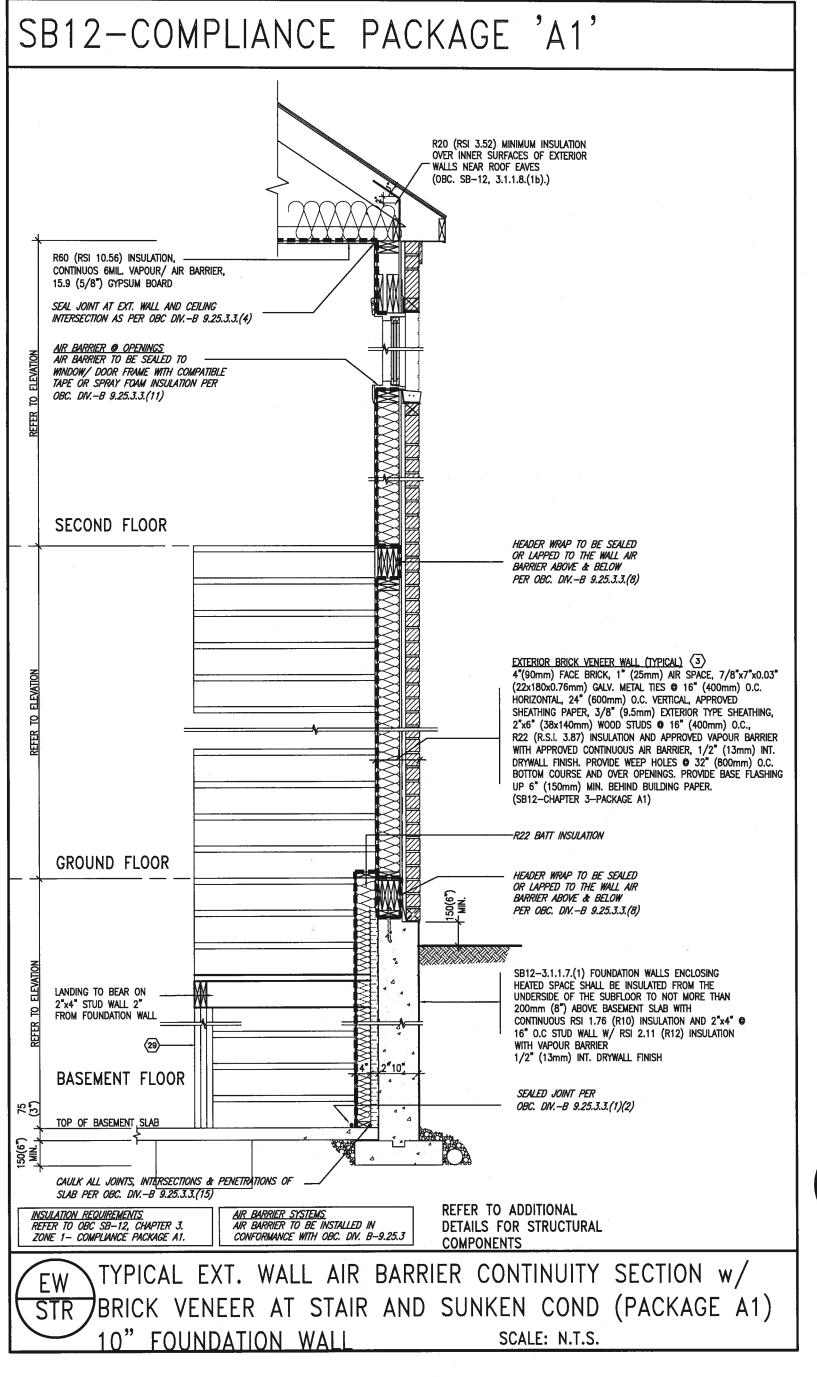




9 . 8 . 7 . 6 .			The undersigned has reviewed and tokes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.  qualification information  Wellington Jno-Baptiste  ### Property Code  25591	VAR	BAYVIEW WELLINGTON CONST_NOTE
5 .	,		name signature BCN registration information VA3 Design Inc. 42658	DESIGN	GREEN VALLEY EAST BRADFORD 16023
2 UPDATE TO 2018 1 ISSUE FOR CLIENT REVIEW	JAN 11-18 AUG 04-17	RC I	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work.	255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782	MAY 2016 CONSTRUCTION NOTES file name CAL7
no. description	date		Drawings are not to be scaled.	va3design.com ings specifications, related documents and des	RICHARD — H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg — Thu — Jon 11 2018 — 10:10 AM  on are the copyright property of VA3 DESKAN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESKAY's written permission.

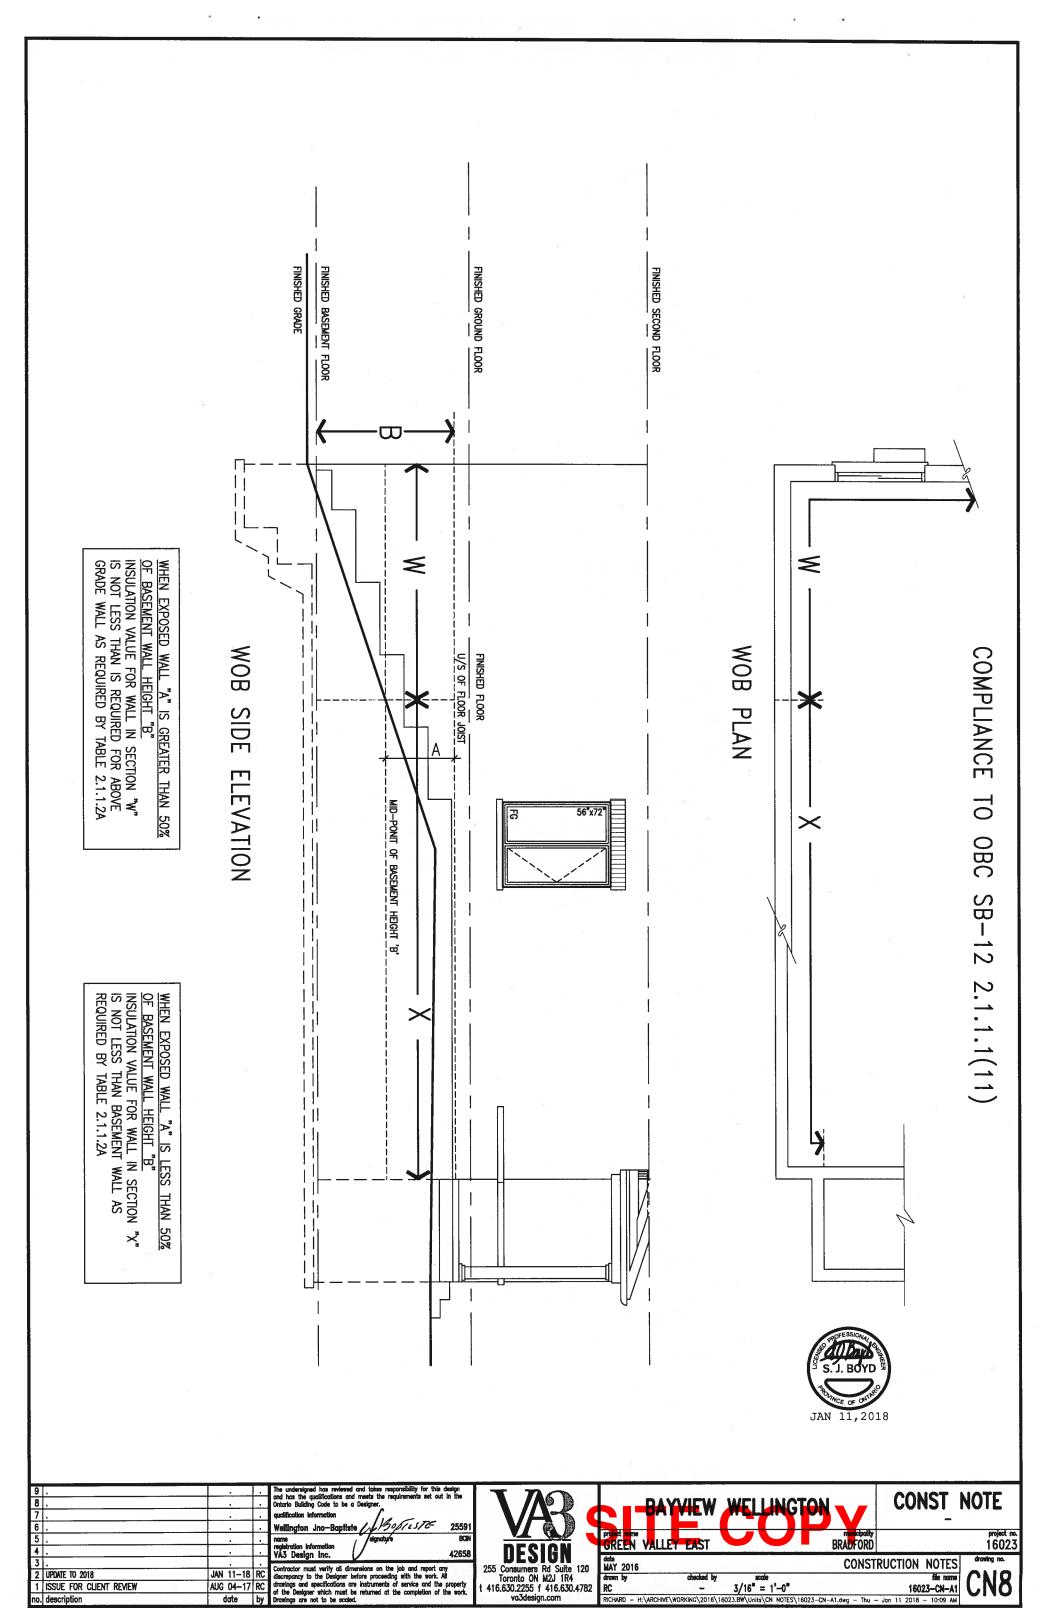



All drawings specifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN's written perm

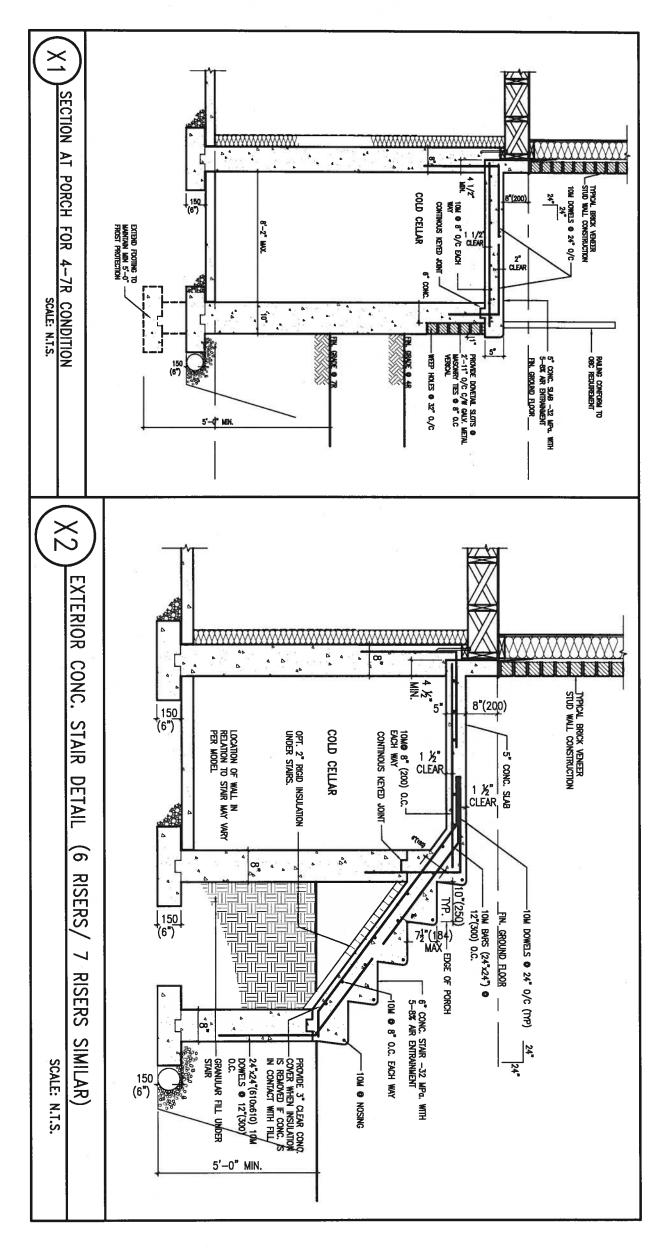




9	The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.  qualification information  Wellington Jno-Baptiste / JBolius 25591	VAR	-BAYVIEW WELLINGTON	CONST_ NOTE
5	name registration information VA3 Design Inc. / signature BCN 42658	DESIGN 255 Consumers Rd Suite 120	GREEN VALLEY EAST	BRADFORD 16023  CONSTRUCTION NOTES drawing no.
1 ISSUE FOR CLIENT REVIEW AUG 04-17 RC no. description date by	discrepancy to the Designer before proceeding with the work. All discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work. Drawings are not to be socied.	Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782 va3design.com	Grown by	16023-CN-A1 -A1.dwg - Thu - Jan 11 2018 - 10:09 AM

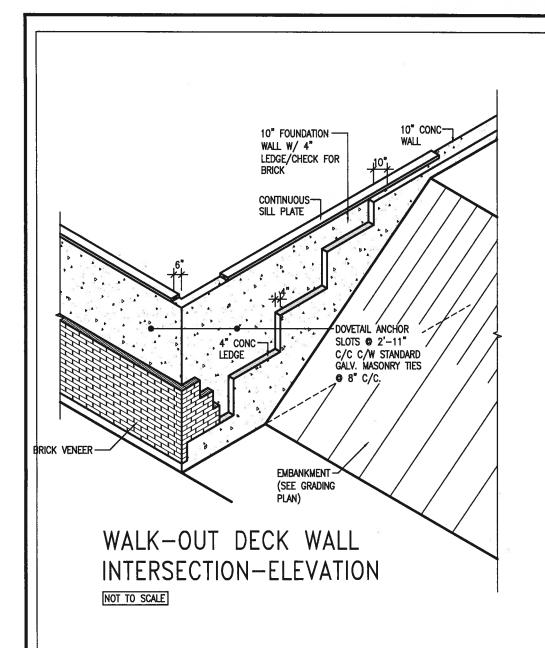

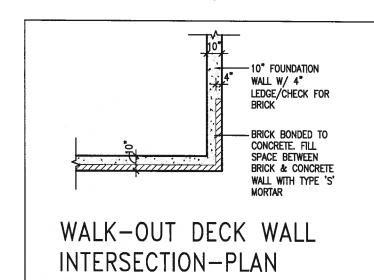


(10" FOUNDATION WALL)


NOT TO SCALE

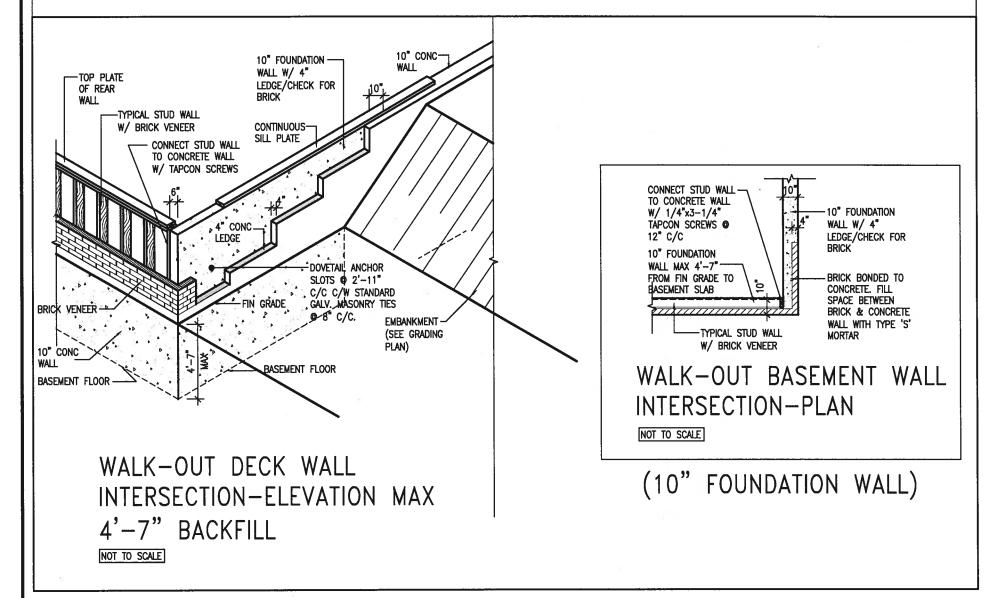






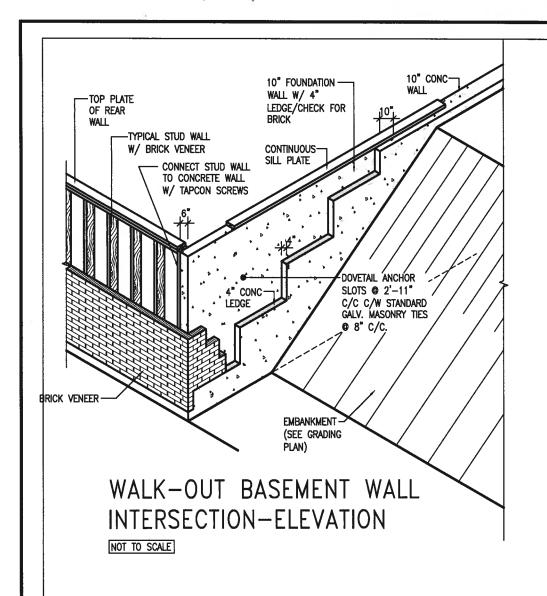


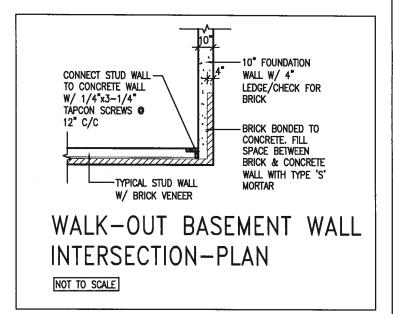

(10" FOUNDATION WALL)

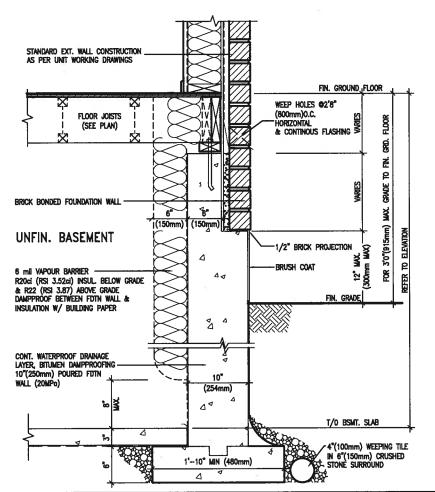

WALL SECTION FOR GRADE TO FIN. <u>EW3.06x</u> FLOOR MORE THAN 4'7" (1400mm) HEIGHT DIFFERENCE PKG A1 SCALE: N.T.S.

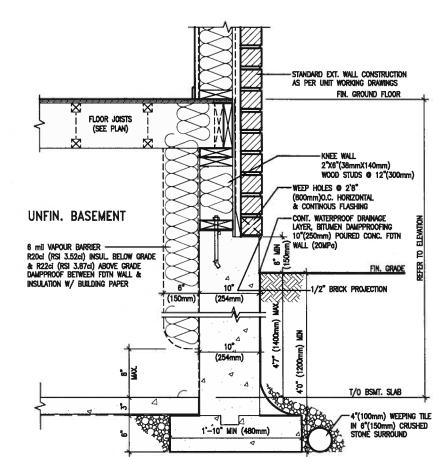


WALL SECTION FOR GRADE TO BASEMENT <u>(EW3.07x)</u> SLAB 4'7"(1400mm) MAX. HEIGHT DIFFERENCE SCALE: N.T.S.



PKG A1

9 . 8 . 7 . 6 .			The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.  Wellington Jno-Baptiste Association of Section 1.		BAYVIEW	WELLINGTON	CONST_NOTE
5 .			name signature BCIN registration information VA3 Design Inc. 42658	DESIGN	GREEN VALLEY EAST	BRADFORD	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
2 UPDATE TO 2018 1 ISSUE FOR CLIENT REVIEW	JAN 11-18 AUG 04-17	RC RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be refurned of the combetion of the work.	255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782	date MAY 2016 drawn by checked by RC -	3/16" = 1'-0"	TRUCTION NOTES  Sile name 16023-CN-A1  CN 1
no. description	date	by	Drawings are not to be scaled.	va3design.com	RICHARD - H:\ARCHIVE\WORKING\2016\1	6023.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu	

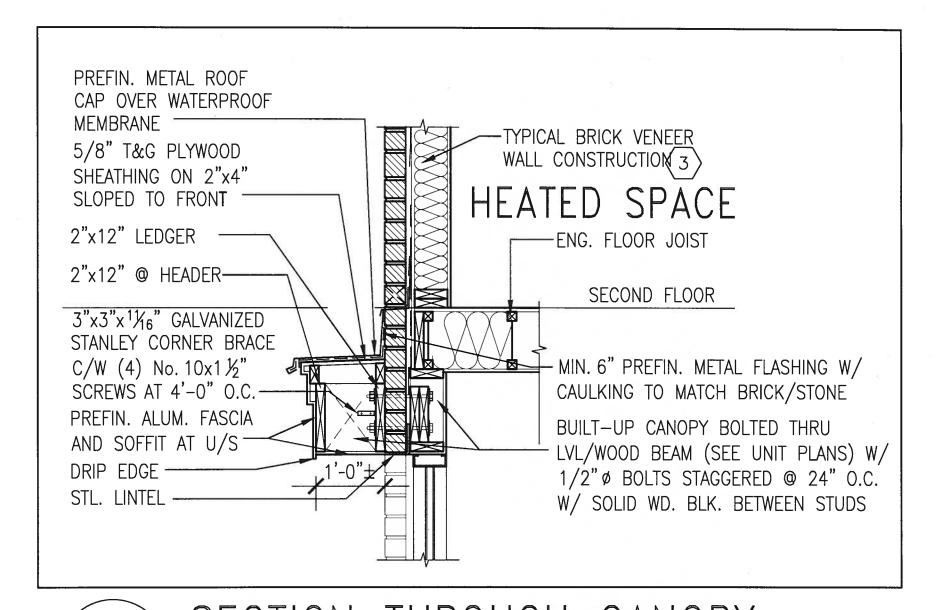


SECTION THROUGH CANOPY

SCALE 1/2" = 1'-0"

CN12



9   . 8   . 7   . 6   .			The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.  qualification information  Wellington Jno-Baptiste   ### 1506   ### 1555	VAR	BAYVIEW	WELLINGTON	CONST_NOTE
5 . 4 .		l . I	name eignotyre BCN registration information VA3 Design inc. 42658	DEGLON	GREEN VALLEY EAST	BRADFORD	project no. 16023
2 UPDATE TO 2018 1 ISSUE FOR CLIENT REVIEW	JAN 11-18 AUG 04-17	RC RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work.	255 Consumers Rd Suite 120 Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782	MAY 2016 drawn by checked by	CONSTR 3/16" = 1'-0"	RUCTION NOTES  file name 16023-CN-A1  CN12
no. description	date	Ьу	Drawings are not to be scaled.	va3design.com		3.BW\Units\CN NOTES\16023-CN-A1.dwg - Thu -	

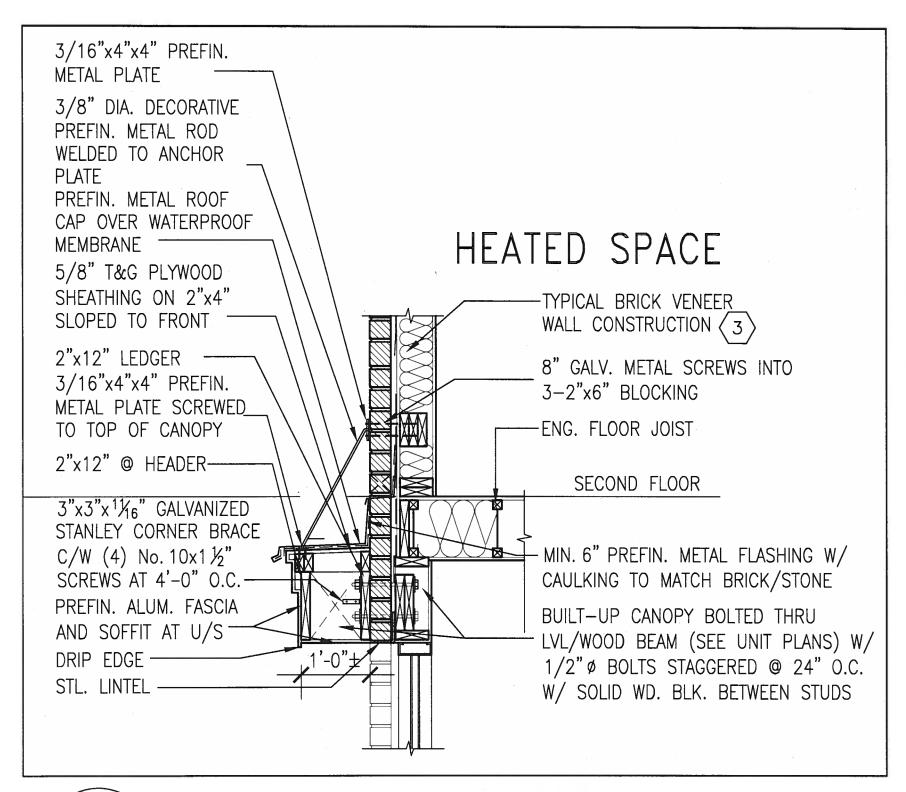


CN13/

## SECTION THROUGH CANOPY

W/ DECORATIVE ROD scale 1/2" = 1'-0"



9 . 8 . 7 . 6 .			The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a Designer.  qualification information  Wellington Jno-Baptiste	VAR	BAYVIEW	WELLINGTO	<b>Sy</b>	CONST_N	IOTE
5.	•		name BCN registration information VA3 Design Inc. 42658	DESIGN	GREEN VALLEY EAST	COL	BRADFORD		project no. 16023
3 . 2 UPDATE TO 2018	JAN 11-18	RC	Contractor must verify all dimensions on the job and report any discrepancy to the Designer before proceeding with the work. All	255 Consumers Rd Suite 120	MAY 2016 drawn by checked	w scale	CONSTRU	JCTION NOTES	drawing no.
1 ISSUE FOR CLIENT REVIEW	AUG 04-17	RC	drawings and specifications are instruments of service and the property of the Designer which must be returned at the completion of the work.  Drawings are not to be scaled.	Toronto ON M2J 1R4 t 416.630.2255 f 416.630.4782 va3design.com		3/16" = 1'-0"	CN-A1 dwn - Thu - Je	16023-CN-A1	CN15

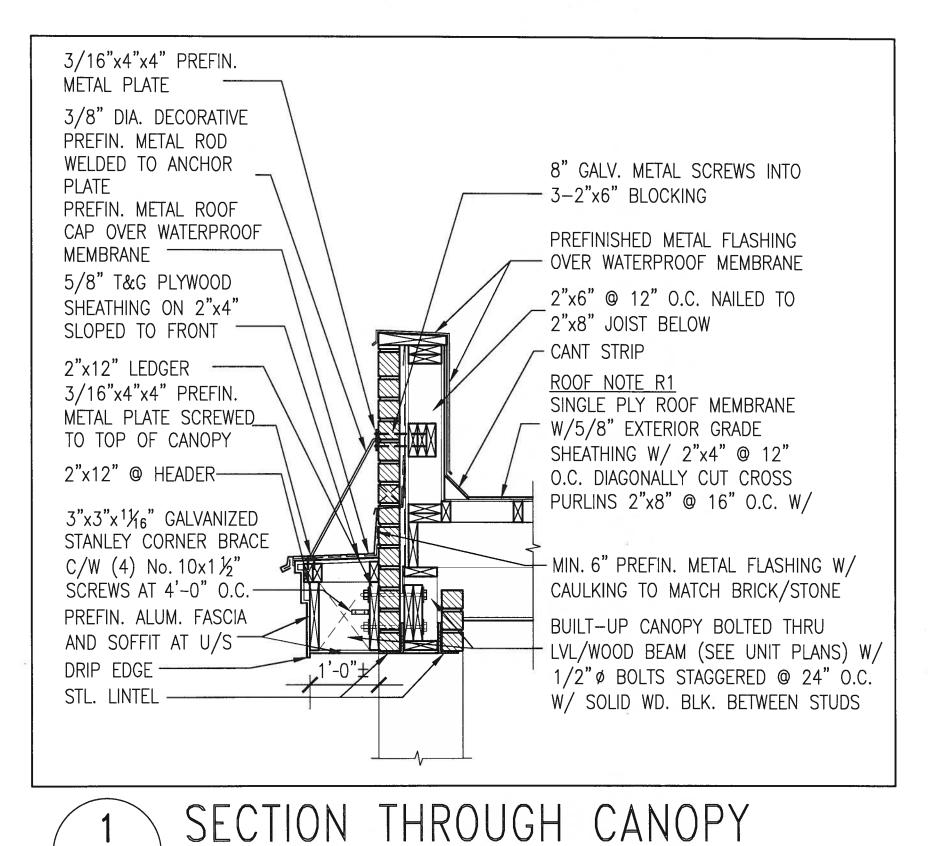

1 CN14/

## W / DECORATIVE ROD

W/ DECORATIVE ROD SCALE 1/2" = 1'-0"



All drawings specifications, related documents and design are the copyright property of VA3 DESIGN. Reproduction of this property in whole or in part is strictly prohibited without VA3 DESIGN's written permission

22			
9 .	. The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the	700	COMOT MOTE
8 .	Ontario Building Code to be a Designer.	DAYVIEW WEILINGTON	_   CONST NOTE
7 .	qualification information	THE PILE PILE PROPERTY OF THE PERSON OF THE	
6 .	Wellington Ino-Baptiste / 1/30512576 25591		
5 .	nome , /signature BCRN	GREEN VALLEY EAST BRA	DFORD 16023
4 .	registration information VA3 Design Inc. 42658		
3 .		onsumers Rd Suite 120 MAY 2016	ONSTRUCTION NOTES drowing no.
2 UPDATE TO 2018	JAN 11-16 KC II discrepancy to the Designer before proceeding with the work. All	ronto ON M2.J 1R4 drawn by checked by scale	file name CA14 A
1 ISSUE FOR CLIENT REVIEW		30.2255 f 416.630.4782 RC - 3/16" = 1'-0"	16023-CN-A1 UN 4
no. description	date by Drawings are not to be scaled.	va3design.com RICHARD - H:\ARCHIVE\WORKING\2016\16023.BW\Units\CN NOTES\16023-CN-A1.dwg	- Thu - Jan 11 2018 - 10:19 AM