


Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	17
J1DJ	16-00-00	9 1/2" NI-40x	2	4
J2	14-00-00	9 1/2" NI-40x	1	26
J3	12-00-00	9 1/2" NI-40x	1	15
J4	10-00-00	9 1/2" NI-40x	1	5
J5	6-00-00	9 1/2" NI-40x	1	2
J6	4-00-00	9 1/2" NI-40x	1	1
J7	2-00-00	9 1/2" NI-40x	1	4
B1	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B14L	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B2	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B3	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B4	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
9	H1	IUS2.56/9.5
2	H1	IUS2.56/9.5
7	H1	IUS2.56/9.5

TOWN OF BRADFORD WEST GWILLIMBURY
BUILDING DEPARTMENT
PLANS EXAMINED
ONTARIO BUILDING CODE APPLIES
DATE: 2018-10-22
INSPECTOR: BG

SITE COPY




FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4
ELEVATION: A,B,C
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7, TABLES 1 & 2.
CERAMIC TILE APPLICATION AS PER
O.B.C 9.30.6.
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 29/08/2017


1st FLOOR

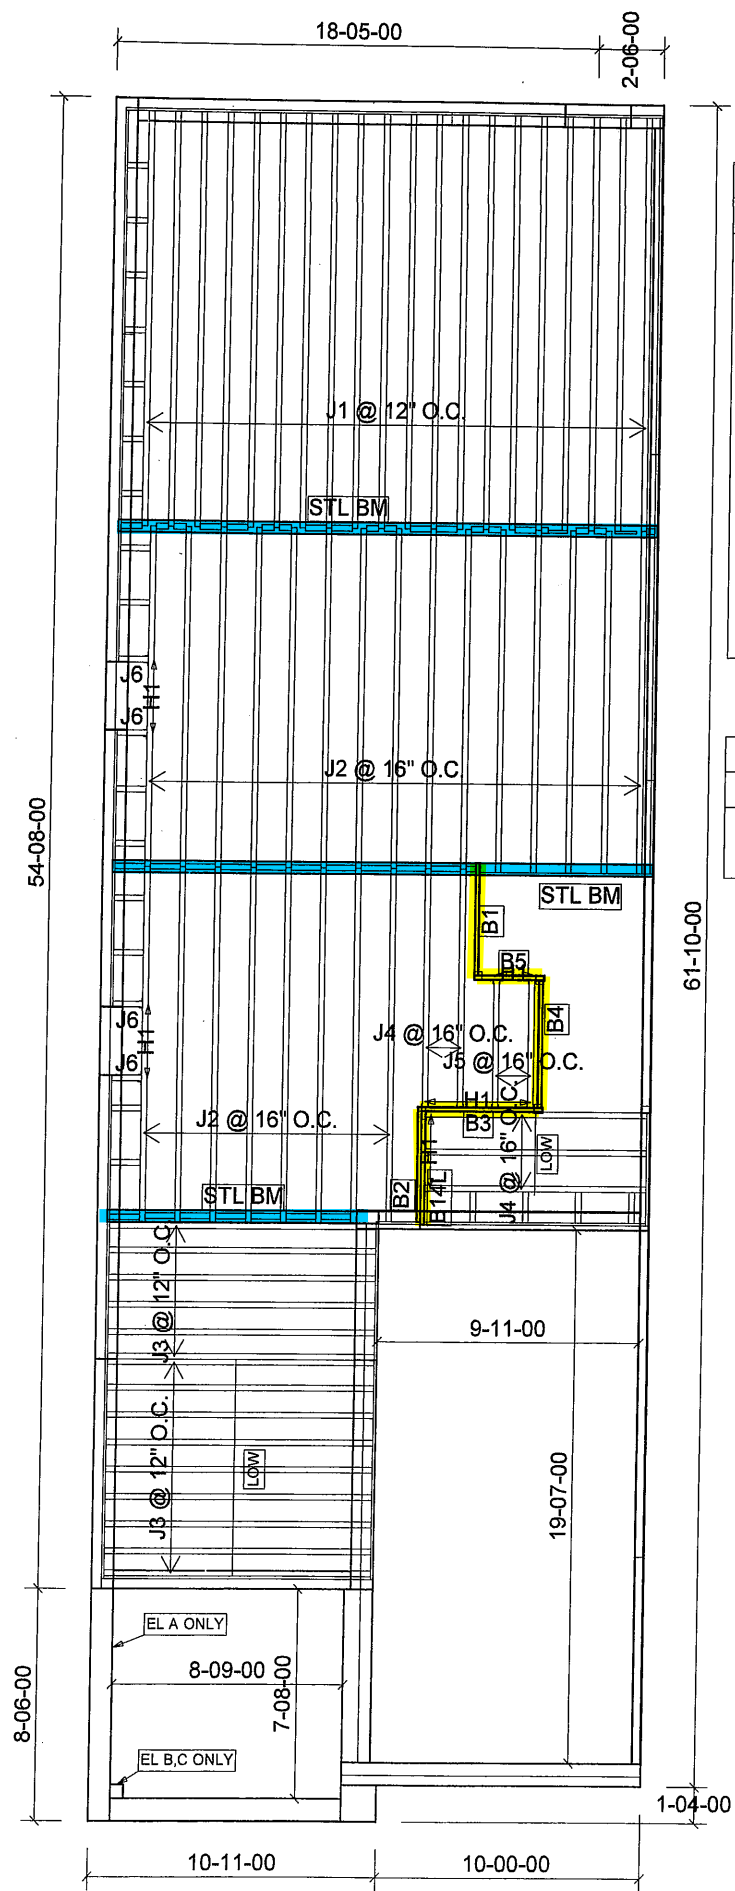

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	20
J2	14-00-00	9 1/2" NI-40x	1	23
J3	12-00-00	9 1/2" NI-40x	1	15
J4	10-00-00	9 1/2" NI-40x	1	5
J5	6-00-00	9 1/2" NI-40x	1	2
J6	2-00-00	9 1/2" NI-40x	1	4
B1	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B14L	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B2	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B3	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B4	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
9	H1	IUS2.56/9.5
4	H1	IUS2.56/9.5

Incase you
need WOB & WOD



FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4
ELEVATION: A,B,C
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:


NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7, TABLES 1 & 2.
CERAMIC TILE APPLICATION AS PER
O.B.C 9.30.6.
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 14/02/2018

1st FLOOR

WOB & WOD CON.

SITE COPY

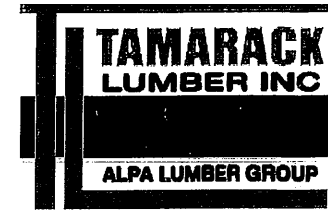

FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4
ELEVATION: A,B
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:


NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 29/08/2017


2nd FLOOR

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	19
J2	14-00-00	9 1/2" NI-40x	1	33
J3	12-00-00	9 1/2" NI-40x	1	12
J4	10-00-00	9 1/2" NI-40x	1	11
J5	6-00-00	9 1/2" NI-40x	1	4
B10	14-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B6	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	3	3
B8DR	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B11	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B13	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B9	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B7DR	16-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3

Connector Summary		
Qty	Manuf	Product
7	H1	IUS2.56/9.5
10	H1	IUS2.56/9.5
1	H2	HUS1.81/10
2	H2	HUS1.81/10

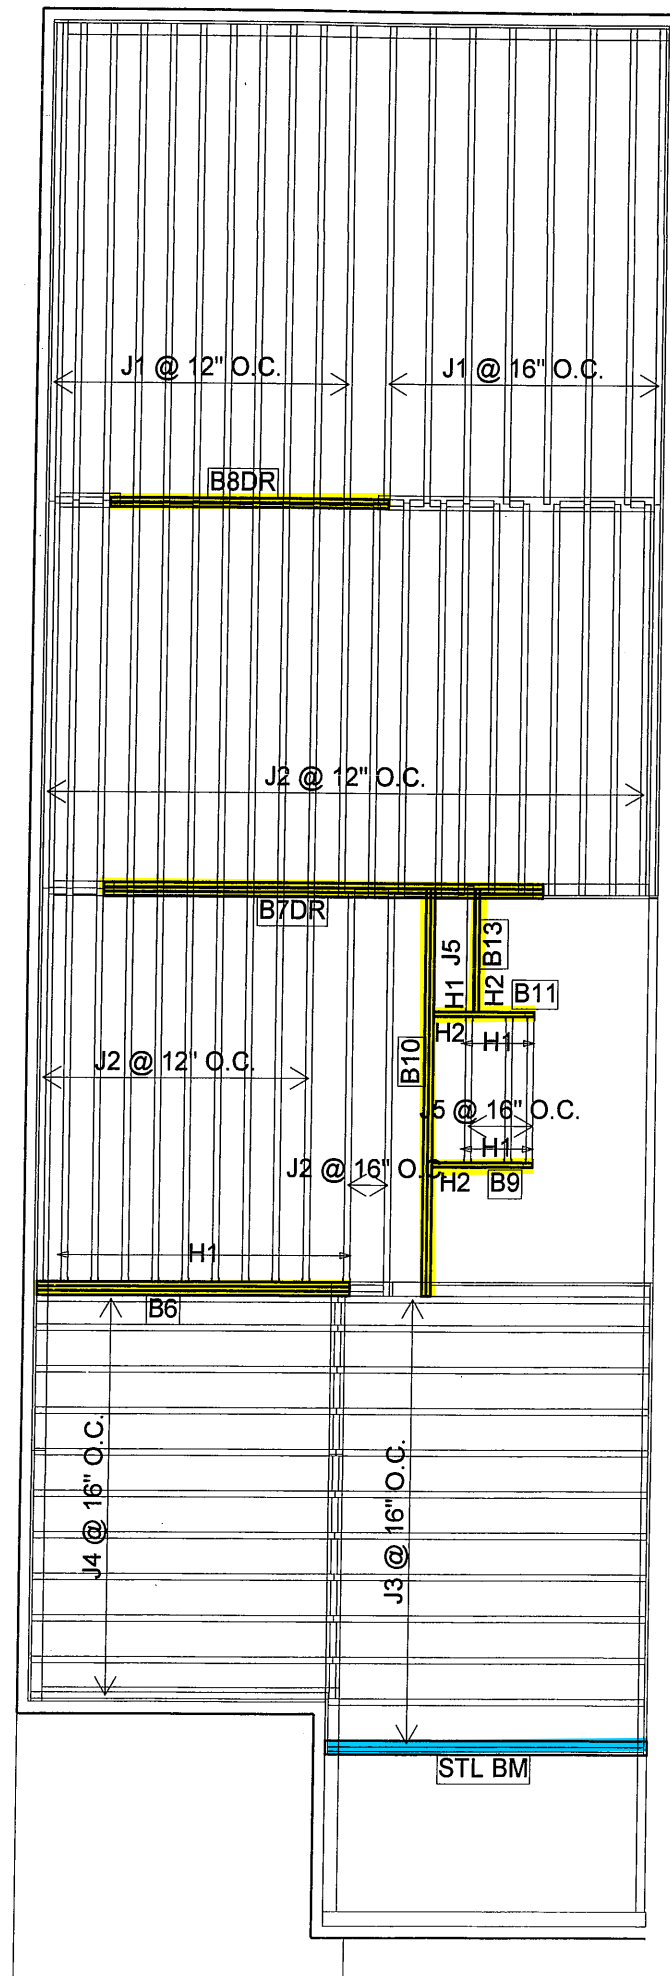


SITE COPY

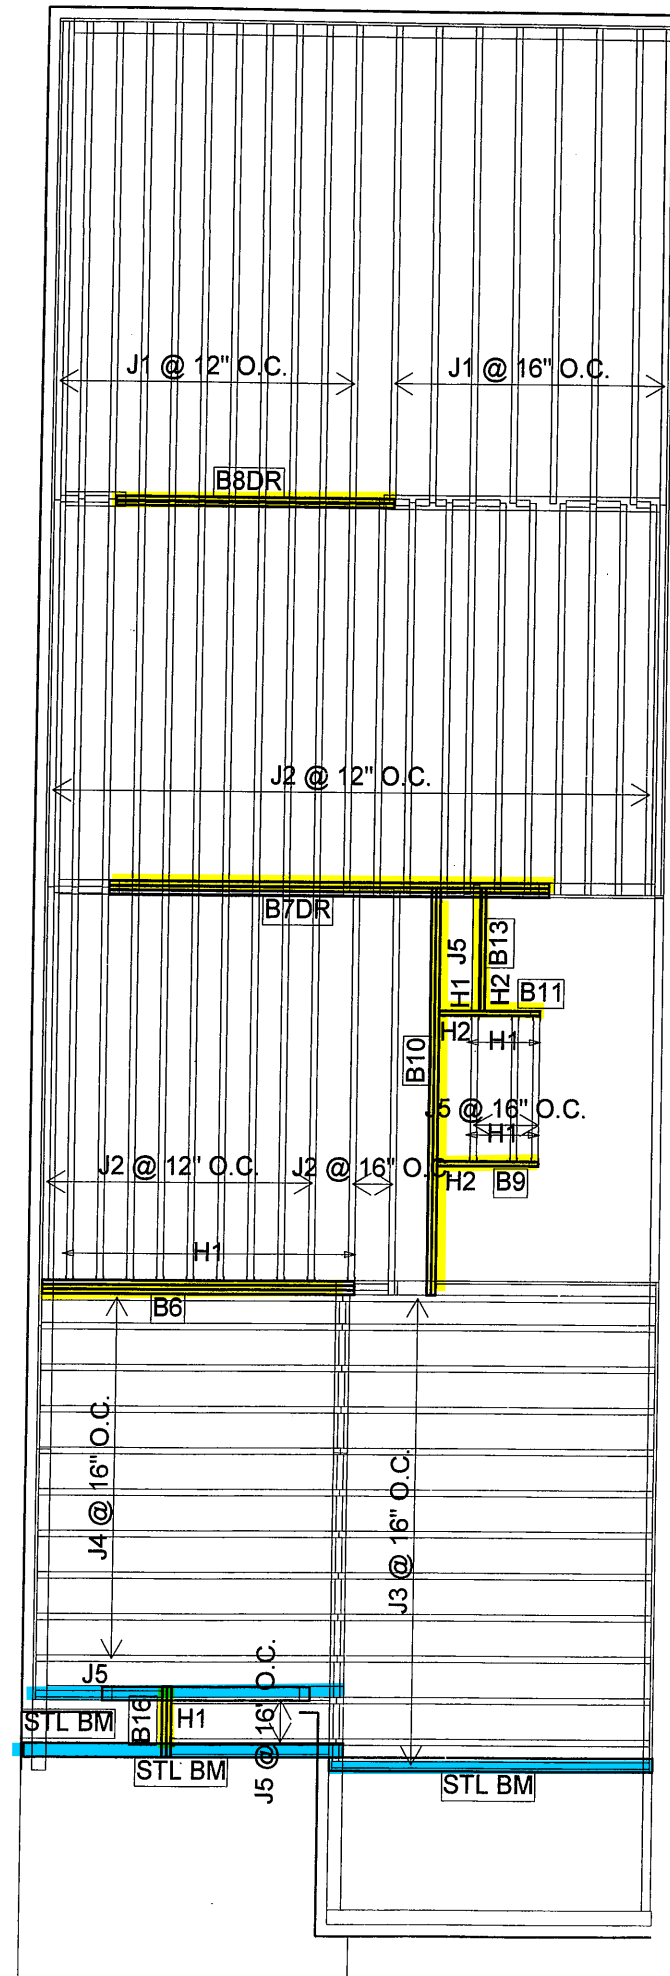

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	19
J2	14-00-00	9 1/2" NI-40x	1	33
J3	12-00-00	9 1/2" NI-40x	1	13
J4	10-00-00	9 1/2" NI-40x	1	10
J5	6-00-00	9 1/2" NI-40x	1	7
B10	14-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B6	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	3	3
B8DR	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B11	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B13	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B9	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B16	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B7DR	16-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3

Connector Summary		
Qty	Manuf	Product
7	H1	IUS2.56/9.5
1	H1	IUS2.56/9.5
10	H1	IUS2.56/9.5
1	H2	HUS1.81/10
2	H2	HUS1.81/10



FROM PLAN DATED: NOV 2016

BUILDER: BAYVIEW WELLINGTON

SITE: GREEN VALLEY EAST

MODEL: SD25-4 SONOMA 4

ELEVATION: C

LOT:

CITY: BRADFORD

SALESMAN: M D

DESIGNER: CZ

REVISION:

NOTES:

REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6

LOADING:

DESIGN LOADS: L/480.000

LIVE LOAD: 40.0 lb/ft²

DEAD LOAD: 15.0 lb/ft


TILED AREAS: 20 lb/ft

SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 29/08/2017

2nd FLOOR

SITE COPY

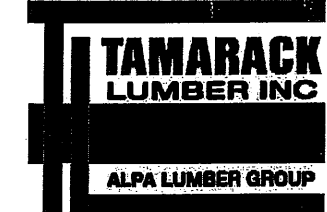


FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4 CORNER
ELEVATION: C
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 14/02/2018


1st FLOOR

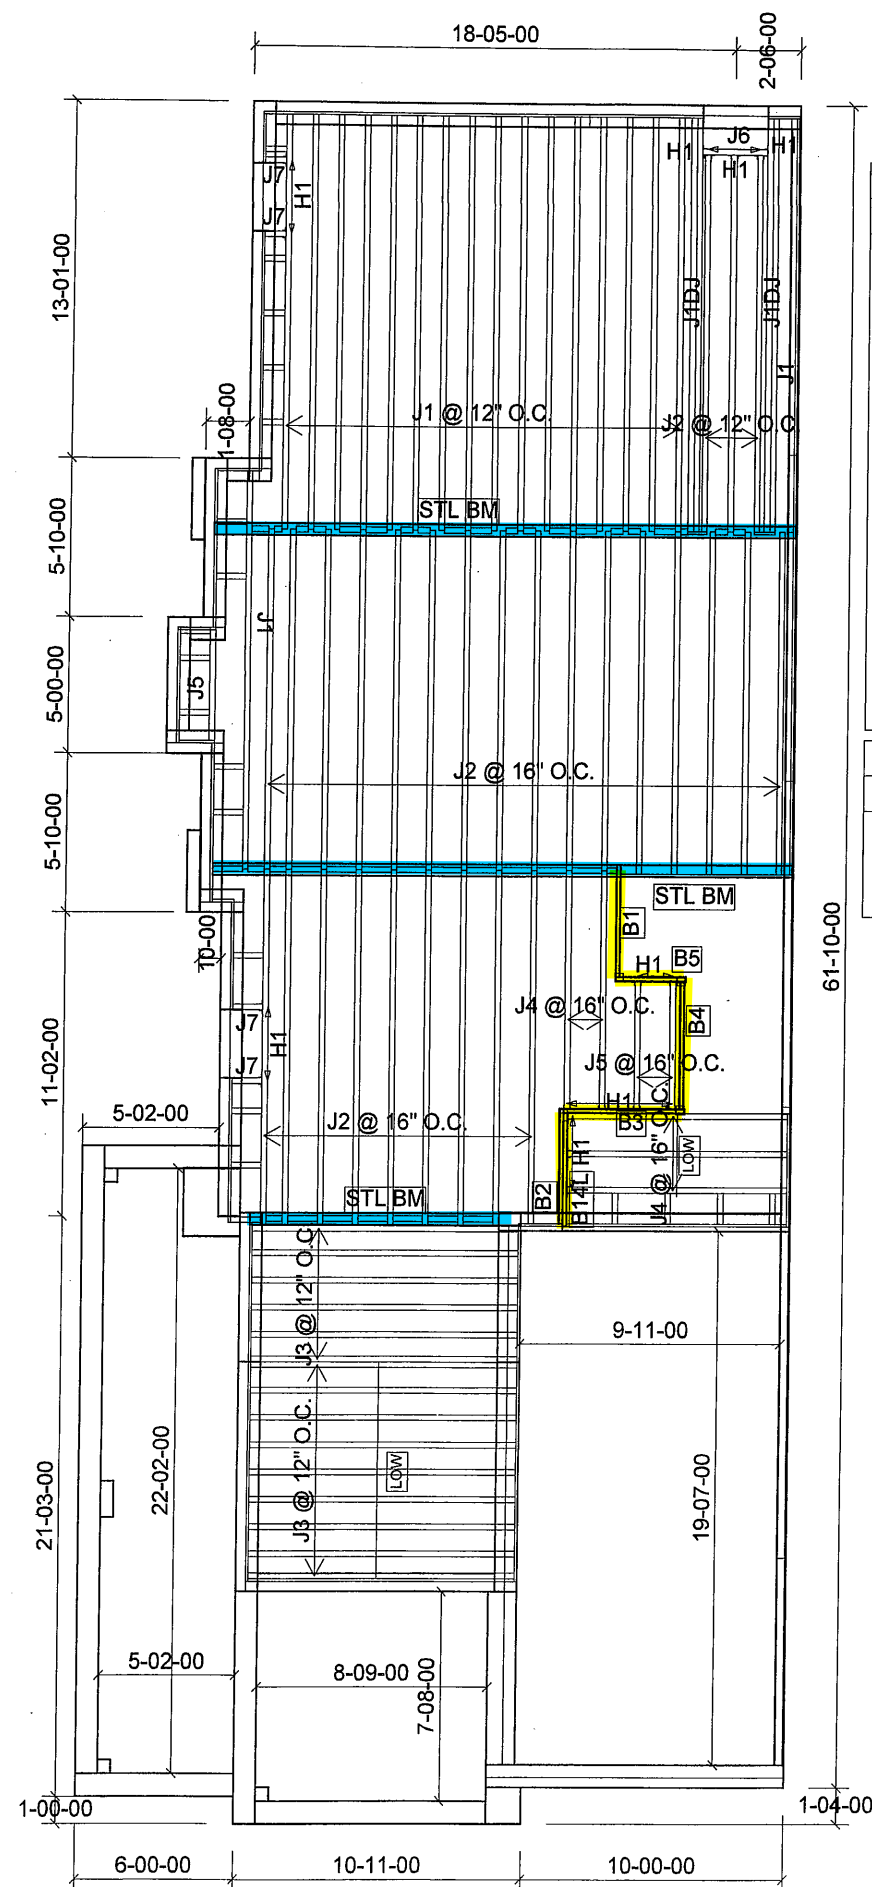

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	18
J1DJ	16-00-00	9 1/2" NI-40x	2	4
J2	14-00-00	9 1/2" NI-40x	1	28
J3	12-00-00	9 1/2" NI-40x	1	15
J4	10-00-00	9 1/2" NI-40x	1	5
J5	6-00-00	9 1/2" NI-40x	1	3
J6	4-00-00	9 1/2" NI-40x	1	1
J7	2-00-00	9 1/2" NI-40x	1	4
B1	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B14L	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B2	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B3	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B4	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
9	H1	IUS2.56/9.5
2	H1	IUS2.56/9.5
7	H1	IUS2.56/9.5

SITE COPY

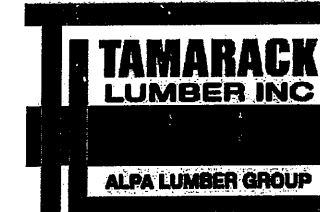


FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4 CORNER
ELEVATION: A,B
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7, TABLES 1 & 2.
CERAMIC TILE APPLICATION AS PER
O.B.C 9.30.6.
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 14/02/2018


1st FLOOR

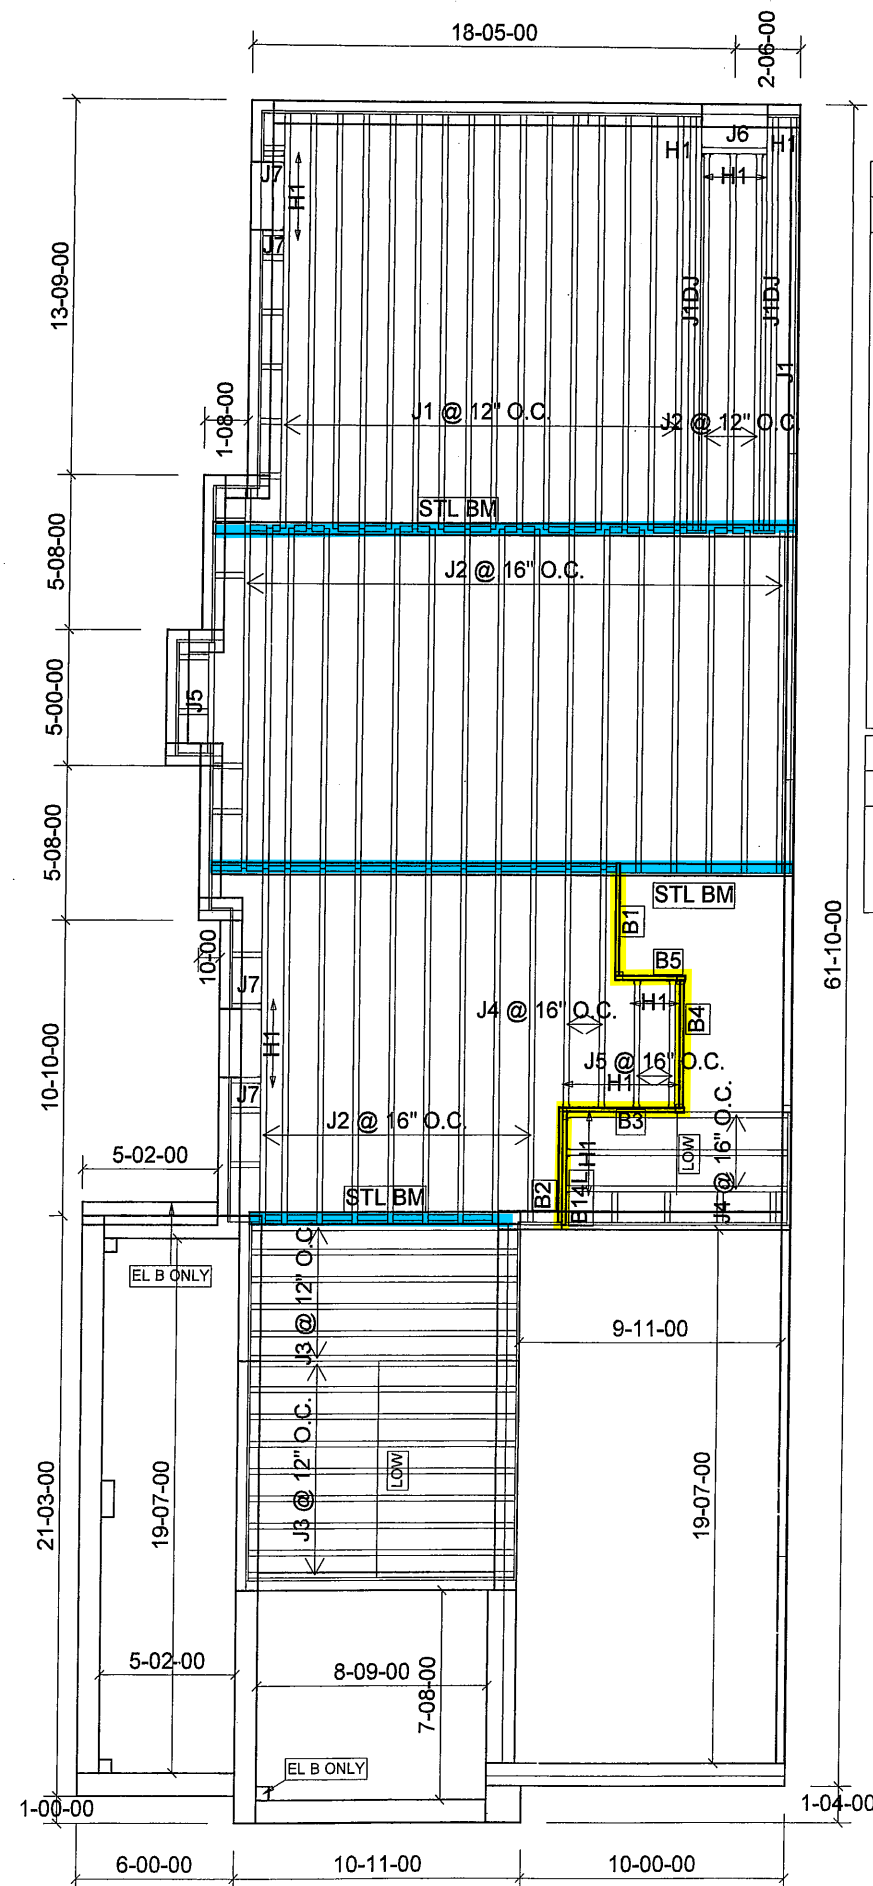

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	17
J1DJ	16-00-00	9 1/2" NI-40x	2	4
J2	14-00-00	9 1/2" NI-40x	1	29
J3	12-00-00	9 1/2" NI-40x	1	15
J4	10-00-00	9 1/2" NI-40x	1	5
J5	6-00-00	9 1/2" NI-40x	1	3
J6	4-00-00	9 1/2" NI-40x	1	1
J7	2-00-00	9 1/2" NI-40x	1	4
B1	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B14L	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B2	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B3	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B4	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
9	H1	IUS2.56/9.5
2	H1	IUS2.56/9.5
7	H1	IUS2.56/9.5

SITE COPY

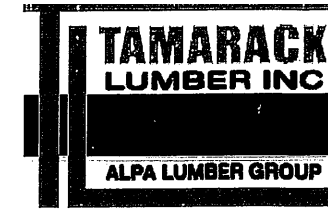

FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4 CORNER
ELEVATION: A,B
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:


NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 29/08/2017


2nd FLOOR

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	19
J2	14-00-00	9 1/2" NI-40x	1	36
J3	12-00-00	9 1/2" NI-40x	1	12
J4	10-00-00	9 1/2" NI-40x	1	11
J5	6-00-00	9 1/2" NI-40x	1	4
J6	2-00-00	9 1/2" NI-40x	1	1
B10	14-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B6	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	3	3
B8DR	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2 ✓
B11	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B13	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B9	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B7DR	16-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3 ✓

Connector Summary		
Qty	Manuf	Product
7	H1	IUS2.56/9.5
10	H1	IUS2.56/9.5
1	H2	HUS1.81/10
2	H2	HUS1.81/10

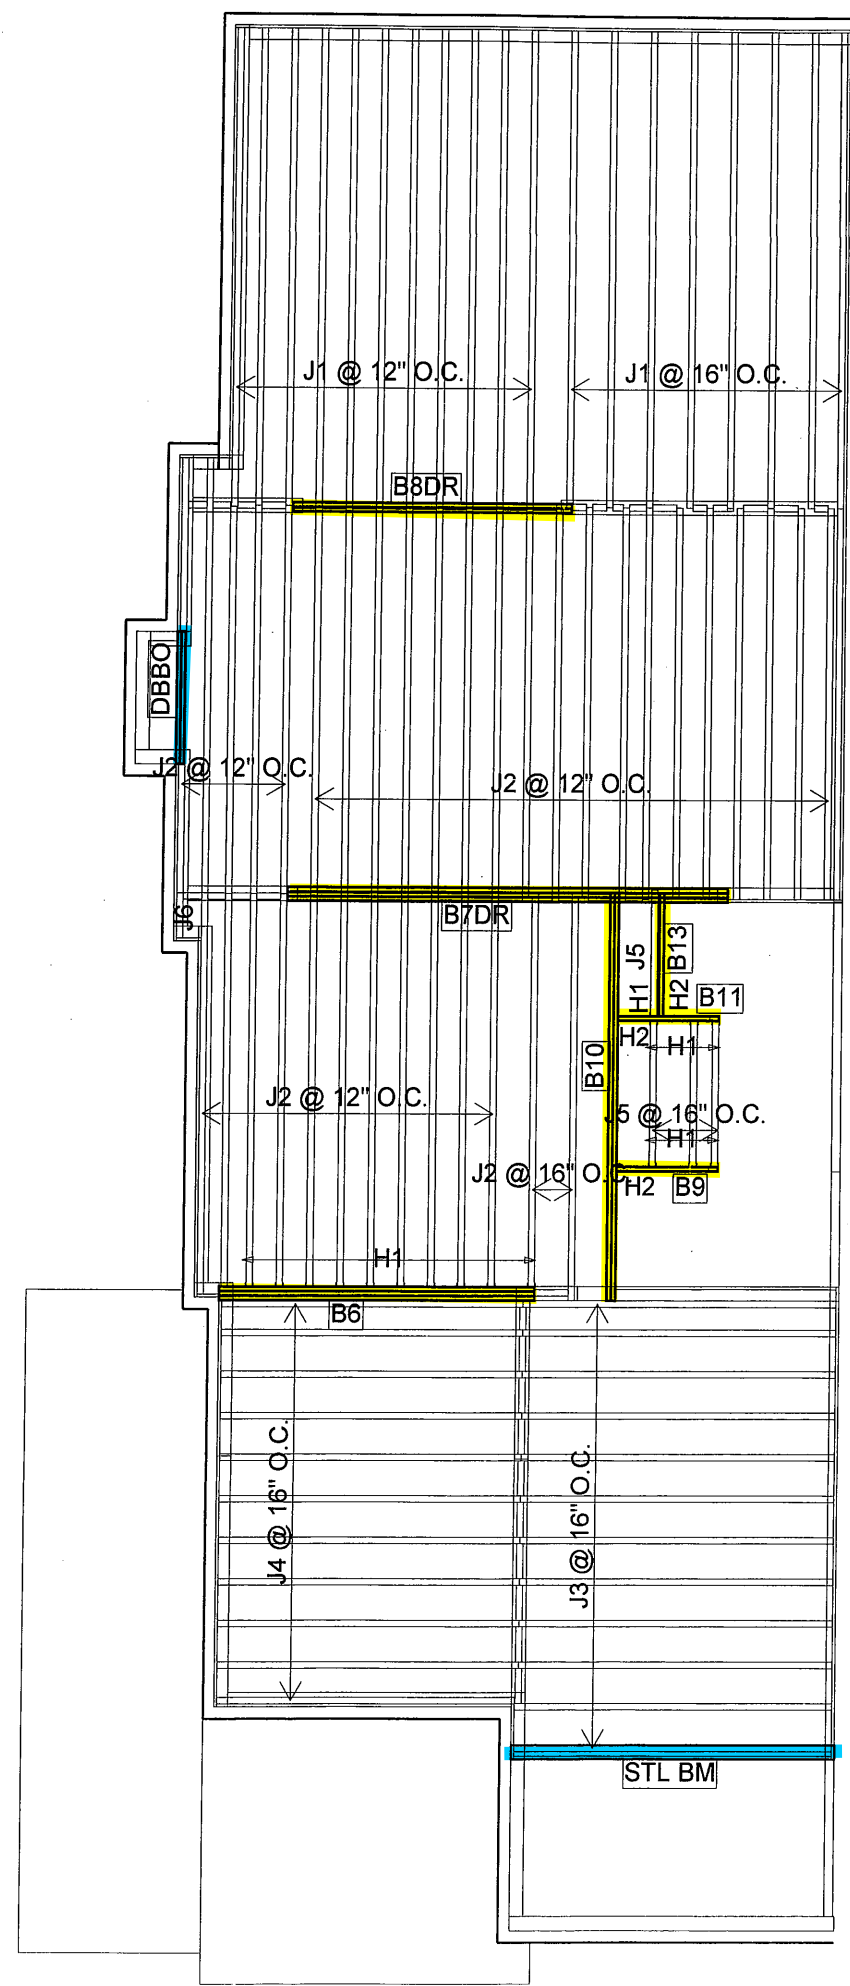

SITE COPY

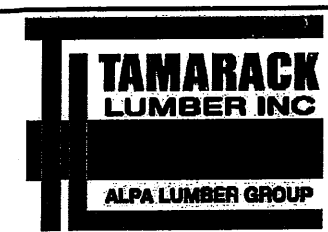

FROM PLAN DATED: NOV 2016
BUILDER: BAYVIEW WELLINGTON
SITE: GREEN VALLEY EAST
MODEL: SD25-4 SONOMA 4 CORNER
ELEVATION: C
LOT:
CITY: BRADFORD
SALESMAN: M D
DESIGNER: CZ
REVISION:


NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 14/02/2018

2nd FLOOR

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	21
J2	14-00-00	9 1/2" NI-40x	1	34
J3	12-00-00	9 1/2" NI-40x	1	13
J4	10-00-00	9 1/2" NI-40x	1	10
J5	6-00-00	9 1/2" NI-40x	1	8
J6	2-00-00	9 1/2" NI-40x	1	1
B10	14-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B6	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	3	3
B8DR	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B11	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B13	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B9	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B16	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
B7DR	16-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3

Connector Summary		
Qty	Manuf	Product
7	H1	IUS2.56/9.5
1	H1	IUS2.56/9.5
11	H1	IUS2.56/9.5
1	H2	HUS1.81/10
2	H2	HUS1.81/10

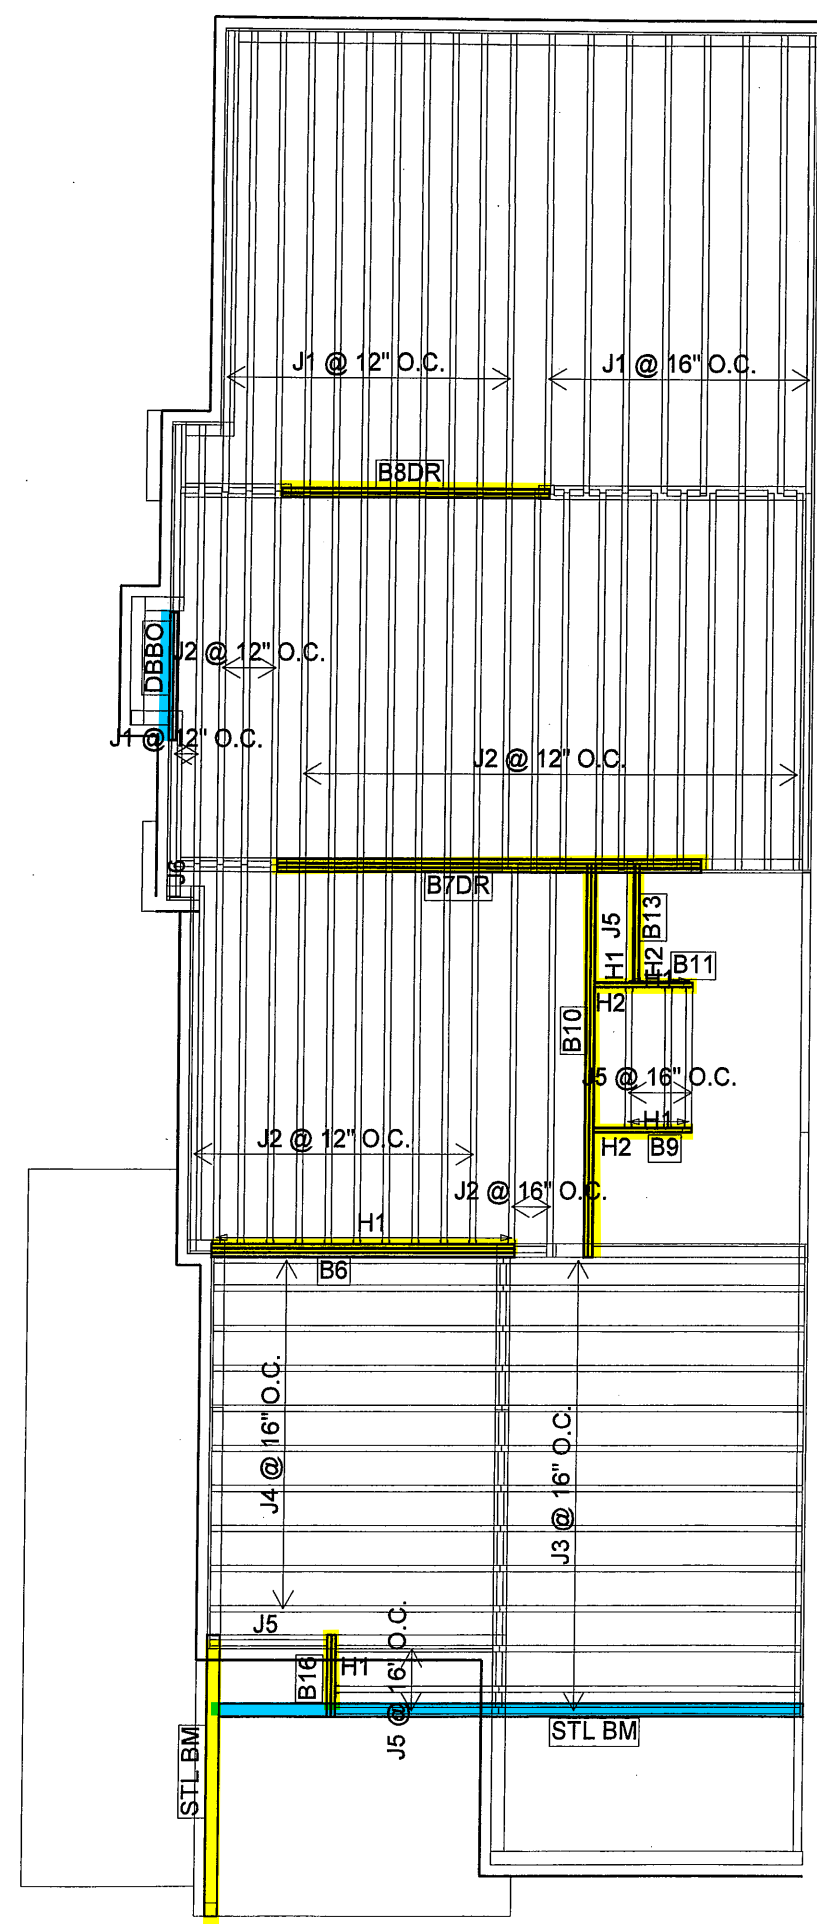

SITE COPY



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\Flush Beams\B1(i1242)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:22

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B1(i1242)

Specifier:

Designer: CZ

Company:

Misc:

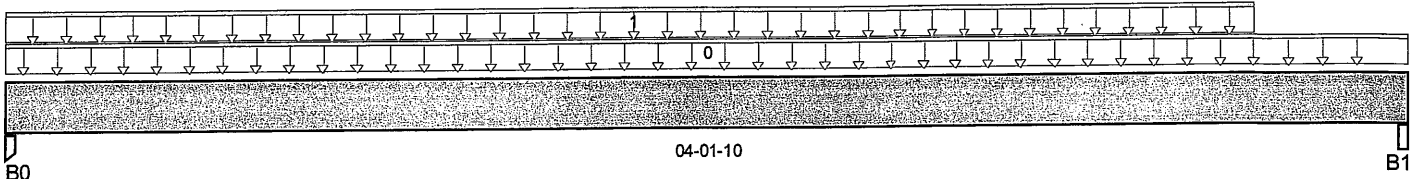

Total Horizontal Product Length = 04-01-10

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 1-3/4"	485 / 0	252 / 0		
B1, 5-1/4"	553 / 0	287 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	User Load	Unf. Lin. (lb/ft)	L	00-00-00	04-01-10	240	120			n/a
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-08-06	12	6			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	917 ft-lbs	12,704 ft-lbs	7.2%	1	01-11-01
End Shear	534 lbs	5,785 lbs	9.2%	1	00-11-04
Total Load Defl.	L/999 (0.006")	n/a	n/a	4	01-11-01
Live Load Defl.	L/999 (0.004")	n/a	n/a	5	01-11-01
Max Defl.	0.006"	n/a	n/a	4	01-11-01
Span / Depth	4.6	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Post	1-3/4" x 1-3/4"	1,043 lbs	41.9%	27.9%	Unspecified
B1 Beam	5-1/4" x 1-3/4"	1,189 lbs	24.2%	10.6%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012



DWG NO. TAM 9259 - 18
STRUCTURAL
COMPONENT ONLY

SITE COPY



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\Flush Beams\B2(i1241)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B2(i1241)

Specifier:

Designer: CZ

Company:

Misc:

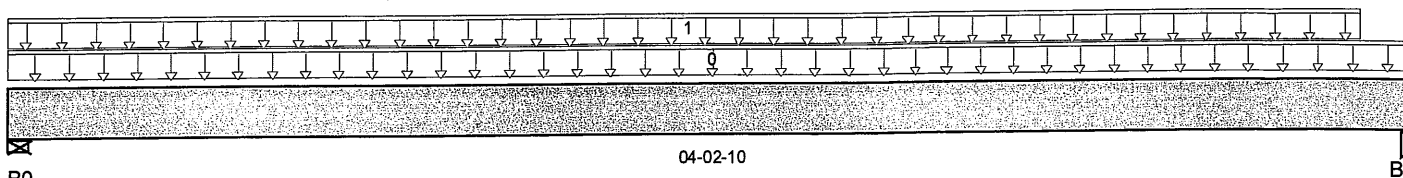

Total Horizontal Product Length = 04-02-10

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 4-3/8"	586 / 0	304 / 0		
B1, 1-3/4"	525 / 0	272 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	User Load	Unf. Lin. (lb/ft)	L	00-00-00	04-02-10	240	120			n/a
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	04-00-14	24	12			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	1,042 ft-lbs	12,704 ft-lbs	8.2%	1	02-02-10
End Shear	603 lbs	5,785 lbs	10.4%	1	01-01-14
Total Load Defl.	L/999 (0.008")	n/a	n/a	4	02-02-10
Live Load Defl.	L/999 (0.005")	n/a	n/a	5	02-02-10
Max Defl.	0.008"	n/a	n/a	4	02-02-10
Span / Depth	4.8	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	4-3/8" x 1-3/4"	1,259 lbs	30.8%	13.5%	Unspecified
B1 Post	1-3/4" x 1-3/4"	1,127 lbs	45.3%	30.2%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012



DWG NO. TAM 9260-18
STRUCTURAL
COMPONENT ONLY

SITE COPY



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\Flush Beams\B3(i1269)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B3(i1269)

Specifier:

Designer: CZ

Company:

Misc:

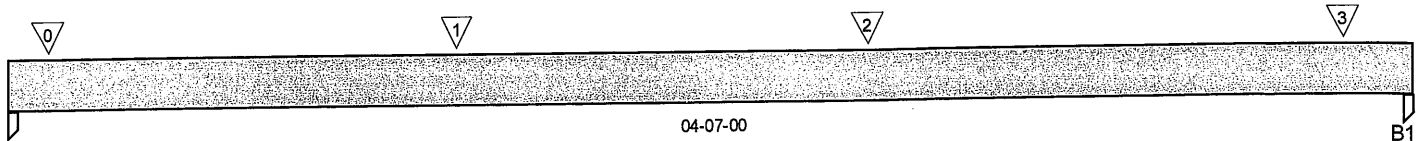

Total Horizontal Product Length = 04-07-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 1-3/4"	442 / 0	232 / 0		
B1, 3-1/2"	417 / 0	310 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	J4(i1346)	Conc. Pt. (lbs)	L	00-01-08	00-01-08	238	119			n/a
1	J4(i1334)	Conc. Pt. (lbs)	L	01-05-08	01-05-08	226	113			n/a
2	J5(i1303)	Conc. Pt. (lbs)	L	02-09-08	02-09-08	133	67			n/a
3	-	Conc. Pt. (lbs)	L	04-04-04	04-04-04	262	221			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	630 ft-lbs	12,704 ft-lbs	5%	1	01-05-08
End Shear	442 lbs	5,785 lbs	7.6%	1	00-11-04
Total Load Defl.	L/999 (0.006")	n/a	n/a	4	02-02-00
Live Load Defl.	L/999 (0.004")	n/a	n/a	5	02-02-00
Max Defl.	0.006"	n/a	n/a	4	02-02-00
Span / Depth	5.4	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Post	1-3/4" x 1-3/4"	953 lbs	38.3%	25.5%	Unspecified
B1 Post	3-1/2" x 1-3/4"	1,013 lbs	20.4%	13.6%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



SITE COPY



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\Flush Beams\B4(i1580)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B4(i1580)

Specifier:

Designer: CZ

Company:

Misc:

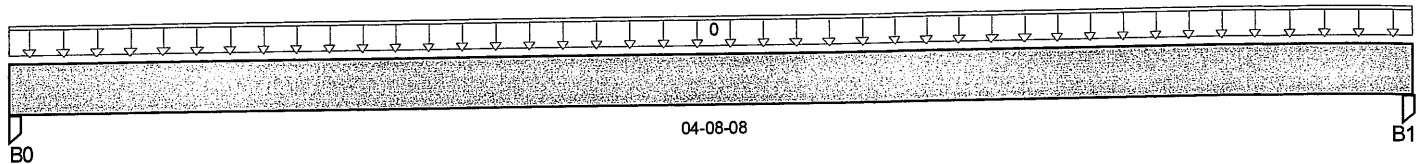

Total Horizontal Product Length = 04-08-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 1-3/4"	26 / 0	25 / 0		
B1, 1-3/4"	26 / 0	25 / 0		

Load Summary

Tag Description	Load Type	Ref.	Start	End	Live	Dead	Snow	Wind	Trib.
0 FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	04-08-08	11	6	1.00	1.15	n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	77 ft-lbs	12,704 ft-lbs	0.6%	1	02-04-04
End Shear	42 lbs	5,785 lbs	0.7%	1	00-11-04
Total Load Defl.	L/999 (0.001")	n/a	n/a	4	02-04-04
Live Load Defl.	L/999 (0")	n/a	n/a	5	02-04-04
Max Defl.	0.001"	n/a	n/a	4	02-04-04
Span / Depth	5.7	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Post	1-3/4" x 1-3/4"	70 lbs	2.8%	1.9%	Unspecified
B1 Post	1-3/4" x 1-3/4"	70 lbs	2.8%	1.9%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

CONFORMS TO OBC 2012

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

SITE COPY



DWG NO. TAM 9262-18
STRUCTURAL
COMPONENT ONLY



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\Flush Beams\B5(i1343)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B5(i1343)

Specifier:

Designer: CZ

Company:

Misc:

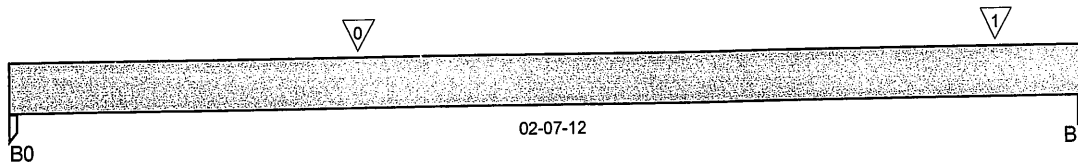

Total Horizontal Product Length = 02-07-12

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	104 / 0	59 / 0		
B1, 3-1/2"	318 / 0	259 / 0		

Load Summary

Tag Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0 J5(i1303)	Conc. Pt. (lbs)	L	00-10-04	00-10-04	133	67			n/a
1 -	Conc. Pt. (lbs)	L	02-05-02	02-05-02	289	238			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	141 ft-lbs	12,704 ft-lbs	1.1%	1	00-10-04
End Shear	141 lbs	5,785 lbs	2.4%	1	01-01-00
Total Load Defl.	L/999 (0")	n/a	n/a	4	01-03-03
Live Load Defl.	L/999 (0")	n/a	n/a	5	01-03-03
Max Defl.	0"	n/a	n/a	4	01-03-03
Span / Depth	2.8	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Post	3-1/2" x 1-3/4"	229 lbs	4.6%	3.1%	Unspecified
B1 Post	3-1/2" x 1-3/4"	801 lbs	16.1%	10.7%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012





Triple 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\Flush Beams\B6(i1554)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B6(i1554)

Specifier:

Designer: CZ

Company:

Misc:

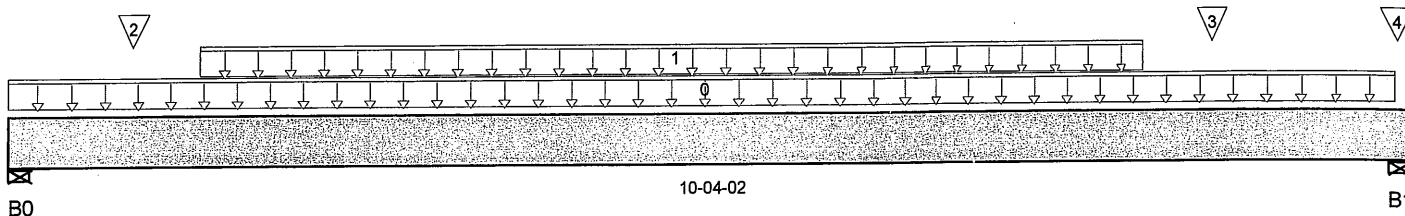

Total Horizontal Product Length = 10-04-02

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 4-3/8"	1,212 / 0	679 / 0		
B1, 7-1/4"	1,540 / 0	847 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	10-02-14	6	3			n/a
1	Smoothed Load	Unf. Lin. (lb/ft)	L	01-04-14	08-04-14	258	130			n/a
2	J2(i1450)	Conc. Pt. (lbs)	L	00-10-14	00-10-14	234	117			n/a
3	J2(i1463)	Conc. Pt. (lbs)	L	08-10-14	08-10-14	301	151			n/a
4	J2(i1618)	Conc. Pt. (lbs)	L	10-02-14	10-02-14	343	172			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	6,611 ft-lbs	39,636 ft-lbs	16.7%	1	04-10-14
End Shear	2,596 lbs	17,356 lbs	15%	1	08-11-06
Total Load Defl.	L/999 (0.101")	n/a	n/a	4	05-00-06
Live Load Defl.	L/999 (0.065")	n/a	n/a	5	05-00-06
Max Defl.	0.101"	n/a	n/a	4	05-00-06
Span / Depth	12	n/a	n/a		00-00-00

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	4-3/8" x 5-1/4"	2,668 lbs	21.7%	9.5%	Unspecified
B1 Wall/Plate	7-1/4" x 5-1/4"	3,369 lbs	16.6%	7.3%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

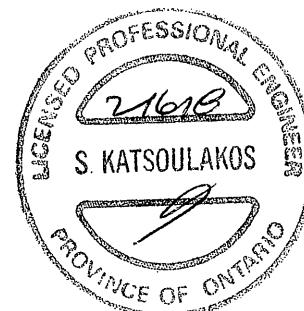

SITE COPY



Triple 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\Flush Beams\B6(i1554)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl

Description: Designs\Flush Beams\1st Floor\Flush Beams\B6(i1554


Specifier:

Designer: CZ

Company:

Misc:

Connection Diagram



4 rows

a minimum = 1" c = 6 1/2"
b minimum = 3" d = 6"
e minimum = 1"

Calculated Side Load = 551.9 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record. Nailing schedule applies to both sides of the member.

Connectors are: 16d Nails

3-1/2" ARDOX SPIRAL

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.



SITE COPY



Triple 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP 1st Floor\...\B7DR(i1792)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:24

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Dropped Beams\1st Floor\Dropped Beams\B7D

Specifier:

Designer: CZ

Company:

Misc:

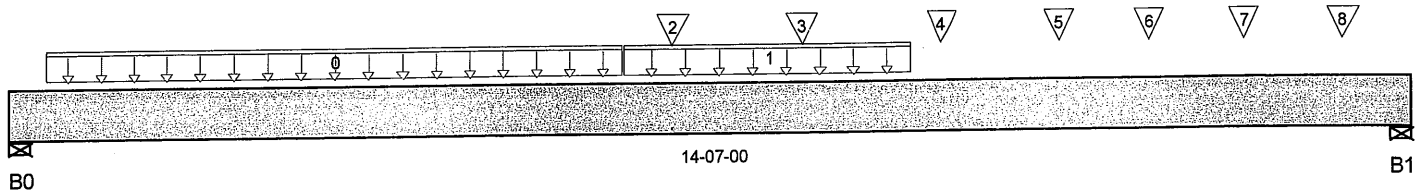

Total Horizontal Product Length = 14-07-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 4"	3,503 / 0	1,901 / 0		
B1, 4"	3,198 / 0	1,794 / 0		


Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	Smoothed Load	Unf. Lin. (lb/ft)	L	00-04-08	06-04-08	504	252			n/a
1	Smoothed Load	Unf. Lin. (lb/ft)	L	06-04-08	09-04-08	253	126			n/a
2	J2(i1728)	Conc. Pt. (lbs)	L	06-10-08	06-10-08	294	147			n/a
3	J2(i1710)	Conc. Pt. (lbs)	L	08-02-08	08-02-08	336	168			n/a
4	-	Conc. Pt. (lbs)	L	09-08-05	09-08-05	618	310			n/a
5	-	Conc. Pt. (lbs)	L	10-11-01	10-11-01	848	498			n/a
6	J2(i1436)	Conc. Pt. (lbs)	L	11-10-08	11-10-08	220	110			n/a
7	J2(i1429)	Conc. Pt. (lbs)	L	12-10-08	12-10-08	251	125			n/a
8	J2(i1423)	Conc. Pt. (lbs)	L	13-10-08	13-10-08	258	129			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	27,315 ft-lbs	60,415 ft-lbs	45.2%	1	06-10-08
End Shear	7,113 lbs	21,696 lbs	32.8%	1	01-03-14
Total Load Defl.	L/360 (0.468")	0.702"	66.7%	4	07-04-08
Live Load Defl.	L/557 (0.303")	0.468"	64.7%	5	07-04-08
Max Defl.	0.468"	n/a	n/a	4	07-04-08
Span / Depth	14.2	n/a	n/a		00-00-00

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	4" x 5-1/4"	7,630 lbs	44.7%	29.8%	Unspecified
B1 Wall/Plate	4" x 5-1/4"	7,039 lbs	41.3%	27.5%	Unspecified

Notes

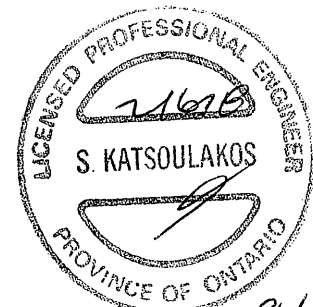

P615

SITE COPY



Triple 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP 1st Floor...\B7DR(i1792)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:24

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl

Description: Designs\Dropped Beams\1st Floor\Dropped Beams\B7

Specifier:

Designer: CZ

Company:

Misc:

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 00-05-04, Bottom: 00-05-04.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9


CONFORMS TO OBC 2012

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.

Connection Diagram

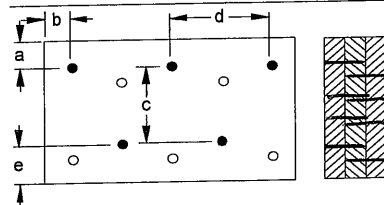

a minimum = 1"

c = 6-7/8"

b minimum = 3"

d = 4"

e minimum = 3"

Connection design assumes pointload is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Nailing schedule applies to both sides of the member.

Member has no side loads.

Connectors are: 16d ^{16d} Nails

3-1/2" ARDOX SPIRAL



Per

DWG NO. TAM 9265-18
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\...\B8DR(i1694)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:24

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Dropped Beams\1st Floor\Dropped Beams\B8D

Specifier:

Designer: CZ

Company:

Misc:

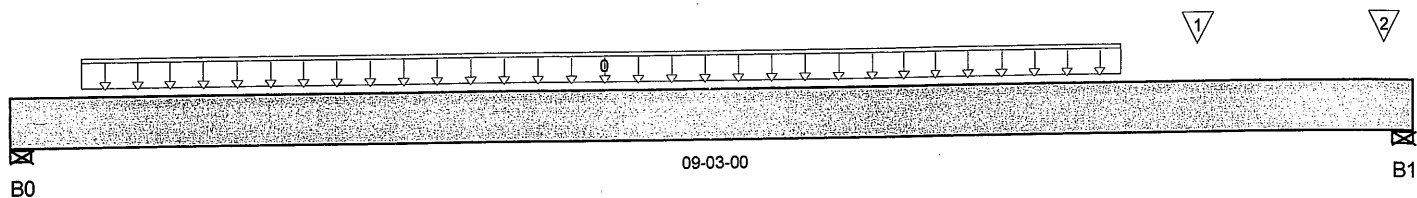

Total Horizontal Product Length = 09-03-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-3/4"	2,329 / 0	1,211 / 0		
B1, 4-1/4"	2,755 / 0	1,425 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	Smoothed Load	Unf. Lin. (lb/ft)	L	00-05-08	07-04-04	556	278			n/a
1	-	Conc. Pt. (lbs)	L	07-10-04	07-10-04	597	299			n/a
2	-	Conc. Pt. (lbs)	L	09-00-12	09-00-12	646	324			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	11,250 ft-lbs	25,408 ft-lbs	44.3%	1	04-10-04
End Shear	4,626 lbs	11,571 lbs	40%	1	01-01-04
Total Load Defl.	L/485 (0.216")	0.435"	49.5%	4	04-09-00
Live Load Defl.	L/736 (0.142")	0.29"	48.9%	5	04-09-00
Max Defl.	0.216"	n/a	n/a	4	04-09-00
Span / Depth	11	n/a	n/a		00-00-00

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	3-3/4" x 3-1/2"	5,007 lbs	47%	31.3%	Unspecified
B1 Wall/Plate	4-1/4" x 3-1/2"	5,914 lbs	49%	32.6%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 00-03-03, Bottom: 00-03-03.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

CONFORMS TO OBC 2012

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9



P6 1/2

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl

Description: Designs\Dropped Beams\1st Floor\Dropped Beams\B8


Specifier:

Designer: CZ

Company:

Misc:

Connection Diagram

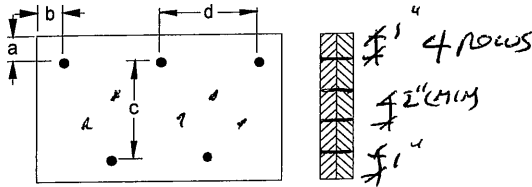

a minimum = 1" c = 1-1/2"
b minimum = 3" d = 4"

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Member has no side loads.

Connectors are: 16d ^{hooker} Nails

3-1/2" ARDOX SPIRAL

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCK®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.





Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\Flush Beams\B9(i1576)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B9(i1576)

Specifier:

Designer: CZ

Company:

Misc:

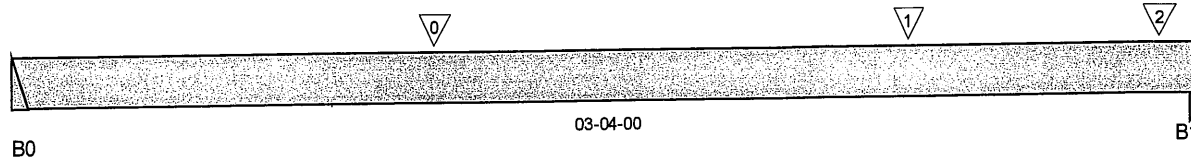

Total Horizontal Product Length = 03-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0	106 / 0	61 / 0		
B1, 3-1/2"	175 / 0	96 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	J5(i1546)	Conc. Pt. (lbs)	L	01-02-04	01-02-04	133	67			n/a
1	J5(i1556)	Conc. Pt. (lbs)	L	02-06-04	02-06-04	107	54			n/a
2	J5(i1582)	Conc. Pt. (lbs)	L	03-02-12	03-02-12	41	20			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	250 ft-lbs	12,704 ft-lbs	2%	1	01-02-04
End Shear	229 lbs	5,785 lbs	4%	1	00-11-08
Total Load Defl.	L/999 (0.001")	n/a	n/a	4	01-07-01
Live Load Defl.	L/999 (0.001")	n/a	n/a	5	01-07-01
Max Defl.	0.001"	n/a	n/a	4	01-07-01
Span / Depth	3.8	n/a	n/a		00-00-00

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Hanger	2" x 1-3/4"	235 lbs	n/a	5.5%	HUS1.81/10
B1 Post	3-1/2" x 1-3/4"	383 lbs	7.7%	5.1%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.


Importance Factor: Normal. Part code: Part 9

CONFORMS TO OBC 2012

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCK®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.

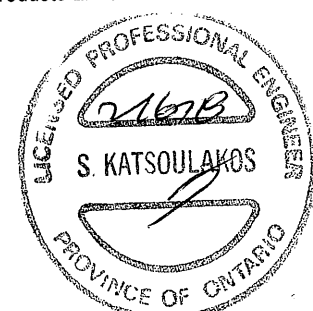

DWG NO. TAM 9267-18
STRUCTURAL
COMPONENT ONLY

SITE COPY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\...\B10(i1232)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B10(i1232)

Specifier:

Designer: CZ

Company:

Misc:

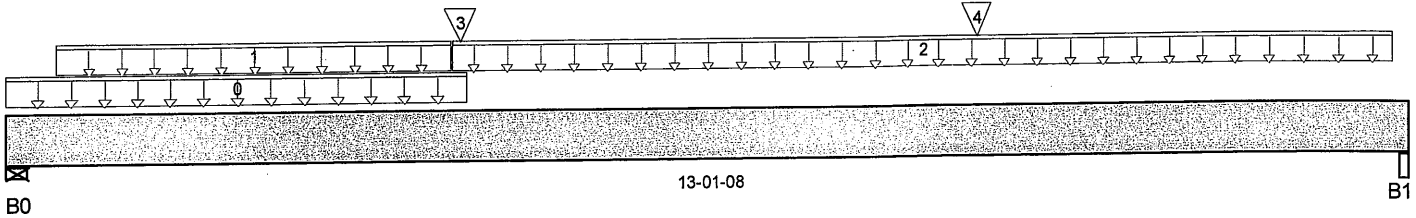

Total Horizontal Product Length = 13-01-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 5-1/2"	1,260 / 0	703 / 0		
B1, 3-1/2"	604 / 0	376 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	User Load	Unf. Lin. (lb/ft)	L	00-00-00	04-03-12	240	120			n/a
1	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-05-08	04-02-00	29	15			n/a
2	FC3 Floor Material	Unf. Lin. (lb/ft)	L	04-02-00	12-11-12	53	26			n/a
3	B9(i1576)	Conc. Pt. (lbs)	L	04-02-14	04-02-14	103	59			n/a
4	B11(i1461)	Conc. Pt. (lbs)	L	09-01-02	09-01-02	148	88			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	5,537 ft-lbs	25,408 ft-lbs	21.8%	1	04-07-06
End Shear	2,061 lbs	11,571 lbs	17.8%	1	01-03-00
Total Load Defl.	L/675 (0.222")	0.625"	35.5%	4	06-04-14
Live Load Defl.	L/1,076 (0.139")	0.417"	33.5%	5	06-04-14
Max Defl.	0.222"	n/a	n/a	4	06-04-14
Span / Depth	15.8	n/a	n/a		00-00-00

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	5-1/2" x 3-1/2"	2,769 lbs	26.9%	11.8%	Unspecified
B1 Beam	3-1/2" x 3-1/2"	1,376 lbs	10.3%	9.2%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

CONFORMS TO OBC 2012

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9



P6 1/2

SITE COPY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor...\B10(i1232)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl

Description: Designs\Flush Beams\1st Floor\Flush Beams\B10(i1232)


Specifier:

Designer: CZ

Company:

Misc:

Connection Diagram

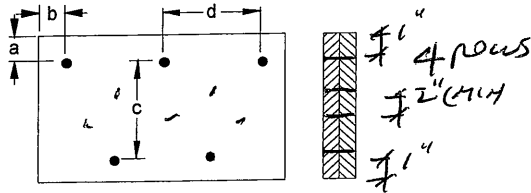

a minimum = 2" c = 3-1/2"
b minimum = 3" d = 6"

Calculated Side Load = 42.7 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Connectors are: Nails

3-1/2" ARDOX SPIRAL

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.





Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\Flush Beams\B11(i1461)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B11(i1461)

Specifier:

Designer: CZ

Company:

Misc:

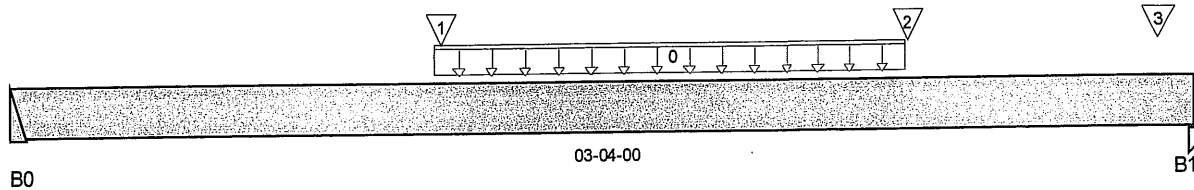

Total Horizontal Product Length = 03-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0	151 / 0	89 / 0		
B1, 3-1/2"	202 / 0	114 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	FC3 Floor Material	Unf. Lin. (lb/ft)	L	01-02-04	02-06-04	3				n/a
1	-	Conc. Pt. (lbs)	L	01-02-08	01-02-08	204	112			n/a
2	J5(i1556)	Conc. Pt. (lbs)	L	02-06-04	02-06-04	105	53			n/a
3	J5(i1582)	Conc. Pt. (lbs)	L	03-02-12	03-02-12	41	20			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	363 ft-lbs	12,704 ft-lbs	2.9%	1	01-02-04
End Shear	333 lbs	5,785 lbs	5.8%	1	00-11-08
Total Load Defl.	L/999 (0.002")	n/a	n/a	4	01-06-09
Live Load Defl.	L/999 (0.001")	n/a	n/a	5	01-06-09
Max Defl.	0.002"	n/a	n/a	4	01-06-09
Span / Depth	3.8	n/a	n/a		00-00-00

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Hanger	2" x 1-3/4"	339 lbs	n/a	7.9%	HUS1.81/10
B1 Post	3-1/2" x 1-3/4"	446 lbs	9%	6%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALCO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.

CONFORMS TO OBC 2012



SITE COPY

DWG NO. TAM 9269-18
STRUCTURAL
COMPONENT ONLY

BC CALC® Design Report



Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:24

Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B13(i1675)

Specifier:

Designer: CZ

Company:

Misc:

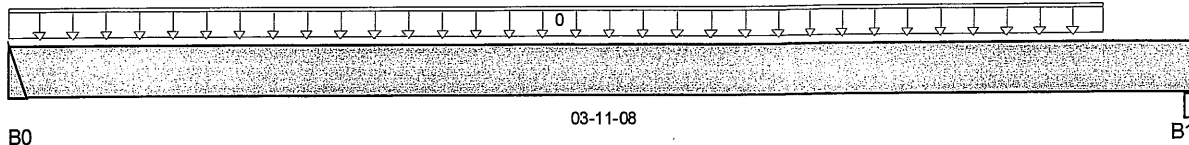

Total Horizontal Product Length = 03-11-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0	12 / 0	15 / 0		
B1, 3-1/2"	11 / 0	15 / 0		

Load Summary

Tag Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0 FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-08-00	6	3			n/a

Controls Summary	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	32 ft-lbs	12,704 ft-lbs	0.2%	1	01-11-00
End Shear	18 lbs	5,785 lbs	0.3%	1	00-11-08
Total Load Defl.	L/999 (0")	n/a	n/a	4	01-11-00
Live Load Defl.	L/999 (0")	n/a	n/a	5	01-11-00
Max Defl.	0"	n/a	n/a	4	01-11-00
Span / Depth	4.6	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Hanger	2" x 1-3/4"	37 lbs	n/a	0.9%	HUS1.81/10
B1 Beam	3-1/2" x 1-3/4"	36 lbs	0.5%	0.5%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

BC CALCO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.





Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP Basement\...\B14L(i1364)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 09:54:23

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 EL C.mmdl


Description: Designs\Flush Beams\Basement\Flush Beams\B14L(i136

Specifier:

Designer: CZ

Company:

Misc:

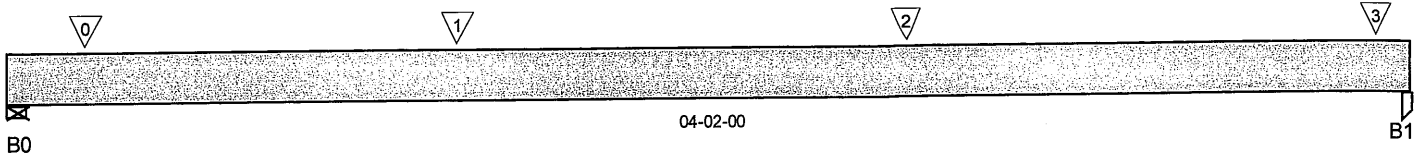

Total Horizontal Product Length = 04-02-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 5-1/2"	255 / 0	153 / 0		
B1, 3-1/2"	344 / 0	181 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	1(i649)	Conc. Pt. (lbs)	L	00-02-12	00-02-12		15			n/a
1	J4(i1390)	Conc. Pt. (lbs)	L	01-04-00	01-04-00	228	114			n/a
2	J4(i1388)	Conc. Pt. (lbs)	L	02-08-00	02-08-00	243	121			n/a
3	J4(i1386)	Conc. Pt. (lbs)	L	04-00-12	04-00-12	128	64			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	592 ft-lbs	12,704 ft-lbs	4.7%	1	02-08-00
End Shear	547 lbs	5,785 lbs	9.5%	1	01-03-00
Total Load Defl.	L/999 (0.004")	n/a	n/a	4	02-02-00
Live Load Defl.	L/999 (0.002")	n/a	n/a	5	02-02-00
Max Defl.	0.004"	n/a	n/a	4	02-02-00
Span / Depth	4.5	n/a	n/a		00-00-00

Disclosure

Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Wall/Plate	5-1/2" x 1-3/4"	573 lbs	11.1%	4.9%	Unspecified
B1 Post	3-1/2" x 1-3/4"	743 lbs	14.9%	9.9%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

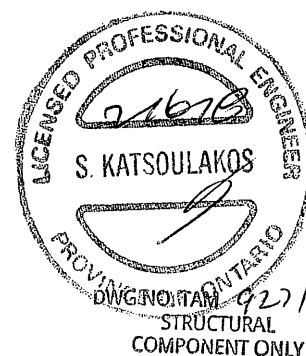



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\...\B16(i2866)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 11:58:59

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 CORNER EL C.mmdl


Description: Designs\Flush Beams\1st Floor\Flush Beams\B16(i2866)

Specifier:

Designer: CZ

Company:

Misc:

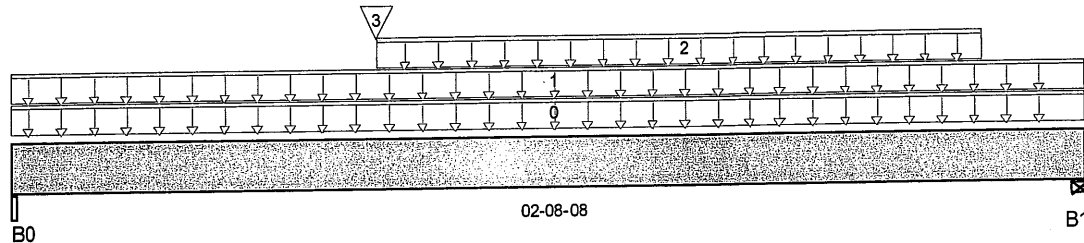

Total Horizontal Product Length = 02-08-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 5-1/4"	179 / 0	273 / 0	193 / 0	
B1, 5-1/2"	130 / 0	251 / 0	196 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Trib.
0	User Load	Unf. Lin. (lb/ft)	L	00-00-00	02-08-08	33	130	72		n/a
1	LOWROOF	Unf. Lin. (lb/ft)	L	00-00-00	02-08-08	33	30	72		n/a
2	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-11-00	02-05-06	6				n/a
3	J5(i2808)	Conc. Pt. (lbs)	L	00-11-00	00-11-00	121	60			n/a


Controls Summary

	Factored Demand	Factored Resistance	Demand / Resistance	Load Case	Location
Pos. Moment	260 ft-lbs	25,408 ft-lbs	1%	1	01-02-01
End Shear	134 lbs	11,571 lbs	1.2%	1	01-02-12
Total Load Defl.	L/999 (0")	n/a	n/a	35	01-03-13
Live Load Defl.	L/999 (0")	n/a	n/a	51	01-03-13
Max Defl.	0"	n/a	n/a	35	01-03-13
Span / Depth	2.4	n/a	n/a		00-00-00

Bearing Supports

	Dim. (L x W)	Demand	Demand / Resistance Support	Demand / Resistance Member	Material
B0 Beam	5-1/4" x 3-1/2"	720 lbs	7.3%	3.2%	Unspecified
B1 Wall/Plate	5-1/2" x 3-1/2"	674 lbs	6.6%	2.9%	Unspecified

Notes

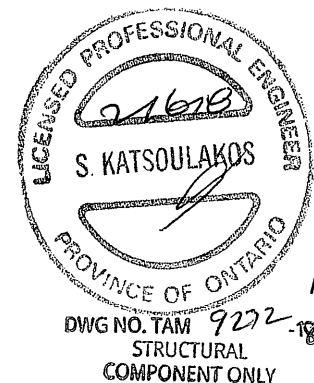



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP 1st Floor\...\B16(i2866)

Dry | 1 span | No cantilevers | 0/12 slope (deg)

August 29, 2017 11:58:59

BC CALC® Design Report



Build 5033

Job Name:

Address:

City, Province, Postal Code: BRADFORD,

Customer:

Code reports: CCMC 12472-R

File Name: SD25-4 SONOMA 4 CORNER EL C.mmdl

Description: Designs\Flush Beams\1st Floor\Flush Beams\B16(i2866)

Specifier:

Designer: CZ

Company:

Misc:

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.


CONFORMS TO OBC 2012

Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

Connection Diagram

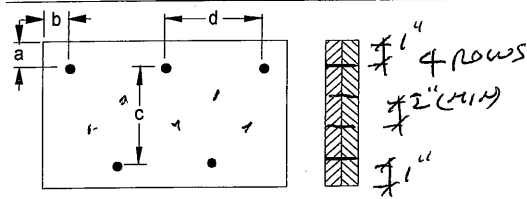

a minimum = 1" c = 3-1/2"
b minimum = 3" d = 4"

Calculated Side Load = 94.7 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Connectors are: Nails

3-1/2" ARDOX SPIRAL

Disclosure



Completeness and accuracy of input must be verified by anyone who would rely on output as evidence of suitability for particular application. Output here based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call 1-800-964-6999 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, SIMPLE FRAMING SYSTEM®, VERSA-LAM®, VERSA-RIM PLUS®, VERSA-RIM®, VERSA-STRAND®, VERSA-STUD® are trademarks of Boise Cascade Wood Products L.L.C.



Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing





Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-2"	13'-9"	N/A	15'-7"	14'-8"	14'-2"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
14"	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
16"	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	N/A	16'-8"	15'-3"	14'-5"	N/A
	NI-40x	17'-11"	16'-11"	16'-1"	N/A	18'-5"	17'-1"	16'-1"	N/A
	NI-60	18'-2"	17'-1"	16'-4"	N/A	18'-7"	17'-4"	16'-4"	N/A
	NI-70	19'-2"	17'-10"	17'-2"	N/A	19'-7"	18'-3"	17'-7"	N/A
	NI-80	19'-5"	18'-0"	17'-4"	N/A	19'-10"	18'-5"	17'-8"	N/A
11-7/8"	NI-20	19'-6"	18'-1"	17'-3"	N/A	19'-11"	18'-3"	17'-3"	N/A
	NI-40x	21'-0"	19'-6"	18'-8"	N/A	21'-7"	20'-2"	19'-2"	N/A
	NI-60	21'-4"	19'-9"	18'-11"	N/A	21'-11"	20'-4"	19'-6"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-5"	20'-5"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-8"	N/A
	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
14"	NI-40x	23'-7"	21'-11"	20'-11"	N/A	24'-3"	22'-7"	21'-7"	N/A
	NI-60	24'-0"	22'-3"	21'-3"	N/A	24'-8"	22'-11"	21'-11"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-11"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
16"	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	25'-3"	24'-2"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans



Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing

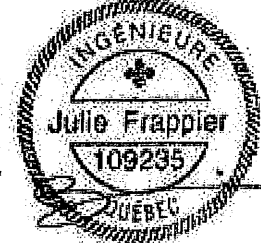

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-9"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-6"	16'-7"	15'-11"	15'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-7"	18'-5"	17'-3"	16'-7"	15'-11"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
	NI-20	17'-10"	16'-10"	16'-2"	15'-6"	18'-6"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-6"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
11-7/8"	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-11"	22'-1"	20'-6"	19'-7"	18'-7"
14"	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
16"	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-70	20'-0"	18'-7"	17'-9"	16'-7"	20'-5"	18'-11"	17'-10"	16'-7"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-7"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
11-7/8"	NI-70	23'-4"	21'-8"	20'-8"	19'-7"	23'-10"	22'-3"	21'-2"	19'-9"
	NI-80	23'-7"	21'-11"	20'-11"	19'-9"	24'-1"	22'-6"	21'-5"	20'-0"
	NI-90x	24'-3"	22'-6"	21'-6"	20'-4"	24'-8"	23'-0"	22'-0"	20'-9"
	NI-40x	24'-5"	22'-9"	21'-8"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
14"	NI-60	24'-10"	23'-1"	22'-0"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-70	26'-1"	24'-3"	23'-2"	21'-10"	26'-8"	24'-11"	23'-9"	22'-4"
	NI-80	26'-6"	24'-7"	23'-5"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
	NI-90x	27'-3"	25'-4"	24'-1"	22'-9"	27'-9"	25'-11"	24'-8"	23'-4"
16"	NI-60	27'-3"	25'-5"	24'-2"	22'-10"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-70	28'-8"	26'-8"	25'-4"	23'-11"	29'-3"	27'-4"	26'-1"	24'-8"
	NI-80	29'-1"	27'-0"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90x	29'-11"	27'-10"	26'-6"	25'-0"	30'-6"	28'-5"	27'-2"	25'-8"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

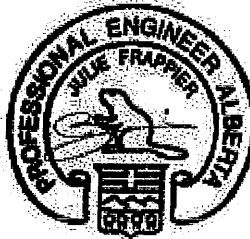



Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
14"	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
16"	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	17'-9"	16'-1"	15'-1"	N/A	17'-9"	16'-1"	15'-1"	N/A
	NI-60	18'-1"	16'-4"	15'-4"	N/A	18'-1"	16'-4"	15'-4"	N/A
	NI-70	19'-2"	17'-10"	16'-9"	N/A	19'-7"	17'-10"	16'-9"	N/A
	NI-80	19'-5"	18'-0"	17'-1"	N/A	19'-10"	18'-3"	17'-1"	N/A
11-7/8"	NI-20	18'-9"	17'-0"	16'-0"	N/A	18'-9"	17'-0"	16'-0"	N/A
	NI-40x	21'-0"	19'-3"	17'-9"	N/A	21'-3"	19'-3"	17'-9"	N/A
	NI-60	21'-4"	19'-8"	18'-5"	N/A	21'-8"	19'-8"	18'-5"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-4"	20'-0"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-5"	N/A
	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
14"	NI-40x	23'-7"	21'-5"	19'-6"	N/A	24'-1"	21'-5"	19'-6"	N/A
	NI-60	24'-0"	22'-3"	21'-0"	N/A	24'-8"	22'-5"	21'-0"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-9"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
16"	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	24'-10"	23'-4"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.




Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing




Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-0"	16'-0"	15'-1"	13'-11"	17'-5"	16'-1"	15'-1"	13'-11"
	NI-60	17'-2"	16'-2"	15'-5"	14'-3"	17'-6"	16'-5"	15'-5"	14'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-6"	18'-5"	17'-3"	16'-7"	15'-6"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	15'-10"
11-7/8"	NI-20	17'-10"	16'-10"	16'-0"	14'-10"	18'-6"	17'-1"	16'-0"	14'-10"
	NI-40x	19'-4"	17'-11"	17'-3"	15'-10"	19'-11"	18'-6"	17'-9"	15'-10"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-1"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
14"	NI-40x	21'-5"	19'-10"	18'-11"	17'-5"	22'-1"	20'-6"	19'-6"	17'-5"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
16"	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-9"	16'-1"	15'-1"	13'-11"	17'-9"	16'-1"	15'-1"	13'-11"
	NI-60	18'-1"	16'-5"	15'-5"	14'-3"	18'-1"	16'-5"	15'-5"	14'-3"
	NI-70	19'-10"	17'-11"	16'-9"	15'-6"	19'-10"	17'-11"	16'-9"	15'-6"
	NI-80	20'-2"	18'-3"	17'-1"	15'-10"	20'-2"	18'-3"	17'-1"	15'-10"
11-7/8"	NI-20	18'-10"	17'-1"	16'-0"	14'-10"	18'-10"	17'-1"	16'-0"	14'-10"
	NI-40x	21'-3"	19'-3"	17'-9"	15'-10"	21'-3"	19'-3"	17'-9"	15'-10"
	NI-60	21'-9"	19'-8"	18'-5"	17'-1"	21'-9"	19'-8"	18'-5"	17'-1"
	NI-70	23'-4"	21'-5"	20'-1"	18'-6"	23'-8"	21'-5"	20'-1"	18'-6"
	NI-80	23'-7"	21'-10"	20'-5"	18'-11"	24'-1"	21'-10"	20'-5"	18'-11"
	NI-90x	24'-3"	22'-6"	21'-3"	19'-7"	24'-8"	22'-7"	21'-3"	19'-7"
14"	NI-40x	24'-2"	21'-5"	19'-6"	17'-5"	24'-2"	21'-5"	19'-6"	17'-5"
	NI-60	24'-9"	22'-5"	21'-0"	19'-6"	24'-9"	22'-5"	21'-0"	19'-6"
	NI-70	26'-1"	24'-3"	22'-9"	21'-0"	26'-8"	24'-3"	22'-9"	21'-0"
	NI-80	26'-6"	24'-7"	23'-3"	21'-6"	27'-1"	24'-10"	23'-3"	21'-6"
	NI-90x	27'-3"	25'-4"	24'-1"	22'-4"	27'-9"	25'-10"	24'-3"	22'-4"
16"	NI-60	27'-3"	24'-11"	23'-5"	21'-7"	27'-6"	24'-11"	23'-5"	21'-7"
	NI-70	28'-8"	26'-8"	25'-3"	23'-4"	29'-3"	26'-11"	25'-3"	23'-4"
	NI-80	29'-1"	27'-0"	25'-9"	23'-10"	29'-8"	27'-6"	25'-10"	23'-10"
	NI-90x	29'-11"	27'-10"	26'-6"	24'-10"	30'-6"	28'-5"	26'-11"	24'-10"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

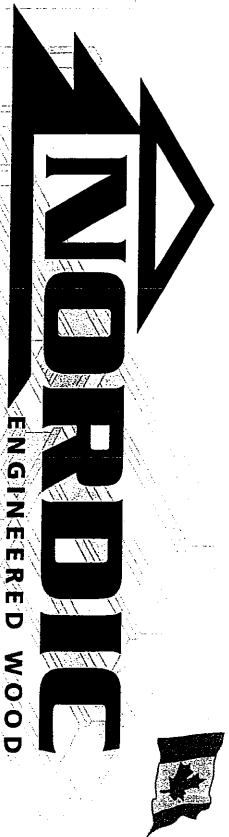

INSTALLATION GUIDE FOR RESIDENTIAL FLOORS

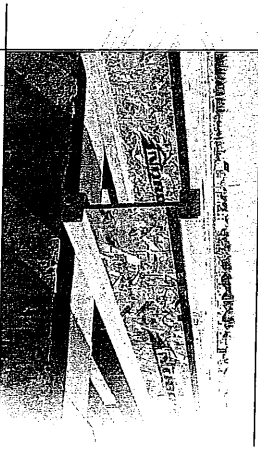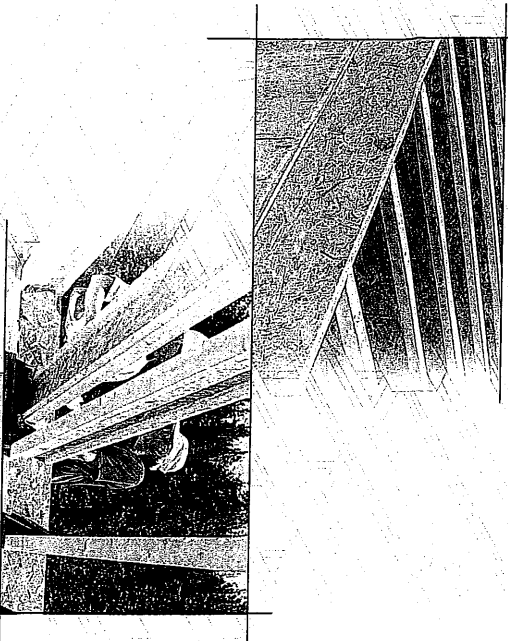

Distributed by:


N-C301 / November 2014

SAFETY AND CONSTRUCTION PRECAUTIONS

WARNING

I-joists are not stable until completely installed, and will not carry any load until fully braced and sheathed.

Avoid Accidents by Following these Important Guidelines:



Do not walk on I-joists until fully fastened and braced, or serious injuries can result.

1. Brace and nail each I-joist as it is installed, using hangers, blocking panels, rim board, and/or cross-bridging at joist ends. When I-joists are applied continuous over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.

2. When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joists. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joist rollover or buckling.

- Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each I-joist. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joists.



- Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of I-joists at the end of the bay.

3. For cantilevered I-joists, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bridging.

4. Install and fully nail permanent sheathing to each I-joist before placing loads on the floor system. Then, stack building materials over beams or walls only.

5. Never install a damaged I-joist.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

STORAGE AND HANDLING GUIDELINES

1. Bundle wrap can be slippery when wet. Avoid walking on wrapped bundles.

2. Store, stack, and handle I-joists vertically and level only.

3. Always stack and handle I-joists in the upright position only.

4. Do not store I-joists in direct contact with the ground and/or flatwise.

5. Protect I-joists from weather, and use spacers to separate bundles.




6. Bundled units should be kept intact until time of installation.

7. When handling I-joists with a crane on the job site, take a few simple precautions to prevent damage to the I-joists and injury to your work crew.

- Pick I-joists in bundles as shipped by the supplier.
- Orient the bundles so that the webs of the I-joists are vertical.
- Pick the bundles at the 5th points, using a spreader bar if necessary.

8. Do not handle I-joists in a horizontal orientation.

9. NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.



SITE COPY



MAXIMUM FLOOR SPANS

- Maximum clear spans applicable to simple-span or multiple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration and a live load deflection limit of L/480. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less, or 3/4 inch for joist spacing of 24 inches. Adhesive shall meet the requirements given in CGS-71.26 Standard. No concrete topping or bridging element was assumed. Increased spans may be achieved with the use of gypsum and/or a row of blocking at mid-span.
- Minimum bearing length shall be 1-3/4 inches for the end bearings, and 3-1/2 inches for the intermediate bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniform loads, an engineering analysis may be required based on the use of the design properties.
- Tables are based on Limit States Design per CAN/CSA C08-09 Standard, and NBC 2010.
- SI units conversion: 1 inch = 25.4 mm
1 foot = 0.305 m

MAXIMUM FLOOR SPANS FOR NORDIC I-JOISTS SIMPLE AND MULTIPLE SPANS

Joist Depth	Joist Series	Simple spans				Multiple spans			
		On centre spacing	On centre spacing	On centre spacing	On centre spacing	On centre spacing	On centre spacing	On centre spacing	On centre spacing
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
12"	NI-20	13.1	14.2	13.9	13.5	16.3	15.4	14.3	14.2
12"	NI-40x	16.1	15.2	14.8	14.9	17.5	16.5	15.1	15.5
12"	NI-60x	18.4	17.3	16.7	16.7	19.6	18.7	17.4	16.1
12"	NI-80	20.2	19.1	18.3	18.3	21.5	20.7	19.3	19.1
12"	NI-90x	22.5	21.1	20.3	20.3	23.8	22.9	21.4	21.0
16"	NI-20	15.1	16.3	15.9	15.5	18.4	17.3	16.1	16.2
16"	NI-40x	18.1	17.0	16.5	16.6	20.3	19.6	18.0	18.1
16"	NI-60x	19.6	18.0	17.4	17.5	21.5	20.7	19.3	19.1
16"	NI-80	20.2	18.7	17.6	17.6	22.9	22.0	20.7	20.4
16"	NI-90x	22.5	20.3	19.1	19.1	24.8	23.8	22.4	22.2
19.2"	NI-20	16.1	17.1	16.7	16.3	19.6	18.6	17.9	18.1
19.2"	NI-40x	19.1	18.1	17.4	17.5	21.5	20.7	19.3	19.1
19.2"	NI-60x	20.2	19.1	18.3	18.3	22.9	22.0	20.7	20.4
19.2"	NI-80	22.5	21.1	20.3	20.3	24.8	23.8	22.4	22.2
19.2"	NI-90x	24.8	23.8	22.4	22.4	26.1	25.2	24.0	24.0
24"	NI-20	17.1	18.1	17.7	17.3	20.3	19.6	18.0	18.1
24"	NI-40x	20.3	19.1	18.3	18.3	22.9	22.0	20.7	20.4
24"	NI-60x	21.5	20.7	19.3	19.3	24.8	23.8	22.4	22.2
24"	NI-80	22.9	22.0	20.7	20.7	26.1	25.2	24.0	24.0
24"	NI-90x	24.8	23.8	22.4	22.4	26.1	25.2	24.0	24.0

CGMC EVALUATION REPORT 13032-R


WEB STIFFENERS

RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the I-joist properties table found in the I-joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.

SI units conversion: 1 inch = 25.4 mm


FIGURE 2
WEB STIFFENER INSTALLATION DETAILS

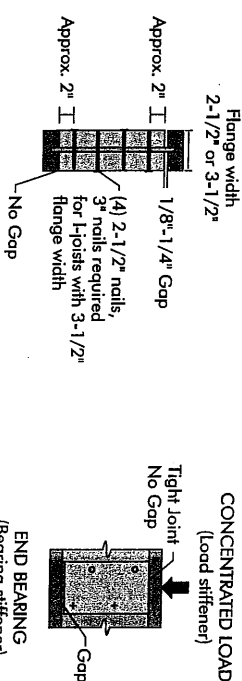

See table below for web stiffener size requirements

STIFFENER SIZE REQUIREMENTS

Flange Width	Web Stiffener Size Each Side of Web
2-1/2"	1" x 2-5/16" minimum width
3-1/2"	1-1/2" x 2-5/16" minimum width




NORDIC I-JOIST SERIES

Series	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-20	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-40x	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-60x	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-70	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-80	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-90	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber
NI-90x	1950F MSR	2100F MSR	1950F MSR	2100F MSR	2400F MSR	NFC Lumber

I-JOIST HANGERS

- Hangers shown illustrate the three most commonly used metal hangers to support I-joists.
- All nailing must meet the hanger manufacturer's recommendations.
- Hangers should be selected based on the joist depth, flange width and load capacity based on the maximum spans.
- Web stiffeners are required when the sides of the hangers do not laterally brace the top flange of the I-joist.



Face Mount

Skewed

2015-04-16

SITE COPY

INSTALLING NORDIC I-JOISTS

1. Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, contact your supplier.
2. Except for cutting to length, I-joist flanges should **never** be cut, drilled, or notched.
3. Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
4. I-joists must be anchored securely to supports before floor sheathing is attached, and supports for multiple spans must be level.
5. Minimum bearing lengths: 1-3/4 inches for end bearings and 3-1/2 inches for intermediate bearings.
6. When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
7. Leave a 1/16-inch gap between the I-joist end and a header.
8. Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unusual or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
9. Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
10. Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
11. For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squash blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
12. Due to shrinkage, common framing lumber set on edge **may never** be used as blocking or rim boards. I-joist blocking panels or other engineered wood products – such as rim board – must be cut to fit between the I-joists, and an I-joist-compatible depth selected.
13. Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
14. If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
15. Nail spacing: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.





FIGURE 1
TYPICAL NORDIC I-JOIST FLOOR FRAMING AND CONSTRUCTION DETAILS


Some framing requirements such as erection bracing and blocking panels have been omitted for clarity.

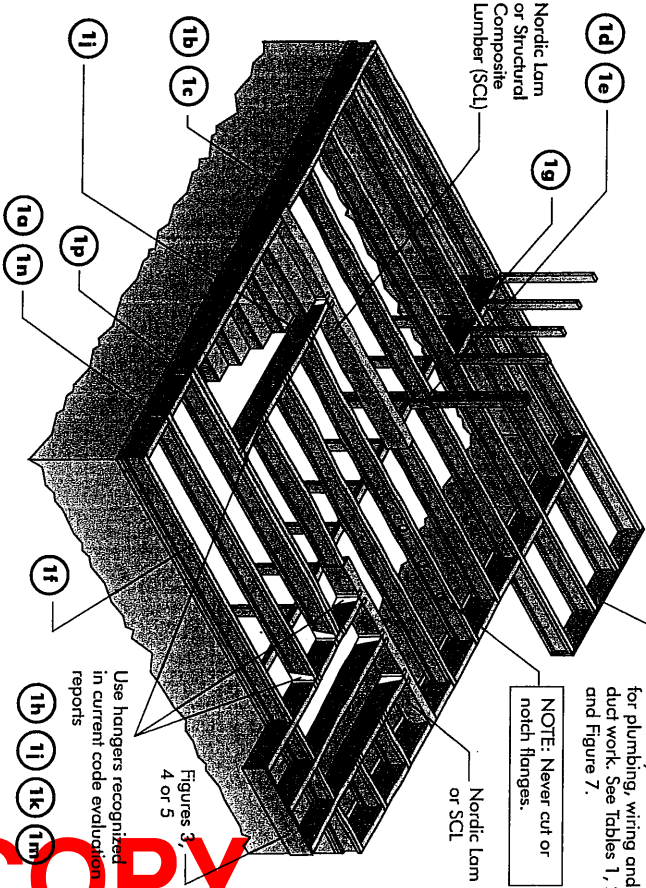

Figures 3, 4 or 5
Holes may be cut in web for plumbing, wiring and duct work. See Tables 1, 2 and Figure 7.
NOTE: Never cut or notch flanges.


Figures 3, 4 or 5
Use hangers recognized in current code evaluation reports

All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.122" dia.) common spiral nails may be substituted for 2-1/2" (0.128" dia.) common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.

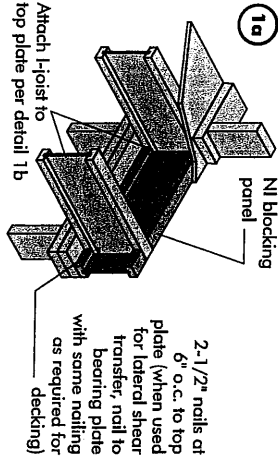


Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
NI Joists	3,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

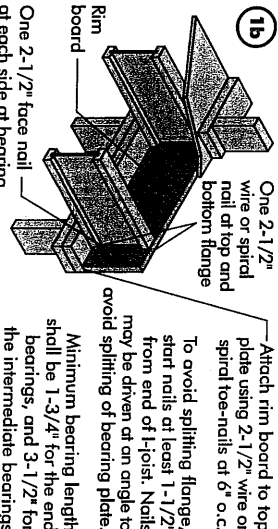


Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	8,090

*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

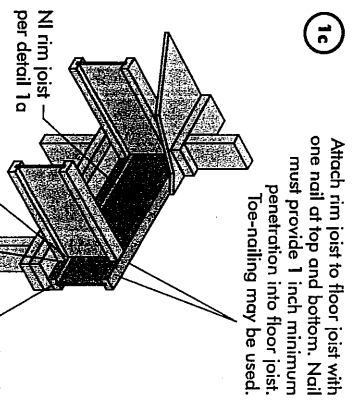

Pair of Squash Blocks	Maximum Factored Vertical per Pair of Squash Blocks (lbs)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300







Provide lateral bracing per detail 1a, 1b, or 1c

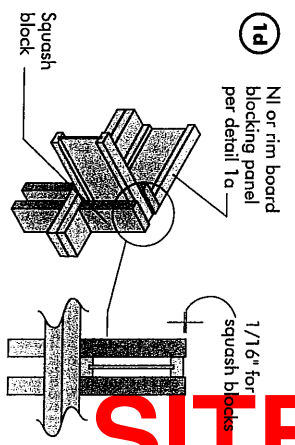

Pair of Squash Blocks	Maximum Factored Vertical per Pair of Squash Blocks (lbs)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300

Provide lateral bracing per detail 1a, 1b, or 1c





SITE COPY

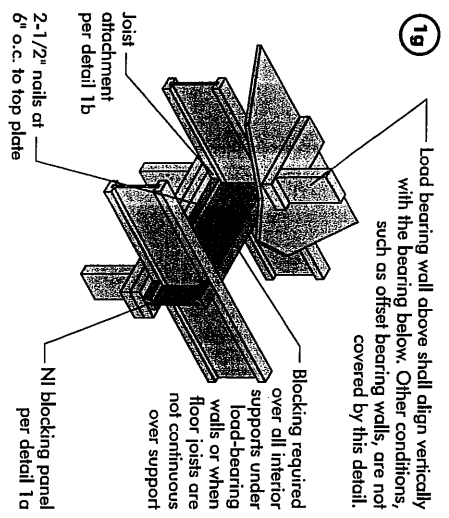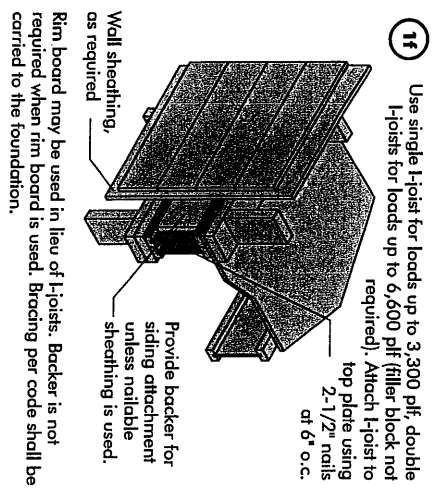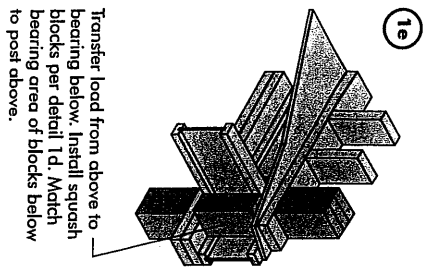

Top- or face-mount hanger installed per manufacturer's recommendations

For nailing schedules for multiple beams, see the manufacturer's recommendations.

Note: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

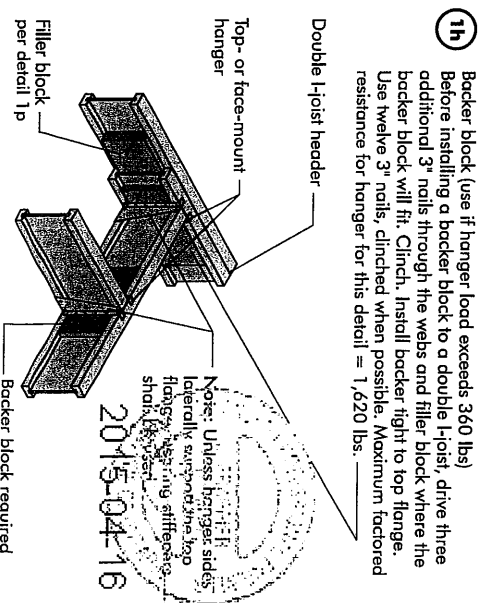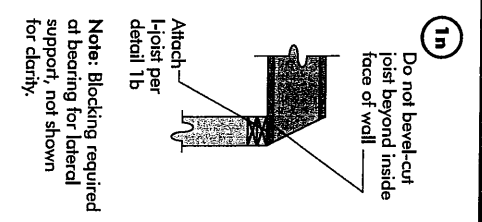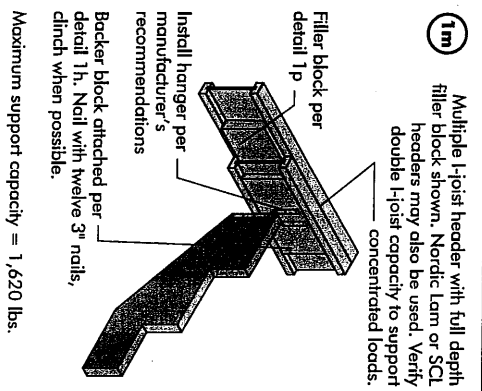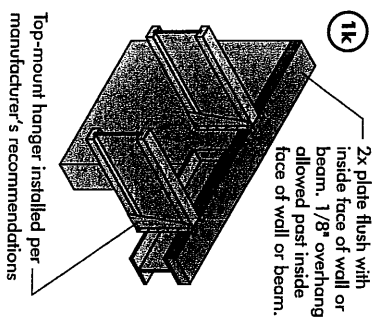


Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

* Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA-Q325 or CAN/CSA-Q437 Standard.

** For face-mount hangers use net joist depth minus 3-1/4" for joists with 1-1/2" thick flanges. For 2" thick flanges use net depth minus 4-1/4".



BACKER BLOCKS (Blocks must be long enough to permit required nailing without splitting)



Notes:

- Support back of I-joist web during nailing to prevent damage to web/flange connection.
- Leave a 1/8 to 1/4-inch gap between top of filler block and bottom of top I-joist flange.
- Filler block is required between joists for full length of span.
- Nail joists together with two rows of 3" nails at 12 inches o.c. (clinched when possible) on each side of the double I-joist. Total of four nails per foot required. If nails can be clinched, only two nails per foot are required.
- The maximum factored load that may be applied to one side of the double joist using this detail is 860 lb/ft. Verify double I-joist capacity.

Flange Size	Joist Depth	Filler Block Size
2-1/2" x 1-1/2"	9-1/2" x 1-1/2"	2-1/8" x 6"
2-1/2" x 1-1/2"	11-7/8" x 1-1/2"	2-1/8" x 8"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	2-1/8" x 10"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	2-1/8" x 12"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 6"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 8"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 10"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 12"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 7"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 9"
3-1/2" x 1-1/2"	11-7/8" x 1-1/2"	3" x 11"

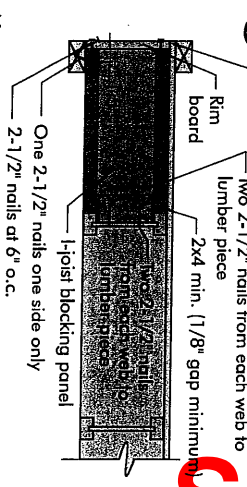
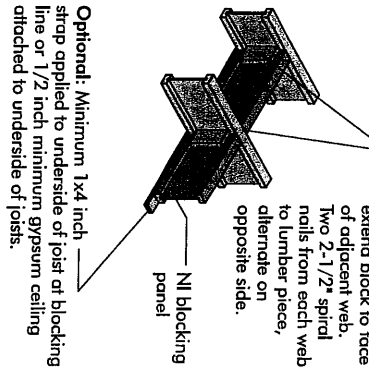


Notes:

- In some local codes, blocking is prescriptively required in the first joist space (or first and second joist space) next to the starter joist. Where required, see local code requirements for spacing of the blocking.
- All nails are common spiral in this detail.

SITE COPY

CANTILEVER DETAILS FOR BALCONIES (NO WALL LOAD)

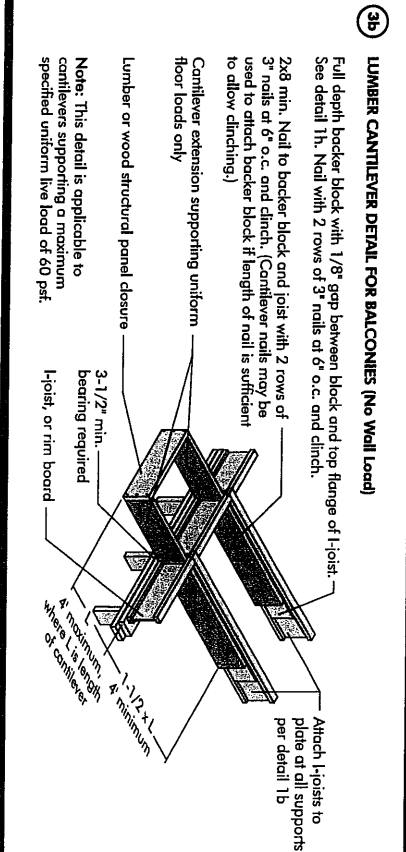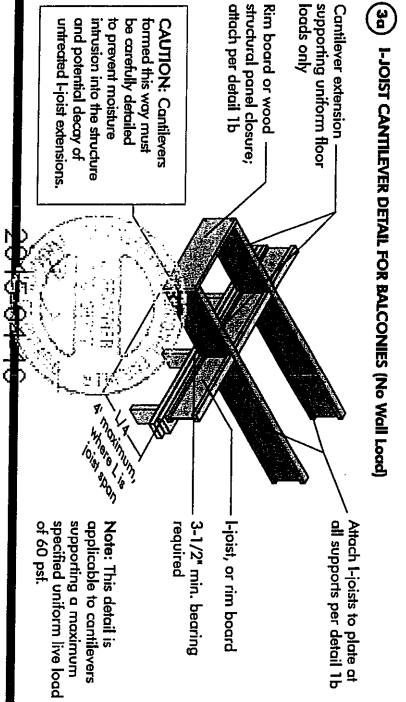

CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)

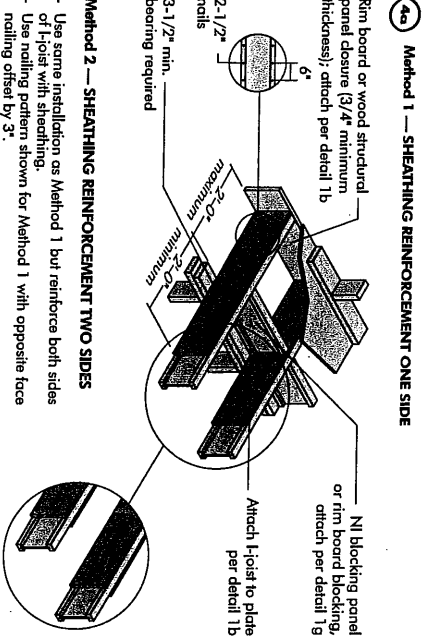


FIGURE 4 (continued)


See table below for NI reinforcement requirements of cantilever.

For hip roofs with the jack trusses running parallel to the cantilevered floor joists, the I-joist reinforcement requirements for a span of 26 ft. shall be permitted to be used.

CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN				ROOF LOADING (UNFACTORED)				JOIST SPACING (in.)			
	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
26	N	N	N	N	N	N	N	N	N	N	N	N
28	N	N	N	N	N	N	N	N	N	N	N	N
30	N	N	N	N	N	N	N	N	N	N	N	N
32	N	N	N	N	N	N	N	N	N	N	N	N
34	N	N	N	N	N	N	N	N	N	N	N	N
36	N	N	N	N	N	N	N	N	N	N	N	N
38	N	N	N	N	N	N	N	N	N	N	N	N
40	N	N	N	N	N	N	N	N	N	N	N	N
42	N	N	N	N	N	N	N	N	N	N	N	N

4b) Alternate Method 2 — DOUBLE I-JOIST

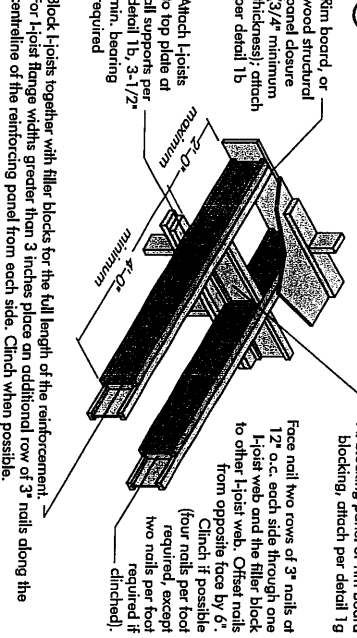


SITE COPY

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS.

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS.

1. The distance between the inside edge of the support and the centerline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
2. I-joist top and bottom flanges must NEVER be cut, notched, or otherwise modified.
3. Whenever possible, field-cut holes should be centered on the middle of the web.
4. The maximum size hole or the maximum depth of a duct chase opening that can be cut into an I-joist web shall equal the clear distance between the flanges of the I-joist minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole or opening and the adjacent I-joist flange.
5. The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
6. Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the longest side of the longest rectangular hole or duct chase opening) and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
7. A knockout is **not** considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
8. Holes measuring 1-1/2 inches or smaller shall be permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.
9. A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
10. All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
11. Limit three maximum size holes per span, of which one may be a duct chase opening.
12. A group of round holes at approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

FIGURE 7
FIELD-CUT HOLE LOCATOR

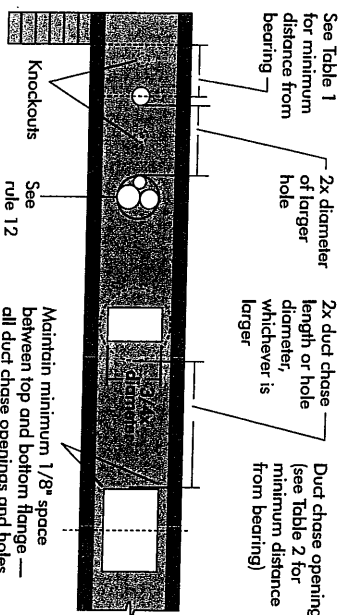

A knockout is **NOT** considered a hole, may be utilized wherever it occurs and may be ignored for purposes of calculating minimum distances between holes.



Knockouts are prescored holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on centre along the length of the I-joist. Where possible, it is preferable to use knockouts instead of field-cut holes.

Never drill, cut or notch the flange, or over-cut the web.

For triangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joist.

TABLE 1
LOCATION OF CIRCULAR HOLES IN JOIST WEBS
Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of hole (ft-in.)														Span adjustment Factor
		2	3	4	5	6	6-1/4	7	8	8-5/8	9	10	10-3/4	11	12	
0	0	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	1	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	2	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	3	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	4	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	5	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	6	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	7	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	8	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	9	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	10	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	11	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	12	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	13	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	14	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	15	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	16	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	17	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	18	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	19	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	20	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	21	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	22	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	23	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	24	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	25	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	26	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	27	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	28	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	29	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	30	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	31	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	32	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	33	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	34	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	35	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	36	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	37	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	38	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	39	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	40	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	41	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	42	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	43	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	44	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	45	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	46	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	47	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	48	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	49	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	50	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	51	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	52	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	53	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	54	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	55	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	56	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	57	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	58	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	59	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	60	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	61	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	62	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	63	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	64	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	65	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	66	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	67	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	68	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	69	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	70	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	71	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	72	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	73	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	74	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	75	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	76	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	77	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	78	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	79	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	80	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	81	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	82	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	83	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	84	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	85	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	86	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	87	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	88	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7	4.0	4.3	4.6	4.9
0	89	0.7														

1. Above table may be used for I-joist spacing of 24 inches on centre or less.
2. Hole location distance is measured from inside face of supports to centre of hole.
3. Distances in this chart are based on uniformly loaded joists.

OPTIONAL:

the minimum distance from the centreline of the hole to the face of any support (D), as given above may be reduced as follows:

$$D_{\text{reduced}} = \frac{D_{\text{actual}}}{\text{SAF}} \times D$$

Where

Lactual

3 D

Distance from the inside face of any support to centre of hole, reduced for less-than-maximum distance shall not be less than distance from the face of the support to edge of the hole. The actual measured span distance between the inside faces of supports (if).
Span Adjustment Factor given in this table.
The minimum distance from the inside face of any support to centre of hole from this table. If d_{actual} is greater than 1, use 1 in the above calculation for d_{SAF} .

TABLE 2

DOCI CHASE OPENING SIZES AND LOCATIONS — Simple Span Only

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of opening (ft-in.)											
		Duct chase length (in.)											
		8	10	12	14	16	18	20	22	24			
12	12-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
14	14-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
16	16-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
18	18-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
20	20-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
22	22-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
24	24-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
26	26-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
28	28-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
30	30-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
32	32-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
34	34-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
36	36-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
38	38-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
40	40-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
42	42-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
44	44-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
46	46-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
48	48-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
50	50-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
52	52-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
54	54-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
56	56-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
58	58-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
60	60-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
62	62-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
64	64-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
66	66-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
68	68-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
70	70-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
72	72-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
74	74-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
76	76-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
78	78-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
80	80-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
82	82-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
84	84-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
86	86-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
88	88-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
90	90-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
92	92-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
94	94-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
96	96-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
98	98-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			
100	100-10	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5			

1. Move crane may be used for I-post spacing of 24 inches on center or less.
2. Duct chase opening location distance is measured from inside face of supports to centre of opening.
3. The above table is based on simple-span joist only. For other applications, contact your local distributor.
4. Distances are based on uniformly loaded floor joists that meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. For other applications, contact your local distributor.


SITE COPY

BRICK CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)

5d SHEATHING REINFORCEMENT

Provide full depth blocking between joists over support (not shown)


Note: Canadian softwood plywood sheathing or equivalent (minimum thickness 3/4") required on sides of joist. Depth shall match the full height of the joist. Nail with 2-1/2" nails at 6" o.c., top and bottom flange. Install with face grain horizontal. Attach I-joist to plate at all supports per detail 1b. Verify reinforced I-joist capacity.

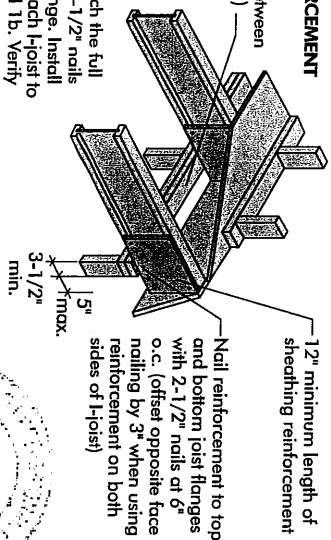

5b SET-BACK DETAIL

Rim board or wood structural panel closure (3/4" minimum thickness), attach per detail 1b.

Notes:
- Provide full depth blocking between joists over support (not shown for clarity)
- Attach I-joist to plate of all supports per detail 1b.
- 3-1/2" minimum I-joist bearing required.

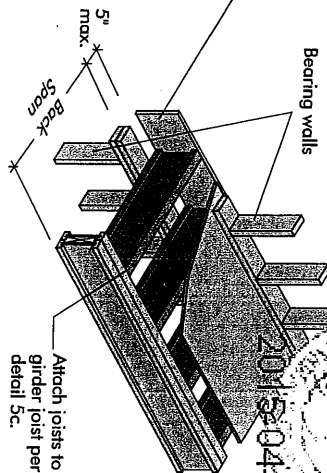

5c SET-BACK CONNECTION

Vertical solid sawn blocks (2x6 S-P-F No. 2 or better) nailed through joist web and web of girder using 2-1/2" nails.

Notes:
- Verify girder joist capacity if the back span exceeds the joist spacing.
- Attach double I-joist per detail 1p, if required.


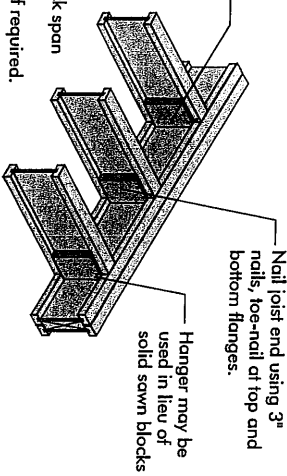


FIGURE 5 (continued)

See table below for NI reinforcement requirements at cantilever.



For hip roofs with the jack trusses running parallel to the cantilevered floor joists, the I-joist reinforcement requirements for a span of 26 ft. shall be permitted to be used.

BRICK CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft)	ROOF LOADING (UNFACTORED) LL = 30 psf, DL = 15 psf				ROOF LOADING (UNFACTORED) LL = 40 psf, DL = 15 psf				ROOF LOADING (UNFACTORED) LL = 50 psf, DL = 15 psf			
		JOIST SPACING (in.)				JOIST SPACING (in.)				JOIST SPACING (in.)			
9-1/2"	26	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	28	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	30	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	32	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	34	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
11-7/8"	26	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	28	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	30	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	32	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	34	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
14"	26	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	28	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	30	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	32	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	34	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
16"	26	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	28	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	30	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	32	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	34	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	36	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	38	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	40	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	42	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
	44	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24

INSTALLING THE GLUED FLOOR SYSTEM

1. Wipe any mud, dirt, water, or ice from I-joist flanges before gluing.
2. Snap a chalk line across the I-joists four feet in from the wall for panel edge alignment and as a boundary for spreading glue.
3. Spread only enough glue to lay one or two panels at a time, or follow specific recommendations from the glue manufacturer.
4. Lay the first panel with tongue side to the wall, and nail in place. This protects the tongue of the next panel from damage when topped into place with a block and sledgehammer.
5. Apply a continuous line of glue (about 1/4-inch diameter) to the top flange of a single I-joist. Apply glue in a winding pattern on wide areas, such as with double I-joists.
6. Apply two lines of glue on I-joists where panel ends butt to assure proper gluing of each end.
7. After the first row of panels is in place, spread glue in the groove of one or two panels at a time before laying the next row. Glue line may be continuous or spaced, but avoid squeeze-out by applying a thinner line (1/8 inch) than used on I-joist flanges.
8. Tap the second row of panels into place, using a block to protect groove edges.
9. Stagger end joints in each succeeding row of panels. A 1/8-inch space between all end joints and 1/8-inch at all edges, including T&G edges, is recommended. (Use a spacer tool or an 2-1/2" common nail to assure accurate and consistent spacing.)
10. **Complete all nailing of each panel before glue sets.** Check the manufacturer's recommendations for cure time. (Warm weather accelerates glue setting.) Use 2" ring- or screw-shank nails for panels 3/4-inch thick or less, and 2-1/2" ring- or screw-shank nails for thicker panels. Space nails per the table below. Closer nail spacing may be required by some codes, or for diaphragm construction. The finished deck can be walked on right away and will carry construction loads without damage to the glue bond.

FASTENERS FOR SHEATHING AND SUBFLOORING(1)

Maximum Joist Spacing (in.)	Minimum Panel Thickness (in.)	Nail Size and Type			Maximum Spacing of Fasteners
		Common Wire or Spiral Nails	Ring Thread Nails or Screws	Staples	Edges of Joists
16	5/8	2"	1-3/4"	2"	6"
20	5/8	2"	1-3/4"	2"	6"
24	3/4	2"	1-3/4"	2"	6"

1. Fasteners of sheathing and subflooring shall conform to the above table.
 2. Staples shall not be less than 1/16-inch in diameter or thickness, with not less than a 3/8-inch crown driven with the crown parallel to framing.
 3. Flooring screws shall not be less than 1/8-inch in diameter.
 4. Special conditions may impose heavy traffic and concentrated loads that require construction in excess of the minimums shown.
 5. Use only adhesives conforming to CAN/CGSB-7.1.26 Standard, Adhesives for Field-Gluing Plywood to Lumber Framing for Floor System, applied in accordance with the manufacturer's recommendations. If OSB panels with sealed surfaces and edges are to be used, use only solvent-based glues; check with panel manufacturer.
- Ref.: NRC-CNRC, National Building Code of Canada 2010, Table 9.23.3.5.

IMPORTANT NOTE:


Floor sheathing must be field glued to the I-joist flanges in order to achieve the maximum spans shown in this document. If sheathing is nailed only, I-joist spans must be verified with your local distributor.

RIM BOARD INSTALLATION DETAILS


8a ATTACHMENT DETAILS WHERE RIM BOARDS ABUT

Rim board Joint Between Floor Joists


2-1/2" nails at 6" o.c. (typical)

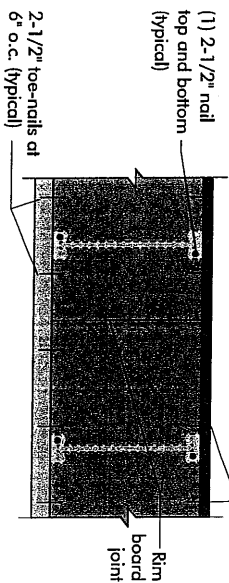


Rim board Joint at Corner

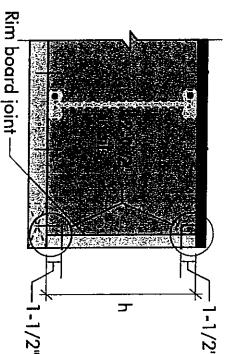

8b TOE-NAIL CONNECTION AT RIM BOARD



8c 2X LEDGER TO RIM BOARD ATTACHMENT DETAIL

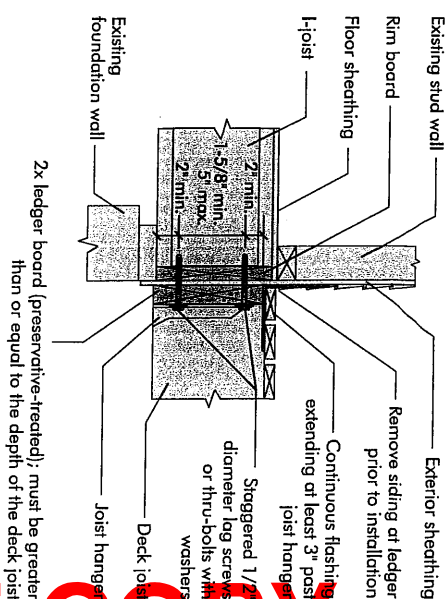

2015-04-16


PRODUCT WARRANTY

Chattanooga guarantees that, in accordance with our specifications, **Novus** products are free from manufacturing defects in material and workmanship.

Furthermore, **Chattanooga** warrants that our products, when utilized in accordance with our handling and installation instructions, will meet or exceed our specifications for the lifetime of the structure.




LVL HEADER AND CONVENTIONAL LUMBER NAILING DETAILS		
DETAIL NUMBER	NUMBER OF ROWS	SPACING (INCHES o/c) "d"
A	2	12
B	2	8
C	2	6
D	2	4
1A	3	12
1B	3	8
1C	3	6
1D	3	4
2A	4	12
2B	4	8
2C	4	6
2D	4	4
3A	5	12
3B	5	8
3C	5	6
3D	5	4
4A	6	12
4B	6	8
4C	6	6
4D	6	4

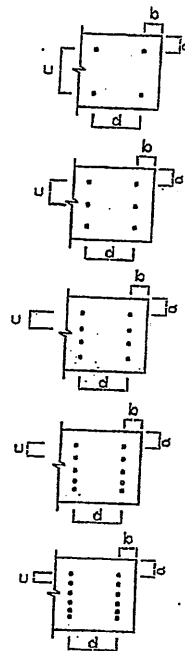

NOTES:

- (1) MINIMUM LUMBER EDGE DISTANCE "a" = 1"
- (2) MINIMUM LUMBER END DISTANCE "b" = 2"
- (3) MINIMUM NAIL ROW SPACING "c" = 2"
- (4) STAGGER NAILS "d/2" BETWEEN PLYS FOR MULTI-PLY MEMBERS (3 PLY OR MORE)
- (5) ALL NAILS ARE 3-1/2" ARDOX SPIRAL NAILS
- (6) DO NOT USE AIR-DRIVEN NAILS

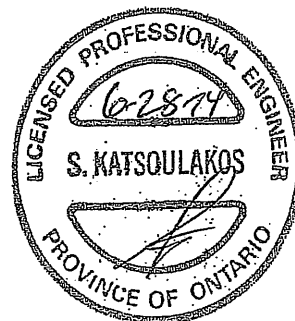

DWG NO TAMN1001.14

STRUCTURAL

COMPONENT ONLY

TO BE USED ONLY
WITH BEAM CALCS
BEARING THE
STAMP BELOW

PROVIDE NAILING
DETAIL # X SEE
DWG # TAMN1001-14

SITE COPY