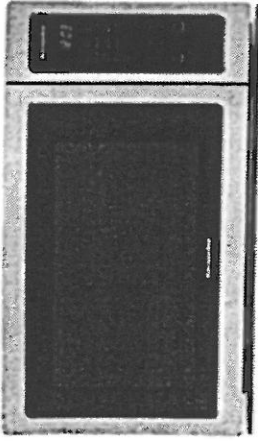


1 of 1 **KenAid®****KitchenAid® 21 3/4" Countertop Microwave**
Oven - 1100 Watt

YKMCS1016GS

Cook quickly and confidently with a countertop microwave that eliminates guesswork. Enjoy the control of nine sensor-driven and pre-programmed cooking cycles and precise timed defrosting, plus the convenience of electronic controls and LED displays. The 13 1/2" turntable is recessed to maximize the large 1.6 cu. ft. capacity.

Top Features**9 Quick-Touch Cycles Including Six Sensor Cycles**

Takes the guesswork out of getting exceptional results from your microwave. The microwave will automatically adjust cooking time based on a menu of preprogrammed, menu-driven cycles.

Timed Defrost

Allows intuitive operation by automatically setting the microwave oven's power level at 30% for the amount of time you select.

1.6 Cu. Ft. Capacity

Provides large capacity to make this microwave a true complement to a wall oven or range.

13 1/2" Recessed Turntable

Helps food cook evenly by continuously rotating throughout the cooking cycle. The turntable is sunken into the bottom of the microwave to maximize the capacity.

Available Finishes/Colours
YKMCS1016GS
Stainless Steel

Manuals & Literature:

- Installation Instructions
- Use and Care
- Warranty

Dimensions

Depth 17 1/4"

Height 13"

Width 21 3/4"

Configuration and Overview

Microwave Type Countertop

Exterior

Cabinet Color Stainless

Door Release Push Button

Door Opening Left

Compatibility

Connectivity No

Works With No

Misc.

UPS Shippable UPS1

Home Delivery Yes

Wi-Fi Call Yes

Controls

Display Color White

Controls

Control Location Right

Number of Quick Touch/One-Touch Selections 9

Electronic Display Type LED

Number of Keypads 1

Control Type Electronic Touch

Features

Number of Power Levels 10

Sensor Cooking Yes

Clock Yes

Number of Sensor Control Keypads 6

MK2167AS 27" wide.

INSTALLATION INSTRUCTIONS

Tools and Parts

Tools Needed


Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

- Measuring tape
- Drill
- Pencil
- 7/64" drill bit
- Phillips screwdriver

Parts Supplied (not shown to scale)

Rails (2)	Bottom duct	Trim kit frame
Short screws (14) (11 + 3 extra)	Long wood screws (6 - painted) (4 + 2 extra)	

Required Cutout Dimensions

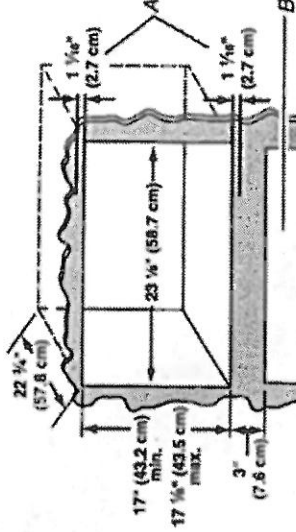

A. Trim kit frame overhang
B. Cutout for lower oven

NOTES:


- Height dimension is critical: 17" (43.2 cm) minimum, 17 1/8" (43.5 cm) maximum.
- Width and depth measurements have $\pm 1/16$ " (2 mm) tolerance.
- 3" (7.6 cm) minimum dimension is from lower oven cutout ceiling to microwave oven cutout floor.
- Trim kit frame extends 1 1/8" (2.7 cm) above and below the cutout opening.

Location Requirements

The microwave oven may be installed over a built-in oven, if installing over a built-in oven, make sure there is a minimum of 3" (7.6 cm) between the top of the lower oven cutout and the microwave oven cutout floor.


The microwave oven may also be installed in a cabinet by itself (without a built-in oven below). For best usability, we recommend a minimum distance of 36" (91.4 cm) from the floor to the cutout floor.

Make sure the surrounding cabinetry has clearance to open and close freely. Allow a clearance of at least 1 1/8" (4.0 cm) below the cutout floor (3" (7.6 cm) for installation above a built-in oven), and a clearance of at least 2" (5.1 cm) above the cutout opening.

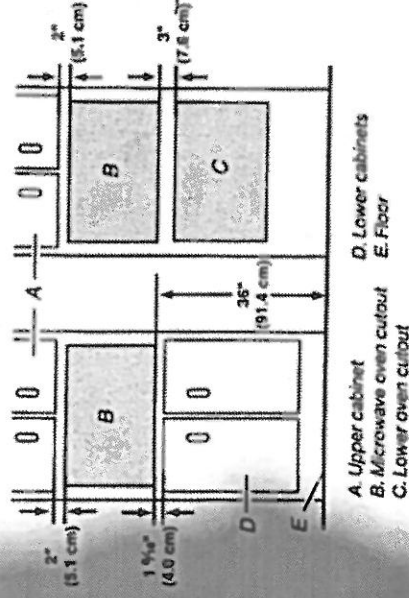

A. Upper cabinet
B. Microwave oven cutout
C. Lower oven cutout
D. Lower cabinets
E. Floor

Trim Kit Frame Dimensions

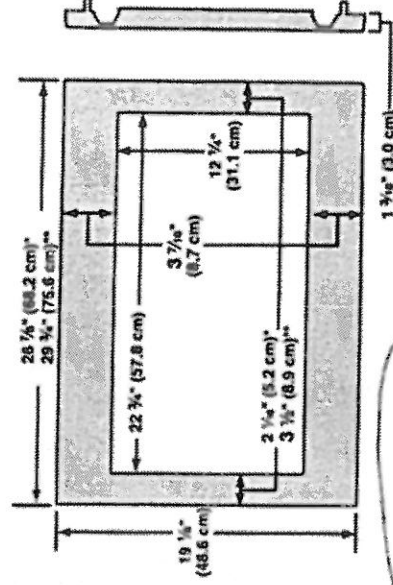

*27" (68.6 cm) trim kit
**30" (76.2 cm) trim kit

27" wide

MK2167AS

KitchenAid® 30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

KSGB900E KSGG700E

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{8}$ in (1.9 cm) rigid pipe for the range. A shut-off valve on the gas supply line is required. The range can be used with LP gas, piping or tubing size can be $\frac{1}{2}$ in (1.3 cm) maximum. Usually, LP gas suppliers determine the size and type of gas supply line required.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape. Flexible metal appliance connector.

- If local codes permit, a new CSA design-certified, 4 to 5 ft (1.2 to 1.5 m) long flexible metal connector may be used to connect the range to the gas supply line.




- A $\frac{1}{2}$ in (1.3 cm) male pipe thread shut-off valve is required for the gas supply line.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shut-off valve:

The supply line must be equipped with a manual shut-off valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shut-off valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shut-off valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

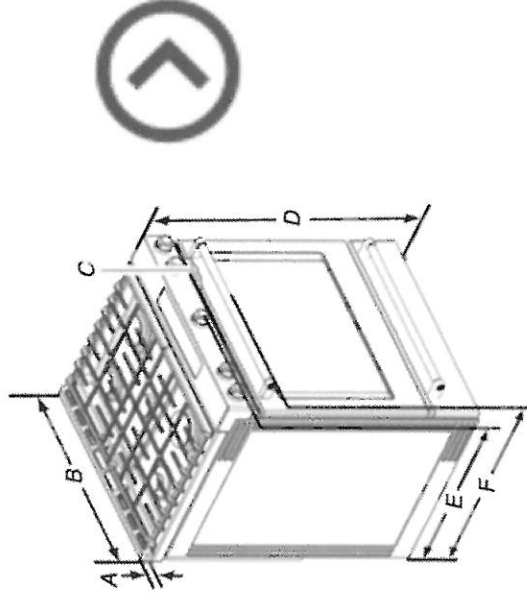

A. 14 in (35.5 cm) height from cooktop to top of vent

B. 28 in (71.3 cm) max. depth from front of console to back of range

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36 in (91.4 cm) height to top of cooktop edge with leveling legs

E. 28 in (71.3 cm) max. depth from handle to back of range

F. 28 in (71.3 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

This range is design-certified by CSA International for use with Natural gas or, after proper conversion, for use with LP gas.

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

*TEFLON is a registered trademark of E.I. Du Pont de Nemours and Company

Where is my User Manual ? - User Manuals in PDF

All your User Manuals online, with over 1000 different brands to choose from all-usermanuals.com/Owners+Guide/PDF

OPEN



Specifications_Sheet

1 of 1



26 cu. ft. French Door Refrigerator
KRMF706E



Stainless Steel
KRMF706ESS

Also available in:

- Black Stainless Steel with PrintShield™ Finish

KRMF706EBS

Key Features & Benefits

5-Door Configuration


Put all your food in ready sight and easy reach. Soft close pantry doors offer added convenience.

Preserva® Food Care System

Two independent cooling systems help keep all your ingredients fresh longer.

Herb Storage

Keep herbs like rosemary, oregano and thyme fresh in a dedicated storage compartment.

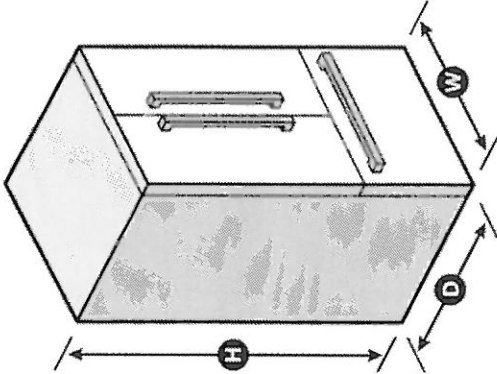

Capacity	
Total Capacity	26 cu. ft.
Refrigerator Capacity	18 cu. ft.
Freezer Capacity	8 cu. ft.
General Features & Properties	
2 Soft-Close Drawers	
Professionally-Inspired Design	
3-Tier Freezer Drawer with Storage Divider	
LED Lighting	
SatinGlide® Crispers	
Adjustable Spill Resistant Shelves	
Exterior Ice and Water Dispenser	
Measured Water Fill	
Electrical Details	
In-Door-Ice® System	
Amps	20
Volts	115

Technical Details	
Refrigerator Type	French Door
Number of Doors	5
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	4 Adjustable, 1 Fixed
Number of Interior Freezer Shelves	3 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Refrigerator Door
Dispenser Type	Exterior Ice and Water
Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 36" x 36-1/4"
Depth with Door Open 90°	49"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	
Dimension Guide	
Use & Care Guide	
Energy Guide	
Warranty	

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
©/TM © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. KRMF706ESPECSHEETV01.



Green Valley Bayview Wellington Homes

Contact



greenvalley@spectrumnewhomes.ca

Show more

11:02 PM

Wednesday

Forwarded

Atlanta 860CFM 30" Wide Stainless Steel Under Cabinet Range Hood

\$599.99 CAD

This stainless steel under cabinet range hood is a durable companion for your kitchen. It features two powerful motors, two baffle filters, and two halogen lights, providing a new level of performance to a new level. The hood exhausts air at a 960-cfm level and features a switch between 6 levels of speed using the touch screen controls. The filters are detachable and dishwasher friendly. The vent connections (top round, top rectangular, and back rectangular) provide a brighter cooking area. The stainless steel body is easy to clean with a wet cloth.

8:27 PM

Stainless Steel Under Cabinet Range Hood

Vesta Atlanta 860CFM 30" Wide Stainless Steel Under Cabinet Range Hood

\$599.99 CAD

This 30" wide stainless steel under cabinet range hood is a durable companion for your kitchen. It features two powerful motors, two baffle filters, and two halogen lights, providing a new level of performance to a new level. The hood exhausts air at a 960-cfm level and features a switch between 6 levels of speed using the touch screen controls. The filters are detachable and dishwasher friendly. The vent connections (top round, top rectangular, and back rectangular) provide a brighter cooking area. The stainless steel body is easy to clean with a wet cloth.

User Manual

ADD TO CART

8:27 PM

Control Type: Touch Control

Filter Quantity / Type: 2 / Baffle

Light Quantity / Type: 2 / Halogen

Motor Power / Quantity: 130W / 2

Noise Level: 65 Decibels

Speed: 6

Style: Under Cabinet

Width: 30"

Product Dimension (In): 29.5W x 22D x 7H

Vent Size / Shape #1: 6" / Top Round

Vent Size / Shape #2: 3.5x10" / Top Rectangular

Vent Size / Shape #3: 3.5x10" / Rear Rectangular

Oil Collector: Yes

Special Function #1: Time Delay Shut Down

Warranty: 1 Year for Parts & Lifetime for Motors

8:27 PM

Product Dimension (In): 29.5W x 22D x 7H

Vent Size / Shape #1: 6" / Top Round

Vent Size / Shape #2: 3.5x10" / Top Rectangular

Vent Size / Shape #3: 3.5x10" / Rear Rectangular

Oil Collector: Yes

Special Function #1: Time Delay Shut Down

Warranty: 1 Year for Parts & Lifetime for Motors

8:27 PM