

# GOEMANS APPLIANCES

*Expect More. Get More.*

## APPLIANCE SPECIFICATIONS



**PROJECT PARTNER:**  
Bill To: 6478235273

**SHIP TO:**  
Ship To: 6478235273

SHABA & HANNA, JULIANA & YONEL  
43 JONKMAN BLVD LOT 138N-R  
BRADFORD, ON L3Z 4K3

### REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Goemans Appliances assumes no liability for product specifications.

**Ship To: 6478235273**

Bill To: 6478235273

SHABA & HANNA, JULIANA & YONEL  
43 JONKMAN BLVD LOT 138N-R  
BRADFORD, ON L3Z 4K3

<i>Models</i>	<i>Pages</i>
<b>RF23R6201SR/AA</b> Samsung Refrigeration	<b>3-4</b>
<b>NE63T8311SS/AC</b> Samsung Range	<b>5-8</b>
<b>DW80R5061US/AA</b> Samsung Dishwasher	<b>9-10</b>

**GOEMANS**  
APPLIANCES

**Goemans Appliances**

goemans.com

**JASON NG**

9052641771

Document **HB00023157-138NR-1**  
Version 1.1

Wed, Jul 14, 2021  
9:52 AM EDT



[enterprise.steelcod.com/sp/goem/YEFP6Z7M](https://enterprise.steelcod.com/sp/goem/YEFP6Z7M)

**Note about page numbers:**

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

**All specifications are intended for initial planning purposes only.**

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

# RF23R6201SR

SAMSUNG

23 cu. ft. Counter-Depth, 3-Door French Door Refrigerator  
with CoolSelect Pantry™



## Signature Features

### Twin Cooling Plus®

- Independent fridge and freezer controls keep food fresher longer.

### CoolSelect Pantry™

- Full-width drawer with three temperature control settings to chill or defrost food to ideal temperatures.

### Ice Max

- Large capacity, stores up to 2.7 lbs of ice.

### Counter Depth

- Offers a premium, built-in look.

### Fingerprint Resistant Finish

- A special finish to reduce smudges and minimize cleaning.

## Available Colors



CoolSelect Pantry™ with  
Temperature Control



Ice Max

## Convenience

- CoolSelect Pantry™ with Temperature Control and Pantry Divider
- Wi-Fi and Bixby Enabled
- Adjustable Shelves for Tall Oversized Items
- Auto Pull-Out Upper Freezer Drawer
- Water Filter Indicator

## Design

- Counter Depth
- Fingerprint Resistant Finish
- Premium External Filtered Water and Ice Dispenser with Light
- High Efficiency LED Lighting
- Accessibility (ADA Compliant)
- EZ-Open Handle™ on Freezer Door
- Tempered Glass Spill-Proof Shelves
- Gallon Door Bins

## Performance

- Twin Cooling Plus®
- Ice Max - Stores up to 2.7 lbs of Ice
- ENERGY STAR® Compliant
- Two Humidity-Controlled Crispers
- Power Freeze and Power Cool Options
- CoolTight Door
- Door Alarm

## Rating



ENERGY STAR® rated:  
699 kWh/yr

# RF23R6201SR

SAMSUNG


## 23 cu. ft. Counter-Depth, 3-Door French Door Refrigerator with CoolSelect Pantry™

### Installation Specifications


1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and to be able to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at [samsung.com](http://samsung.com).

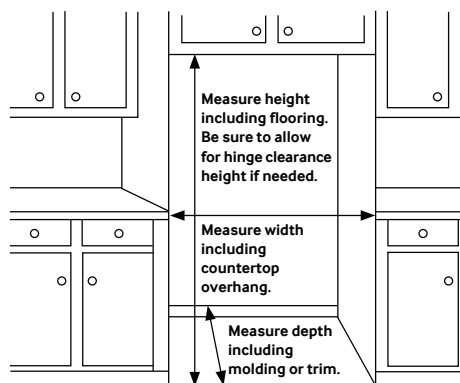

### Dimensions

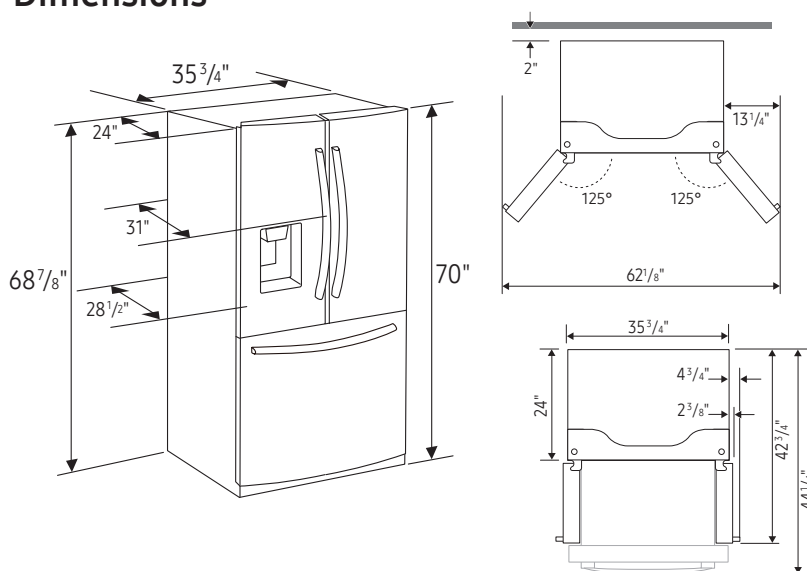

**Total Capacity: 22.6 cu. ft.**

**Refrigerator: 15.7 cu. ft.**

- Premium External Filtered Water and Ice Dispenser
  - Crushed or Cubed Ice
- Ice Max
- CoolSelect Pantry™ with Temperature Control – Deli (41°C), Fresh (38°F) and Chilled (32°F) Options
- Pantry Divider
- 2 Humidity-Controlled Crispers
- 5 Tempered Glass Spill-Proof Shelves:
  - 1 Slide-In
  - 1 Slide-Out
  - 1 Foldable Half
  - 2 Fixed
- 6 Clear Door Bins
  - Right Door: 3 Gallon Bins
  - Left Door: 3 Regular Bins
- Adjustable Shelves for Tall Oversized Items
- High Efficiency Top LED Lighting

**Freezer: 6.9 cu. ft.**

- EZ-Open Handle™
- 2 Drawer Dividers
- High Efficiency LED Lighting

### Accessories

Water Filter: HAF-QIN

### Warranty

One (1) Year Parts and Labor on Refrigerator

Five (5) Years Parts and Labor on

Sealed Refrigeration System Only\*

Ten (10) Years Parts and Five (5) Years

Labor on Digital Inverter Compressor

\*Compressor, evaporator, condenser, drier and connecting tubing.

### Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):

35 3/4" x 70" x 31"

Dimensions (WxHxD without hinges and door):

35 3/4" x 68 7/8" x 24"

Dimensions (WxHxD with hinge and door, no handle):

35 3/4" x 70" x 28 1/2"

Weight: 279 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 1/4" x 76" x 31 1/4"

Weight: 300 lbs

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	RF23R6201SR	887276341286
Fingerprint Resistant Black Stainless Steel	RF23R6201SG	887276341279
Fingerprint Resistant Tuscan Stainless Steel	RF23R6201DT	887276341262
White	RF23R6201WW	887276341293



# NE63T8311SS/AC



6.3 cu. ft. Electric Range with Fan Convection

[www.samsung.com/ca](http://www.samsung.com/ca)



**Color**    Stainless Steel

## Dimensions

Width	29-15/16"
Height	36" to 36-3/4"
Depth	28-11/16"

Oven Capacity 6.3 cu. ft.
Drawer Capacity 1.0 cu. ft.
Self Clean   Steam Clean
Wi-Fi Connection
Bread Proof 100°F (40°C)
Favorite Cook App
Keep Warm
Clock   Timer   Numeric Pad
Child Safety Lock
Hidden Bake Element
Interior Light 1 Incandescent 40W / Back
Light (Lamp) On/Off
Sound on/off
Setting (Clock System Option (12H/24H))
Delay Start
Sabbath Mode
Heating Element 1 - 6"/9" - 3000W
Heating Element 2 - 6" - 1200W
Heating Element 3 - 9"/12" - 3000W
Heating Element 4 - 6" - 1200W
Heating Element 5 - Warm Zone (100W)
Hot Surface Indicator
Fan Convection
Bake (Single) - 175°F (80°C) - 550°F (285°C)
Variable Broil (Low-High) (Single)
Convection Bake (Single) - 175°F (80°C) - 550°F (285°C)
Convection Roast (Single) - 175°F (80°C) - 550°F (285°C)
Bake Element - 3000W
Broil Element - 4200W
Storage Drawer
7 Oven Rack Positions   2 Wire Racks
Anti-Tip Device
WiFi Embedded


**Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections with the installation**

®Registered trademark/TM Trademark of Samsung Electronics Canada Inc. © Samsung Electronics Canada Inc. All Rights Reserved.

All other trademarks are owned by their respective companies.

Because Samsung Electronics Canada Inc. policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

## Preparing to install the range

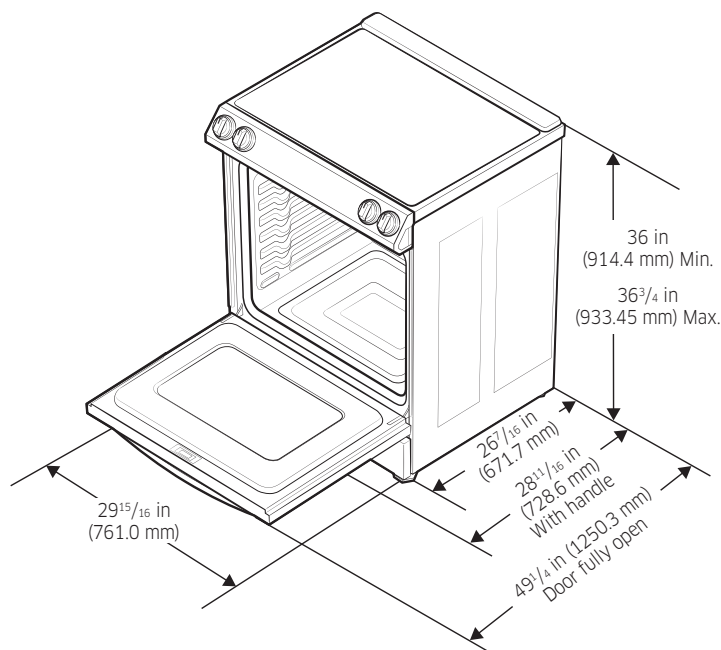


## Checking the installation site

## Clearances and dimensions

To install the range, refer to the following figure.

**CAUTION**

This range has been designed to comply with the maximum allowable wood cabinet temperatures of 194 °F. Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F) generated by the range. If not, discoloration, delamination, or melting may occur.

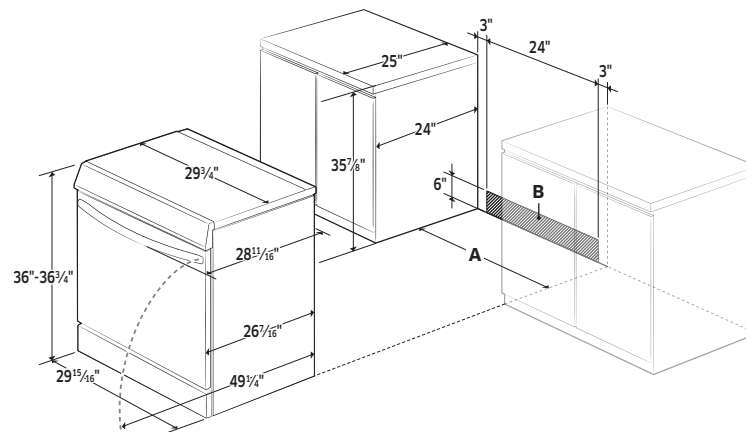

**A : Cabinet opening** min 30" (76.2 cm)


**B : Acceptable electrical outlet area**

**IMPORTANT:** If your cabinets are over 36¾" high, you must install this range on a hard, heat resistant support that raises the surface of the range so that it is about even with the countertop.

# Preparing to install the range

## Minimum dimensions

**IMPORTANT:** To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

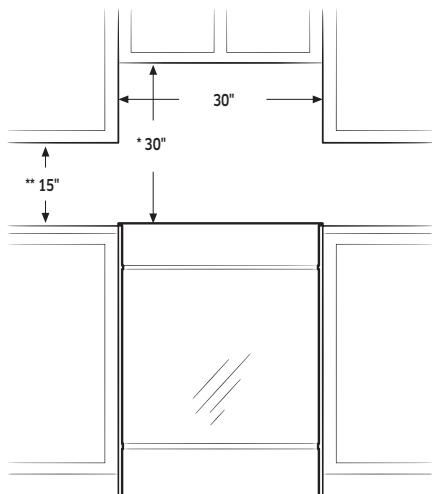

\* A minimum of 30" is required between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; a minimum of 24" is required if the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG of sheet steel, 0.015" of stainless steel, 0.024" of aluminum, or 0.020" of copper.

\*\* A minimum of 15" is required between the countertop and the adjacent cabinet bottom.

## CAUTION

Vapors may come out from the vent. It is normal, but be careful as it may be hot. Depending on the material of your wall, hot vapors may leave stains on it.

## To avoid breakage

### CAUTION

Do NOT lift or handle the unit by the cooktop glass or door handle.

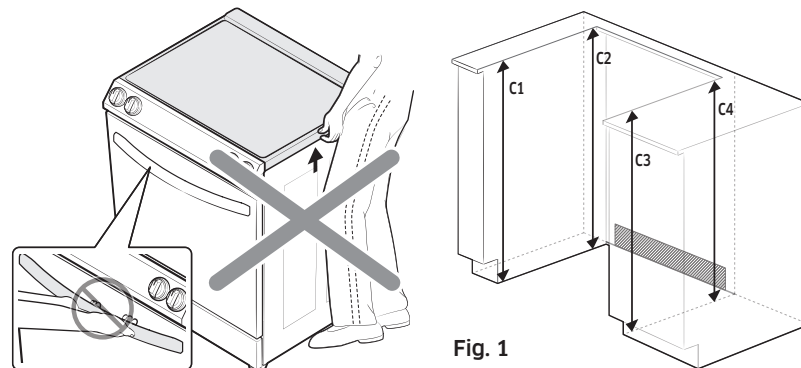



Fig. 1

1. The counter top around the cut-out should be flat and leveled.
2. Before installing the unit, measure the heights of the two cabinet sides (C1-C4), front and back (See Fig. 1) from the floor to the top of the counter.
3. Level the range using the four leveling legs so that the height from the floor to the underside of the cooktop glass frame is greater than the tallest cabinet measurement by at least 1/16".
4. Slide the unit into the cabinet (**DO NOT PUSH THE UNIT HARD**). Make sure the center of the unit aligns with the center of the cabinet cut-out.

# Connecting the power

## Step 2. Accessing the power cord connection

Loosen and then remove the rear access cover screw with a screwdriver. Remove the rear access cover by pull right and then out. The terminal block will then be accessible.

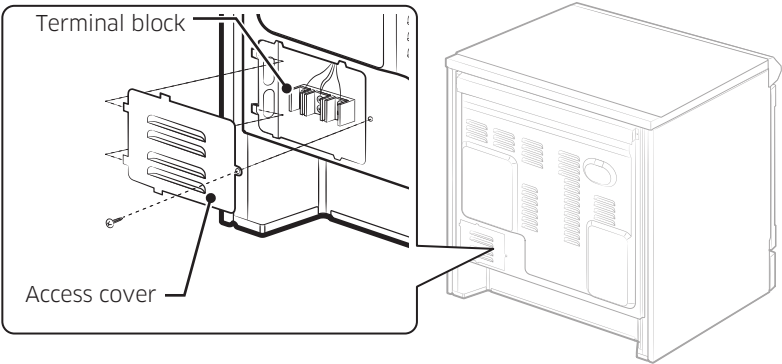

## Specified rating of power-supply-cord kit and circuit protection

Range rating, watts		Specified rating of power-supply-cord kit and circuit protection, Amps	Diameter (inches) of range connection opening	
120/240 volts 3-wire	120/208 volts 3-wire		Power cord	Conduit
8750-16500	7801-12500	40 or 50 A	1 3/8"	1 1/8"

This appliance must be supplied with the proper voltage at the proper frequency and must be connected to a dedicated, properly grounded branch circuit protected by a 40 amp or larger circuit breaker.

### NOTE

For power cord installations, go to **Step 3**. For conduit installations, go to **Step 4** on page 11.



# DW80R5061

**SAMSUNG**

## Samsung StormWash™ 48 dBA Dishwasher



### Signature Features

#### StormWash™

- A heavy-duty wash gets the messiest pots and pans thoroughly clean without pre-washing.

#### Whisper Quiet Cleaning

- Less noise and less disturbance with silent wash cycles at 48 dBA.

#### AutoRelease™ Door

- At the end of the cycle, the door automatically opens to circulate air and improve drying performance.

### Available Colors



Fingerprint Resistant  
Stainless Steel (shown)



Fingerprint Resistant  
Black Stainless Steel



Fingerprint Resistant  
Tuscan Stainless Steel



StormWash™



AutoRelease™ Door

### Features

- 3rd Rack
- Fingerprint Resistant Stainless Finish
- One-Touch Adjustable Racking System
- Digital Touch Control
- Sanitize Cycle
- 6 Wash Cycles
- 6 Options
- Half-Load Cycle
- Express Cycle: 60 Minutes
- Full Stainless Steel Interior
- 15 Place Settings
- 3 Spray Wash Arms (Upper, Middle, Lower)
- ENERGY STAR® rated

### Convenience

- Control Lock
- Delay Start
- Digital Leak Sensor

### Rating


ENERGY STAR®-rated:  
265 kWh/yr

# DW80R5061

**SAMSUNG**

## Samsung StormWash™ 48 dBA Dishwasher

### Installation Specifications

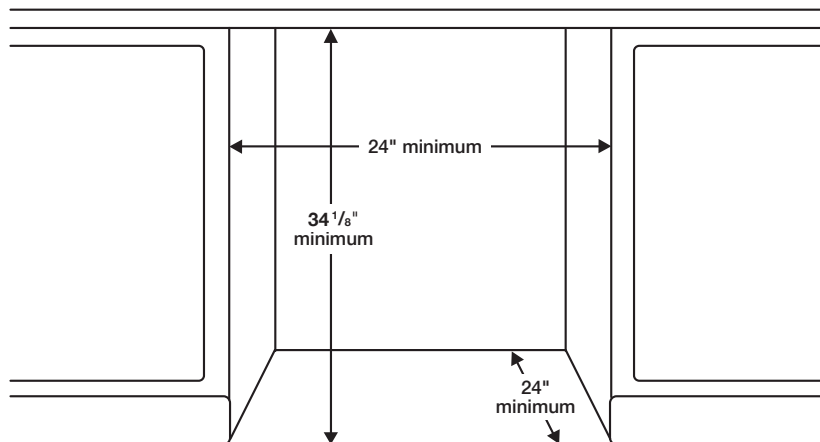

#### Features

- 6 Wash Cycles: Auto, Normal, Heavy, Delicate, Express 60, Rinse Only
- 6 Options: Half-Load Wash (Lower Rack), StormWash™, Hi-Temp Wash, Sanitize (Anti-bacterial – NSF), Delay Start, Control Lock
- AutoRelease™ Door
- Hidden Heat Element
- Stainless Steel Interior Tub

#### Convenience


- Control Lock
- Digital Water Leakage Sensor
- 3rd Rack
- One-Touch Adjustable Racking System
- Silverware Basket
- Upper Rack: Foldable Cup Shelves, 2 Adjustable Tines
- Lower Rack: Removable Plate Support

#### Warranty

One (1) Year All Parts and Labor

Five (5) Year Limited on Printed Circuit Board and Interior Nylon Racks

### Dimensions

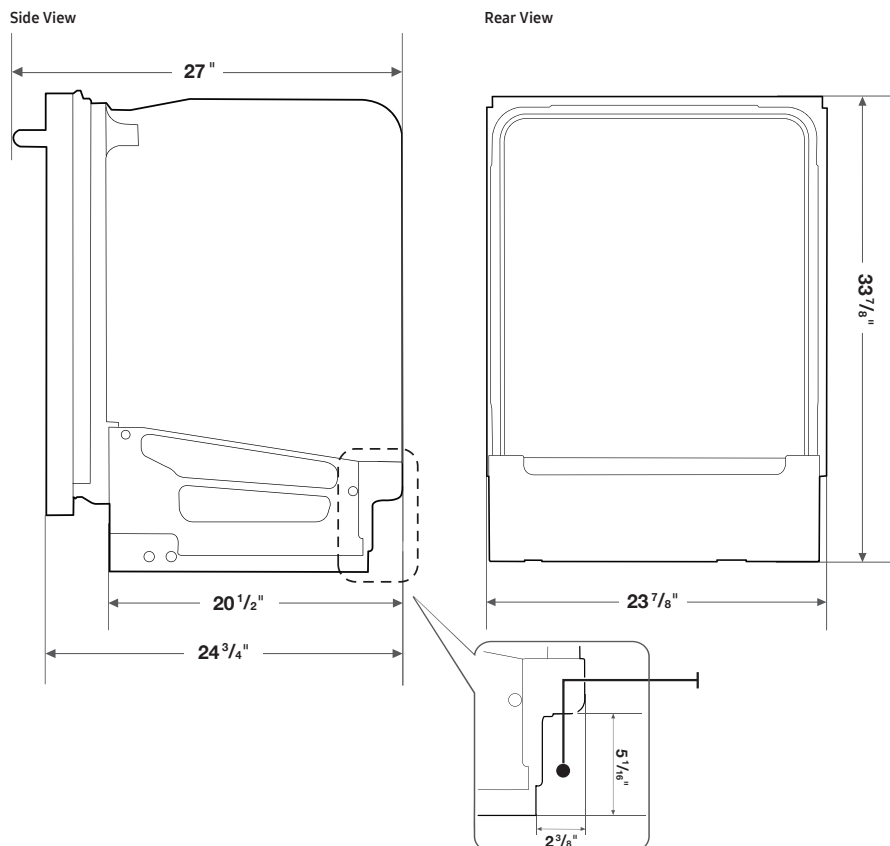

#### Product Dimensions & Weight (WxHxD)

Dimensions (height is adjustable):

23<sup>7</sup>/<sub>8</sub>" x 33<sup>7</sup>/<sub>8</sub>" – 35" x 24<sup>3</sup>/<sub>4</sub>"

Weight: 95 lbs

#### Shipping Dimensions & Weight (WxHxD)

Dimensions:

26" x 35" x 29<sup>1</sup>/<sub>2</sub>"

Weight: 106 lbs

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	DW80R5061US	887276338729
Fingerprint Resistant Black Stainless Steel	DW80R5061UG	887276338712
Fingerprint Resistant Tuscan Stainless Steel	DW80R5061UT	887276338736