

# GOEMANS APPLIANCES

*Expect More. Get More.*

## APPLIANCE SPECIFICATIONS



**PROJECT PARTNER:**  
Bill To: 6475732165

**SHIP TO:**  
Ship To: 6475732165

KHOJA, RASHIDA & SYED  
90 FERRAGINE CRESCENT LOT # 70NR  
BRADFORD, ON L3Z 4K3

### REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Goemans Appliances assumes no liability for product specifications.

**Ship To: 6475732165**

Bill To: 6475732165

KHOJA, RASHIDA & SYED  
90 FERRAGINE CRESCENT LOT # 70NR  
BRADFORD, ON L3Z 4K3

| <i>Models</i>                                  | <i>Pages</i> |
|--|--------------|
| <b>RF23R6201SG/AA</b><br>Samsung Refrigeration | 3-4          |
| <b>NE59R6631SG/AC</b><br>Samsung Range         | 5-7          |
| <b>DW80R5061UG/AA</b><br>Samsung Dishwasher    | 8-9          |
| <b>WF45T6000AW</b><br>Samsung Washer           | 10-11        |
| <b>DVE45T6005W/AC</b><br>Samsung Dryer         | 12-13        |

**GOEMANS**  
APPLIANCES**Goemans Appliances**

goemans.com

**JASON NG**

9052641771

Document **HB00023157-70NR-1-1**  
Version 1.1

Tue, Dec 7, 2021  
5:40 PM EST

[enterprise.steelcod.com/sp/goem/1J6SZ9DS](https://enterprise.steelcod.com/sp/goem/1J6SZ9DS)**Note about page numbers:**

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

**All specifications are intended for initial planning purposes only.**

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

# RF23R6201SR

SAMSUNG

23 cu. ft. Counter-Depth, 3-Door French Door Refrigerator  
with CoolSelect Pantry™



## Signature Features

### Twin Cooling Plus®

- Independent fridge and freezer controls keep food fresher longer.

### CoolSelect Pantry™

- Full-width drawer with three temperature control settings to chill or defrost food to ideal temperatures.

### Ice Max

- Large capacity, stores up to 2.7 lbs of ice.

### Counter Depth

- Offers a premium, built-in look.

### Fingerprint Resistant Finish

- A special finish to reduce smudges and minimize cleaning.

## Available Colors



CoolSelect Pantry™ with  
Temperature Control



Ice Max

## Convenience

- CoolSelect Pantry™ with Temperature Control and Pantry Divider
- Wi-Fi and Bixby Enabled
- Adjustable Shelves for Tall Oversized Items
- Auto Pull-Out Upper Freezer Drawer
- Water Filter Indicator

## Design

- Counter Depth
- Fingerprint Resistant Finish
- Premium External Filtered Water and Ice Dispenser with Light
- High Efficiency LED Lighting
- Accessibility (ADA Compliant)
- EZ-Open Handle™ on Freezer Door
- Tempered Glass Spill-Proof Shelves
- Gallon Door Bins

## Performance

- Twin Cooling Plus®
- Ice Max - Stores up to 2.7 lbs of Ice
- ENERGY STAR® Compliant
- Two Humidity-Controlled Crispers
- Power Freeze and Power Cool Options
- CoolTight Door
- Door Alarm

## Rating



ENERGY STAR® rated:  
699 kWh/yr

# RF23R6201SR

SAMSUNG


## 23 cu. ft. Counter-Depth, 3-Door French Door Refrigerator with CoolSelect Pantry™

### Installation Specifications


1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and to be able to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at [samsung.com](http://samsung.com).

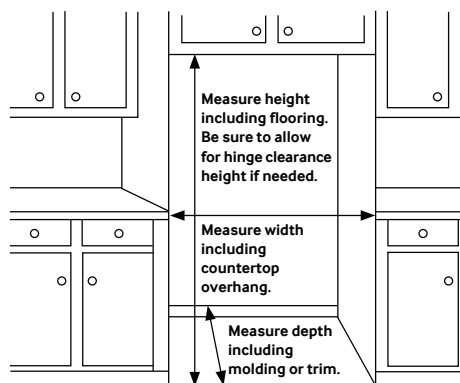

### Dimensions

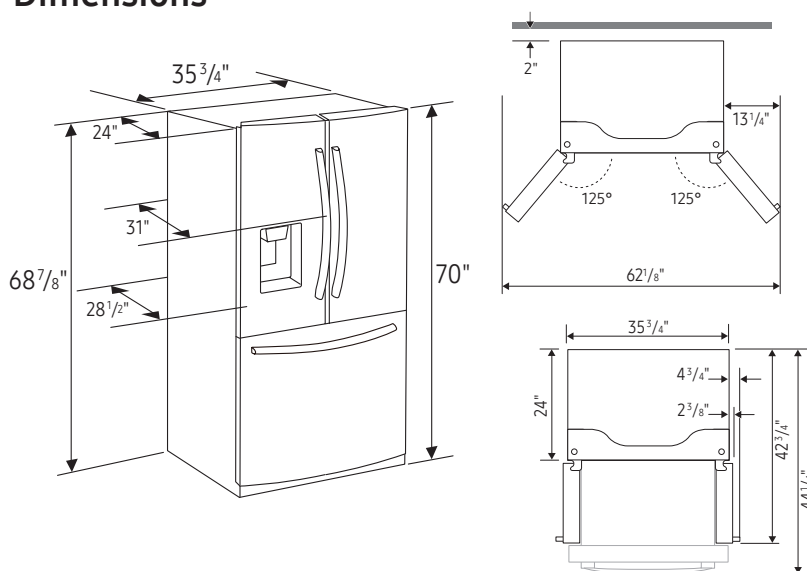

**Total Capacity: 22.6 cu. ft.**

**Refrigerator: 15.7 cu. ft.**

- Premium External Filtered Water and Ice Dispenser
  - Crushed or Cubed Ice
- Ice Max
- CoolSelect Pantry™ with Temperature Control – Deli (41°C), Fresh (38°F) and Chilled (32°F) Options
- Pantry Divider
- 2 Humidity-Controlled Crispers
- 5 Tempered Glass Spill-Proof Shelves:
  - 1 Slide-In
  - 1 Slide-Out
  - 1 Foldable Half
  - 2 Fixed
- 6 Clear Door Bins
  - Right Door: 3 Gallon Bins
  - Left Door: 3 Regular Bins
- Adjustable Shelves for Tall Oversized Items
- High Efficiency Top LED Lighting

**Freezer: 6.9 cu. ft.**

- EZ-Open Handle™
- 2 Drawer Dividers
- High Efficiency LED Lighting

### Accessories

Water Filter: HAF-QIN

### Warranty

One (1) Year Parts and Labor on Refrigerator

Five (5) Years Parts and Labor on

Sealed Refrigeration System Only\*

Ten (10) Years Parts and Five (5) Years

Labor on Digital Inverter Compressor

\*Compressor, evaporator, condenser, drier and connecting tubing.

### Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):

35 3/4" x 70" x 31"

Dimensions (WxHxD without hinges and door):

35 3/4" x 68 7/8" x 24"

Dimensions (WxHxD with hinge and door, no handle):

35 3/4" x 70" x 28 1/2"

Weight: 279 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 1/4" x 76" x 31 1/4"

Weight: 300 lbs

### Color

Fingerprint Resistant  
Stainless Steel

### Model #

RF23R6201SR

### UPC Code

887276341286

Fingerprint Resistant  
Black Stainless Steel

RF23R6201SG

887276341279

Fingerprint Resistant  
Tuscan Stainless Steel

RF23R6201DT

887276341262

White

RF23R6201WW

887276341293



# NE59R6631SG/AC



FreeStanding Electric Range

[www.samsung.com/ca](http://www.samsung.com/ca)



**Color** Black Stainless

## Dimensions

|        |       |
|--------|-------|
| Width  | 29.9" |
| Height | 46.5" |
| Depth  | 28.4" |

Oven Capacity 5.9 cu.ft  
Drawer Capacity 1.4 cu.ft  
Self Clean | Steam Clean  
Bread Proof | Favorite Cook  
Keep Warm  
Clock | Timer  
Numeric Pad  
Child Safety Lock  
Hidden Bake Element  
Interior Light (Position) 1 Incandescent 40W (Back)  
Auto Oven Light  
Light (Lamp) On/Off  
Sound on/off  
Setting (Clock System Option (12H/24H))  
Delay Start  
Sabbath Mode  
Cooktop Electric radiant (Triple 1; Dual 1 ; Single 2; Warming 1)  
Heating Element 1 6"/9" - 3300W (Rapid Boil)  
Heating Element 2 6" - 1200W  
Heating Element 3 6"/9"/12" - 3000W  
Heating Element 4 6" - 1200W  
Heating Element 5 Warm Zone  
Hot Surface Indicator  
Convection True convection  
Bake (Single) 175°F (80°C) - 550°F (285°C)  
Variable Broil (Low-High) (Single) Low - High  
Convection Bake (Single) 175°F (80°C) - 550°F (285°C)  
Convection Roast (Single) 175°F (80°C) - 550°F (285°C)  
Bake Element 3,000W  
Broil Element 4,200W  
Convection Heater Element 800W  
Storage Drawer

**Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections with the installation**

®Registered trademark/TM Trademark of Samsung Electronics Canada Inc. © Samsung Electronics Canada Inc. All Rights Reserved.

All other trademarks are owned by their respective companies.

Because Samsung Electronics Canada Inc. policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

## CHECKING THE INSTALLATION SITE

## Clearances and dimensions


To install the range, refer to the following figure.

**For installation in CANADA, a Free-standing range is not to be installed closer than 12mm from any adjacent surface.**



## CAUTION

**CAUTION** This range has been designed to comply with the maximum allowable wood cabinet temperatures of 194°F. Make sure the wall covering, countertops and cabinets around the range can withstand the heat (up to 194°F) generated by the range. If not, discoloration, delamination or melting may occur.

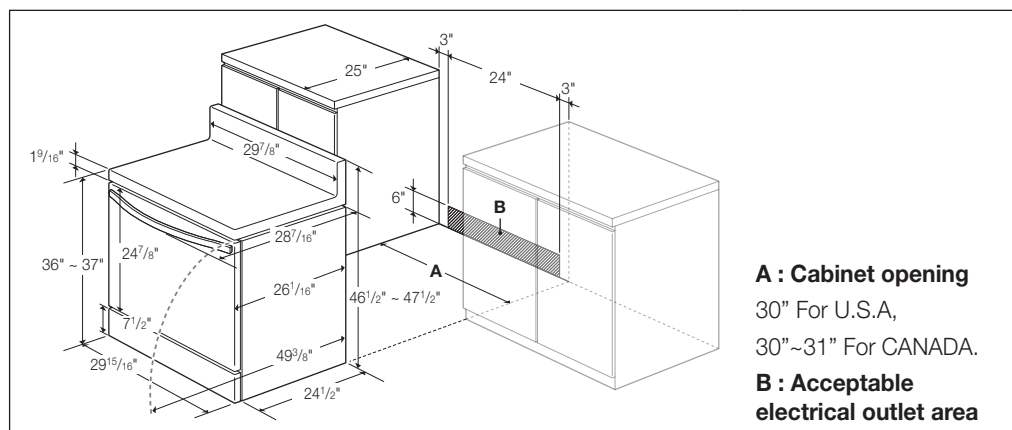


### Minimum dimensions



**★ IMPORTANT**

**★ IMPORTANT** To eliminate the risk of burns or fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

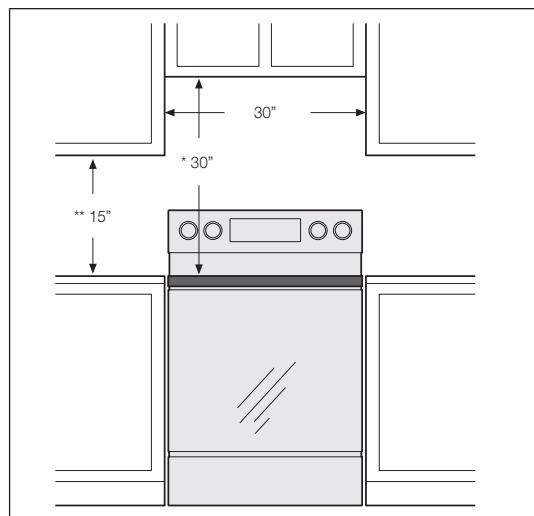

- \* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- \*\* 15" minimum between the countertop and the adjacent cabinet bottom.

# connecting the power

## STEP 1. MEETING ELECTRICAL CONNECTION REQUIREMENTS



**CAUTION** For personal safety, do not use an extension cord with this appliance. Remove house fuse or open circuit breaker before beginning installation.

This appliance must be supplied with the proper voltage and frequency, and connected to an individual properly grounded branch circuit, protected by a circuit breaker or fuse having amperage as specified on the rating plate. The rating plate is located above the drawer on the oven frame. **(Fig. 1 or Fig. 2)**


We recommend you have the electrical wiring and hookup of your range connected by a qualified electrician. After installation, have the electrician show you where your main range disconnect is located.

Check with your local utilities for electrical codes which apply in your area. Failure to wire your oven according to governing codes could result in a hazardous condition. If there are no local codes, your range must be wired and fused to meet the requirements of the National Electrical Code, ANSI/NFPA No. 70–Latest Edition. You can get a copy by writing:

National Fire Protection Association  
Batterymarch Park  
Quincy, MA 02269



(Fig. 1)



(Fig. 2)

**Effective January 1, 1996, the National Electrical Code requires that new construction (not existing) utilize a 4-conductor connection to an electric range.**

**When installing an electric range in new construction, follow Steps 2 and 3 for 4-wire connection.**

You must use a 3-wire or 4-wire, single-phase A.C. 208Y/120 Volt or 240/120 Volt, 60 hertz electrical system.

If the electrical service provided does not meet the above specifications, have a licensed electrician install an approved outlet.

Use only a 3-conductor or a 4-conductor UL-listed range cord. These cords may be provided with ring terminals on wire and a strain relief device.

A range cord rated at 40 amps with 125/250 minimum volt range is required. A 50 amp range cord is not recommended but if used, it should be marked for use with nominal 1 $\frac{3}{8}$ " diameter connection openings. Care should be taken to center the cable and strain relief within the knockout hole to keep the edge from damaging the cable.

- Because range terminals are not accessible after range is in position, flexible service conduit or cord must be used.



**NOTE** If conduit is being used, go to Step 4 on page 9.



**ALL NEW BRANCH-CIRCUIT CONSTRUCTIONS, MOBILE HOMES, RECREATIONAL VEHICLES AND INSTALLATIONS WHERE LOCAL CODES DO NOT ALLOW GROUNDING THROUGH NEUTRAL, REQUIRE A 4-CONDUCTOR UL-LISTED RANGE CORD.**

# DW80R5061

SAMSUNG

## Samsung StormWash™ 48 dBA Dishwasher



### Signature Features

#### StormWash™

- A heavy-duty wash gets the messiest pots and pans thoroughly clean without pre-washing.

#### Whisper Quiet Cleaning

- Less noise and less disturbance with silent wash cycles at 48 dBA.

#### AutoRelease™ Door

- At the end of the cycle, the door automatically opens to circulate air and improve drying performance.

### Available Colors



Fingerprint Resistant  
Stainless Steel (shown)



Fingerprint Resistant  
Black Stainless Steel



Fingerprint Resistant  
Tuscan Stainless Steel



StormWash™



AutoRelease™ Door

### Features

- 3rd Rack
- Fingerprint Resistant Stainless Finish
- One-Touch Adjustable Racking System
- Digital Touch Control
- Sanitize Cycle
- 6 Wash Cycles
- 6 Options
- Half-Load Cycle
- Express Cycle: 60 Minutes
- Full Stainless Steel Interior
- 15 Place Settings
- 3 Spray Wash Arms (Upper, Middle, Lower)
- ENERGY STAR® rated

### Convenience

- Control Lock
- Delay Start
- Digital Leak Sensor

### Rating

ENERGY STAR®-rated:  
265 kWh/yr




# DW80R5061

**SAMSUNG**

## Samsung StormWash™ 48 dBA Dishwasher

### Installation Specifications

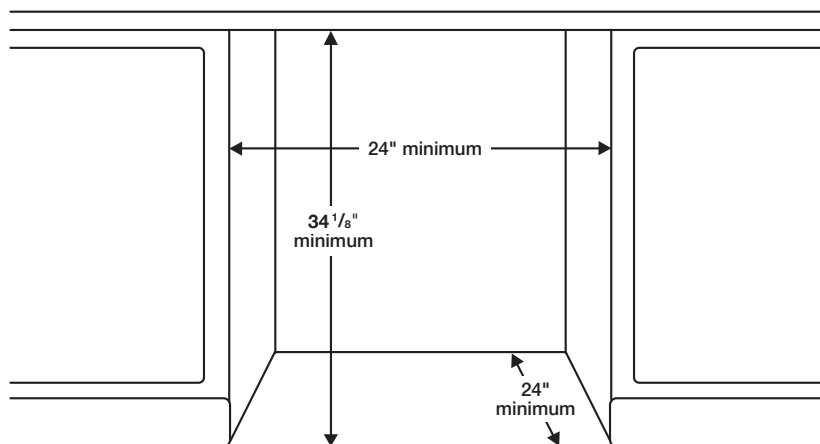

### Features

- 6 Wash Cycles: Auto, Normal, Heavy, Delicate, Express 60, Rinse Only
- 6 Options: Half-Load Wash (Lower Rack), StormWash™, Hi-Temp Wash, Sanitize (Anti-bacterial – NSF), Delay Start, Control Lock
- AutoRelease™ Door
- Hidden Heat Element
- Stainless Steel Interior Tub

### Convenience


- Control Lock
- Digital Water Leakage Sensor
- 3rd Rack
- One-Touch Adjustable Racking System
- Silverware Basket
- Upper Rack: Foldable Cup Shelves, 2 Adjustable Tines
- Lower Rack: Removable Plate Support

### Warranty

One (1) Year All Parts and Labor

Five (5) Year Limited on Printed Circuit Board and Interior Nylon Racks

### Dimensions

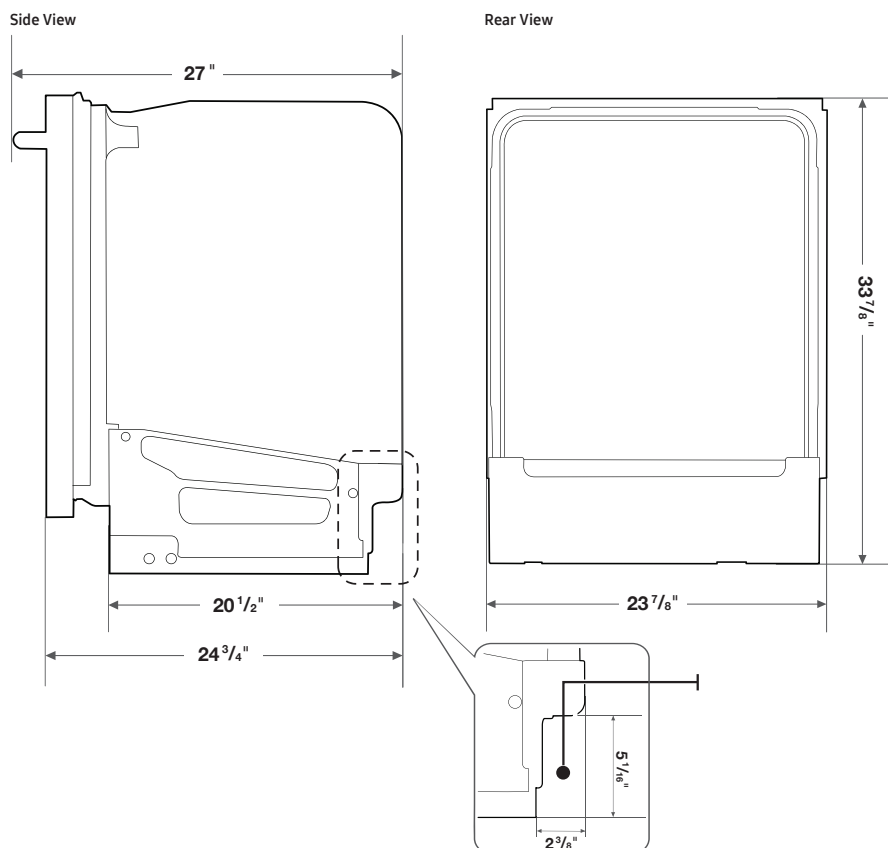

### Product Dimensions & Weight (WxHxD)

Dimensions (height is adjustable):

23<sup>7</sup>/<sub>8</sub>" x 33<sup>7</sup>/<sub>8</sub>" – 35" x 24<sup>3</sup>/<sub>4</sub>"

Weight: 95 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions:

26" x 35" x 29<sup>1</sup>/<sub>2</sub>"

Weight: 106 lbs

| Color  | Model #     | UPC Code     |
|--|-------------|--------------|
| Fingerprint Resistant Stainless Steel        | DW80R5061US | 887276338729 |
| Fingerprint Resistant Black Stainless Steel  | DW80R5061UG | 887276338712 |
| Fingerprint Resistant Tuscan Stainless Steel | DW80R5061UT | 887276338736 |

# WF45T6000AW

SAMSUNG

Samsung Front Load Washer with Closet - Depth Design  
5.2 cu.ft. capacity IEC.



## Signature Features

### Self Clean+

Keeps your washer drum fresh and clean by eliminating 99% of bacteria<sup>1</sup>. Will also send a reminder to clean the drum every forty wash cycles.

### Closet-Depth

This washer fits within your existing laundry space without sacrificing any capacity thanks to our new, wider drum. A new control panel design provides better visibility so it's easy to use even when stacked.<sup>2</sup>

### VRT Plus™

Innovative VRT Plus™ technology reduces noise and vibration for quiet washing.

## Available Colors



White



Self Clean+



Closet-Depth

## Features

- Self Clean+
- Smart Care
- VRT Plus™ technology
- Swirl+ Drum Design
- Closet-Depth Fit<sup>2</sup>
- Stackability
- Direct Drive Motor
- LED Display: Ice Blue
- 24-Hour Delay End

## Convenience

- Child Lock
- Delay End
- Dispenser Trays: Main Wash, Softener, Bleach

## Rating



ENERGY STAR® - Rated  
CEE Tier 2  
IMEF = 2.92  
IWF = 2.9

<sup>1</sup>Based on testing by Intertek of the Self Clean+ cycle on the WF6000R.

<sup>2</sup>Designed to fit a 40" installation depth.

# WF45T6000AW

SAMSUNG

## Samsung Front Load Washer with Closet - Depth Design 5.2 cu.ft. capacity IEC.


### Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


\* Required spacing (External exhaust elbow may require additional space.)

#### 1. Alcove or closet installation

Minimum Clearance for Closet and Alcove Installations:

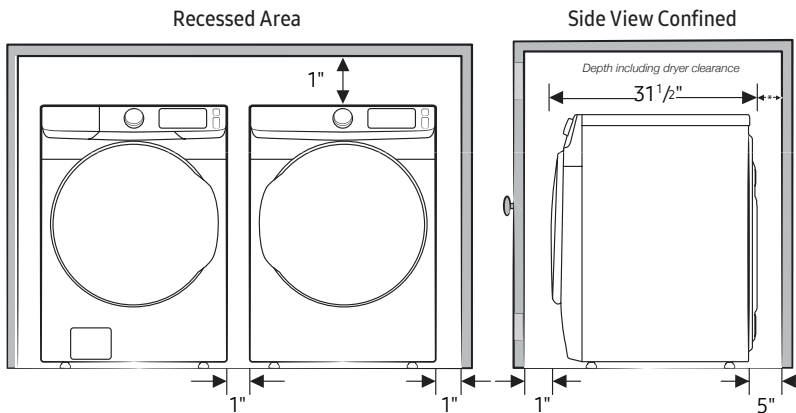


#### 2. With stacked washer and dryer

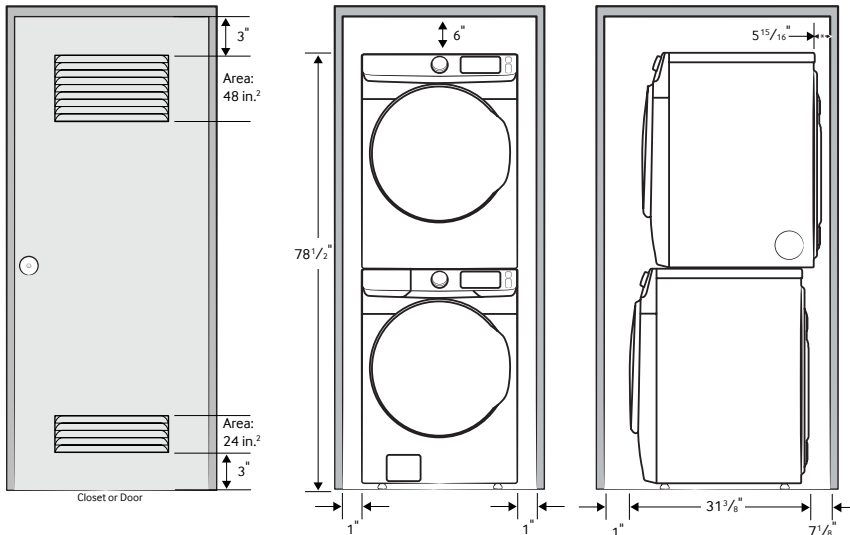

### Dimensions

Required Dimensions for Installation with Pedestal:

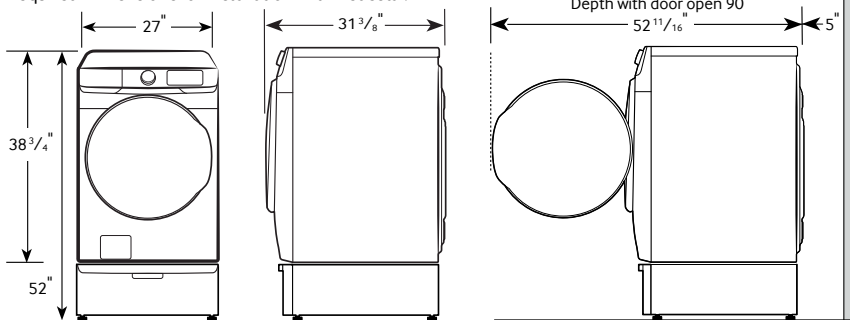

#### 10 Preset Washing Cycles:

Normal, Heavy Duty, Bedding, Quick Wash, Permanent Press, Delicates, Whites, Rinse and Spin, Self Clean+, Active Wear.

#### 7 Additional Washing Options:

Presoak, Delay End, Alarm Off, Child Lock, Smart Care, Spin Only

#### 5 Temperature Levels:

Hot, Warmer, Warm, Cool, Cold

#### 5 Spin Speeds:

High, Medium High, Medium, Low, No Spin

#### 5 Soil Levels:

Heavy, Medium Heavy, Normal, Medium Low, Light

#### Dispenser Trays:

Main Wash, Softener, Bleach

#### Warranty

One (1) Year Parts and Labor

Ten (10) Years Direct Drive Motor (Part Only)

#### Product Dimensions & Weight (WxHxD)

Dimensions: 27 x 38<sup>3</sup>/<sub>4</sub> x 31<sup>3</sup>/<sub>8</sub> inch

Weight: 200 lb

#### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29<sup>3</sup>/<sub>8</sub> x 42<sup>3</sup>/<sub>8</sub> x 34<sup>1</sup>/<sub>8</sub> inch

Weight: 205 lbs

#### Color

White

#### Model #

WF45T6000AW

#### UPC Code

887276394794

#### Matching Dryer

White

DVE45T6005W

887276387802

#### Pedestal

White

WE402NW

887276310152

#### Accessories

Stacking Kit

SKK-8K

887276344034

# DVE45T6005W

SAMSUNG

Samsung Front Load Electric Dryer with Sensor Dry  
7.5 cu.ft. Capacity DOE



## Signature Features

### Sensor Dry

Automatically optimizes the time and temperature of your drying cycle to protect your clothes from heat damage, while avoiding excess energy use.

### Smart Care

Easy troubleshooting from the convenience of your smartphone<sup>1</sup>. SmartCare interacts with your washer and dryer to perform an immediate diagnosis and offer quick solutions.

### Energy Star®

Save money by using less energy without sacrificing performance or functionality.

## Available Colors



White



Sensor Dry



Smart Care

## Features

- Sensor Dry
- Smart Care
- Interior Drum Light
- Reversible Door
- LED Display: Ice Blue

## Convenience

- Child Lock
- Lint Filter Indicator<sup>2</sup>

## Rating



ENERGY STAR® - Rated  
608 kwh/yr

<sup>1</sup>The Samsung Smart Washer/Dryer App is required and is available on Android and iOS devices. The Samsung Smart Washer/Dryer app supports Android OS 2.3.6 or later and iOS 3 or later for iPhone models. A Wi-Fi connection is required. Service callouts will occasionally be required and may incur extra repair costs.

<sup>2</sup>User will be solely responsible for any consequence(s) that may result, including but not limited to any damage or harm caused by incorrect information provided by the user.

# DVE45T6005W

# SAMSUNG


## Samsung Front Load Electric Dryer with Sensor Dry 7.5 cu.ft. Capacity DOE

### Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


\* Required spacing (External exhaust elbow may require additional space.)

### DIMENSIONS

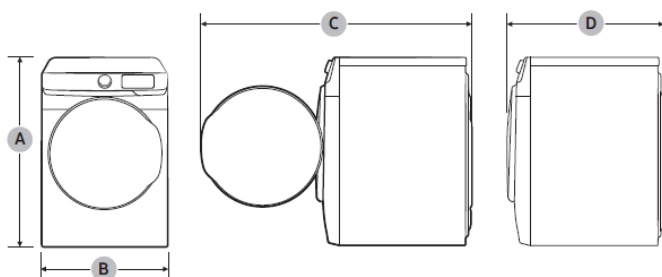


| Type                    | Front loading dryer |
|-------------------------|---------------------|
| Dimensions (in. (mm))   |                     |
| A. Overall height       | 38.7 (984)          |
| B. Width                | 27.0 (686)          |
| C. Depth with door open | 52.6 (1335)         |
| D. Depth                | 31.5 (800)          |

### UNDER COUNTER INSTALLATION




|   |                    |
|---|--------------------|
| A | 39.6 in. (1006 mm) |
| B | 1 in. (25 mm)      |
| C | 1 in. (25 mm)      |

### PEDESTAL INSTALLATION




|   |                    |
|---|--------------------|
| A | 5.9 in. (150 mm)   |
| B | 6 in. (152 mm)     |
| C | 52.0 in. (1320 mm) |

### SIDE BY SIDE INSTALLATION

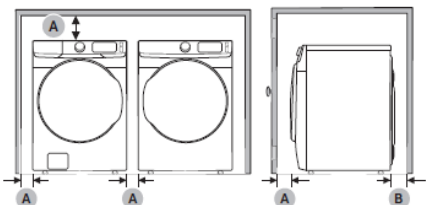

### STACKED INSTALLATION



### 4-Way Venting

#### 10 Preset Drying Cycles:

Normal, Heavy Duty, Permanent Press, Bedding, Delicates, Time Dry, Air Fluff, Quick Dry, Sanitize, Wrinkle Release.

#### 9 Additional Drying Options:

Damp Alert, Wrinkle Prevent, Adjust Time (Up), Adjust Time (Down), Eco Dry, Child Lock, Smart Care, Alarm Off, Drum Light

#### 5 Temperature Levels:

High, Medium High, Medium, Medium Low, Low

#### 5 Dry Levels:

More Dry, Normal-More Dry, Normal Dry, Normal-Less Dry, Less Dry

### Warranty

One (1) Year Parts and Labor

### Product Dimensions & Weight (WxHxD)

Dimensions: 27 x 38<sup>3</sup>/<sub>4</sub> x 31<sup>1</sup>/<sub>2</sub> inch

Weight: 123 lb

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29<sup>3</sup>/<sub>8</sub>" x 42<sup>9</sup>/<sub>16</sub>" x 33<sup>1</sup>/<sub>2</sub>"

Weight: 130 lbs

| Color | Model #     | UPC Code     |
|-------|-------------|--------------|
| White | DVE45T6005W | 887276387802 |

### Matching Washer

|       |             |              |
|-------|-------------|--------------|
| White | WF45T6000AW | 887276394794 |
|-------|-------------|--------------|

### Pedestal

|       |         |              |
|-------|---------|--------------|
| White | WE402NW | 887276310152 |
|-------|---------|--------------|

### Accessories

|              |        |              |
|--------------|--------|--------------|
| Stacking Kit | SKK-8K | 887276344034 |
|--------------|--------|--------------|

|   |                    |
|---|--------------------|
| A | 1 in. (25 mm)      |
| B | 5.9 in. (150 mm)   |
| C | 7.1 in. (180 mm)   |
| D | 6 in. (152 mm)     |
| E | 78.5 in. (1994 mm) |