

Already own this appliance?
Join the Frigidaire Family
and unlock benefits with
YOU in mind.

Join the Frigidaire Family

and unlock benefits with

YOU in mind.



Register your appliance to



REGISTER YOUR APPLIANCE (OWNER-CENTRE/PRO

BUY REPLACEMENT PARTS (HTTPS://WWW.FRIGIDA

CLEAN & CARE

Guides & Manuals



PDF
Complete
Owner's
Guide

English

Electrolux Electolux
PDF specifications
du produit

Français

PDF Specifications Sheet

English

Get the most out of
your new appliance

Welcome to the Frigidaire Family! Here are some helpful places to start after installing your new Frigidaire appliance at home.

C

Register your [/Owner-Centre/Product-](#)

(/Owner-

Centre/Product-

Height	27 ⁷ / ₈ "
Width	30 ⁵ / ₈ "
Depth	21 ³ / ₈ "
Frigidaire Fit Promise	Yes
Installed Over a Wall Oven	Yes
Cooking Surface Type	Smooth

Reviews

Reviews



Reviews

WRITE A REVIEW

Rating Snapshot

Select a row below to filter reviews.

5 ★	100
4 ★	27
3 ★	9
2 ★	0
1 ★	5

FFIC3026TB

BUILT-IN COOKTOP 30" INDUCTION



AVAILABLE COLORS



SIGNATURE FEATURES

Amazingly Fast

Get amazingly fast heat with induction that boils water 50% faster than an electric cooktop.¹

Even Heat

Whip up delicious meals with induction that delivers incredibly even heat across the surface of the pan so you get golden results every time.

Easy To Clean

Don't stress over spills with induction's easy-to-clean surface that generates heat only to your pan, not your cooktop, meaning spills can't burn onto the surface.

Auto Sizing™

Pan Detection

Make fluffy pancakes with ease using Auto Sizing™ Pan Detection that automatically senses the size of your pan to only send heat to whatever small, medium, or large pan you are using.

PRODUCT DIMENSIONS

Width	30-3/4"
Depth	21-1/2"
Height	4-3/8"

MORE EASY-TO-USE FEATURES

True Temperature Melt & Hold

Get perfectly melted goodness with True Temperature Melt & Hold that delivers low, precise heat for melting delicate ingredients or sauces without scorching or burning for up to one hour.

Temperature Precision

Seal steaks, crisp sandwiches, melt chocolate, or simmer sauces with the precise temperature control of induction.

Safe Surface

The Safe Surface — Induction only heats pans and the food in them; the area around the pans stays cool to the touch.

Energy Efficiency

Since induction only heats your cookware and not your kitchen, less energy is lost throughout the cooking process.

Cooktop Timer

Use the built-in timer function to set a specified amount of time you want items to cook.

Cookware Compatibility

Most stainless steel and cast iron cookware is compatible with induction elements. An easy rule of thumb: if a magnet sticks to the bottom of the cookware, it's induction-friendly.

CERTIFICATIONS

A.D.A.- Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.



10" induction burner element, 6 at 10" diameter, 14,500 BTU/hr. 10" heat water compared to Frigidaire® 3000W 8" electric right front element.

ELEMENTS	SIZE	WATTS
Right Front	Induction 7"	1800/2,600
Center	Induction 10"	2,500/3,800
Left Front	Induction 6"	1,450/2,000
Left Rear	Induction 6"	1,450/2,000

FFIC3026TB
BUILT-IN COOKTOP
30" INDUCTION

FRIGIDAIRE

FEATURES

Controls	Glass-Touch
Surface Type	Black Ceramic Glass
Right Front Element (Watts)	7" - 1800/2600
Center Element (Watts)	10" - 2500/3800
Left Front Element (Watts)	6" - 1450/2000
Left Rear Element (Watts)	6" - 1450/2000
Hot Surface Indicators	Yes
Control Location	Center Front
Knob Color	
Knob Type	

CERTIFICATIONS

A.D.A. Compliant*	Yes
-------------------	-----

SPECIFICATIONS

Power Supply Connection Location	Right Rear
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts†	72/62
Amps @ 240/208 Volts	350/351
Minimum Circuit Required (Amps)	30
Approved for Electric Single Wall Oven Combination Installation‡	Yes
Shipping Weight (Approx.)	46 Lbs

When properly installed, this model is A.D.A. qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design

*Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit. Fused on both sides of line.


‡Cooktops are approved for installation above any of our Electric Single Wall Ovens.

PRODUCT DIMENSIONS

A - Width	30-3/4"
B - Depth	21-1/2"
C - Height	4-3/8"

CUTOUT DIMENSIONS

Width (Min. - Max.)	28-1/2"-29-5/8"
Depth (Min. - Max.)	19-5/8"-20-1/2"
Height	4-1/2"

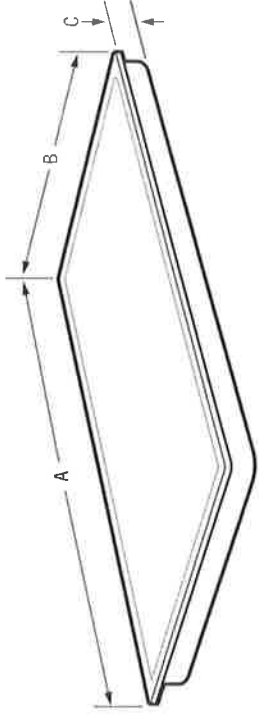

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FFIC3062 02/18
 © 2017 Electrolux Home Products, Inc.

FFIC3026TB BUILT-IN COOKTOP 30" INDUCTION

FRIGIDAIRE

PRODUCT DIMENSIONS

A-Width	30-3/4"
B-Depth	21 1/2"
C-Height	4-3/8"

CUTOUT DIMENSIONS


D-Width (Min.)	28-1/2"
(Max.)	29-5/8"
E-Depth (Min.)	19-5/8"
(Max.)	20-1/2"
F-Height (Min.)*	4-1/2"

REQUIRED CLEARANCES

G- (Min.)	1 1/2"
H- (Min.)	2"
I- (Min.)	2"
J- (Min.)	24 1/2"
K- Cabinet Opening Width (Min.)	30"

UTILITY CONNECTION LOCATIONS

Power Supply	Right
Rear	Rear

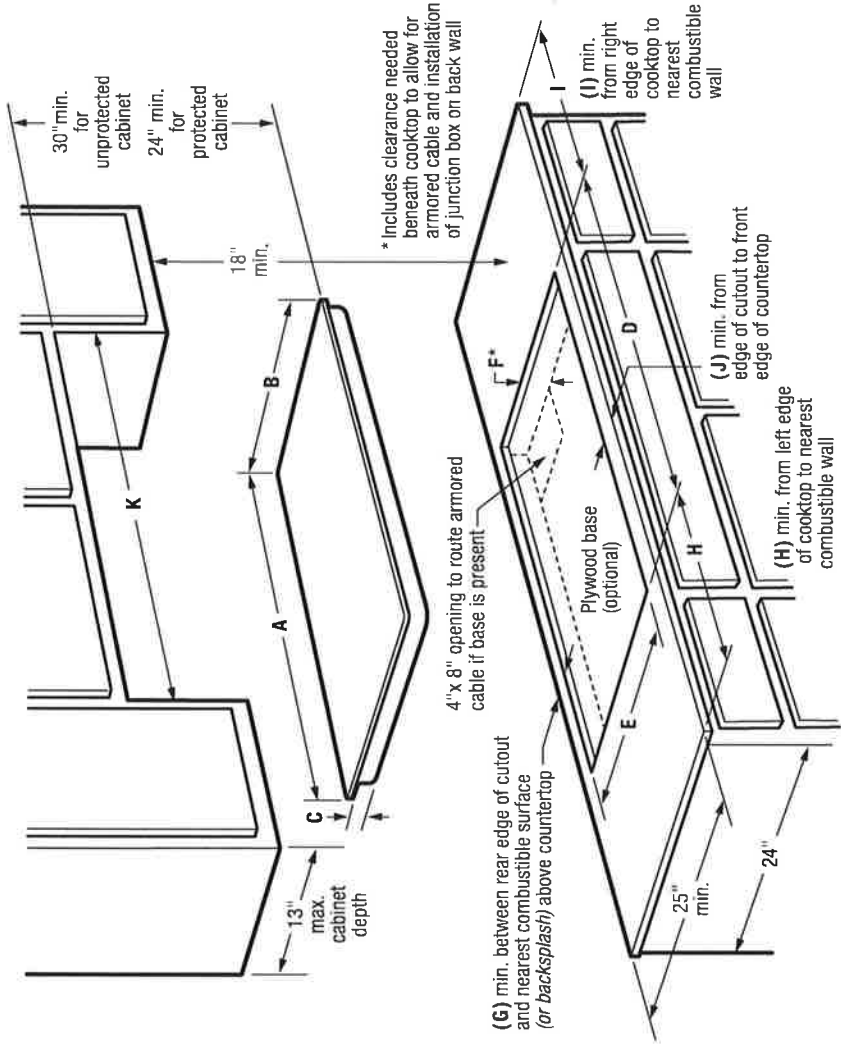

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 46 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 7.2/6.2 kW
- Amps @ 240/208 Volts = 35.0/35.1 Amps
- Recommended Circuit Breaker - 30 Amps
- Always consult local and national electric codes.
- Cooktop cutout height includes clearance needed beneath cooktop to allow for armored cable and installation of junction box on back wall. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 30".
- Allow 30" minimum clearance between top of cooktop platform and bottom of unprotected wood or metal overhead cabinet, or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant milboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

- Allow 1-1/2" minimum clearance between rear edge of cutout and nearest combustible surface (or backsplash) above countertop.
- Allow 2" minimum required clearance from left edge of cooktop to nearest combustible wall and 2" minimum from right edge of cooktop to nearest combustible wall.
- Installation of drawer not recommended beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Induction Built-in Cooktop model FFIC3026T is approved to be used over any Frigidaire® Electric Single Wall Oven. (Refer to Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications page on web.)

OPTIONAL ACCESSORIES

- Granite Countertop Installation Kit - (PN # 903061-9010).



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

30" Contemporary Black Stainless Wall Mount Range Hood


Model: WW53UC0HV  (0) [Write a review](#)

MSRP: \$1,099.99

Add to Cart

Overview Specifications Reviews Help And Resources Find In Store

Mouse over to zoom

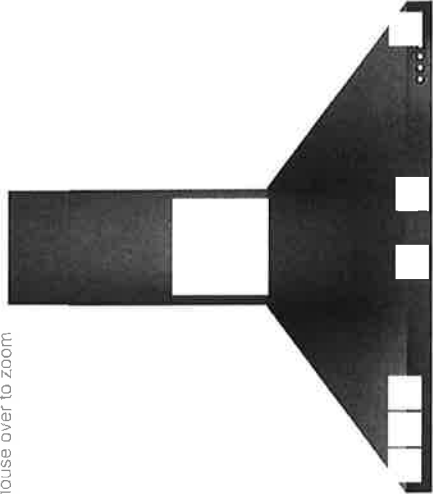

0:00 / 0:00

Compare

Wish List

Share

Key Features

- LED Task Lighting
- Grease filter
- Fingerprint Resistant
- 3-Speed, 400 CFM Motor Class
- Convertible Ventilation (Recirculating or Vented)

Color

Black Stainless



MSRP: \$1,099.99

X

SIGN UP

Add to Cart

depending on your kitchen ventilation system setup, you can vent vapors and odors outside or filter them and recirculate the air thanks to the range hood's convertible ventilation. When venting at low speed, sound levels can get as low as 44 dBA.

Additional Features

LED Task Lighting

Bright, long-lasting LED task lighting makes it easy to see what you're cooking.

Grease Filter

The grease filter helps trap unwanted grease and helps remove odors.

[View More](#) 

Specifications

Height:
73.34, 28-7/8"
Centimeters,
Inches

Width:
76.20, 30.0"
Centimeters,
Inches

Depth:
50.80, 20.0"
Centimeters,
Inches

[Download Dimension Guide](#)

Certifications

Energy Star® Qualified

No

Dimensions

Depth

50.80 cm, 20.0 in

Height

73.34 cm, 28-7/8 in

Width

76.20 cm, 30.0 in





30" (76.2 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood


PRODUCT MODEL NUMBERS

WW53UC0F WW53UC6F

ELECTRICAL REQUIREMENTS

A 120-volt, 60-Hz., AC-only, 15-amp, fused electrical circuit is required.

CABINET DIMENSIONS

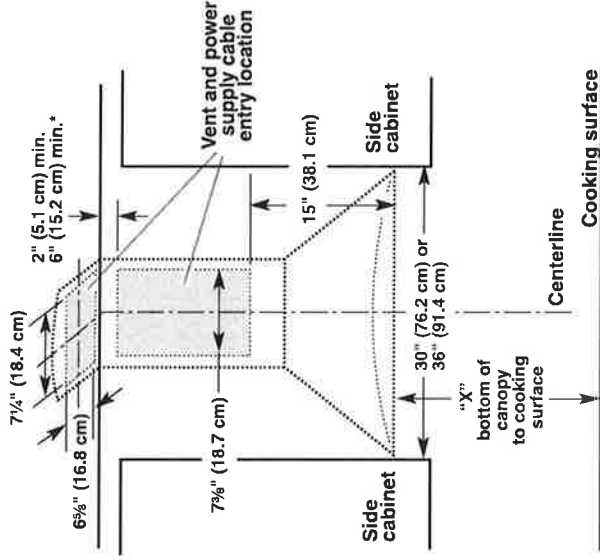

* For non-vented (recirculating) installations

IMPORTANT:

Minimum distance "X": 24" (61 cm) from electric cooking surface

Minimum distance "X": 27" (68.6 cm) from gas cooking surface

Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations


	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 5" (2.26 m)	9' 2" (2.79 m)
Gas cooking surface	7' 8" (2.34 m)	9' 2" (2.79 m)

Non-Vented (Recirculating) Installations

	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 5" (2.26 m)	9' 6" (2.9 m)
Gas cooking surface	7' 8" (2.34 m)	9' 6" (2.9 m)

NOTE: The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Stainless Steel Chimney Extension Kit Part Number EXTKT18FS is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the range hood.

PRODUCT DIMENSIONS

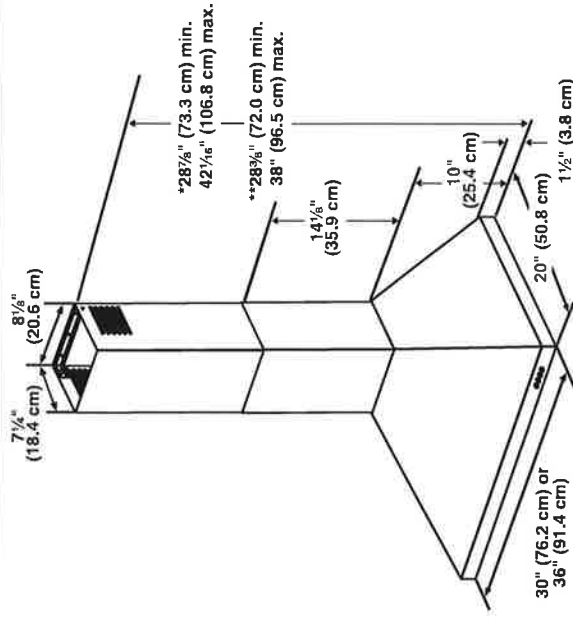

* For non-vented (recirculating) installations

** For vented installations.

VENTING REQUIREMENTS

- Vent system must terminate to the outdoors except for non-vented (recirculating) installations.
- Do not terminate the vent system in an attic or other enclosed area.
- Do not use 4" (10.2 cm) laundry-type wall cap.
- Use metal vent only. Rigid metal vent is recommended. Plastic or metal foil vent is not recommended.
- The length of vent system and number of elbows should be kept to a minimum to provide efficient performance.

For the Most Efficient and Quiet Operation:

- Use no more than three 90° elbows.
- Make sure there is a minimum of 24" (61 cm) of straight vent between the elbows if more than 1 elbow is used.
- Do not install 2 elbows together.
- Use clamps to seal all joints in the vent system.
- The vent system must have a damper. If the roof or wall cap has a damper, do not use the damper supplied with the range hood.
- Use caulking to seal exterior wall or roof opening around the cap.
- The size of the vent should be uniform.

VENTING METHODS

This canopy hood is factory set for venting through the roof or wall.

A 6" (15.2 cm) round vent system is needed for installation (not included).

The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, fitting a charcoal filter and the deflector. Fumes and vapors are recycled through the top grille. See the "Assistance or Service" section for information on ordering.

Roof Venting **Wall Venting** **Non-Vented (Recirculating)**

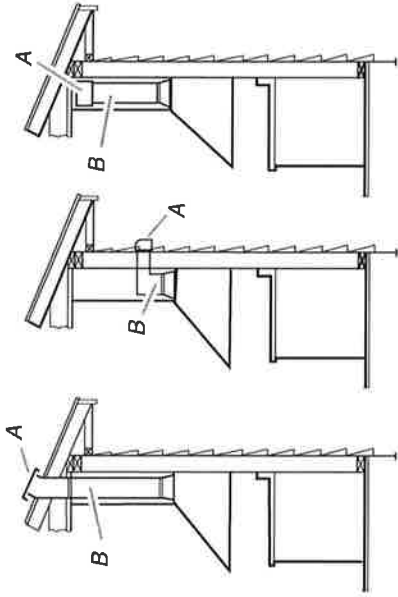

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| A. Roof cap | A. Wall cap | A. Deflector |
| B. 6" (15.2 cm) round vent | B. 6" (15.2 cm) round vent | B. 6" (15.2 cm) round vent |


Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent Piece	6" (15.2 cm) Round
45° elbow	2.5 ft (0.8 m)
90° elbow	5 ft (1.5 m)

Maximum equivalent vent length is 35 ft (10.7 m).

Example Vent System

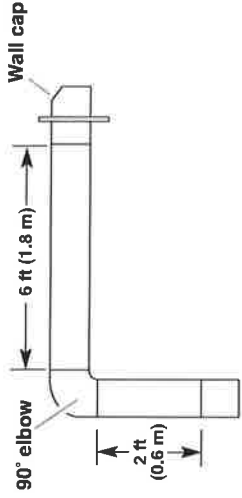

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

- | | |
|-------------------------|------------------------|
| 1 - 90° Elbow | = 5 ft (1.5 m) |
| 1 - Wall cap | = 0 ft (0 m) |
| 8 ft (2.4 m) straight | = 8 ft (2.4 m) |
| Length of system | = 13 ft (3.9 m) |

25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

Model: KRMF708BS ★★★★★ 4.1 (5070) [Write a review](#)

MSRP: \$6,499.99
Save \$900.00
(13%)

[ADD TO CART](#)

- OVERVIEW
- SPECIFICATIONS
- REVIEWS
- HELP AND RESOURCES
- FIND IN STORE



CONFIGURATION AND OVERVIEW

Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
Counter Depth	No
Number of Doors	5

APPEARANCE

Cabinet Finish	Textured
Door Style	Flat
Handle Material	Metal
Hidden Hinge	Yes
LCD Touch Screen	No

CONTROLS

Air Filter Indicator/Reset	Yes
----------------------------	-----

25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

Model KRMF706EBS ★★★★★ 4.1 (6070) Write a review

WICK® 30,477.77
Save \$900.00
(13%)

ADD TO CART

- OVERVIEW
- SPECIFICATIONS
- REVIEWS
- HELP AND RESOURCES
- FIND IN STORE

Offer optimized storage and are a first for freestanding refrigeration. The left drawer features 5 preset temperatures; meat/fish, drinks, greens/herbs, deli/cheese, thaw/marinate. The right drawer includes a Produce Preserver and is ideal for produce.

PROFESSIONALLY-INSPIRED DESIGN

Combines a bold blend of professionally-inspired styling with sleek touches for the home. This beautiful 5-door refrigeration unit features Satin Textured Handles and the KitchenAid® Badge, a symbol of uncompromised quality.

VIEW MORE

Specifications

Height:
178.12, 70-1/8"
Centimeters,
Inches

Width:
91.44, 36.0"
Centimeters,
Inches

Depth:
92.08, 36-1/4"
Centimeters,
Inches

CERTIFICATIONS

ADA Compliant No

Energy Star® Qualified No

ULe Environmentally Preferred Certified Passed 60 point AHAM (Association of Home Appliance Manufacturers) Sustainability Standards

DIMENSIONS

Capacity 25-19/25

Depth 92.08 cm, 36-1/4 in

Freezer Volume 215.36 l, 7.61 cu. ft.

Height 178.12 cm, 70-1/8 in

Net Weight 170.55 kg, 376 lbs

Refrigerator Volume 513.64 l, 18.15 cu. ft.

Width 91.44 cm, 36.0 in

SIGN UP

Sale: \$5,599.95
MAY 11, 2025 11:00 AM

By closing this message, you consent to our cookies on this device in accordance with our [Privacy Notice](#) unless you have disabled them.

CLOSE

KitchenAid®


Sign In



What can we help you find?



Home > Major Kitchen Appliances > Wall Ovens > Combination Wall Ovens > KOCE500EBS

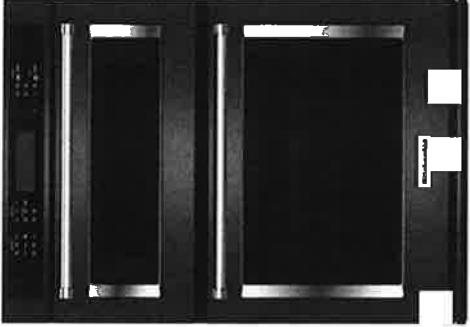

COMPARE

WISH LIST

SHARE

30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

Model: KOCE500EBS ★★★★★ 4.3 (2186) [Write a review](#)

Key Features

- Even-Heat™ True Convection Oven (Lower Oven)
- Microwave Convection Cooking (upper oven)
- FIT System Guarantee
- Temperature Probe
- EasyConvect™ Conversion System

Color

Black Stainless Steel with PrintShield™ Finish



MSRP: \$7,399.99

ADD TO CART

SHIPPING TO HOME

SIGN UP

Additional Features

FIT SYSTEM GUARANTEE

Allows for customization of wall oven installation to match the height of existing cabinets through flexible design elements.

TEMPERATURE PROBE

Allows accurate measurement of internal temperatures of meats, poultry, and casseroles without having to open the oven so that food can be cooked perfectly.

VIEW MORE

Specifications

Height:
107.95, 42-1/2"
Centimeters,
Inches

Width:
76.20, 30.0"
Centimeters,
Inches

Depth:
68.90, 27-1/8"
Centimeters,
Inches

CERTIFICATIONS

ADA Compliant

No

Energy Rating

356

DIMENSIONS

Capacity

6-2/5

Depth

68.90 cm, 27-1/8 in

Height

107.95 cm, 42-1/2 in

Microwave Capacity

39.62 l, 1.4 cu. ft.

Oven Capacity

141.50 l, 5.0 cu. ft.

Width

76.20 cm, 30.0 in

By closing this message, you consent to our cookies on this device in accordance with our Privacy Notice unless you have disabled them.

CLOSE

KitchenAid®




Sign In



What can we help you find?

Home > Major Kitchen Appliances > Dishwashers > Fully Integrated Console Dishwashers > KDTF204KBS

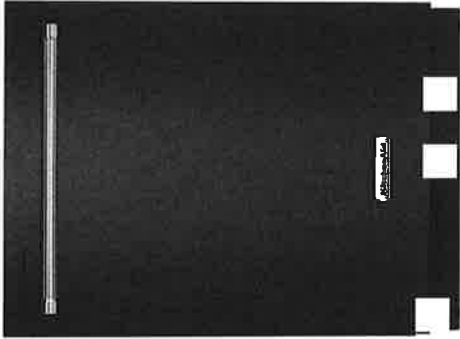

COMPARE

WISH LIST

SHARE

KitchenAid® 39 dBA Dishwasher in PrintShield™ Finish with Third Level Utensil Rack

Model: KDTF204KBS **★★★★★** 3.7 (29) [Write a review](#)

Key Features

- 39 dBA
- Third Level Utensil Rack
- ProWash™ Cycle
- PrintShield™ Finish
- Adjustable Middle Rack

Color

Black Stainless Steel with PrintShield™ Finish



Sale: \$1,399.99

MSRP: \$1,699.99 SAVE \$300.00 (17%)


ADD TO CART

SHIPPING TO YOU

SIGN UP

meals or the dishes that result are exactly the same.

Resists smudges and fingerprints. The specialized coating for stainless steel is easy to clean with just water and a soft cloth, so you can spend more time cooking and less time cleaning up the kitchen.

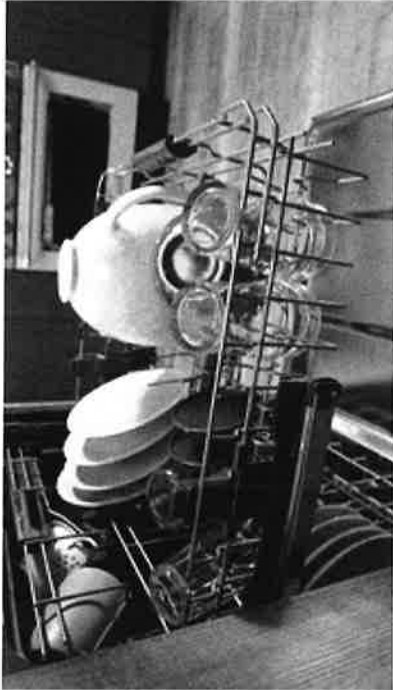

Adjustable Middle Rack

adds flexibility to fit tall items like a stand mixer bowl. Lower the rack to place large dishes inside or raise it to make room for platters, pitchers, blender jars and more in the rack below.

Additional Features

39 DBA

provides the quietest cleaning available from KitchenAid® Dishwashers, so there's no need to wait to run a wash cycle while entertaining and enjoying meals, even in open concept kitchens.

THIRD LEVEL UTENSIL RACK

provides additional space for long and flat items like silverware, serving utensils and spatulas.

VIEW MORE



Specifications

Height:
85.41, 33-5/8"
Centimeters,
Inches

Width:
60.66, 23-22/25"
Centimeters,
Inches

Depth:
67.94, 26-3/4"
Centimeters,
Inches

CERTIFICATIONS

ADA Compliant

No

Energy Star® QualifiedENERGY STAR® Qualified

Kosher Consumer FriendlyKosher Consumer Friendly

NSF® CertifiedYes

DIMENSIONS

Depth67.94 cm, 26-3/4 in

Height85.41 cm, 33-5/8 in

Net Weight40.37 kg, 89 lbs

Number of Place Settings13

Width60.66 cm, 23-22/25 in



VIEW MORE SPECS

Reviews

★★★★★ 3.7 29 Reviews

19 out of 28 (68%) reviewers recommend this product

Search topics and reviews

29
Reviews

0
Questions

0
Answers

Reviews

WRITE A REVIEW

Average Customer Ratings

Overall ★★★★★ 3.7

1–6 of 29 Reviews

Sort by: Highest to Lowest Rating ▾



SIGN UP


5.8 cu. ft. I.E.C. Front Load Washer with Load & Go™ XL Dispenser

Model: WFW8620HC ★★★★★ 3.8 (212) [Write a review](#)

Sale: \$1,499.99 ~~MSP: \$1,749.99~~
Save \$250.00 (14%)

Add to Cart

Overview Specifications Reviews Help And Resources Find In Store

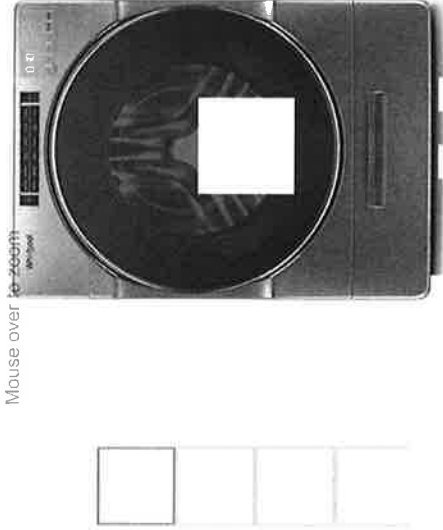

Mouse over to zoom

0:00 / 0:00

☐ Compare

Wish List

Share

Key Features

- Load & Go™ XL Dispenser
- #1 in Customer Satisfaction in the J.D. Power 2020 Laundry Appliances Satisfaction Study
- Our largest capacity front load washer at 5.8 cu. ft. I.E.C.
- Intuitive Controls
- 12-Hour FanFresh® Option



Color

Chrome Shadow

Sale: \$1,499.99
~~MSP: \$1,749.99~~ Save \$250.00 (14%)



Add to Cart

Skip steps with the Load & Go™ XL dispenser. Simply add detergent once and skip refills for 40 loads.



12-Hour FanFresh® Option

Keep clothes fresh for up to 12 hours after the wash cycle has ended. A built-in fan activates after the wash cycle is over, tumbling clothes for up to 12 hours so you can finish laundry when you're ready.

Additional Features

#1 in Customer Satisfaction In The J.D. Power 2020 Laundry Appliances Satisfaction Study

Our Largest Capacity Front Load Washer At 5.8 Cu. Ft. I.E.C.

Fit more in a single load with our largest capacity front load washer at 5.8 cu. ft. I.E.C.

[View More](#)

Specifications

Height:
98.11, 38-5/8"
Centimeters,
Inches

Width:
68.58, 27.0"
Centimeters,
Inches

Depth:
84.46, 33-1/4"
Centimeters,
Inches

X

[SIGN UP](#)

[Download Dimension Guide](#)

Certifications

ADA Compliant	ADA Compliant when installed on a 10in. riser, with the feet fully in		
Energy Rating	159		
Energy Star® Qualified	No		
IMEF	1-21/25		
IWF	4-7/10		

Dimensions

Capacity	5.00, 5		
Capacity IEC CAN	164.14 l, 5.8 cu. ft.		
Depth	84.46 cm, 33-1/4 in		
Gross Weight	111.13 kg, 245 lbs		
Height	98.11 cm, 38-5/8 in		
Net Weight	106.59 kg, 235 lbs		

View More Specs

Reviews

★★★★ 3.8 212 Reviews

Search topics and reviews

Reviews

Rating Snapshot
Select a row below to filter reviews.




Average Customer Ratings

Write a review

Home > Laundry > Explore Dryers > Shop Electric Dryers > YWED8620HC

Whirlpool

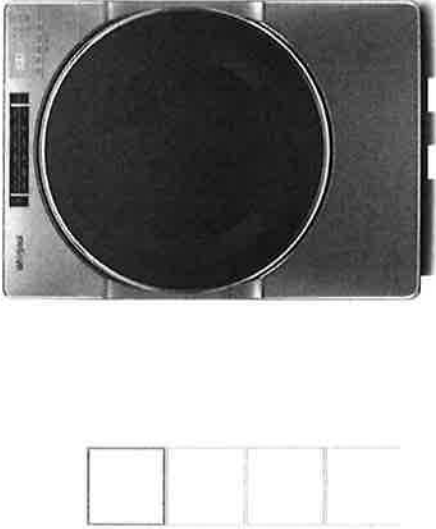

☐ Compare

Wish List

Share

Key Features

- Steam Refresh Cycle
- Wrinkle Shield™ Plus Option with Steam
- Stainless Steel Dryer Drum
- 7.4 cu. ft. Capacity
- Intuitive Controls



Color

Chrome Shadow



Sale: \$1,399.99
MSRP-\$1,649.99 Save \$250.00 (15%)



Add to Cart

7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Model: YWED8620HC 3.8 (9) [Write a review](#)

Sale: \$1,399.99 ~~MSRP-\$1,649.99~~
Save \$250.00 (15%)
Add to Cart

 Extended Service Plans

- No Selection

1 Year — \$94.99

2 Year — \$169.99

4 Year — \$229.99

Accessories

Frequently bought additional items

- ☐



Hose Kit for Steam Dryer
MSRP: \$19.99
- ☐



Washer & Dryer Stacking Kit
MSRP: \$45.99

Overview

Product Overview

7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Help prevent overdrying with a front load electric dryer with Advanced Moisture Sensing, which uses three moisture sensors to end the cycle at just the right time. A stainless steel dryer drum gently cradles clothes as they tumble. When drying ends, the ENERGY STAR® certified electric dryer's steam cycles help release and prevent wrinkles.



Steam Refresh Cycle

Release wrinkles and reduce odors with the Steam Refresh cycle. It uses water and heat to get clothes ready to wear without rewashing.



Wrinkle Shield™ Plus Option with Steam

Help keep wrinkles from setting into clean, dry fabrics. The Wrinkle Shield™ Plus option with Steam uses tumbling and steam for up to 150 minutes after the cycle ends or until you open the dryer door for improved wrinkle-fighting performance.



7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Model: YWED8620HC  3.8 (9) [Write a review](#)

Sale: \$1,399.99 ~~MSRP: \$1,600.00~~
SAVE \$200.00 (13%)

[Add to Cart](#)



Intuitive Controls

Let the dryer guide you to the right cycle combinations or customize up to 36 of your own to get the right type of fabric care for whatever you're drying.

Additional Features

Stainless Steel Dryer Drum

Clothes are gently cradled as they tumble around the smooth surface of this drum's stainless steel construction.

7.4 Cu. Ft. Capacity

Get plenty of room to dry the large loads you washed in the matching front load washer. This 7.4 cu. ft. dryer easily handles bulky items like comforters and sleeping bags.

[View More](#)

Specifications

Height:
98.42, 38-3/4"
Centimeters,
Inches

Width:
68.58, 27.0"
Centimeters,
Inches

Depth:
78.74, 31.0"
Centimeters,
Inches

Certifications

ADA Compliant

ADA Compliant with feet fully extended

Energy Star® Qualified

ENERGY STAR® Qualified

SIGN UP FOR

Alerts

7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Model: YWED8620HC 3.8 (9) [Write a review](#)

Sale: \$1,399.99 ~~MSRP: \$1,600.00~~
Save \$200.00 (13%)

[Add to Cart](#)

Depth78.74 cm, 31.0 in

Gross Weight79.38 kg, 175 lbs

Height98.42 cm, 38-3/4 in

Net Weight71.67 kg, 158 lbs

Width68.58 cm, 27.0 in

Configuration and Overview

Fuel TypeElectric

Appearance

Door StyleSide Swing

Reversible DoorYes

WindowYes

Details

Automatic Dry ControlYes

Lint Screen LocationFront

Moisture SensorYes

Quad BafflesYes

Secondary Lint FilterNo

Cycles and Options

Cycle Time RemainingYes

Lint Filter IndicatorNo

Number Of Temperatures5

Ventilation System

Long VentNo

Maximum Vent Length64



7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Model: YWED8620HC 3.8 (9) [Write a review](#)

Sale: \$1,399.99 ~~MSRP \$1,649.99~~
Save \$250.00 (15 %)

Add to Cart