



Specifications for Project

HIRAL PATEL

Location

Brampton

i REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

HIRAL PATEL



<i>Contents</i>	<i>Page no.</i>
LFXC222596S LG Refrigeration	4-5
KFGC506JSS KitchenAid Range	6-9
KDTM404KPS KitchenAid Dishwasher	10-14
ECL136S4 Elica Ventilation	15-16
CALABRIA Wall 36" SS	
WM3850HVA LG Washer	17
5.2 cu.ft. Ultra Large Capacity Front Load Washer with AI DD	
DLEX3850V LG Dryer	18
7.4 cu.ft. Ultra Large Capacity Front Load Electric Dryer	
WDP4V	19

Coast Appliances
coastappliances.com

Mansur Merchant
General Manager
4162721973

Search **20220929223810878SC**
Version 1.1

Thu, Sep 29, 2022
6:38 PM EDT

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.



enterprise.steelcod.com/sp/csta/4FDSM7AQ

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.
Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

Full Spec Package

LG Laundry

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

LG REFRIGERATION

LFXC22596™

3-Door Counter Depth Refrigerator with InstaView™ Door-in-Door®

InstaView™ Door-in-Door®

Dual Ice Maker

Counter Depth

PrintProof™ Finish

Smart Cooling™ System

Door Cooling +

LG SmartThinQ™

SmartDiagnosis™

LoDecibel™ Quiet Operation

ENERGY STAR® Qualified



SmartThinQ®

works with the
Google Assistantworks with
alexa

Enjoy new ways to control your home with LG smart appliances

- Get an alert when kids forget to close the door
- Make more ice while you're at work
- Works with the LG SmartThinQ® app

CAPACITY

Refrigerator (cu.ft.)

14.60

Freezer (cu.ft.)

7.30

Total Capacity (cu.ft.)

21.9

ENERGY

Energy Consumption (kWh/Year)

664

ENERGY STAR® Qualified

Yes

WATER & ICE SYSTEM

Ice & Water Dispenser

Yes

Dispenser Type

Integrated Tall Ice & Water Dispenser

Daily Ice Production (lbs)

6.0 lbs

IcePlus™ Production (lbs)

6.5 lbs

Ice Storage Capacity (lbs)

2.5 + 4.0 lbs

Ice System

Slim SpacePlus®

Dual Ice

Yes

Dispenser Light

Yes

Water Filter

LTI1000P

COOLING

Linear Compressor

Yes

Smart Cooling™ System

Yes

Multi-Air Flow™ System

Yes

Temperature Sensors

6

Fresh Air Filter

Yes

Evaporator

Yes

CONVENIENCE

Display Type

Membrane / White LED

Temperature Controls

Electronic/Digital

Door Alarm

Yes

Child Lock

Yes

Auto Closing Door Hinge

Yes

Sabbath Mode

Yes

LoDecibel™ Quiet Operation

Yes

REFRIGERATOR

No. of Shelves

4 Split

Cantilevered Shelves

Hybrid Cantilevered

Shelf Construction

Spill Protector™ Tempered Glass

Crisper Bins

2 Humidity Crispers

Glide 'N' Serve™ Drawer

Yes

Refrigerator Light

Ceiling LED (Frameless)

REFRIGERATOR DOOR

InstaView™ Door-in-Door®

Yes

Door-In-Door® with ColdSaver™ Panel

Yes

No. of Bins

7 Total (Including Door-in-Door®)

Door Bin Construction

1 Piece (Clear)

FREEZER

Door Type

Pull Drawer

Drawers

2-Tier Organization

DuraBase™ Solid Drawer Base

Yes

Drawer Divider

Yes

Freezer Light

LED Lighting

Freezer Handle

SmartPull™ Handle

SmartThinQ® SMART FEATURES

Wi-Fi Enabled

Yes

Works with

Amazon Alexa, Google Assistant

SmartDiagnosis™

Yes

MATERIALS AND FINISHES

Contour Door

Yes

Hidden Hinges

Yes

Surface

Smooth

Fingerprint & Smudge Resistant Exterior

Yes

Handles

Matching Commercial

PrintProof™ Stainless Steel,

PrintProof™ Matte Black Stainless Steel

PrintProof™ Black Stainless Steel

All Available Colors

DIMENSIONS/CLEARANCES/WEIGHTS

Depth with Handles

31 1/4"

Depth without Handles

28 3/4"

Depth without Door

24 3/4"

Depth (Total with Door Open)

43 1/2"

Height to Top of Case

68 3/8"

Height to Top of Door Hinge

69 3/4"

Width

35 3/4"

Width (Door Open 90° with Handle)

44 1/4"

Width (Door Open 90° without Handle)

39 1/4"

Door Edge Clearance with Handle

4 1/2"

Door Edge Clearance without Handle

1 1/3"

Installation Clearance

Sides 1/8", Top 1", Back 2"

Weight (Unit/ Carton)

289 lbs. / 319 lbs.

Carton Dimensions (WxHxD)

38" x 73" x 36"

LIMITED WARRANTY

Parts & Labor

1 Year

Sealed System (Parts & Labor)

5 Years

Compressor (Parts & Labor)

5 Years

Linear Compressor (Parts Only)

6-10 Years

UPC CODES

LFXC22596S

048231797214

LFXC22596M

048231797221


LFXC22596D

048231802581



Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, the doors must be removed.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

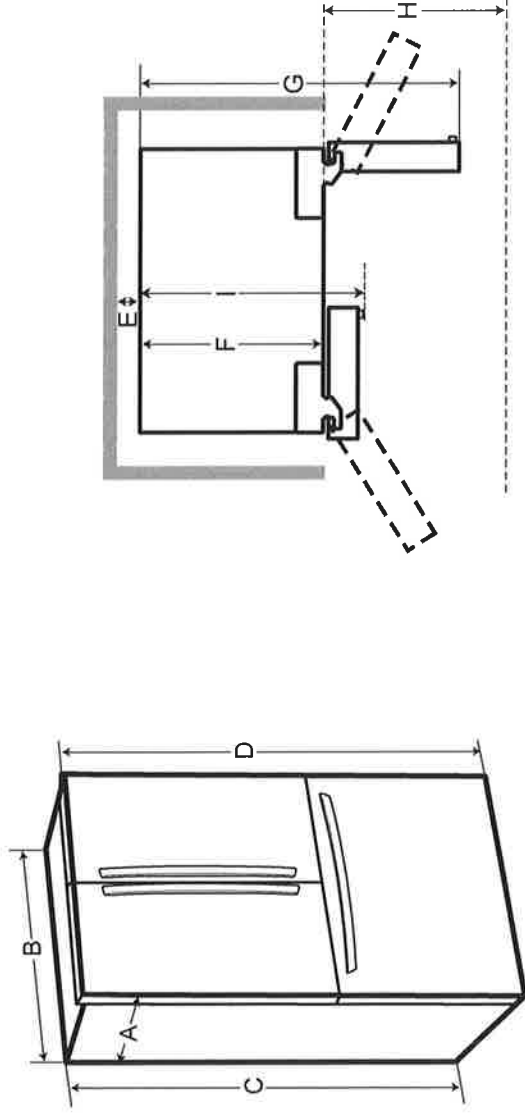

-	List	LFXC22596*
A	Depth without handle	28 3/4" (728 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 3/8" (1737 mm)
D	Height to Top of Hinge	69 3/4" (1772 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (630 mm)
G	Depth (Total with Door Open 90°)	43 1/2" (1103 mm)
H	Front Clearance	24" (610 mm)
I	Depth With handle	31 1/4" (792 mm)

KFGC506JSS

KitchenAid® 36" Smart Commercial-Style Gas Range with 6 Burners

KitchenAid®

<http://www.kitchenaid.com>



Available in:

Avocado Cream

● Imperial Black

Ink Blue

Misty Blue

Milkshake

Passion Red

Scorched Orange

● Stainless Steel

Yellow Pepper

INVESTED
IN
AMERICA

Key Features:

- Even-Heat™ True Convection
- Two 20,000 BTU Ultra Power™ Dual-Flame Burners
- Smart Appliance
- 5,000 BTU Simmer & Melt Burner
- Three-Level Convertible Grates
- Three 15,000 BTU Burners
- Dual-Concentric Oven Knob
- SatinGlide™ Roll-Out Extension Rack
- 5.1 Cu. Ft. Capacity
- EasyConvect™ Conversion System
- KitchenAid® Handle Medallion Kit (sold separately)

Product Dimensions:

Height: 36

Width: 35 7/8

Additional Information:

[Use And Care Guide](#)

[Dimension Guide](#)

[Installation Guide](#)

[Warranty Certificate](#)

®Registered trademark/™ Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved.
All other trademarks are owned by their respective companies.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.


Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.

Created On: Friday, May 08, 2020 13:03:52

Parts Supplied

Check that all parts are included.

- Anti-tip bracket kit



- A. Anti-tip bracket
- B. #8-18 x 1" (2.5 cm) Phillips head screws (4)

NOTE: Anti-tip bracket must be securely mounted to subfloor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store. See the "Install Anti-Tip Bracket" section.

- Burner grates
- Burner caps
- Griddle drip tray (on griddle models)

Parts Needed

- All models must be installed with a backguard if installing at zero clearance to a combustible back wall surface such as drywall. See "Cabinet Dimensions" in the "Location Requirements" section for installation requirements.

Check local codes and consult gas supplier. Check existing gas supply and electrical supply. See the "Electrical Requirements" and "Gas Supply Requirements" sections.

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances. Do not obstruct flow of combustion and ventilation air.

- It is the installer's responsibility to comply with installation clearances specified on the model/serial/rating plate. The model/serial/rating plate is located under the console on the right-hand side.
- It is recommended that a 585 CFM (993.9 m³/hr) or larger range hood be installed above the range.
- Follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.
- Recessed installations must provide complete enclosure of the sides and rear of the range.
- All openings in the wall or floor where range is to be installed must be sealed.
- Do not seal the range to the side cabinets.
- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see the "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See the "Electrical Requirements" section.
- Proper gas supply connection must be available. See the "Gas Supply Requirements" section.
- Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F (93°C). Use an insulated pad or 1/4" (6.4 mm) plywood over carpet and under range if installing range over carpeting.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or local codes. In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition or with local codes.


Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.

Product Dimensions


NOTE: Cooktop features may differ.

30" (76.2 cm) models

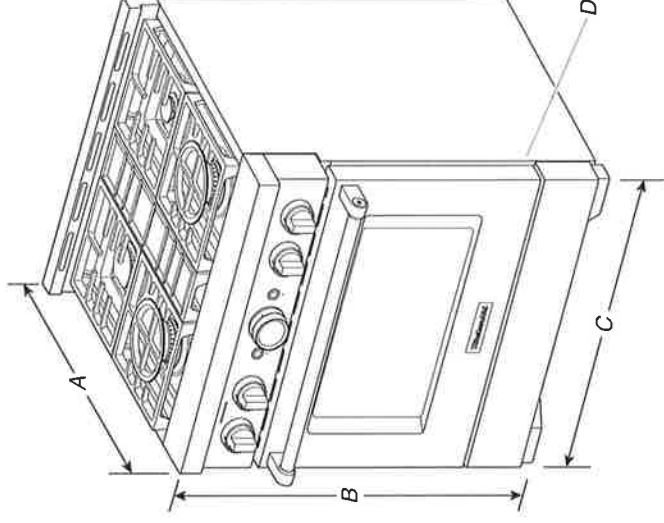


- A. 27¹/₄" (70.5 cm) depth with control panel (See NOTE.)
- B. 36" (91.4 cm) range height when sitting on the wheels
- C. 29⁷/₈" (75.7 cm) width
- D. Model/serial/rating plate location/SAID label (located on front side panel)

36" (91.4 cm) models

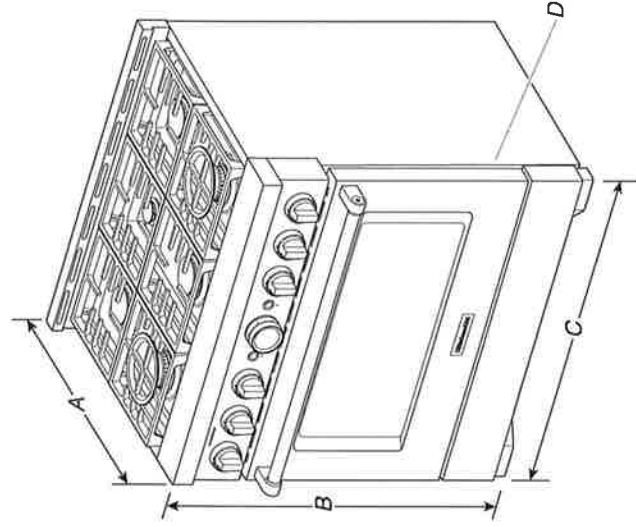

- A. 27³/₄" (70.5 cm) depth with control panel (See NOTE.)
- B. 36" (91.4 cm) range height when sitting on the wheels
- C. 35⁵/₈" (91.1 cm) width
- D. Model/serial/rating plate location/SAID label (located on front side panel)

48" (121.9 cm) models

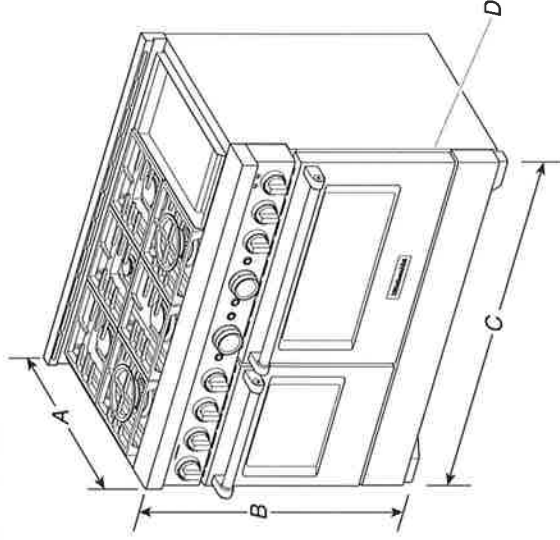


- A. 27³/₄" (70.5 cm) depth with control panel (See NOTE.)
- B. 36" (91.4 cm) range height when sitting on the wheels
- C. 47¹/₈" (121.6 cm) width
- D. Model/serial/rating plate location/SAID label (located on front side panel)

NOTE: When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 3" (7.6 cm) beyond 24" (61.0 cm) base cabinet.

Cabinet Requirements

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, and 36" (91.4 cm) countertop height. Dimensions must be met in order to ensure a flush fit to back wall.

IMPORTANT: If installing a range hood, hood liner, or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooking surface.

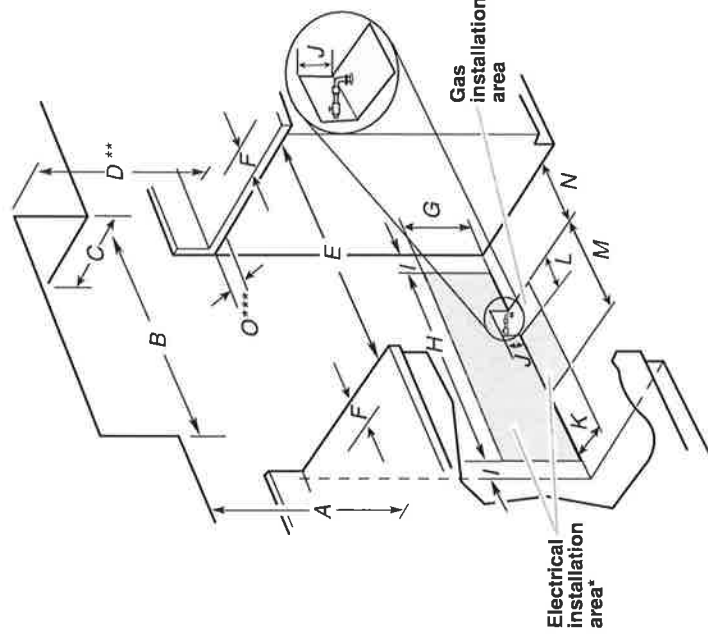

- A. 18" (45.7 cm) upper cabinet to countertop
- B. 30" (76.2 cm) model: 30" (76.2 cm) min. upper cabinet width
36" (91.4 cm) model: 36" (91.4 cm) min. upper cabinet width
48" (121.9 cm) model: 48" (121.9 cm) min. upper cabinet width
- C. 13" (33 cm) max. upper cabinet depth
- D. For minimum clearance to top of range.**
- E. 30" (76.2 cm) on 30" (76.2 cm) models
36" (91.4 cm) on 36" (91.4 cm) models
48" (121.9 cm) on 48" (121.9 cm) models
- F. 12" (30.4 cm) min. clearance from both sides of range to side wall or other combustible material
- G. 15" (38.1 cm)
- H. 22" (55.9 cm) on 30" (76.2 cm) models
28" (71.1 cm) on 36" (91.4 cm) models
40" (101.6 cm) on 48" (121.9 cm) models
- I. 4" (10.1 cm)
- J. 3" (7.6 cm)
- K. 5" (12.7 cm)
- L. 3" (7.6 cm) on 30" (76.2 cm) models
11" (27.9 cm) on 36" (91.4 cm) models
21" (53.3 cm) on 48" (121.9 cm) models
- M. 7¹/₂" (19.0 cm)
- N. 9" (22.9 cm)
- O. 6" (15.2 cm)***

** If not using ventilation, Minimum Clearances

30" (76.2 cm) models: 42" (106.7 cm) minimum clearance between the top of the cooking platform and the bottom of a combustible surface

36" (91.4 cm) models: 58" (147.3 cm) minimum clearance between the top of the cooking platform and the bottom of a combustible surface

48" (121.9 cm) models: 58" (147.3 cm) minimum clearance between the top of the cooking platform and the bottom of a combustible surface

***If the surface of the back wall is constructed of a combustible material and a backguard is not installed, a 6" (15.2 cm) minimum clearance is required for all models.

Electrical Requirements

⚠ WARNING



Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.
- Do not remove ground prong.
- Do not use an adapter.
- Do not use an extension cord.
- Failure to follow these instructions can result in death, fire, or electrical shock.

IMPORTANT: The range must be electrically grounded in accordance with local codes and ordinances or, in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

CSA International

8501 East Pleasant Valley Road
Cleveland, Ohio 44131-5575

- A 120 V, 60 Hz, AC only, 15 A, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this range be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120 V power and is correctly grounded.
- The wiring diagram is located behind the kick plate in a clear plastic bag.

Gas Supply Requirements

⚠ WARNING



Explosion Hazard

- Use a new CSA International approved gas supply line.
- Install a shut-off valve.
- Securely tighten all gas connections.
- If connected to propane, have a qualified person make sure gas pressure does not exceed 14" (36 cm) water column.
- Examples of a qualified person include:
 - licensed heating personnel,
 - authorized gas company personnel, and
 - authorized service personnel.
- Failure to do so can result in death, explosion, or fire.

Observe all governing codes and ordinances.

IMPORTANT: This installation must conform with all local codes and ordinances. In the absence of local codes, installation must conform with American National Standard, National Fuel Gas Code ANSI Z223.1 — latest edition — or CAN/CGA B149 — latest edition.

IMPORTANT: Range must be connected to a regulated gas supply.

IMPORTANT: Leak testing of the range must be conducted according to the manufacturer's instructions.

KDTM404KPS

44 dBA Dishwasher in PrintShield™ Finish with FreeFlex™ Third Rack

KitchenAid®

<http://www.kitchenaid.com>



Key Features:

- FreeFlex™ Third Rack
- 44 dBA
- Advanced Clean Water Wash System
- ProWash™ Cycle
- PrintShield™ Finish
- Adjustable Middle Rack
- Durable Stainless Steel Interior
- SatinGlide® Rails in Third and Middle Racks
- Adjustable Rows in Middle and Lower Racks
- Two Stemware Holders in Middle Rack
- Express Wash Cycle
- Sani-Rinse Option

Product Dimensions:

Height: 34 1/2

Width: 23 7/8

Depth: 26 3/4

Additional Information:

[Dimension Guide](#)

[Energy Guide](#)

[Warranty Certificate](#)

Available in:

Black Stainless
Steel with Print-
Shield™ Finish
Stainless Steel with
PrintShield™ Finish



©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved
All other trademarks are owned by their respective companies.
Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.
Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.
Created On: Thursday, March 26, 2020 14:28:50




24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with:
KDFE104K, KDFE204K, KDTE204K, KDTE204LPA, KDFM404K,
KDTM404K, KDPM604K, KDTM604K, KDPM704K, KDTM704K,
KDTM704LPA, KDPM804K, KDTM804K

PRODUCT DIMENSIONS

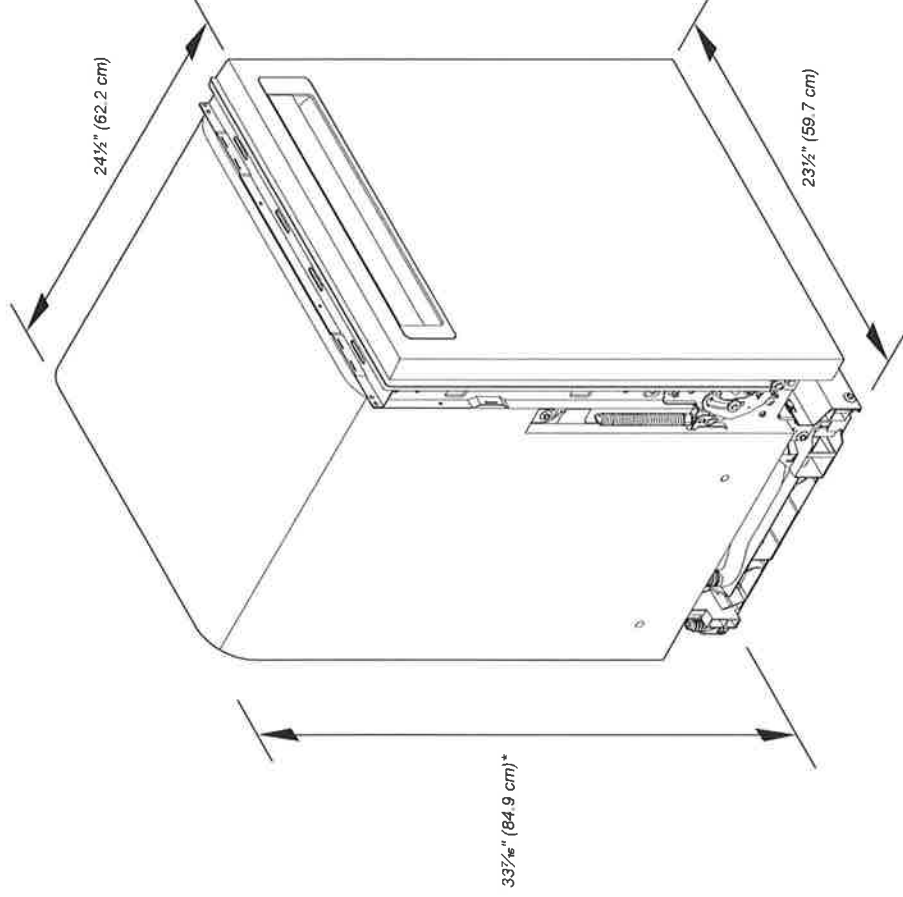

*Dishwasher can be raised 1 ⁷/₁₆" (3.7 cm) with feet fully extended.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid®

24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

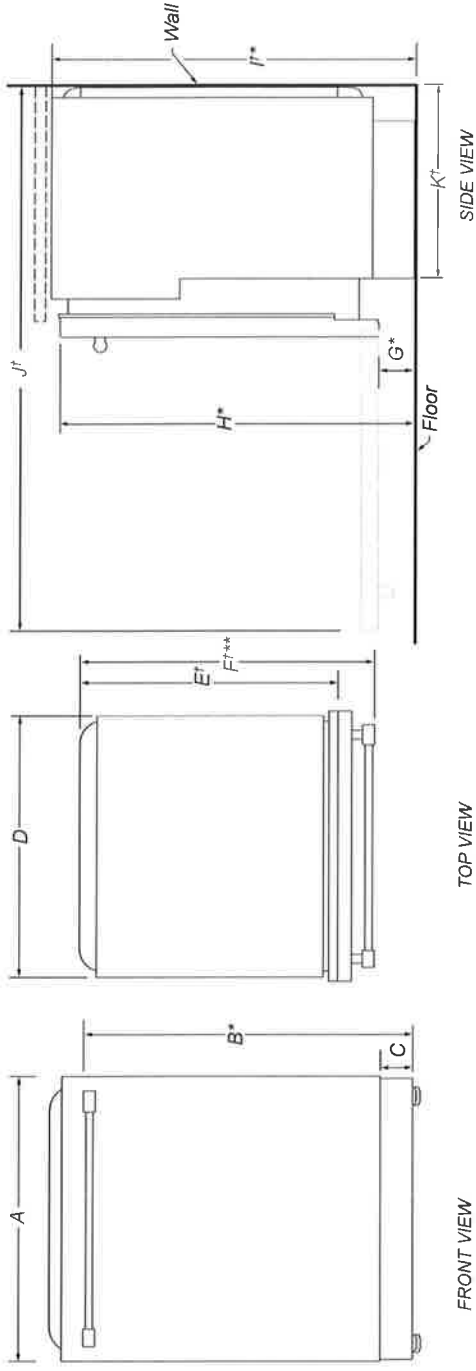

DESCRIPTION	DIMENSIONS
A Width of door	23½" (59.7 cm)
B* Height to top of handle	30¾" (78.3 cm)
C Height of adjustable toe kick	3⅝" (8.4 cm) - min. 4⅛" (11.8 cm) - max.
D Width of recessed dishwasher	22⅝" (57.4 cm)
E† Depth without door	22⅝" (57.5 cm)
F†** Depth with Towel Bar Handle	26⅞" (68.3 cm)
F†**+ Depth with Pocket Handle	24½" (62.6 cm)
G* Depth of Panel-Ready Models	24" (61.0 cm)
H* Height to bottom of door (min.)	3⅝" (8.4 cm)
I* Height to top of door (min.)	33¾" (84.9 cm)
J† Height of recessed dishwasher (min.)	33⅝" (85.4 cm)
K† Depth with door fully open (min.)	50¾" (127.4 cm)
K† Depth with toe kick (min.)	20¾" (52.9 cm)

†Insulation blanket thickness adds up to 11/16" (1.8 cm) but can crush up to 1/8" (0.3 cm).

*Dishwasher can be raised 1⅞" (3.7 cm) with feet fully extended.

**For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

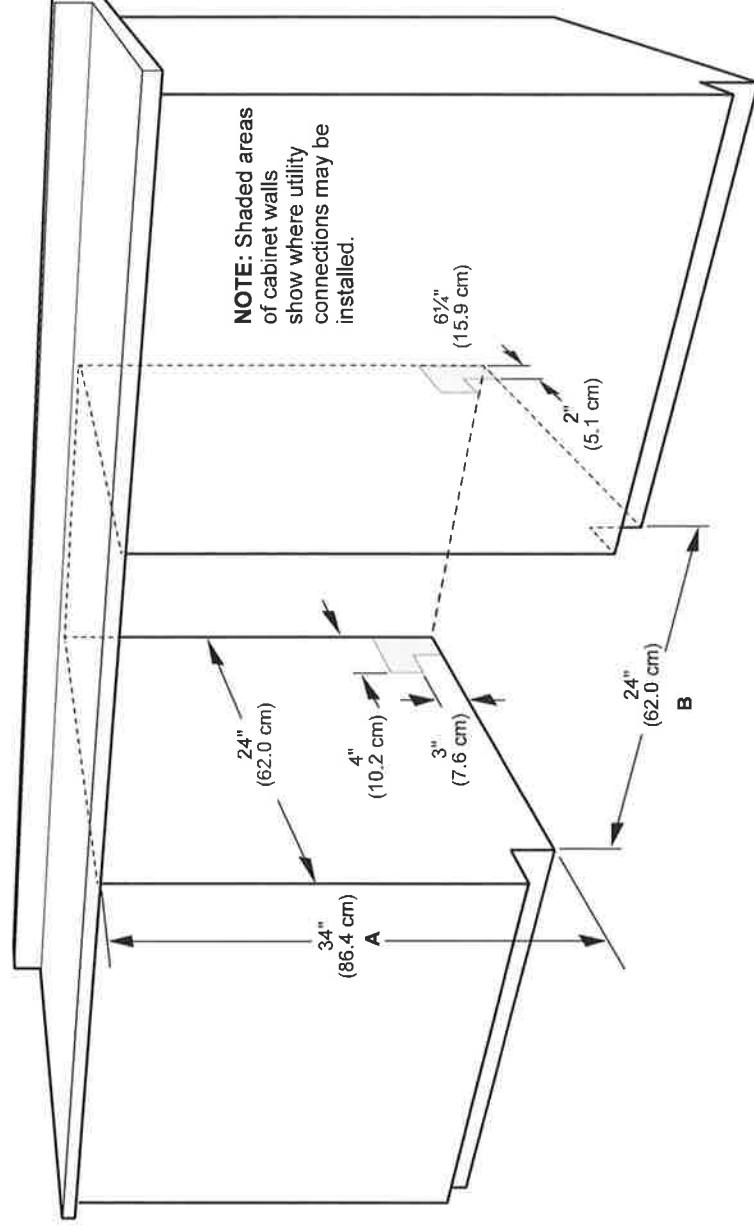

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.

NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

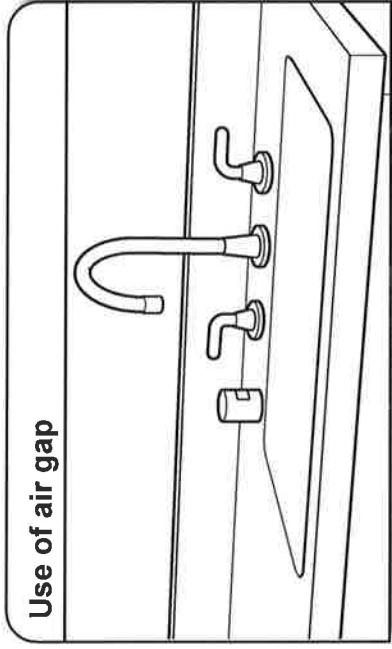

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.

NOTE: 1/2" (1.3 cm) minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
- Do not solder within 6" (15.2 cm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.**
- Do not remove ground prong.**
- Do not use an adapter.**
- Do not use an extension cord.**
- Failure to follow these instructions can result in death, fire, or electrical shock.**

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker.

Circuit Requirements:

- The dishwasher may be installed on the same circuit as a garbage disposal providing that the branch circuit cannot exceed rated circuit load and must comply with all governing codes and regulations such as but not limited to National Electrical Code, ANSI/NFPA 70 - latest edition.
- No electrical connections other than the dishwasher power and ground connections can be made inside of the dishwasher terminal box.

If connecting dishwasher with a power supply cord:

- Use UL Listed power cord kit marked for use with dishwasher.



- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If connecting dishwasher with direct wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

- Use a UL Listed/CSA Approved metallic strain relief.



LG LAUNDRY

WM3850HVA

5.2 cu. ft. Capacity Front Load Washer

AI DD™

Steam Technology

ENERGY STAR® Qualified

SmartDiagnosis™

Touch Control Panel

ThinQ™ Technology (Wi-Fi Enabled)

SMART APPLIANCE

LG ThinQ™

- Enjoy new ways to control your home with LG smart appliances
- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app

works with the

Google Assistant

works with

Alexa

KEY FEATURES



PRODUCT HIGHLIGHTS

CAPACITY	5.2
APPEARANCE	Front Control
Design Look	
Intelligent Electronic Controls with LED Display	
Touch Buttons	
Dial-A-Cycle™	
ENERGY	
ENERGY STAR® Qualified	
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 12	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergene™, Downloaded
No. of Options - 13	Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	5 Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5 Extra High, High, Medium, Low, No Spin
Water Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	
Steam Technology	
Allergene™ Cycle	
Sanitary Cycle	
ColdWash™ Option	
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	
Load Sense	
Control Lock	
Auto Suds Removal	
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	

Wi-Fi	Remote Start and Cycle Monitor
	Energy Monitoring
	Tub Clean Coach
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™	Stainless Steel Drum
Cabinet	
Control Panel	PCM
Top Plate	Plastic
Door Cover	Painted
Door / Rim	Tempered Glass Door
All Available Colours	Glass / Shiny Rose Gold
POWER SOURCE	Graphite Steel (V)
Ratings	
Electrical Requirements	UL Listed
Type	120V, 10 Amps
OPTIONS	Electric
Pedestal	WDP4V 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CV 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4"
Carton (WxHxD)	55" (With door open)
Weight (Products/Carton)	29 23/32" x 42 27/32" x 31 17/32"
LIMITED WARRANTY	198.4 lbs / 712.1 lbs
	1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor
UPC CODES	
WM3850HVA	772454073625
DLEX3850V	772454073304
WD100CV	772454052866
WDP4V	048231015165
KSTK1	772454059896

LG LAUNDRY

DLEX3850V

7.4 cu.ft. Capacity Electric Dryer

TurboSteam™ Technology

AI Sensor Dry™

Aluminized Alloy Steel Drum

Touch Control Panel

ENERGY STAR® Qualified

ThinQ Technology (Wi-Fi Enabled)


FlowSense™ Duct Clogging Indicator

SMART APPLIANCE


LG ThinQ™

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app



KEY FEATURES

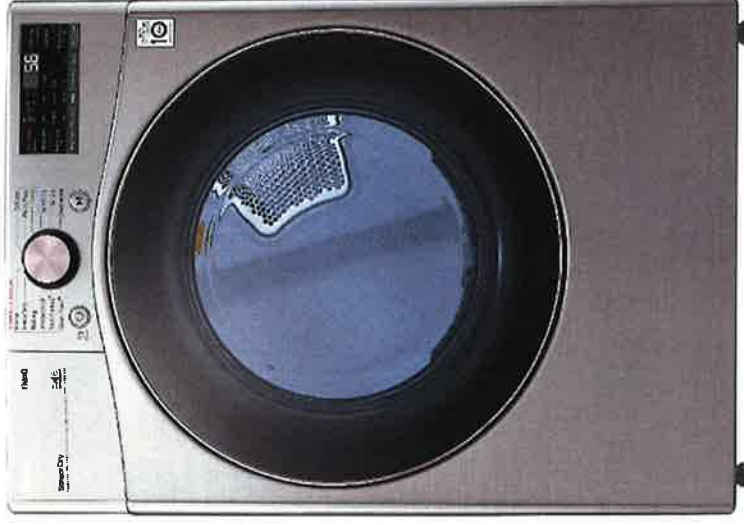

PRODUCT FEATURES

CAPACITY	7.4
Capacity (cu.ft.)	
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	
Touch Buttons	
Dial-A-Cycle™	
ENERGY	
ENERGY STAR® Qualified	
DRYING PROGRAMS	
No. of Programs - 12	Normal, Heavy Duty, Bedding, Anti-Bacterial, SteamSanitary™, SteamFresh™, Perm Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded
No. of Options - 12	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal
Temperature Settings	High, Mid High, Medium, Low, Ultra Low
Drying Levels	Very, More, Normal, Less, Damp
Manual Dry Times	60 min, 50 min, 40 min, 30 min, 20 min, More Time/Less Time
FABRIC CARE FEATURES	
AI Sensor Dry™	
TurboSteam™	
Precise Temperature Control and Variable Heater	
CONVENIENCE FEATURES	
3 Minute Installation Check	
LoDecibel™ Quiet Operation	
End of Cycle Signal	
Drum Light	
Reversible Door	
FlowSense™ Duct Clogging Indicator	
Wrinkle Care Option	
Control Lock	
Venting Option	Electric 4 Way Venting
Leveling Legs	4 Adjustable Legs
Remaining Time Display/Status Indicator(s)	

ThinQ™ TECHNOLOGY	
SmartDiagnosis™ (v3.0)	
Wi-Fi	
Remote Start and Cycle Monitor	
Energy Monitoring	
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum	
Cabinet	Painted Steel
Control Panel	Plastic
Door	Tempered Glass
	Graphite Steel (V)
POWER SOURCE	
All Available Colours	
Ratings	
Electrical Requirements	CSA Listed
Type	Electric 240V, 30 Amps
BTU Rating	Electric 10,000 ft.
OPTIONS	
Pedestal	WDF4V
Pedestal (WxHxD)	27" x 14 1/8" x30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/8"
	51 3/8" (With door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product/Carton)	126.2 lbs / 139.4 lbs
LIMITED WARRANTY	
	1 Year Parts and Labour, 3 Years on Drum
UPC CODES	
WM3850HVA	772454073635
DLEX3850V	772454073304
WD100CV	772454052866
WDF4V	0148231015155
KSTK1	772454058695



LG

Life's Good

WDP4*

Tall Pedestal with Drawer

DIMENSIONS

27" x 13-3/5" x 28-2/5"

UPC CODES

WDP4K Pedestal (Black Stainless Steel)	048231019194
WDP4V Pedestal (Graphite Steel)	048231011198
WDP4R Pedestal (Wild Cherry Red)	048231011204
WDP4W Pedestal (White)	048231011211

