

STEEL QUEEN FABRICATED SINKS * DUAL MOUNT





QDLF2233/8

cUPC®

20 gauge, 18-8 stainless steel Topmount or undermount model

Outside sink dimensions 22" FB x 33 1/4" LR

Equal size bowl dimensions 17" FB x 15" LR x 8" DP

36" cabinet - recommended minimum for Kindred topmount method

39" cabinet - recommended minimum for Kindred undermount method

33" cabinet - minimum to accept sink bowls (refer to Table of Contents page)









DBR10S



Lot 87 Ph2 Bowmanville



☐ 4220CFY

Undermount Sink

Product Specs:

- · Vitreous china
- · Front overflow hole
- · Template and mounting hardware supplied

Overall Dimensions (W x D x H):

(OD): 490mm(19¼") x 410mm(16½") x 195mm(7½") (ID): 430mm(17") x 350mm(13¾") x 145mm(5¾")

Compliance Certifications:

Meets or exceeds the following:

- · IAPMO cUPC
- · ASME A112.19.2 / CSA B45.1-2008


Shipping:

Cube

1.53


GW

19 lbs

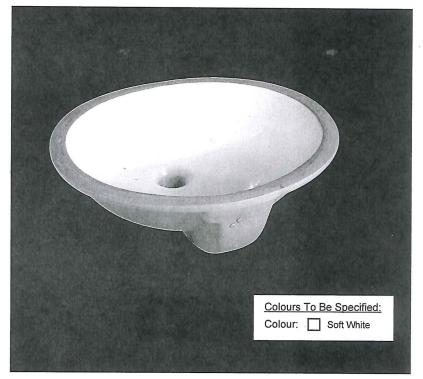

Notes

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

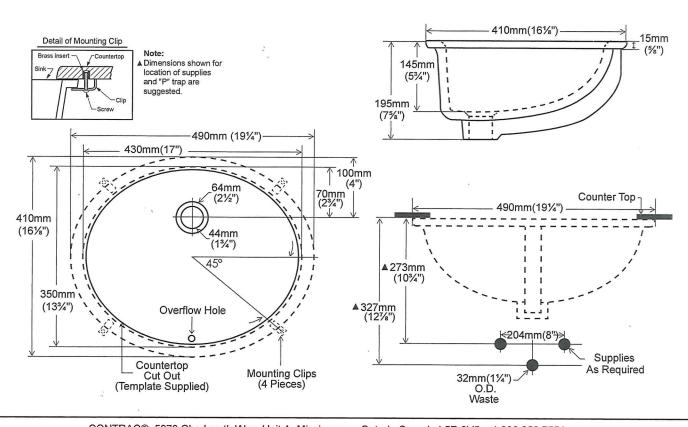

CONTRAC® 5970 Chedworth Way, Unit A, Mississauga, Ontario Canada L5R 3V5 ● 1.888.256.7551 www.contrac.ca

Revised: March 2013

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

Kitchen Master Ensuite UPGRADED EDGE PROFILES

½" BEVEL /

HALF BULLNOSE

FULLBULLNOSE

OGE

DOUBLE OGEE

FEB 1 2 2016

Lot #87Ph2 Bowmanville



