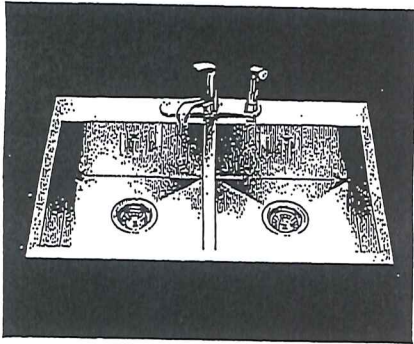


QDLF2031/8

UPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model

Outside sink dimensions
20 9/16" FB x 31 1/4" LR

Equal size bowl dimensions
16" FB x 14" LR x 8" DP

33" cabinet - recommended minimum
for Kindred topmount method

36" cabinet - recommended minimum
for Kindred undermount method

33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

OPTIONAL ACCESSORIES



BGZ145



BGZ145



MBZ16



DBR10S



C10S

Lot 132122



Lot 132 (P2)

21½" RECTANGULAR UNDERMOUNT SINK

contrac

Master Ensuite.

4220CIY Undermount Sink

Ensuite 2.
Ensuite 3/4.

Product Specs:

- Vitreous china
- Front overflow hole
- Template and mounting hardware supplied

Overall Dimensions (W x D x H):

(OD): 545mm(21½") x 355mm(14") x 190mm(7½")
(ID): 485mm(19") x 295mm(11½") x 140mm(5½")


Compliance Certifications:

Meets or exceeds the following:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1-2008

Shipping:

Cube 1.64
GW 25 lbs

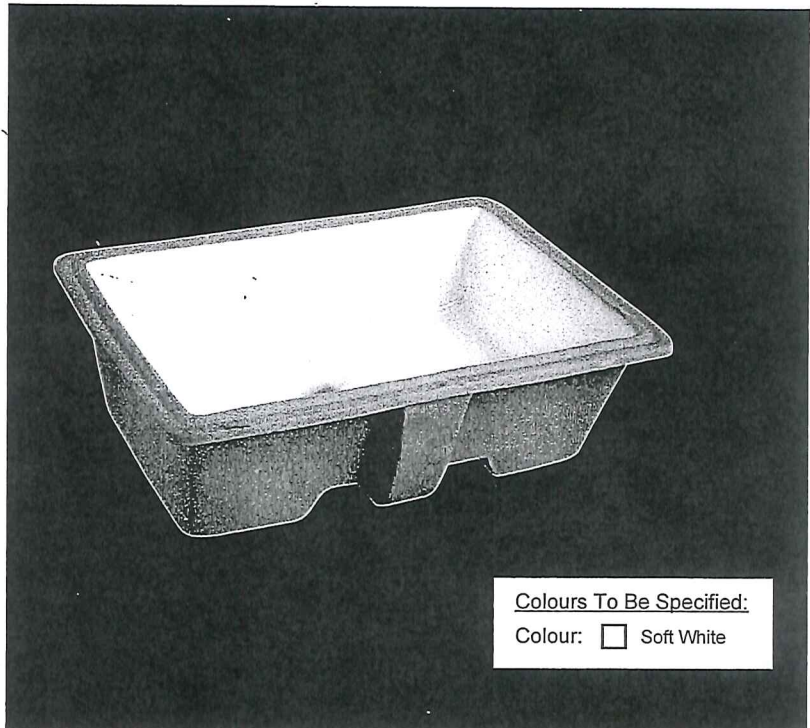


Colours To Be Specified:
Colour: ☐ Soft White



Notes:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.


Detail of Mounting Clip




Note:
▲ Dimensions shown for location of supplies and "P" trap are suggested.

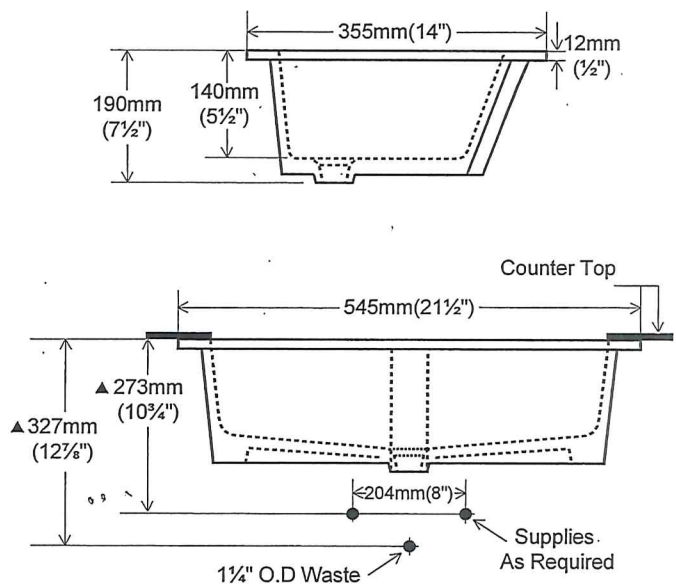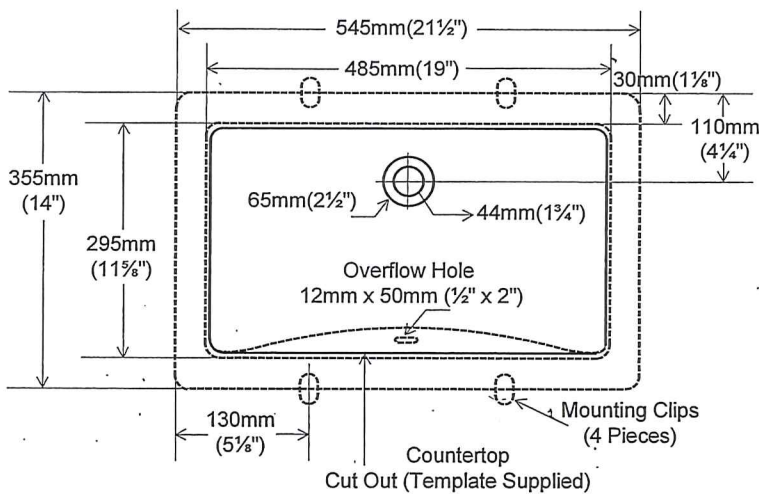

EDGE PROFILE VERIFICATION FORM



Kitchen
Master Ensuite
Ensuite 2
Ensuite 3/4

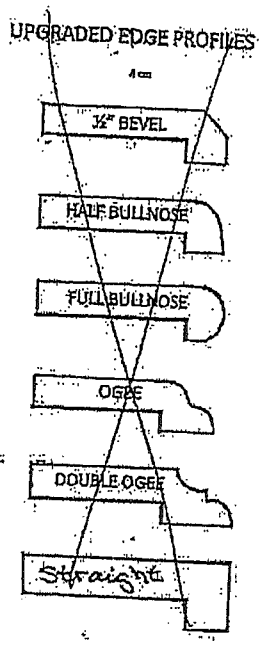

MAY 01 2016

Lot 132 Ph 2
Bowmanville

HB
B