


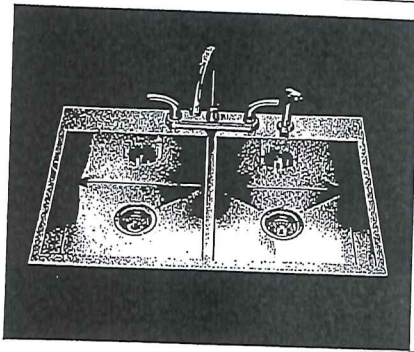




Sutton
Bik 39A-8
Kitchen





QDLF2233/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mod
Outside sink dimensions
22" FB x 33 1/4" LR
Equal size bowl dimensions
17" FB x 15" LR x 8" DP
36" cabinet - recommended minimum
for Kindred topmount method
39" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

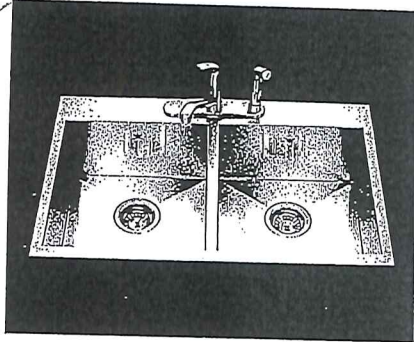



QDLF2031/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mod
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Equal size bowl dimensions
16" FB x 14" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

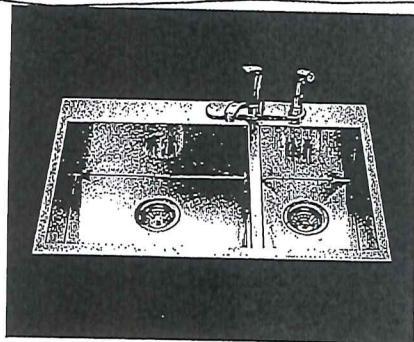

QCLF2031R/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mode
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Large bowl dimensions
16" FB x 18" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

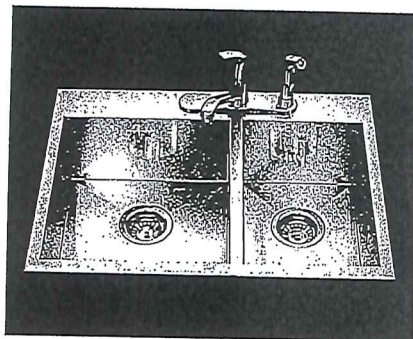


QCLF2027R/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mode
Outside sink dimensions
20 9/16" FB x 27 1/4" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
33" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

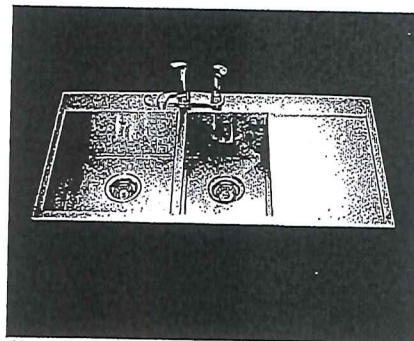

QCLF2039DBR/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 39 3/8" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
45" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

Camerist


Traditional | Transitional | Modern



Single Handle Kitchen Faucet*

Model 7825†
(Use model number only for Chrome finish)


Chrome: \$ 250.73
Other: \$ 372.13



Single Handle Kitchen Faucet with Side Spray in Deck Plate

Model 7835†
(Use model number only for Chrome finish)
• Not available in ORB finish


Chrome: \$ 290.69
Other: \$ 414.20

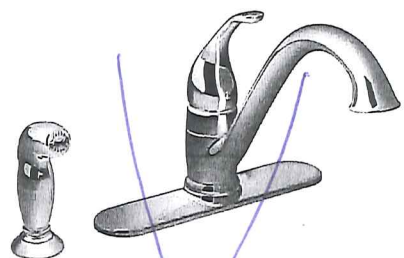

Single Handle Kitchen Faucet with Side Spray (Two or Four Hole Installation)

Model 7840†
(Use model number only for Chrome finish)


Chrome: \$ 290.69
Other: \$ 414.20



Single Handle Pullout Kitchen Faucet*

Model 7545†

Chrome: \$ 472.78
Other: \$ 597.35
White: \$ 529.72



Single Handle Bar/Prep Faucet

Model 4905†
(Use model number only for Chrome finish)

Chrome: \$ 264.36
Other: \$ 367.25

† To order, combine the model number with one of these finish letters:



C



SRS



ORB



W

* Single or Three Hole Installation
± Single Hole Installation Only

(W finish only available in SKU 7545)

MOEN
Buy it for looks. Buy it for life.®





Lot 39A-8
Sutton



Brantford™

Traditional | Transitional | Modern

With intricate architectural features that transcend time, Brantford faucets and accessories give any bath a polished, traditional look.

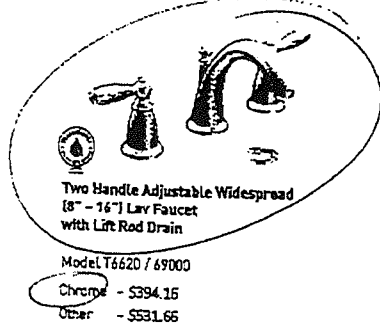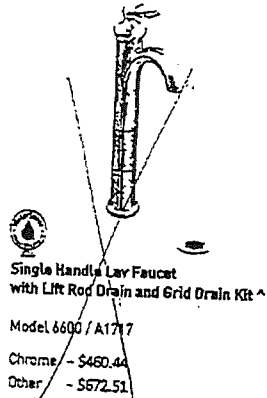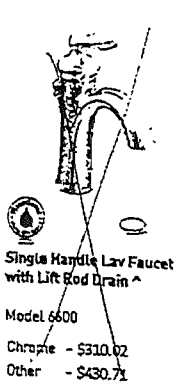

Master Enclosure (2)



To order, combine the model number with one of these finish letter(s): LifeShine® Brushed Nickel (BN) & Oil Rubbed Bronze (ORB). To order Chrome (C) model, use model number only. ^ Deckplate included


FEB 13 2017

Lot 39A-8

[Handwritten signature]


EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

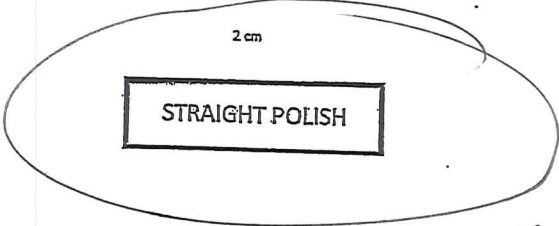



Kitchen & Master Ensuite

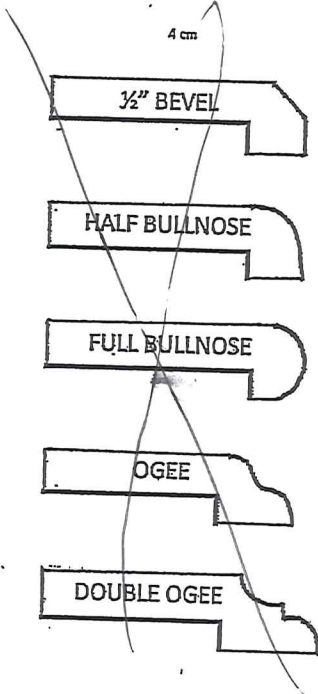UPGRADED EDGE PROFILES



Lot #39A-8
Sutton

Kitchen

INSTALLATION • TOOLS • FAUCET

For installation, you will need:*

- Drill and drill bits
- Teflon tape
- Straight & Phillips screwdriver
- Adjustable wrench
- Work gloves
- Pliers
- Safety glasses
- Knife or scissors

* Additional tools will be required for installation on sinks without a predrilled alternate faucet location.

NOTE: DRILLING OF HOLES MAY BE NEEDED FOR THE FAUCET AND COLD WATER SADDLE VALVE.

CAUTION: DO NOT ATTEMPT TO INSTALL THIS SYSTEM USING DEFECTIVE OR DAMAGED COMPONENTS.

WARNING: IF DRILLING METAL PIPE, TO PROTECT YOURSELF FROM SERIOUS INJURY OR FATAL SHOCK, USE A HAND DRILL OR CORDLESS DRILL TO MAKE THE HOLE. IF YOU USE AN ELECTRIC DRILL, OUTLET MUST BE GROUNDED. ALWAYS USE SAFETY GLASSES OR OTHER EYE PROTECTION WHEN DRILLING TO PREVENT POSSIBLE EYE INJURY FROM FLYING PARTICLES.


Faucet Installation

Select a location to mount the faucet. It is recommended that the faucet be placed in the extra hole provided on most sinks (many times used for a sprayer or a soap dispenser). If this is not possible, an alternative location will be required such as:

- On the counter top next to the sink, positioned to allow the faucet spout to drain into the sink. This requires a 2" clearance around the faucet - both above and under the counter top.
- Another option is to drill a new hole into the sink rim itself, if space allows. ▽

Mounting Faucet

1. From parts bag, locate faucet kit.
2. Disassemble the bottom portion of the faucet.
3. Place faucet into hole of sink and reassemble faucet underneath sink.
4. Proceed to storage tank preparation.

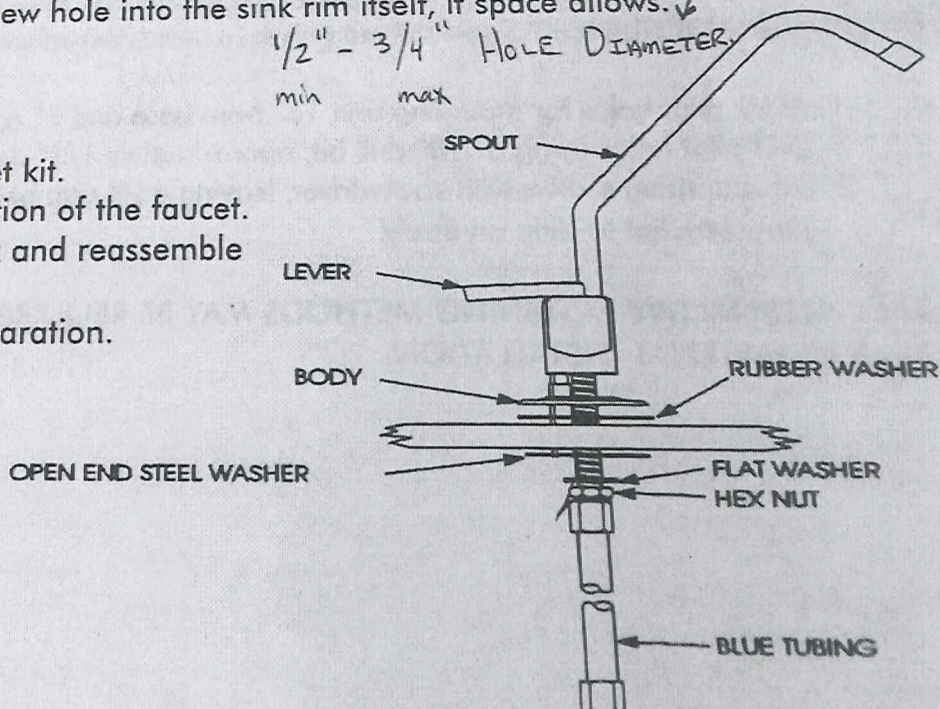

Lnt 39A-8
Sutton

Kitchen