



## The fusion of design and performance

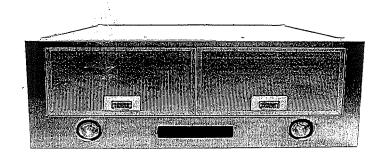

## **INSERTS**

The three speed push button control panel is located on the underside of the machine for easy access and control. The range hood cannot be seen from eye-level, allowing you to arrange your cabinets as though there were no fan, creating a fluid and classy look. Professional grade, machine washable baffle filters efficiently filter the air while bright halogen light bulbs provide all the illumination you'll need. Another innovative desing unique to Cyclone.



Air Flow Volume: 550 CFM Electrical Connection: 120V/60Hz Electrical Consumption: 200 watts

Fan Speed: 1254 RPM Finishes: Stainless Steel

Venting: 6" Round (Top Only) Dimensions: W:28.5" H:11.34" D:10.24"

Sones: Min. at 2 and Max. at 6

| The Model of the Market of the | in Golouia was  |    | SZG. |
|--|-----------------|----|------|
| BX21528  | Stainless Steel | 6" | 28"  |
| BX21534  | Stainless Steel | 6" | 34"  |
|  |                 |    |      |

Cyclone Range Hoods Inc. 110 Silver Star Blvd., Unit#105, Toronto, ON M1V 5A2 CANADA Tel: 416.293.0933 Fax: 416.293.4793 Toll Free: 1.888.293.5662 Website: www.cyclonerangehoods.com

CW PH1