


30" Cooktop


- The cooktop should be installed away from strong draft areas, such as windows, doors, fans or strong heating vents. The cooktop should be located for convenient use in the kitchen.
- Use the countertop opening dimensions that are given with these Installation Instructions. Given dimensions are minimum clearances and provide 0" (0 cm) clearance.
- Grounded electrical supply is required. See "Electrical Requirements" section.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage.

Product Dimensions

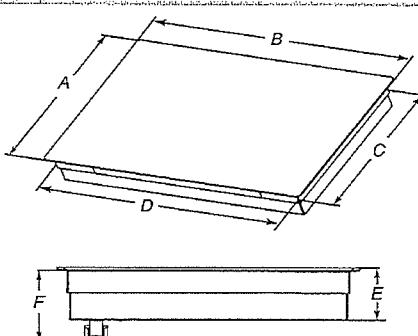


- A. Glass depth - black and white models - 21 3/4" (55.2 cm)
Glass depth - stainless steel models - 22 1/8" (56.4 cm)
- B. Glass width - 24" (60.9 cm) models - 23 13/16" (60.5 cm)
Glass width - 30" (76.2 cm) models - 30 13/16" (76.4 cm)
Glass width - 36" (91.4 cm) models - 36 5/16" (92.3 cm)
- C. Frame depth - 20 5/8" (51.6 cm)
- D. Frame width - 24" (60.9 cm) models - 21 5/8" (55.7 cm)
Frame width - 30" (76.2 cm) models - 29" (73.7 cm)
Frame width - 36" (91.4 cm) models - 34 7/16" (87.5 cm)
- E. Cooktop height with bottom heat shield - 3 7/8" (9.8 cm)
- F. Cooktop height including conduit (located at rear of cooktop, right side) - 5" (12.7 cm)
Cooktop height lighted knobs, including conduit (located at rear of cooktop, right side) - 6 1/16" (15.4 cm)



A. Location of Power Cord (length of power cord is 48" (121.9 cm), including the conduit)

Cabinet Dimensions

IMPORTANT: If installing a range hood or microwave hood combination above cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

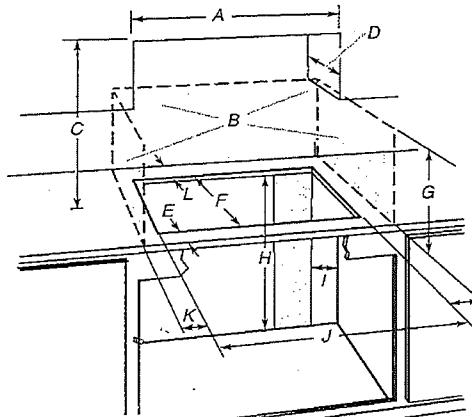

- A. 24" (60.9 cm) on 24" models; 30" (76.2 cm) on 30" models;
+ 26" (91.4 cm) on 36" models
- B. Combustible area above countertop (shown by dashed box above)
 - C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet
(24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
 - D. 13" (33 cm) recommended upper cabinet depth
 - E. 2" (5.1 cm)
 - F. 20 1/2" (52.0 cm) recommended cutout.
Will fit in cutout from 20 5/8"-20 7/8" (51.8-52.2 cm).
 - G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
 - H. Junction box or outlet: 7" (17.8 cm) minimum from top of countertop
 - I. Junction box or outlet: 9" (23.0 cm) maximum from right side of cabinet
 - J. 29 1/4" (74.9 cm) recommended cutout on 30" (76.2 cm) models.
Will fit in cutout from 29 1/4"-29 7/8" (73.8-75.1 cm) on 30" (76.2 cm) models.
 - K. 29 1/4" (74.9 cm) recommended cutout on 36" (91.4 cm) models.
Will fit in cutout from 34 5/8"-35 7/8" (87.8-90.3 cm) on 36" (91.4 cm) models.
 - L. 1 1/2" (3.81 cm) minimum distance to nearest left and right side combustible surface above cooktop

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.
If cabinet has a drawer, a 5 1/4" (14.0 cm) depth clearance from the top of the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

Lot 7 Ph 2
The Brook

~~INSTALLATION INSTRUCTIONS 27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC MICROWAVE/OVEN COMBINATION FLUSH INSTALLATION KIT~~

INSTRUCTIONS D'INSTALLATION POUR TROUSSE D'INSTALLATION EN AFFLEUREMENT D'UN ENSEMBLE FOUR À MICRO-ONDES ÉLECTRIQUE/ FOUR DE 27" (68,6 CM) ET 30" (76,2 CM)

Flush Installation Kit Part Number Ensemble d'installation en affleurement référence	Size and Color Dimensions et couleur	UL Listed for Model Numbers Homologation UL pour les modèles numéro
W11173682	27" (68.6 cm), white	WOC54EC7HW
W11173684	30" (76.2 cm), white	WOC54EC0HW, WOC75EC0HW
W11173686	27" (68.6 cm), black	WOC54EC7HB
W11173692	30" (76.2 cm), black	WOC54EC0HB, WOC75EC0HB
W11173695	27" (68.6 cm), stainless steel	WOC54EC7HS, WOC75EC7HS
W11123004	30" (76.2 cm), stainless steel	WOC54EC0HS, WOC75EC0HS, WOC97EC0HZ, WOCA7EC0HZ
W11173701	27" (68.6 cm), black stainless	WOC75EC7HV
W11173704	30" (76.2 cm), black stainless	WOC75EC0HV
W11123006	30" (76.2 cm), bronze	WOCA7EC0HN

Table of Contents/Table des matières

BUILT-IN OVEN SAFETY	2	SÉCURITÉ DU FOUR ENCASTRÉ	9
INSTALLATION REQUIREMENTS.....	2	EXIGENCES D'INSTALLATION	9
Tools and Parts.....	2	Outillage et pièces.....	9
Location Requirements.....	2	Exigences d'emplacement.....	9
INSTALLATION INSTRUCTIONS.....	4	INSTRUCTIONS D'INSTALLATION.....	11
Prepare Built-In Microwave/Oven Combination.....	4	Préparation de l'ensemble des fours encastrés (micro-ondes/four).....	11
Remove Oven Door.....	4	Dépose de la/des porte du four.....	11
Replace Oven Door.....	5	Réinstallation de la/des porte du four.....	11
Positioning Oven Feet.....	5	Positionnement des pieds du four	12
Replace Plastic Spacers	6	Remplacement des cales d'espacement en plastique	13
Install Oven.....	7	Installation du four.....	14
Install Deflector Kit Bracket	7	Installation du support de la trousse du déflecteur.....	14
Complete Installation	8	Achever l'installation	15

IMPORTANT:

Save for local electrical inspector's use.


IMPORTANT :

À conserver pour consultation par l'inspecteur local des installations électriques.

W11115049A

Lot 7 Ph2
The Brook

Deflector Bracket Dimensions

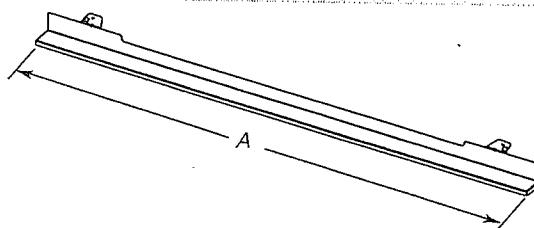


27" (68.6 cm) Models

A. 26^{15/16}" (68.4 cm) overall width

30" (76.2 cm) Models

A. 29^{15/16}" (76.0 cm) overall width

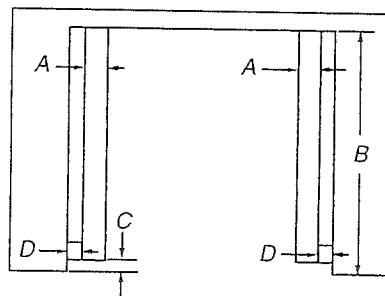

Top View

27" (68.6 cm) Models

A. 1/2" x 2" (13 mm x 51 mm) spacer the entire depth of the cutout*

B. 25" (63.5 cm) depth of cutout

C. 1^{3/8}" (3.5 cm) recess from front of cabinet

D. 1^{1/16}" (17 mm) side cleat*

30" (76.2 cm) Models

A. 1/2" x 2" (13 mm x 51 mm) spacer the entire depth of the cutout*

B. 25" (63.5 cm) depth of cutout

C. 1^{3/8}" (3.5 cm) recess from front of cabinet

D. 1^{1/16}" (17 mm) side cleat*


* Cleats and spacers must be recessed 1^{3/8}" (3.5 cm) from the front of the cabinet.

Cabinet Dimensions - Flush Installations

A 25" (63.5 cm) minimum cutout depth is required.

These dimensions will result in a 1/4" (6 mm) reveal on the top, a 1/4" (6 mm) reveal on the sides, and a 1/8" (3 mm) reveal on the bottom of the wall oven.

The front face of the cleats and platform will be visible and should be treated as a finished surface.

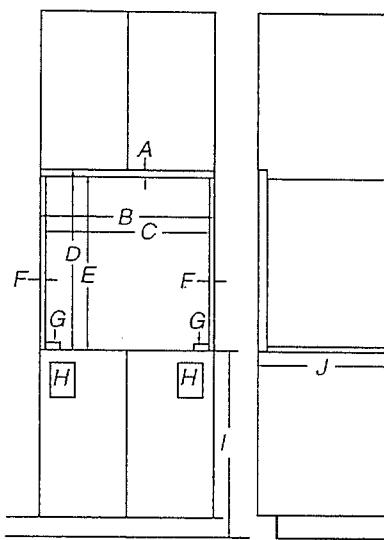

Front View

Side View

27" (68.6 cm) Models

A. 5/8" (16 mm) top cleat*

B. 27^{1/4}" (69.2 cm) minimum width of flush inset cutout

C. 25^{7/16}" (65.7 cm) minimum width of opening

D. 43^{1/8}" (109.5 cm) minimum height of flush inset cutout

E. 42^{1/2}" (107.9 cm) recommended cutout height

F. 1^{1/16}" (17 mm) side cleat*

G. 1/2" x 2" (13 mm x 51 mm) spacer the entire depth of the cutout*

H. Recommended junction box location

I. 4^{5/8}" - 19^{1/4}" (11.7 cm - 48.9 cm) bottom of cutout to floor

J. 25" (63.5 cm) minimum depth of cutout

30" (76.2 cm) Models

A. 5/8" (16 mm) top cleat*

B. 30^{1/4}" (76.8 cm) minimum width of flush inset cutout

C. 28^{7/8}" (73.3 cm) minimum width of opening

D. 43^{1/8}" (109.5 cm) minimum height of flush inset cutout

E. 42^{1/2}" (107.9 cm) recommended cutout height

F. 1^{1/16}" (17 mm) side cleat*

G. 1/2" x 2" (13 mm x 51 mm) spacer the entire depth of the cutout*

H. Recommended junction box location

I. 4^{5/8}" - 19^{1/4}" (11.7 cm - 48.9 cm) bottom of cutout to floor

J. 25" (63.5 cm) minimum depth of cutout

* Cleats and spacers must be recessed 1^{3/8}" (3.5 cm) from the front of the cabinet.

Lot 7 Ph 2
The Brook