

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

UPGRADED EDGE PROFILES

4 cm

1/2" BEVEL

HALF BULLNOSE

FULL BULLNOSE

Ogee


DOUBLE OGEE

Straight

JUN 12 2019

The Ross
Lot 32 Bldg

62


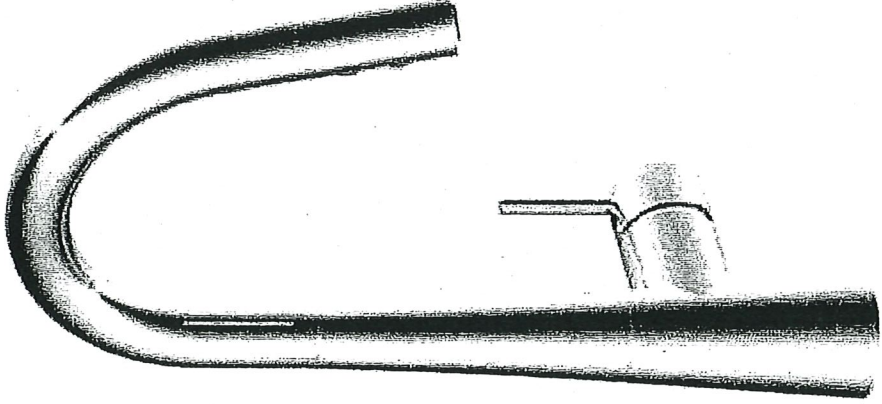


40875 – Bettola Kitchen Faucet with
Pull Down Spray

JUN 12 2019

The Ross
Lot 32 Bldg 6

G.D.

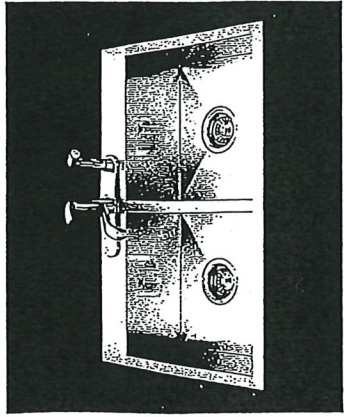

QDLF2031/8 cUPC®

20 gauge, 16-8 stainless steel
Topmount or undermount model

Outside sink dimensions

20 9/16" FB x 31 1/4" LR

Equal size bowl dimensions

16" FB x 14" LR x 8" DP

33" cabinet - recommended minimum

for Kindred topmount method

36" cabinet - recommended minimum

for Kindred undermount method

33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

OPTIONAL ACCESSORIES



BGZ14S



BGZ14S



MBZ16



DBR10S



C10S

The Ross
Lot 32 Bldg G