

SC(B)500 | ALITO Collection









Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel




Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup

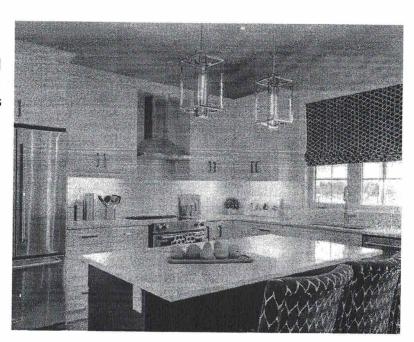

Model	Colour	Ducting	Filters	Size	CFM
SC50024	Stainless Steel	6"	Mesh	24"	550
SC50030	Stainless Steel	6"	Mesh	30''	550
SC50036	Stainless Steel	6"	Mesh	36"	550
SCB50024	Stainless Steel	6"	Baffle	24"	550
X -SCB50030 X	Stainless Steel	6"	Baffle	30"	550
SCB50036	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M15 3J1. Canada.

Toll Free; 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com


Sutton A Block 37A-6


SC(B)500 | ALITO Collection



Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- · 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- · Plug-in connection





Options

· Filters:

SC500 - Quick Release Aluminum

Mesh Filters

SCB500 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

Widths: 24", 30", 36"

Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120V/60Hz

Power Consumption: 240 Watts

Current: 2.0 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

Finishes: Stainless Steel

Ducting: 6" Round

Dimensions: Width: 23 3/4", 30", 36"

Height: 45 1/4" Depth: 17 3/4"

 Noise Level: Min. 2 Sones Max. 6 Sones



Toronto · Vancouver · Boston

www.CycloneRangeHoods.com

authon A Block 37A-6