

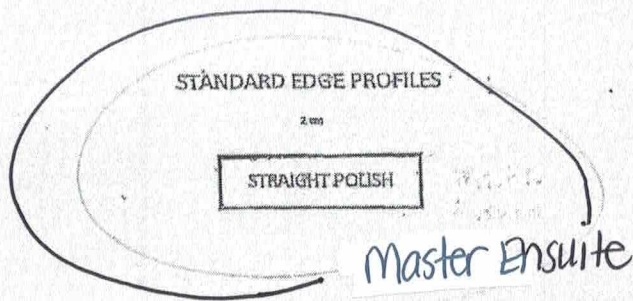
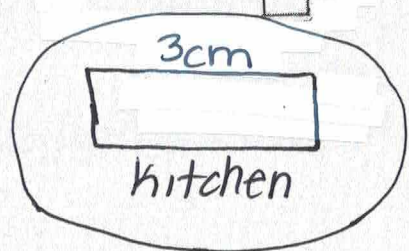






EDGE PROFILE VERIFICATION FORM



UPGRADED EDGE PROFILES

4 cm



Sutton A
LOT# 20A
Model

BLANCO

Sink Specifications

IKON 30 SILGRANIT

Kitchen

| Colour | SKU |
|---------------|--------|
| Anthracite | 401831 |
| Café | 401832 |
| White | 401833 |
| Cinder | 401858 |
| Biscuit | 401863 |
| Metallic Gray | 401865 |
| Truffle | 401866 |
| Concrete Gray | 402262 |



Design and planning tips

- Min cabinet size: 33 in (840 mm)
- Bowl Depth: 9 1/4 in (235.0 mm)
- Apron front height: 10 in (254 mm)
- Rim thickness: 1.5 in (38 mm)

Specifications:

Cabinet template, Installation instructions, 3 1/2" (90 mm)
stainless steel strainer, Limited lifetime warranty

Apron Front depth: 10" (254 mm)

Rim thickness: 1 1/2" (38 mm)

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

This sink requires a custom installation. Exact cutout size is based on installation preferences. Please use actual sink for templating.

To protect from damage, this model should be shipped on a pallet.

Codes/Standards: CSA B45.8-18/ IAPMO Z403-2018

Optional Accessories

| | |
|---------------|--------|
| Floating Grid | 406533 |
| Sink Grid | 406534 |
| CapFlow | 517666 |

Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos:


<https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/>



BLANCO Canada Inc
100 Corporation Drive
Brampton ON L6S 6B5

Tel & Fax
Tel: 905-494-2400 Toll free: 1-877-425-2626
Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation



*There is more than 1 version of this model.
Page down to identify the version you have.*

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Duralock™ Quick connect
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



STō
Single Handle High Arc
Pulldown Kitchen Faucet

Models: S72308 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

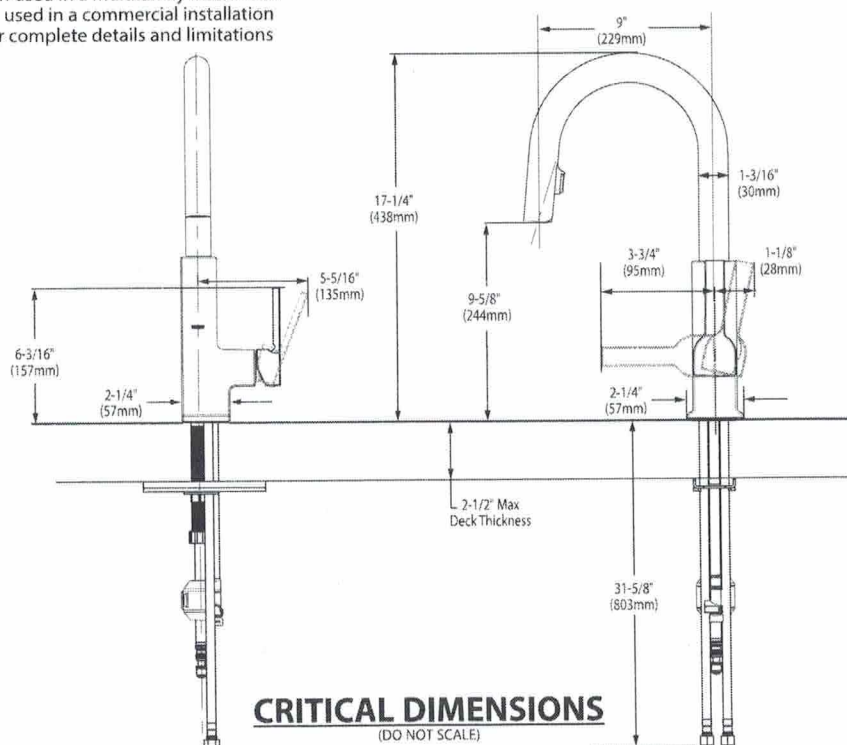

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/17

DESCRIPTION

- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- PowerBoost™ Spray Technology
- Duralock™ quick connect installation
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



Sleek™
Single-Handle High Arc
Pulldown Kitchen Faucet

Models: 7864 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.

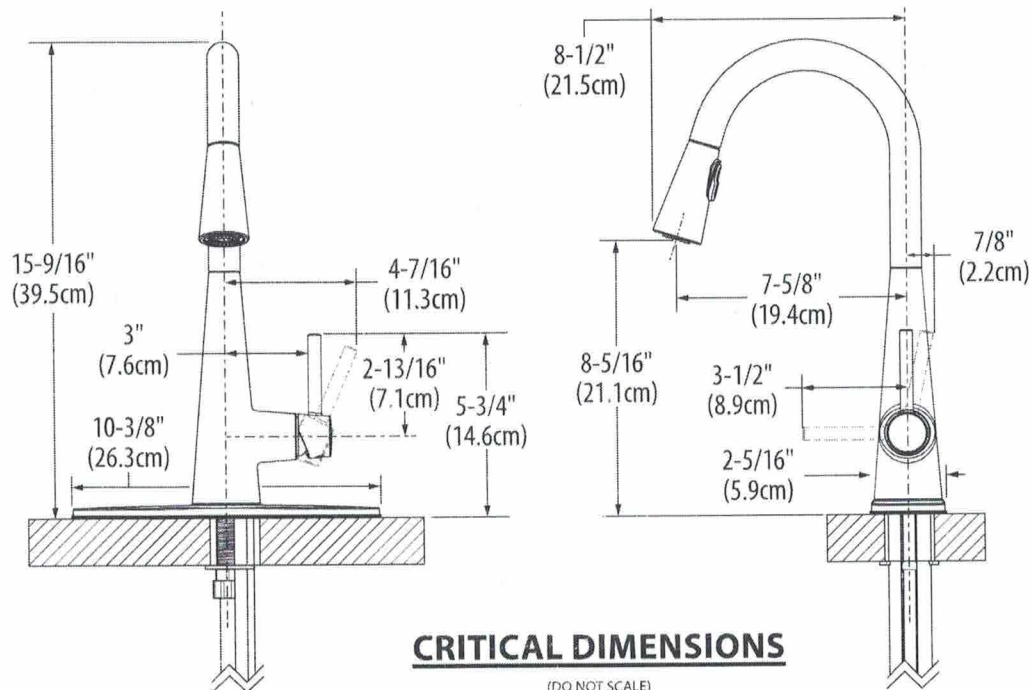

BLANCO

Sink Specifications

QUATRUS R15 LAUNDRY

Colour

brushed finish

SKU

401802

Design and planning tips

- Min cabinet size: 27 in (685 mm)
- Bowl Depth: 12 in (305.0 mm)


Specifications:

Sink template, Mounting clips, Installation instructions, 3 1/2" (90 mm) stainless steel strainers

Sink can be installed as a topmount or undermount.

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Codes/Standards: ASME A112.19.3-2017/ CSA B45.4-17



Optional Accessories

Laundry Rack

401952

CapFlow

517666

Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos:

<https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/>



BLANCO Canada Inc
100 Corporation Drive
Brampton ON L6S 6B5

Tel & Fax

Tel: 905-494-2400 Toll free: 1-877-425-2626

Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

Cabinet - undersink
counter over
Laundry.

LOLAND

21¼" RECTANGULAR DROP-IN SINK

| | |
|-----------|-------------|
| □ 4410BST | Single Hole |
| □ 4440BST | 4" Center |
| □ 4480BST | 8" Center |

PRODUCT SPECS

- Fine fireclay
- Front overflow hole
- Single hole, 4" or 8" faucet center
- Template supplied
- Faucet not included

DIMENSIONS

540mm W x 460mm D x 180mm H
21¼" W x 18¼" D x 7⅛" H


COMPLIANCE CERTIFICATIONS

Meets or exceeds the following:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1
- ANSI A117.1 ADA Guideline
- NBC and OBC Section 3.8 barrier free design and CSA B651 Standard

SHIPPING

Cube 1.97
GW 21 lbs

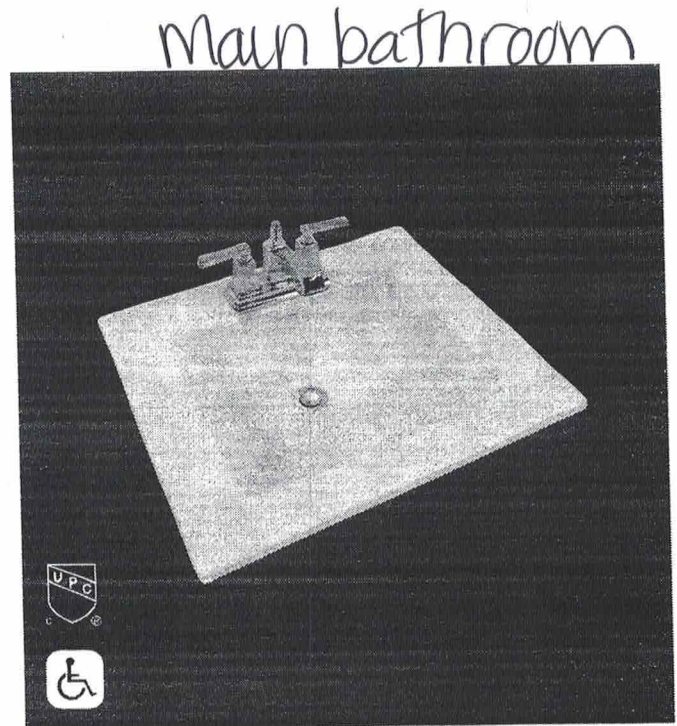



TO BE SPECIFIED

Colour:

- Soft White

NOTES: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Products are designed to comply ADA/ANSI A117.1 Standard and OBC barrier-free requirements. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.

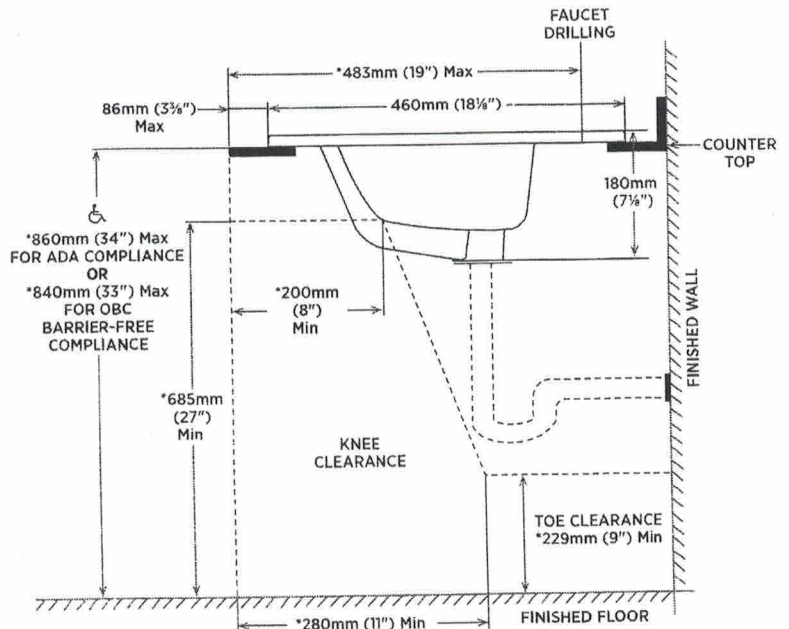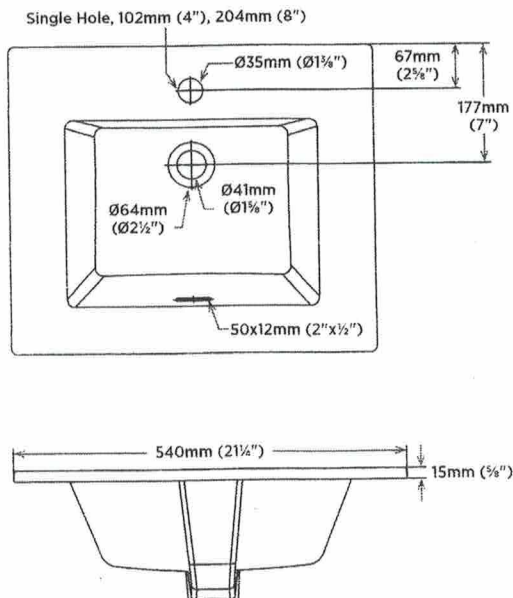

NOTE: * Starred measurements comply with ADA and OBC barrier free accessibility requirements.

REVISED JULY 2019

contrac

CANADA 5970 CHEDWORTH WAY, UNIT B, MISSISSAUGA, ONTARIO, CANADA L5R 4G5 | CONTRAC.CA
USA 6241 NORTHWIND PARKWAY, HOBART, INDIANA, USA 46342 | CONTRAC.US



Buy it for looks. Buy it for life.®

main bathroom Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter spout
- Includes red and blue temperature markings

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^\circ$

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- **ADA**  for lever handle

WARRANTY





- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

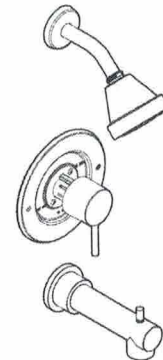

ALIGN™ POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Models: T2191 series - valve trim only
T2192 series - shower trim only
T2193 series - tub/shower trim

Valves: 62300 series
2500 series

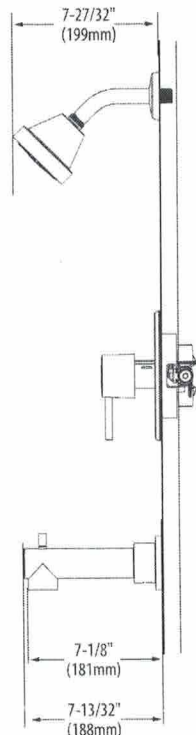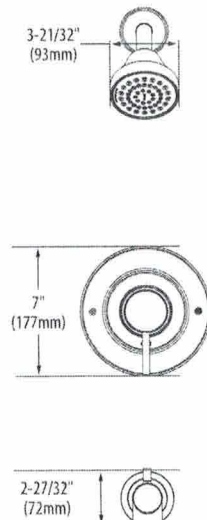

CRITICAL DIMENSIONS (DO NOT SCALE)

MOEN®

main bathroom Specifications

There is more than 1 version of this model.
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes metal pop-up type waste assembly
- Flexible supply lines with 3/8" fittings connect directly to supply stops

OPERATION

- Pivot action lever style handle

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- ° 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets


STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA  for lever handle


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

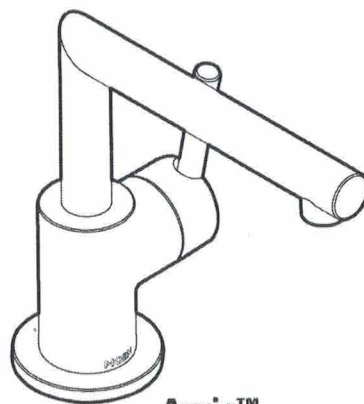

Arris™
Single-Handle Lavatory Faucet
Models: S43001 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE 1-1/4" (32MM) MIN. DIA.

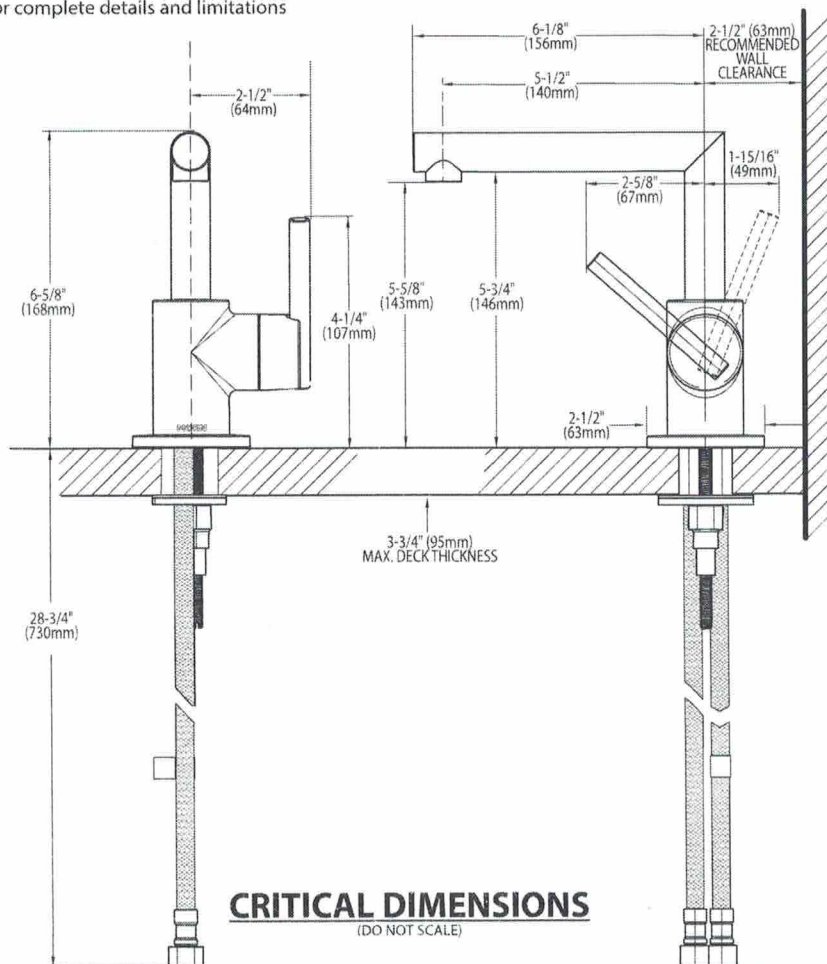


FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com


Spirit 60

Model No: **OV60** [HOME](#) [\(INDEX.PHP\)](#) [BATHTUBS & WHIRLPOOLS](#) [\(TBLIST.PHP\)](#) [SHOWERS](#) [\(TBLIST.PHP?SERS=SHOWER\)](#) [FEATURES](#) [\(L4.PHP\)](#)
[OPTIONS/ACCESSORIES](#) [\(L5.PHP\)](#)

The Spirit 60 is a 60" oval tub, designed for centered taps.

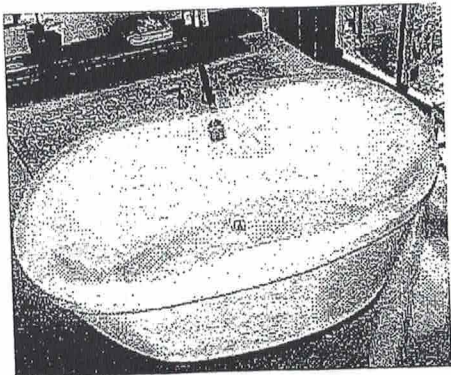

SIZE SHOWN IS LENGTH, WIDTH, HEIGHT
OV60
60" x 34" x 22 5/8ths"
1524mm x 684mm x 575mm




Click to download the PDF (size/specifications)
(images/pdfs/Spirit 60.pdf)

The Spirit 60 is available as a bathtub.

TUBCO
WHIRLPOOLS

Spirit 60

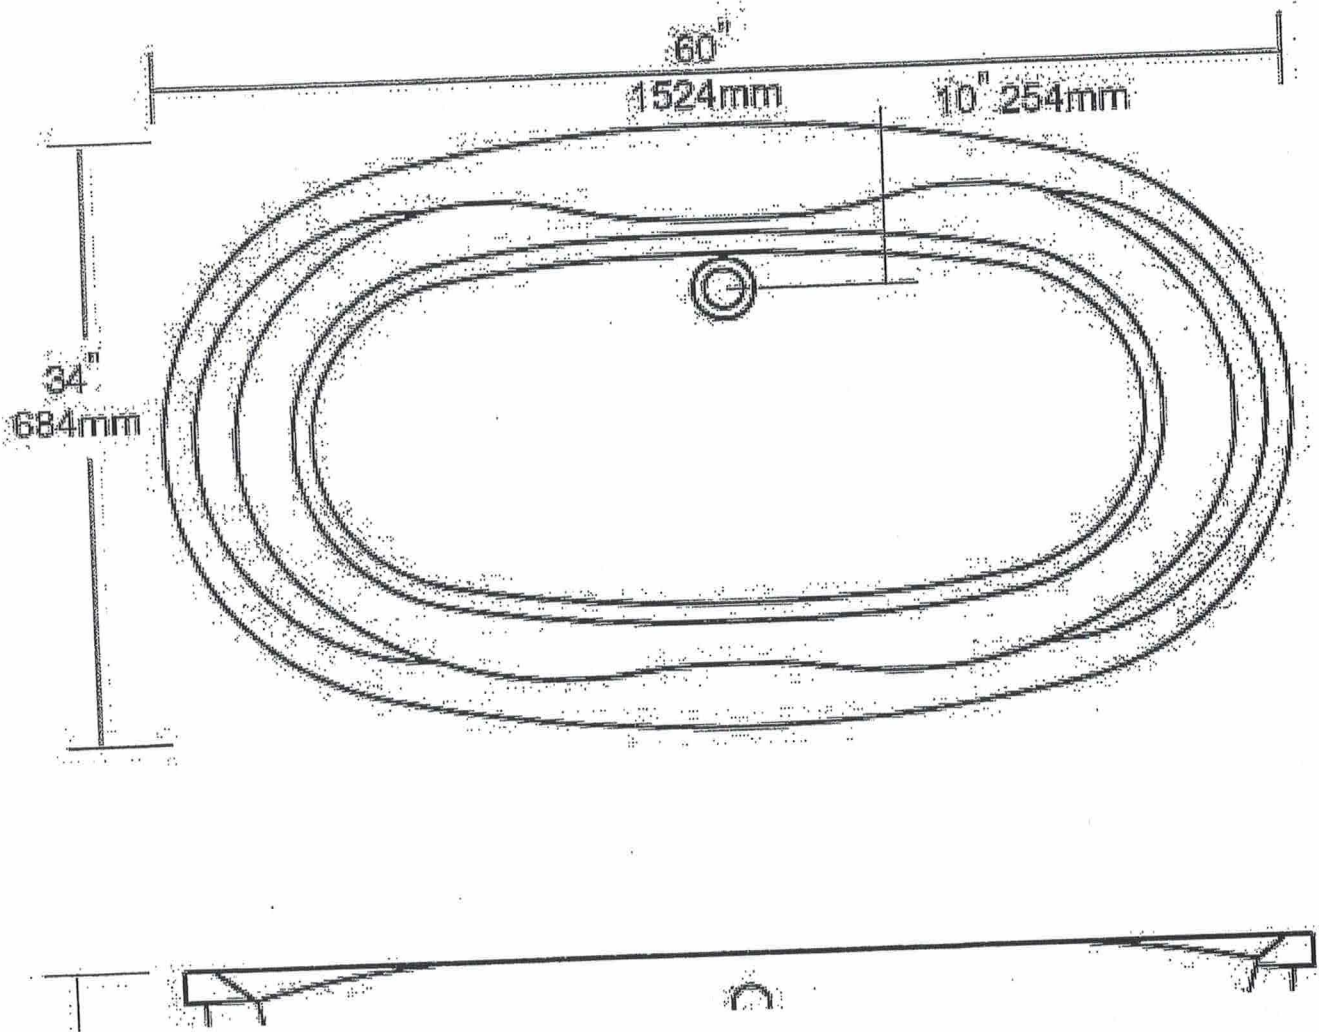

Master Ensuite

EMERY

RECTANGULAR UNDERMOUNT SINK

- 4220CGY Undermount Sink, Soft White
- 4220CGY-077 Undermount Sink, Matte Black
- 4220CGY-088 Undermount Sink, Slate Grey

PRODUCT SPECS:

- Vitreous china
- Front overflow hole
- 8½" Bowl depth
- Template and mounting hardware supplied

DIMENSIONS:

Outer:

545mm W x 355mm D x 210mm H
21½" W x 14" D x 8¼" H

Inner:

495mm W x 305mm D x 160mm H
19½" W x 12" D x 6¼" H


COMPLIANCE CERTIFICATIONS

Meets or exceeds the following:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1

SHIPPING

Cube 1.85
GW 20 lbs

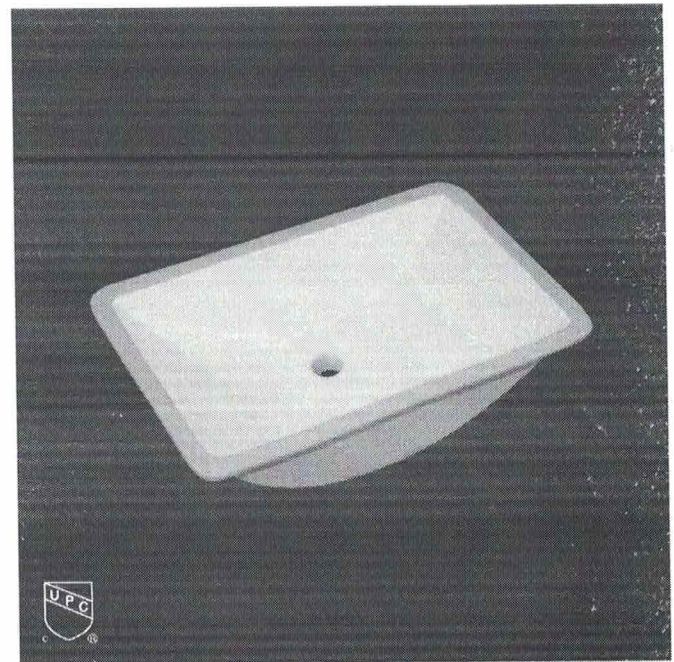


TO BE SPECIFIED

Colour:


- Soft White
- Matte Black
- Slate Grey

NOTES: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.


Master Ensuite

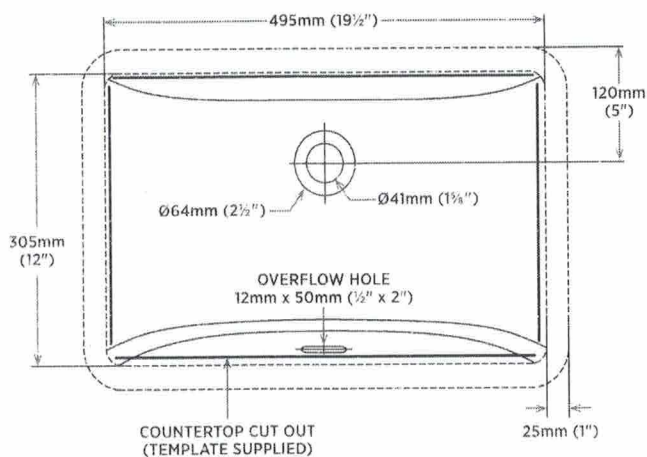

DETAIL OF MOUNTING CLIP



Note:
▲ Dimensions shown for location of supplies and "P" trap are suggested.

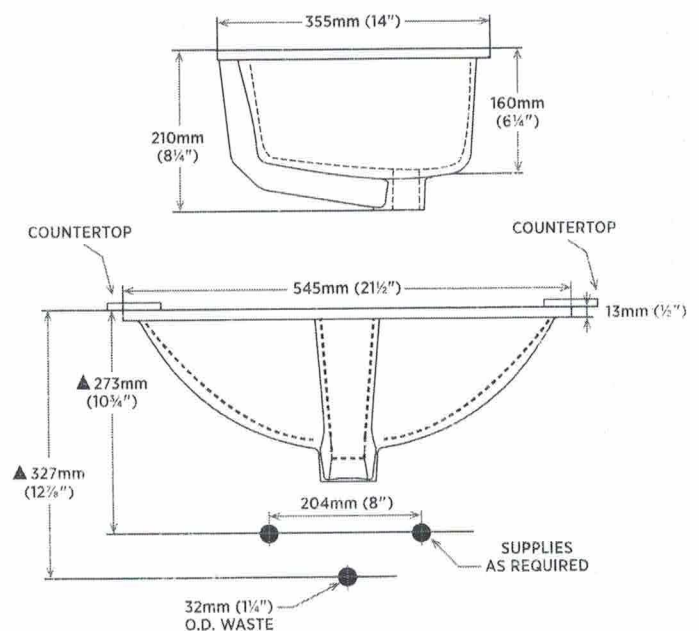

Weymouth® Technical Specification

Towel Bar

YB8418, YB8424


Stock Numbers:

- ☐ **YB8418CH – 18" Towel Bar**
Chrome Finish
- ☐ **YB8424CH – 24" Towel Bar**
Chrome Finish
- ☐ **YB8418BN – 18" Towel Bar**
Brushed Nickel Finish
- ☐ **YB8424BN – 24" Towel Bar**
Brushed Nickel Finish
- ☐ **YB8418ORB – 18" Towel Bar**
Oil Rubbed Bronze Finish
- ☐ **YB8424ORB – 24" Towel Bar**
Oil Rubbed Bronze Finish
- ☒ **YB8418BG – 18" Towel Bar**
Brushed Gold Finish
- ☐ **YB8424BG – 24" Towel Bar**
Brushed Gold Finish
- ☐ **YB8418BL – 18" Towel Bar**
Matte Black Finish
- ☐ **YB8424BL – 24" Towel Bar**
Matte Black Finish

Materials:

Towel Bar Posts are constructed of zinc and **towel bar** is constructed of brass.

Dimensions:

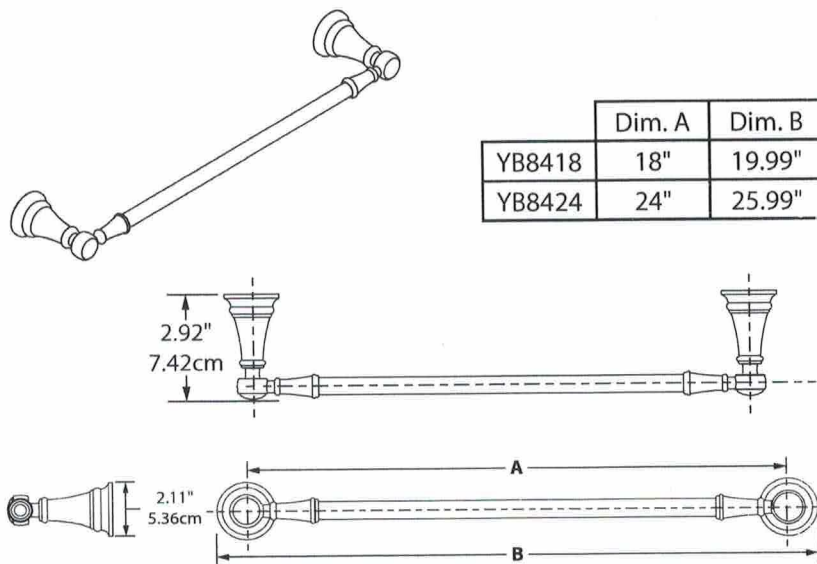

Installation Instructions:

- Position the mounting template on the wall in the desired location. Using a level, align the template and tape it to the wall.
- Remove each mounting post from the body by loosening the setscrew.
- Place each mounting post on the template with notch facing down.
- Mark the 2 large hole locations of each mounting bracket.
- Attach each mounting bracket to the wall, using the wall anchors provided.
- Mount each base on the corresponding mounting bracket. Check and make sure that the base set screw hole(s) are facing down. Assemble a set screw to each base. Use the allen wrench included in hardware kit to tighten each set screw and secure the assembly to the mounting bracket(s).
- Tighten all 4 screws. Do not over tighten.
- Place each post over the mounting plate (setscrew down). Pivoting post with bar to be on left side. Tighten both setscrews.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number: _____ **Towel Bar**
By Moen incorporated

MOEN®

25300 AL MOEN DRIVE • NORTH OLMS TED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.MOEN.COM

© 2019 Moen Incorporated. Moen is a registered trademark and Weymouth is a trademark of Moen Incorporated. All rights reserved.

Weymouth® Technical Specification

Paper Holder

YB8408


Stock Numbers:

- ☐ **YB8408BN – Paper Holder**
Brushed Nickel Finish
- ☐ **YB8408CH – Paper Holder**
Chrome Finish
- ☐ **YB8408ORB – Paper Holder**
Oil Rubbed Bronze Finish
- ☐ **YB8408NL – Paper Holder**
Polished Nickel Finish
- ☒ **YB8408BG – Paper Holder**
Brushed Gold Finish
- ☐ **YB8408BL – Paper Holder**
Matte Black Finish

Materials:

Paper Holder is constructed of zinc.

Dimensions:

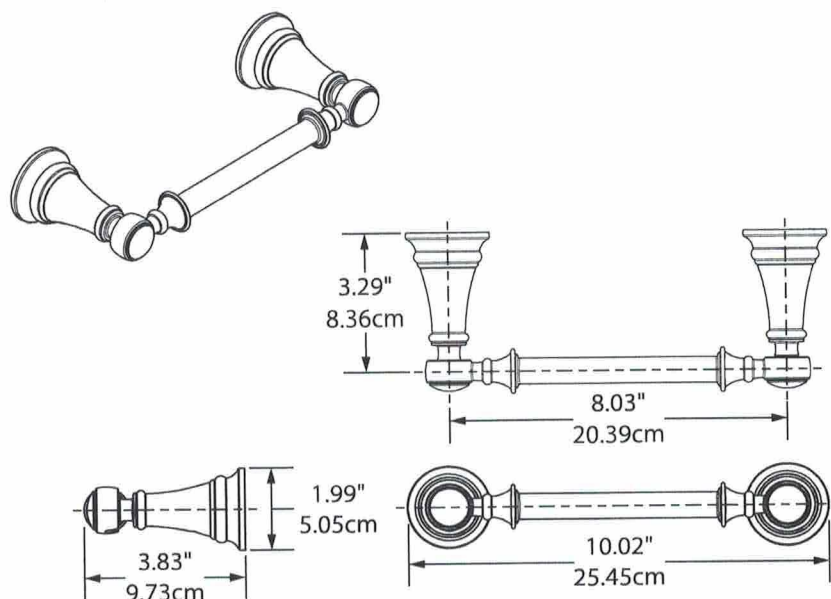

Installation Instructions:

1. Position the mounting template on the wall in the desired location. Using a level, align the template and tape it to the wall.
2. Remove each mounting post from the body by loosening the set screw.
3. Place each mounting post on the template with notch facing down.
4. Mark the 2 large hole locations of each mounting bracket.
5. Attach each mounting bracket to the wall, using the wall anchors provided.
6. Mount each base on the corresponding mounting bracket. Check and make sure that the base set screw hole(s) are facing down. Assemble a set screw to each base. Use the allen wrench included in hardware kit to tighten each set screw and secure the assembly to the mounting bracket(s).
7. Tighten all 4 screws. Do not over tighten.
8. Place each post over the mounting plate (set screw down). Pivoting post with bar to be on left side. Tighten both set screws.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number: _____ **Paper Holder**
By Moen Incorporated

MOEN®

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.MOEN.COM

© 2019 Moen Incorporated. Moen is a registered trademark and Weymouth is a trademark of Moen Incorporated. All rights reserved.

643-39

MOEN®

Specifications

DESCRIPTION

- Duralock™ quick connect system
- Metal construction with various finishes identified by suffix
- 1/2" IPS connections

OPERATION

- Lever and cross style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counter-clockwise to close)

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 - 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE


- 1234™ Duralast™ cartridge
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations


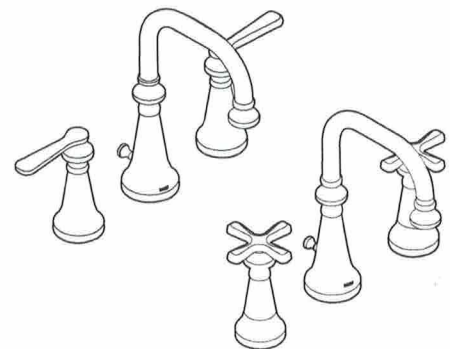


COLINET™ Two-Handle Widespread Lavatory Faucet

Models: TS44102 series (lever handle)
TS44103 series (cross handle)
Valve: 9000, 69000

NOTE: This faucet is designed to be installed through 3 holes— 1 1/8" min. dia.

NOTE: For deck thickness 1-1/2" to 3", use service kit #175709. Valves install through 1-1/4" dia. hole.

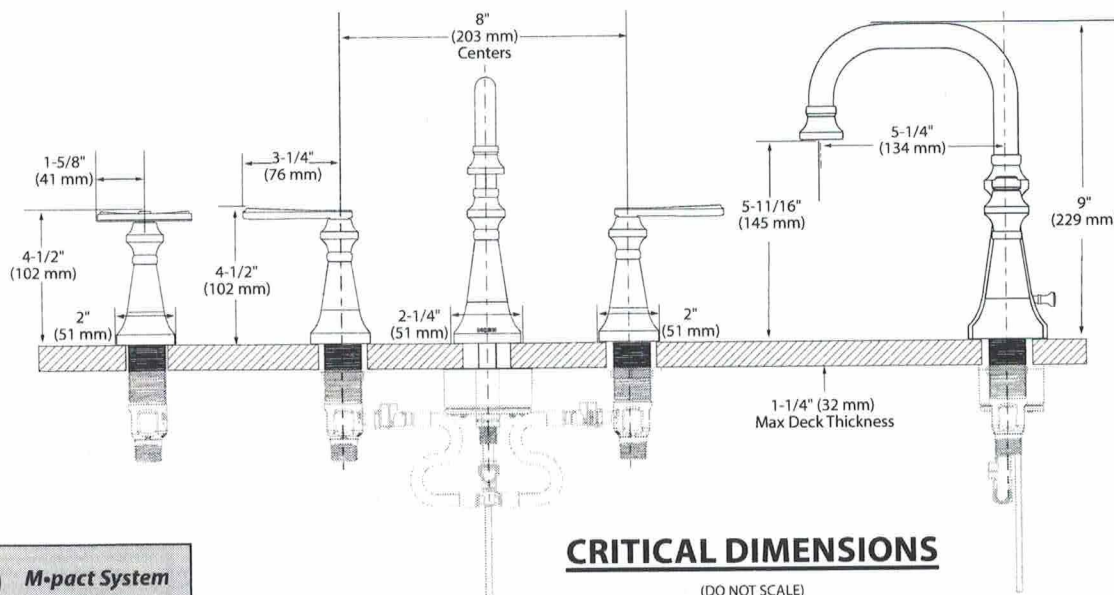

CRITICAL DIMENSIONS

(DO NOT SCALE)

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix

OPERATION


- Lever and cross style handles
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open and (counterclockwise to close)

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- ADA  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations


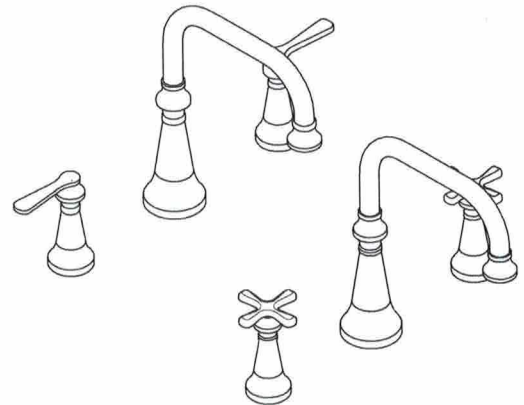


COLINET™
Two-Handle Roman Tub
Faucet Trim

Models: TS44503 series (lever handle)

Models: TS44505 series (cross handle)

Valves: 4792, 4793, 4794,
4796, 4797, 4798

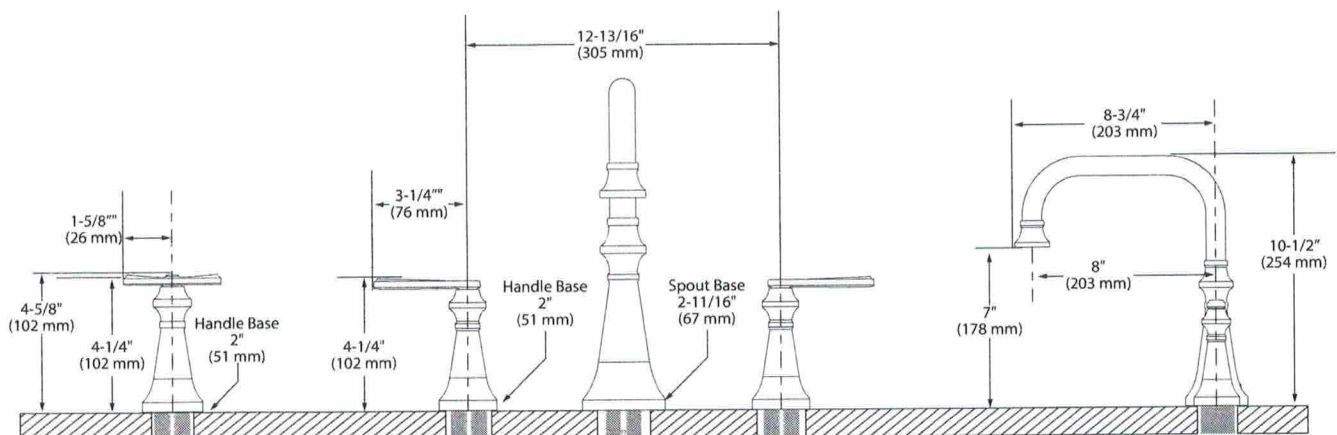

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Shower Only kits include showerhead, arm, flange
- Tub/shower kits include showerhead, arm, flange and diverter spout

OPERATION

- Lever style handle with temperature indicator on the escutcheon.
- Variable volume control handle is lifted in a 0 to 25° arc
- Temperature operates through an 110° arc of handle rotation (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^{\circ}\text{F}$

FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min)
- EP suffix models contain a showerhead limited to 1.75 gpm (6.62 L/min)

CARTRIDGE

- 1213 Ceramic Disk Volume Control Cartridge
- Non-metallic/non-ferrous and plastic material
- Not compatible with back to back installations


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125-1, ASSE 1016 and all applicable requirements reference therein
- Moen's M-CORE™ pressure balance system is capable to meet the pressure and temperature variation requirements of ASSE 1016 when tested as low as 1.5 gpm (5.68 L/min)
- EP suffix models are third party certified to EPA WaterSense®
- ADA ♿ for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation



Visit www.moen.com/support for complete details and limitations

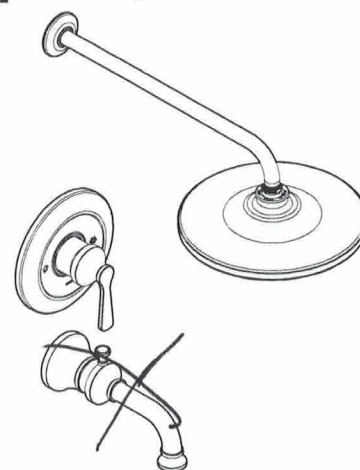

COLINET™ M-CORE™ 3-Series Single-Handle Tub/Shower Trim

Models: UTS344301 series - valve trim
 ✖ UTS344302 series - shower trim
 UTS344303 series - tub/shower trim

Valves: U130 Series and U140 Series

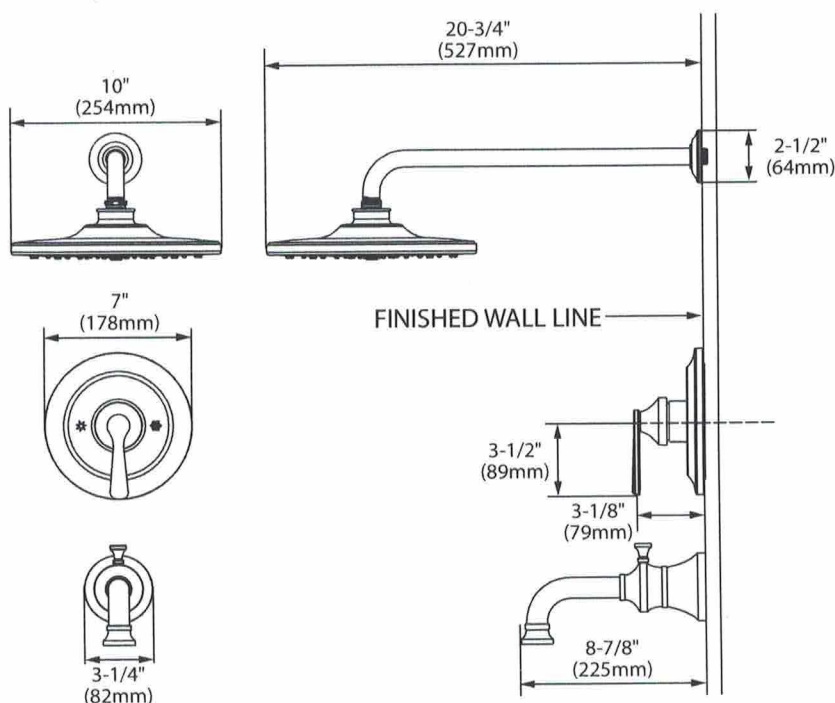

CRITICAL DIMENSIONS

(DO NOT SCALE)

Flara™ Accessories Technical Specification


Double Robe Hook

YB0303

Stock Numbers:

- ☐ YB0303BN – Double Robe Hook
Brushed Nickel Finish
- ☐ YB0303CH – Double Robe Hook
Chrome Finish
- ☐ YB0303NL – Double Robe Hook
Polished Nickel
- ☒ YB0303BG – Double Robe Hook
Brushed Gold

Dimensions:

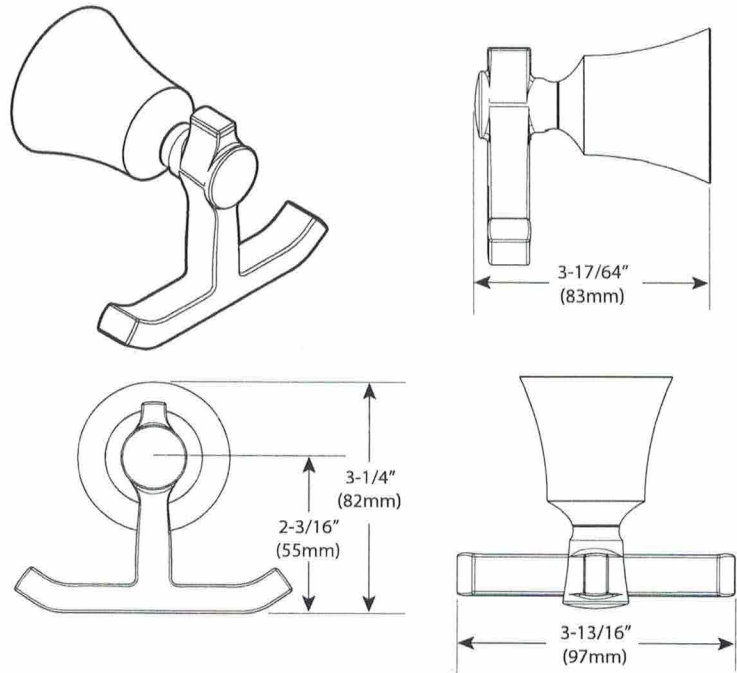

Materials:

Robe Hooks are constructed of zinc.

Installation Instructions:

1. Position the assembled unit on the wall where desired.
2. Using a level, align the provided template and tape it to the wall.
3. Mark the desired hole locations through the template (such as tracing or poking holes).
4. Remove the mounting bracket from the body by loosening the setscrew.
5. Center mounting bracket within the base outline **with "UP" facing you**.
6. Attach the mounting bracket to the wall, using the wall anchors provided.
7. Mount the base on the corresponding mounting bracket. Check and make sure that the base screw hole is facing down. Assemble a set screw to the base. Use the allen wrench included in a hardware kit to tighten the set screw and secure the assembly to the mounting bracket.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number: _____ **Double Robe Hook**
By Moen Incorporated

MOEN®

25300 AL MOEN DRIVE • NORTH OLMDSTED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.MOEN.COM
© 2019 Moen Incorporated