

# Miele

24" Speed Oven - Flush Installation




### PRODUCT DIMENSIONS

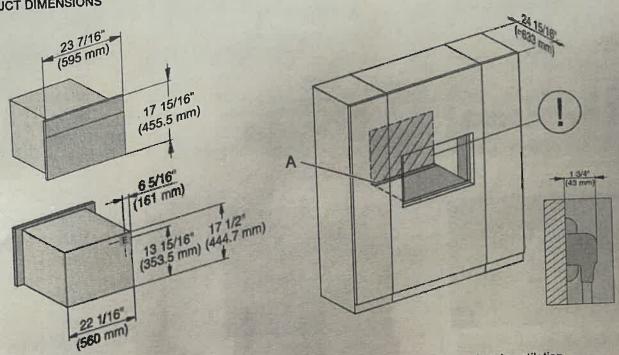


- A Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- ①- Electrical and water supplies are recommended to be placed in adjacent cabinetry.

  Additional cabinet depth is required when placing the electrical and water supplies behind the appliance.

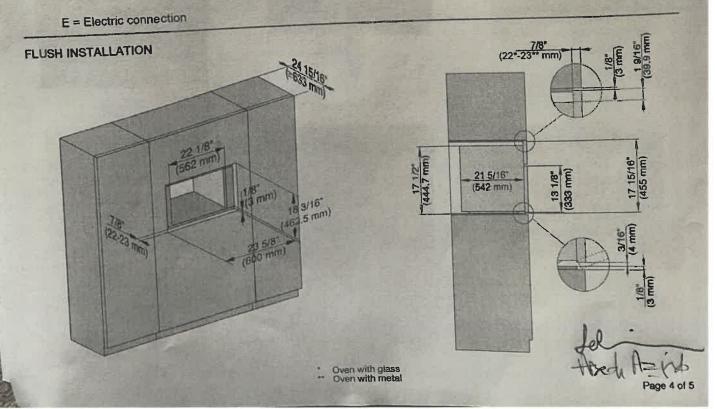


PRODUCT VIEWS

Isometric

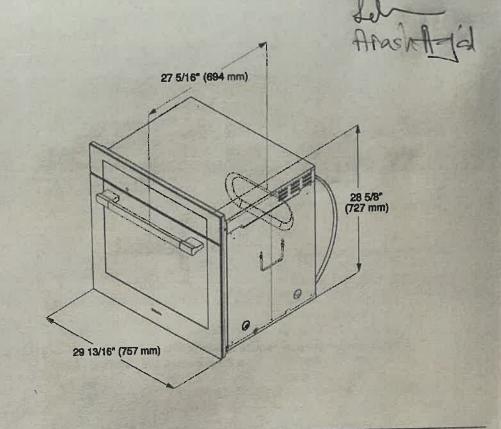


Front

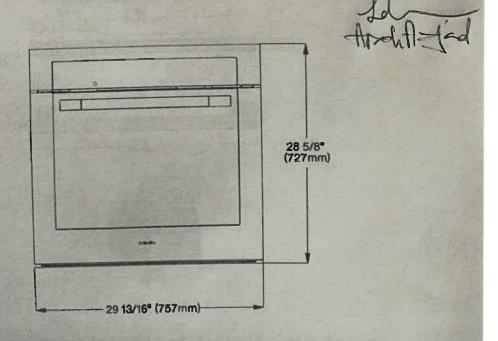


# ContourLine 30" Convection OvenvO molipsymoo "OF Micele H 6580 BP


**PRODUCT VIEWS** 

**Top View** 

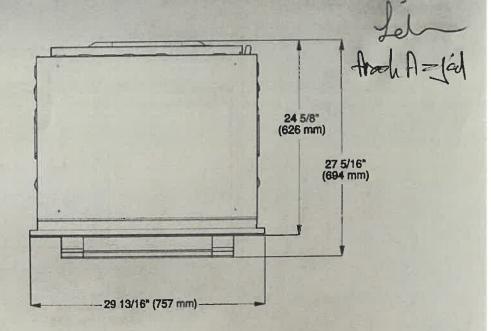

Rear View

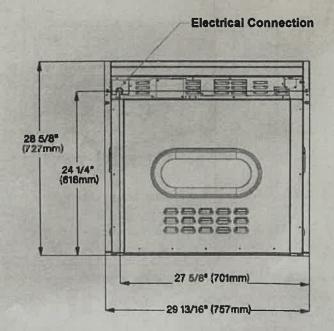

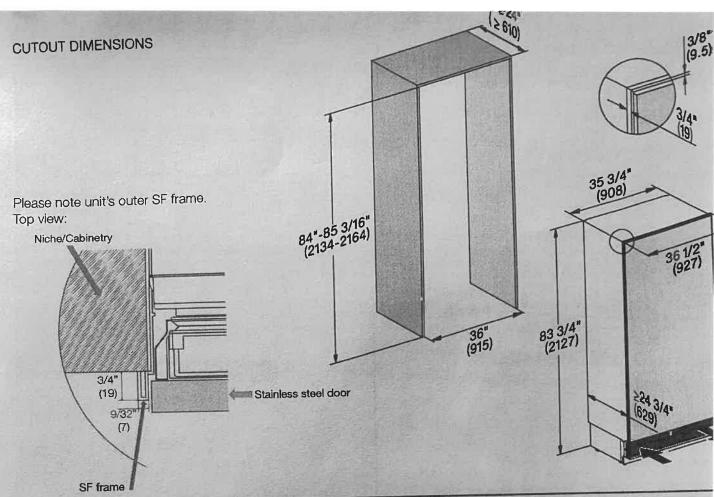



### **CUTOUT DETAILS**

- The electrical connection must not be positioned higher than 9" (228.6 mm) above the floor.
- The 1/4" (6.4 mm) plumbed water connection should not be positioned higher than 2" (50.8 mm) above the floor.

#### Notes:

In case of an emergency the electrical outlet must be easily accessible and must not be concealed behind the appliance.




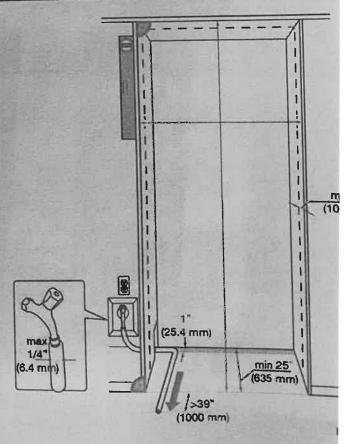


### 30" Trim Kit FBA 6708, FBA 6808

### INSTALLATION SPECIFICATIONS

Installation In Tall Niche




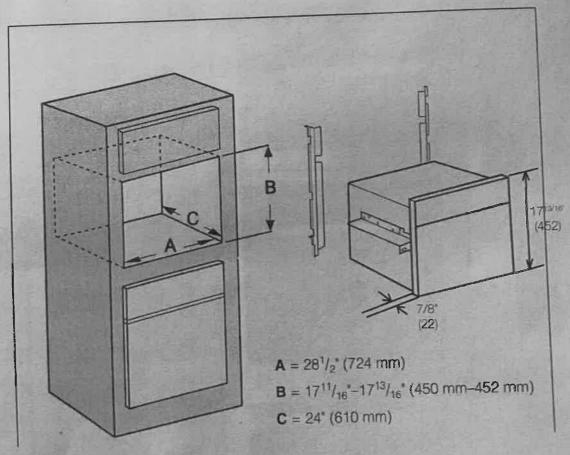


<sup>\*\*</sup> Follow the appliance's insallation directions for plumbing, electrical, and ventalation.

# 30" Trim Kit EBA 6708, EBA 6808




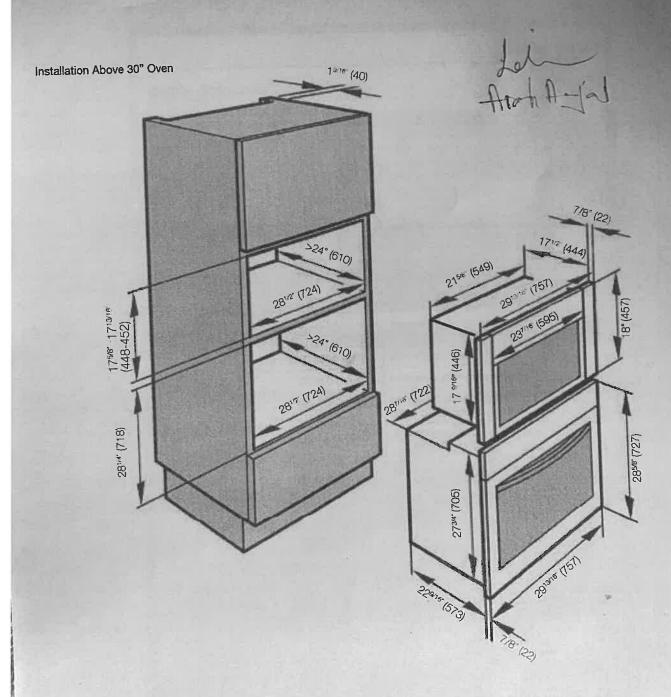

\*\* Follow the appliance's insallation directions for plumbing, electrical, and ventalation.



### Installation

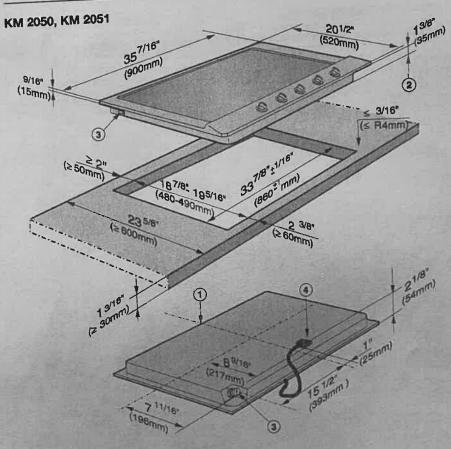


- ① Front
- (2) Installation height
- 3 Gas connection R 1/2" NPT
- (4) Electrical supply connection box with power cord, L = 41 (1,200 mm)

# 36" Classic Wall Ventilation Hood DA 399-7



PRODUCT VIEW

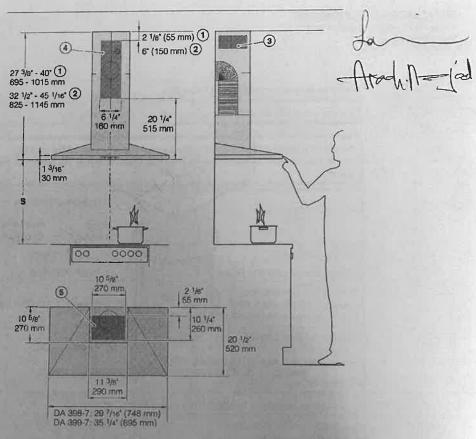

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- (2) Air vent positioned at top for recirculation
- Mounting area (only 
   is required for recirculation ventilation hoods). Wall and celling area for exhaust duct opening and for wall socket installation. Only the wall socket installation is required for recirculation hoods.

Vent collar Ø 6\* (150 mm), with adapter Ø 5\* (125 mm).

PLEASE NOTE: The majority of the weight of the installed ventilation system will be supported by the lower retaining plate. It must be firmly attached to the stud framing behind the drywall. If studs are not available in the required locations, a plywood backing (min. ½" (13 mm) thick) spanning at least two studs must be installed. Failure to adequately support the weight as stated may result in the ventilation system failing off the wall, causing personal injury and property damage.

### 36" Classic Wall Ventilation Hood DA 399-7






#### DA 399-7 FEATURES

The state of the s

- · LED ClearView Lighting
- · Front mounted backlit controls
- Four fan speeds (incl. intensive)
- · Dishwasher-safe metal filters
- · Polished stainless steel logo
- · Stainless steel finish or RAL color options



SPECIFICATIONS		
DA 399-7 - Item 28399750USA		
Overall Unit Width	351/4" (898 mm)	
Overall Unit Height (Air Extraction)	27 <sup>3</sup> / <sub>8</sub> " - 40" (695 - 1015mm)	
Overall Unit Height (Recirculation)	32½" 45½" (825-1145mm)	
Overall Unit Depth	201/2" (520 mm)	
Chimney Dimensions	113/6" (290mm) W x 105/6" (270mm) D	
Fan		
Fan Speeds	4, Including Intensive setting	
Maximum CFM	625 CFM, (Reducing Collar is available to reduce Air flow to less than 400 CFM, more information on page θ)	
Duct		
Recommended Duct Diameter	6" (150 mm)	
Electrical		
Electrical Requirements	120 V, 60 Hz, 15 Amps	
Power Cord	Molded NEMA 5-15 plug, 2.5 ft (0.75m)	
Shipping		
Shipping Weight	55.3 lbs (25.1kg)	
Support		
Call Miele Customer Service	800.999.1360	
Miele Website	*Towww.mieleusa.com	
20/20 Link	ö2020technologies.com	

#### Optional Accessories:



R2000

Reducing collar limits air flow to less than 400 CFM



DUW 20

Installation kit for recirculation mode



DKF12-900

OdorFree Charcoal filter required accessory for recirculation mode



DATK1-760

30" Chimney Extension



DATK2-1000

40° Chimney Extension

#### Work Order





To: CORTINA KITCHENS

Work Order #: 9248

Date Printed: 15-Dec-21

#### Lot: 32 Marbrook - Marbrook - 37-3 ELEV A

Item	Description	Qty.
1 -	UPGRADE HARDWARE THROUGHOUT KITCHEN AS PER COLOUR CHART	1
U547T		
2 -	INSTALL UPGRADE HARDWARE FOR POWDER ROOM CABINETRY AS PER	1
I05T	COLOUR CHART	
3 -	INSTALL UPGRADE HARDWARE FOR MASTER ENSUITE CABINETRY AS PER	1
I571T	COLOUR CHART	
4 -	ADJUSTMENT TO STAGE 1 - BUILT IN APPLIANCES REQUIRING FOLLOWING:	1
A0571		*
E	FLUSH CABINETRY FOR WALL OVEN/MW	7
	ADJUST CABINET OVER FRIDGE	

\$0.00

The Subcontractor agrees to perform the Work and to supply the Extras as may be ordered by the Contractor within the one year period from the date hereof and the price of the Work per dwelling unit listed in pre-determined contract pricing, and the price of each Extra set forth in said contract pricing, which prices are firm and guaranteed from such one year period and are inclusive of all taxes now or herein after imposed whether federal, provincial or municipal, including without limitation all goods and services taxes.

The Subcontractor prior to commencement of the Work with respect to each dwelling unit shall visit the Site-Office and check the specifications, pertaining to each such dwelling unit to ascertain if there are any "changes" or "extras" with respect to such dwelling unit that will effect his Work. If he fails to do this, or if he overlooks any item on the specification that affects his Work it will be his responsibility to rectify his Work and to bear the cost of rectification resulting from his oversight.

For any work orders issued for which there is no conract price subcontractor is to obtain a purchase order from Head Office.

No Invoices will be paid unless the Completion Acknowledgement section below has been signed.

Completed:		
	Site Super	Date