


New Specs

DIMENSIONS

JENNAIR® GAS RANGES
PRODUCT

	48" GAS RANGE
Overall Width (A)	47-7/8" (121.6 cm)
Rear Vent Height (B)	3" (7.6 cm)
Bullnose Height (C)	2-1/8" (5.4 cm)
Control Panel Height (D)	7-1/2" (19.1 cm)
Door Heights (E)	20-11/16" (52.5 cm)
Door Bottom to Handle Top - RISE (F)	20" (50.8 cm)
Door Bottom to Handle Top - NOISE (F)	20-5/8" (52.4 cm)
Secondary Oven Door Width (G)	17-3/4" (45.1 cm)
Main Oven Door Width (H)	29-5/8" (75.2 cm)
Toe Kick Height (I)	6-11/16" (17 cm)

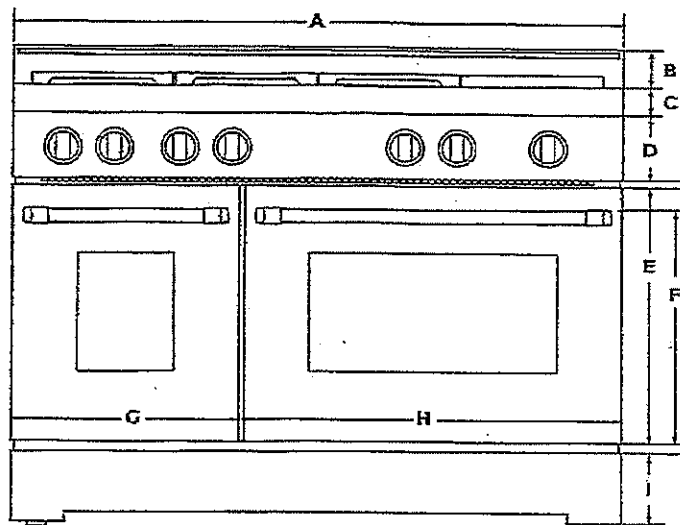


FRONT VIEW


Queensbury
Lot 7

New Specs


Back view

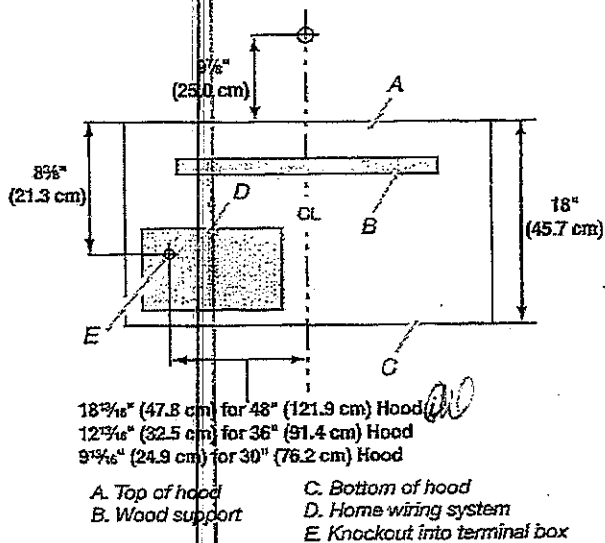

Optional Full-Width Duct Cover Installations

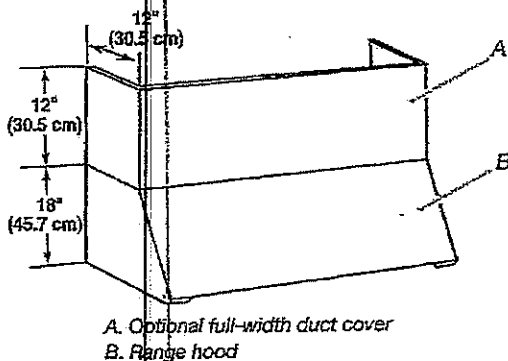

Installation Dimensions

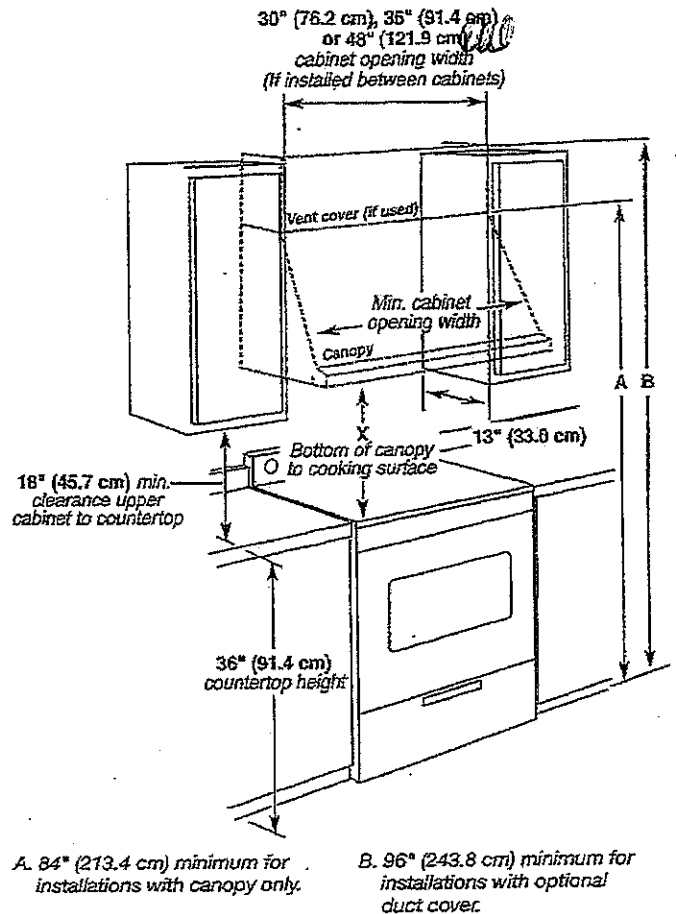

IMPORTANT:


Minimum distance "X": 30" (76.2 cm)
Suggested maximum distance "X": 36" (91.4 cm)

AUG 26 2021

Queensbury
Lot 7

New Specs


Product Dimensions - Double Ovens

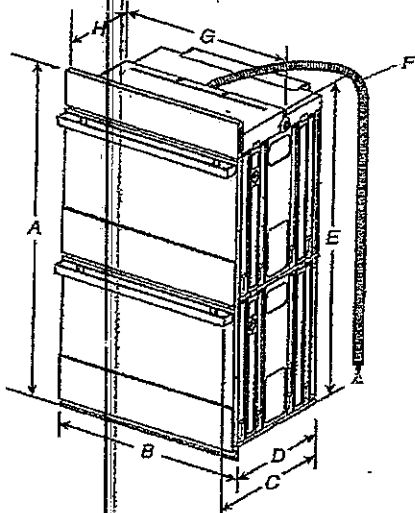

- A. 52³/₁₆" (133 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JJW3830IM - 26³/₁₆" (67 cm)
JJW3830IL - 27¹/₁₆" (69 cm)
- D. 23¹/₁₆" (59.1 cm) max. recessed depth
- E. 49¹/₁₆" (125.1 cm) recessed height
- F. 66" (167.6 cm) flexible conduit length
- G. 28⁷/₁₆" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

Cabinet Dimensions - Double Ovens

Double Ovens Installed in Cabinet

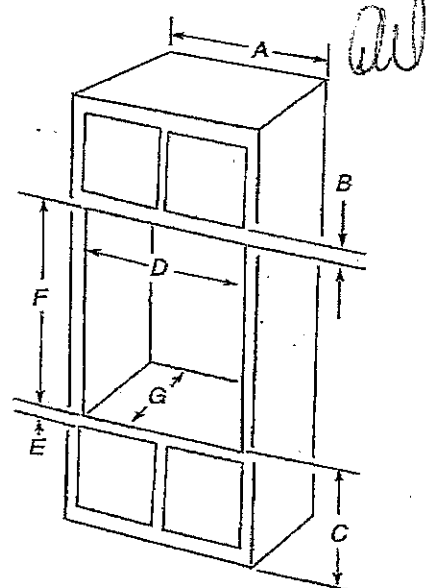

- A. 30" (76.2 cm) min. cabinet width
 - B. 2⁷/₁₆" (5.5 cm) top of cutout to bottom of upper cabinet door
 - C. 14⁹/₁₆" (37.5 cm) bottom of cutout to floor is recommended.
4"-14¹/₄" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
 - D. 28¹/₂" (72.4 cm) cutout width
 - E. 1¹/₂" (3.8 cm) min. bottom of cutout to top of cabinet door
 - F. 50¹/₄" (127.6 cm)* recommended cutout height
 - G. 24" (60.7 cm) cutout depth
- * NOTE: The cutout height can be between 49¹/₂" and 52³/₁₆" (125.2 cm and 132.6 cm) for double ovens.

AUG 26 2021

Queensbury
Lot 7