

Please Use 30" Model

KitchenAid® 7 Microwave/Oven Combination Electric Built-In

PRODUCT MODEL NUMBERS
KEMS30SE KOCE500E KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in performance with the National Electrical Code, ANSI/NFPA 70—latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part I and C22.2 No. 0-M91—latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.




- Models rated from 7.2 to 9.5 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.5 kW and below at 240 volts, 3.6 kW and below at 208 volts require a separate 30-amp circuit.
 - A circuit breaker is recommended.
 - Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
 - Flexible conduit from the oven should be connected directly to the junction box.
 - Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
 - A UL listed or CSA approved conduit connector must be provided.
 - If the house has aluminum wiring, follow the procedure below:
 1. Connect a section of solid copper wire to the pigtail leads.
 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.
- Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage (V)	Amperage (A)	Amperage (A)	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	5000
KOCE507E/KOCE500E	120/208	33	28	6500


*Amperage values noted above are for information purposes only; the units are rated in watts.

PRODUCT DIMENSIONS

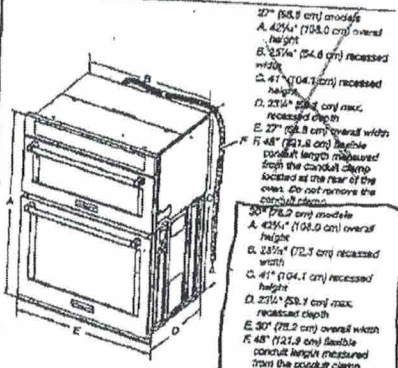

- 27" (68.8 cm) models
- A. 25 1/4" (64.6 cm) overall height
 - B. 25 1/4" (64.6 cm) recessed width
 - C. 41" (104.1 cm) recessed depth
 - D. 23 1/4" (59.3 cm) max. recessed depth
 - E. 27" (68.8 cm) overall width
 - F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
- 30" (76.2 cm) models
- A. 43 1/4" (110.0 cm) overall height
 - B. 23 1/4" (59.3 cm) recessed width
 - C. 41" (104.1 cm) recessed depth
 - D. 23 1/4" (59.3 cm) max. recessed depth
 - E. 30" (76.2 cm) overall width
 - F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions



- 27" (68.8 cm) models
- A. 27" (68.8 cm) min. cabinet width
 - B. 1" (25.4 mm) top of cabinet to bottom of upper cabinet door
 - C. 19 1/4" (49.2 cm) bottom of cabinet to door is recommended.
 - D. 19 1/4" (49.2 cm) min. bottom of cabinet to floor is acceptable.
 - E. 19 1/4" (49.2 cm) min. bottom of cabinet to top of cabinet door
 - F. 41 1/4" (105 cm) recommended cabinet height
 - G. 24" (60.7 cm) cabinet depth
- 30" (76.2 cm) models
- A. 30" (76.2 cm) min. cabinet width
 - B. 1" (25.4 mm) top of cabinet to bottom
 - C. 19 1/4" (49.2 cm) bottom of cabinet to door is recommended.
 - D. 19 1/4" (49.2 cm) min. bottom of cabinet to floor is acceptable.
 - E. 25 1/4" (64.6 cm) min. cabinet width
 - F. 41 1/4" (105 cm) recommended cabinet height
 - G. 24" (60.7 cm) cabinet depth

*NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

AUG 25 2021
 Millwood
 Lot 14 Ph)

Because Ingersoll Corporation believes a continual commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions placed with product. Specifications subject to change without notice. Ref. V19725093a 3/1/21

KitchenAid® 30" (76.2 cm) AND 36" (91.4 cm) ELECTRIC INDUCTION COOKTOP

PRODUCT MODEL NUMBERS

KICU508X KICU509X

ELECTRICAL REQUIREMENTS:

Before You Make the Electrical Connection:

To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

* A 4-wire or 5-wire, single phase, 240 volt, 60 Hz, AC only electrical supply is required on a separate, 50-amp circuit (36" (91.4 cm) models) or 40-amp circuit (30" (76.2 cm) models), fused on both sides of the line.

* The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.

* Locate the junction box to allow as much slack as possible between the junction box and the cooktop so that the cooktop can be moved if servicing becomes necessary in the future.

* Do not cut the conduct. The length of conduct provided is for serviceability of the cooktop.

* A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.


* If the house has aluminum wiring, follow the procedure below:

1. Connect a section of solid copper wire to the pigtail leads.
2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical contractor's manufacturer's recommended procedure. Aluminum-copper connections must conform with local codes and industry accepted wiring practices.

PRODUCT DIMENSIONS

30" (76.2 cm) Cooktop

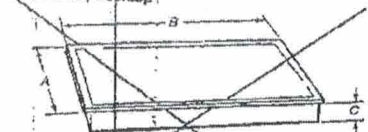

Model JIC4430	Model KICU508
A: 21 1/4" (54.1 cm)	A: 21 1/4" (54.1 cm)
B: 36 1/4" (92.0 cm)	B: 30 1/4" (76.2 cm)
C: 3 1/4" (8.0 cm)	C: 3 1/4" (8.0 cm)


36" (91.4 cm) Cooktop




Model JIC4536 and KICU509
A: 21 1/4" (54.1 cm)
B: 36 1/4" (92.0 cm)
C: 3 1/4" (8.0 cm)

CABINET DIMENSIONS

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

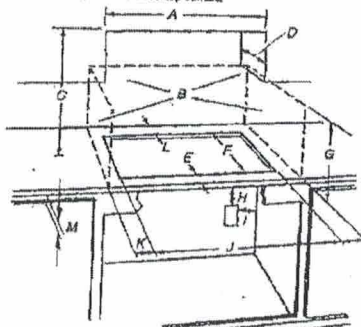

- A: 29 1/2" (75.0 cm) on 30" (76.2 cm) models
- 33 1/4" (84.0 cm) on 36" (91.4 cm) models
- B: Combustible area above countertop (shown by dashed box above)
- C: 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/2" (12.5 mm) flame retardant material covered with not less than No. 28 AWG sheet steel, 0.015" (0.38 mm) stainless steel, or 0.024" (0.61 mm) aluminum or 0.020" (0.51 mm) copper)
- D: 18" (45.7 cm) recommended upper cabinet depth
- E: 2" (5.1 cm)
- F: 19 1/2" (49.0 cm)
- G: 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H: Junction box or outlet: 12" (30.5 cm) minimum from bottom of countertop
- I: Junction box or outlet: 10" (25.4 cm) from right-hand side of cabinet
- J: 29 1/2" (75.0 cm) on 30" (76.2 cm) models
- 33 1/4" (84.0 cm) on 36" (91.4 cm) models
- K: 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L: 1" (2.5 cm) minimum clearance between back wall and countertop
- M: IMPORTANT: For proper ventilation, provide a vent of 1/4" (6 mm) under the countertop, in the front of the cabinet. The ventilation opening is to extend the full length of the cooktop cutout. See the following illustration.



NOTES: After you make the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with side walls wider than the cutout.

If cabinet has a drawer, a 6 1/4" (16 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

Product literature policy includes a continuous commitment to improve our products. We reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref: 301991/000008
42/11

AUG 25 2021
Lot 14 Ph1
LNLWOOD

SW TW

Silhouette



NAPA

24" French door Wine Cooler - DWC047D1BS9PR

PRODUCT FEATURES

French door design

French door design allows for two independently controlled temperature zones and will store up to 42 (750 ml) bottles of wine, 21 bottles in each zone. Precise digital thermostat with LED display can be set and monitored through the door.

- Select a temperature between 50 – 70°C (41°F – 64°F) and the frost-free fan forced cooling maintains and even internal temperature throughout the zone.

Prowave liner

The Prowave liner has re-imagined refrigeration interiors. Designed with extruded ribs on which Proglide shelf system is mounted, this liner offers strain-free and vibrationless stability for your shelves, further increasing their smooth lifespan. Have larger wine bottles you wish to find a home for? Prowave liner allows the storage of larger diameter bottles of wine at the bottom.

Proglide shelving

The Proglide shelving system built in to this unit features 1.57 stainless steel ball bearing glides that allow for full shelf extension and quiet convenience. The extendable tracks are equipped with exclusive anti-vibration technology to safely cradle your finest selection of well-stored wine.

Low E-Glass seals

Low E-Glass seals in the cold in a way that's similar to a thermostat lining. The extremely thin layers of safe and low-impedance materials used in this unit reflect interior temperatures back inside, keeping your drinks properly chilled and protected.

zero-clearance hinge

The zero-clearance hinge system on this unit makes for a flush fit integrated built-in that will blend seamlessly with neighbouring cabinets. Surrounding surfaces will also be safe from bumps and nicks due to these ingeniously designed door joints.

Where some see room for an appliance;
We see room for an experience.

www.silhouetteappliances.com

PRODUCT DESCRIPTION

The Napa is the perfect wine cooler for the stylish entertainer that likes to keep a variety of red and white wine selections on hand and to ensure their favourite varietals are continuously stored at the ideal temperature for their guests' ultimate enjoyment.

SPECIFICATIONS

Dimensions

Width	60cm	23.62"
Depth	55cm	21.65"
Height	87cm	34.6"

Shipping Details

Shipping Depth	72cm	28.35"
Shipping Width	68cm	26.77"
Shipping Height	94cm	37.2"
Shipping Weight	75kg	166.14 Lbs

Capacity

Volume	133 litres	4.7 cu.ft.
Loading Capacity	42 (750ml. Bottle wine)	

Temperature Range

Temperature	Low: 5 °C	High: 17.8 °C
-------------	-----------	---------------

WARRANTY

The Silhouette Professional DWC047D1BS9PR model comes with a 24-month in-home warranty on parts and labour, installation and yearly maintenance (cleaning) of the fridge are not covered under the warranty.

Canby Products Ltd, P.O. Box 1778, Guelph, Ontario Canada N1H 2Z9 (519) 837-0920 FAX: (519) 837-0449
We can make elegance look effortless, but it is always evolving. This is why our specifications may also change along the way, so these specifications are subject to change without notice. MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold.

AUG 25 2021
Trillwood
Lot 14 Ph

SW TW