

Schedule 1: Designer Information

Use one form for each individual who reviews and takes responsibility for design activities with respect to the project.

A. Project Information

Building number, street name		Unit no.	Lot/con.
Municipality VAUGHAN	Postal code	Plan number/ other description	

B. Individual who reviews and takes responsibility for design activities

Name MICHAEL O'ROURKE		Firm HVAC DESIGNS LTD.	
Street address 375 FINLEY AVE		Unit no. 202	Lot/con. N/A
Municipality AJAX	Postal code L1S 2E2	Province ONTARIO	E-mail info@hvacdesigns.ca
Telephone number (905) 619-2300	Fax number (905) 619-2375	Cell number ()	

C. Design activities undertaken by individual identified in Section B. [Building Code Table 3.5.2.1 OF Division C]

☐ House ☐ Small Buildings ☐ Large Buildings ☐ Complex Buildings	☒ HVAC – House ☐ Building Services ☐ Detection, Lighting and Power ☐ Fire Protection	☐ Building Structural ☐ Plumbing – House ☐ Plumbing – All Buildings ☐ On-site Sewage Systems
--	--	---

Description of designer's work
HEAT LOSS / GAIN CALCULATIONS **Model: 42-5**
DUCT SIZING
RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY **Project: KLEINBURG GLEN**
RESIDENTIAL SYSTEM DESIGN per CSA-F280-12

D. Declaration of Designer

I **MICHAEL O'ROURKE** declare that (choose one as appropriate):

(print name)

☐ I review and take responsibility for the design work on behalf of a firm registered under subsection 3.2.4. of Division C, of the Building Code. I am qualified, and the firm is registered, in the appropriate classes/categories.

Individual BCIN: _____

Firm BCIN: _____

☒ I review and take responsibility for the design and am qualified in the appropriate category as an "other designer" under subsection 3.2.5. of Division C, of the Building Code.

Individual BCIN: 19669

Basis for exemption from registration and qualification: O.B.C SENTENCE 3.2.4.1 (4)


☐ The design work is exempt from the registration and qualification requirements of the Building Code.

Basis for exemption from registration and qualification: _____

I certify that:

1. The information contained in this schedule is true to the best of my knowledge.
2. I have submitted this application with the knowledge and consent of the firm.

January 26, 2016
Date


Signature of Designer

NOTE:

1. For the purposes of this form, "individual" means the "person" referred to in Clause 3.2.4.7(1) d) of Division C, Article 3.2.5.1. of Division C, and all other persons who are exempt from qualification under Subsections 3.2.4. and 3.2.5. of Division C.
2. Schedule 1 is not required to be completed by a holder of a license, temporary license, or a certificate of authorization, issued by the Ontario Association of Architects. Schedule 1 is also not required to be completed by a holder of a license to practise, a limited license to practise, or a certificate of authorization, issued by the Association of Professional Engineers of Ontario.

SITE NAME: KLEINBURG GLEN BUILDER: GOLD PARK HOMES										DATE: Jan-16 LO# 65891		WINTER NATURAL AIR CHANGE RATE 0.322 SUMMER NATURAL AIR CHANGE RATE 0.098		HEAT LOSS AT °F. 76 HEAT GAIN AT °F. 16		CSA-F280-12 SB-12 PACKAGE J	
TYPE: 42-5										GFA: 3562		BATH		ENS-2		DEN	
ROOM USE										BED-4		BED-3		BED-2		WIC	
EXP. WALL										12		33		14		9	
CLG. HT.										9		10		9		9	
FACTORS										108		330		126		81	
GRS.WALL AREA										LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN	
GLAZING										63		63		63		63	
NORTH										145		145		145		145	
EAST										105		105		105		105	
SOUTH										6		6		6		6	
WEST										16		16		16		16	
SKYL.T.										44		44		44		44	
DOORS										0		0		0		0	
NET EXPOSED WALL										318		92		318		92	
NET EXPOSED BSMT WALL ABOVE GR										0		0		0		0	
EXPOSED CLG										207		216		207		216	
NO ATTIC EXPOSED CLG										316		328		316		328	
EXPOSED FLOOR										5		44		5		44	
BASEMENT/CRAWL HEAT LOSS										12		260		12		260	
SLAB ON GRADE HEAT LOSS										3		4		3		4	
SUBTOTAL HT LOSS										1030		3122		1147		485	
SUB TOTAL HT GAIN										506		2454		687		162	
LEVEL FACTOR / MULTIPLE										0.20		0.20		0.20		0.20	
AIR CHANGE HEAT LOSS										348		1056		368		164	
AIR CHANGE HEAT GAIN										32		153		43		10	
DUCT LOSS										138		418		153		0	
DUCT GAIN										101		358		170		0	
HEAT GAIN PEOPLE										151		240		1		0	
HEAT GAIN APPLIANCES/LIGHTS										240		1		733		0	
TOTAL HT LOSS BTU/H										733		4595		733		649	
TOTAL HT GAIN x 1.3 BTU/H										1516		5119		2435		223	
TOTAL HT GAIN x 1.3 BTU/H										2160		5119		2435		223	

TYPE: 42-5
SITE NAME: KLEINBURG GLEN

LO # 66891

RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY

COMBUSTION APPLIANCES		9.32.3.1(1)
a)	☒ Direct vent (sealed combustion) only	
b)	☐ Positive venting induced draft (except fireplaces)	
c)	☐ Natural draft, B-vent or induced draft gas fireplace	
d)	☐ Solid Fuel (including fireplaces)	
e)	☐ No Combustion Appliances	

HEATING SYSTEM	
☒ Forced Air	☐ Non Forced Air
☐ Electric Space Heat	

HOUSE TYPE		9.32.1(2)
☒ I	Type a) or b) appliance only, no solid fuel	
☐ II	Type I except with solid fuel (including fireplaces)	
☐ III	Any Type c) appliance	
☐ IV	Type I, or II with electric space heat	
☐	Other: Type I, II or IV no forced air	

SYSTEM DESIGN OPTIONS		O.N.H.W.P.
☐ 1	Exhaust only/Forced Air System	
☐ 2	HRV with Ducting/Forced Air System	
☒ 3	HRV Simplified/connected to forced air system	
☐ 4	HRV with Ducting/non forced air system	
☐	Part 6 Design	

TOTAL VENTILATION CAPACITY		9.32.3.3(1)
Basement + Master Bedroom	2 @ 21.2 cfm	42.4 cfm
Other Bedrooms	3 @ 10.6 cfm	31.8 cfm
Kitchen & Bathrooms	5 @ 10.6 cfm	53 cfm
Other Rooms	6 @ 10.6 cfm	63.6 cfm
Table 9.32.3.A.	TOTAL	190.8 cfm

PRINCIPAL VENTILATION CAPACITY REQUIRED		9.32.3.4.(1)
1 Bedroom	31.8 cfm	
2 Bedroom	47.7 cfm	
3 Bedroom	63.6 cfm	
4 Bedroom	79.5 cfm	
5 Bedroom	95.4 cfm	
More than 5 - Part 6	TOTAL	79.5 cfm

SUPPLEMENTAL VENTILATION CAPACITY		9.32.3.5.
Total Ventilation Capacity	190.8	cfm
Less Principal Ventil. Capacity	95	cfm
Required Supplemental Capacity	95.8	cfm

PRINCIPAL EXHAUST FAN CAPACITY	
Model: VANE 50H	Location: BSMT
95.0 cfm	3.0 sones
☒ HVI Approved	

PRINCIPAL EXHAUST HEAT LOSS CALCULATION			
CFM	ΔT °F	FACTOR	% LOSS
95.0 CFM	X 76 F	X 1.08	X 0.34

SUPPLEMENTAL FANS		NUTONE	
Location	Model	cfm	HVI
ENS	QTXEN050C	50	☒
BATH	QTXEN050C	50	☒
ENS-2	QTXEN050C	50	☒
W/R	QTXEN050C	50	☒

HEAT RECOVERY VENTILATOR		9.32.3.11.
Model: VANE 50H		
95 cfm high	48 cfm low	
66 % Sensible Efficiency	☒ HVI Approved	
@ 32 deg F (0 deg C)		

LOCATION OF INSTALLATION	
Lot:	Concession
Township	Plan:
Address	
Roll #	Building Permit #

BUILDER:	
GOLD PARK HOMES	
Name:	
Address:	
City:	
Telephone #:	Fax #:

INSTALLING CONTRACTOR	
Name:	
Address:	
City:	
Telephone #:	Fax #:

DESIGNER CERTIFICATION	
I hereby certify that this ventilation system has been designed in accordance with the Ontario Building Code.	
Name:	HVAC Designs Ltd.
Signature:	<i>Michael O'Rourke</i>
HRAI #	001820
Date:	January-16

HEAT LOSS AND GAIN SUMMARY SHEET

MODEL: 42-5	BUILDER: GOLD PARK HOMES
SFQT: 3552	LO# 66891
	SITE: KLEINBURG GLEN

DESIGN ASSUMPTIONS

HEATING	°F	COOLING	°F
OUTDOOR DESIGN TEMP.	-4	OUTDOOR DESIGN TEMP.	88
INDOOR DESIGN TEMP.	72	INDOOR DESIGN TEMP. (MAX 75°F)	72

BUILDING DATA

ATTACHMENT:	DETACHED	# OF STORIES (+BASEMENT):	3
FRONT FACES:	EAST	ASSUMED (Y/N):	Y
AIR CHANGES PER HOUR:	3.57	ASSUMED (Y/N):	Y
AIR TIGHTNESS CATEGORY:	AVERAGE	ASSUMED (Y/N):	Y
WIND EXPOSURE:	SHELTERED	ASSUMED (Y/N):	Y
HOUSE VOLUME (ft³):	48448.0	ASSUMED (Y/N):	Y
INTERNAL SHADING:	BLINDS/CURTAINS	ASSUMED OCCUPANTS:	5
INTERIOR LIGHTING LOAD (Btu/h/ft²):	1.27	DC BRUSHLESS MOTOR (Y/N):	Y
FOUNDATION CONFIGURATION	BCIN_1	DEPTH BELOW GRADE:	6.0 ft
LENGTH: 65.0 ft	WIDTH: 34.0 ft	EXPOSED PERIMETER:	198.0 ft

2012 OBC - COMPLIANCE PACKAGE

Component	Compliance Package
	J
Ceiling with Attic Space Minimum RSI (R)-Value	50
Ceiling Without Attic Space Minimum RSI (R)-Value	31
Exposed Floor Minimum RSI (R)-Value	31
Walls Above Grade Minimum RSI (R)-Value	22
Basement Walls Minimum RSI (R)-Value	12
Below Grade Slab Entire surface > 600 mm below grade Minimum RSI (R)-Value	-
Edge of Below Grade Slab ≤ 600 mm Below Grade Minimum RSI (R)-Value	10
Heated Slab or Slab ≤ 600 mm below grade Minimum RSI (R)-Value	10
Windows and Sliding Glass Doors Maximum U-Value	1.8
Skylights Maximum U-Value	2.8
Space Heating Equipment Minimum AFUE	0.94
HRV Minimum Efficiency	60%
Domestic Hot Water Heater Minimum EF	0.67

INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE




Air Infiltration Residential Load Calculator

Supplemental tool for CAN/CSA-F280

Weather Station Description				
Province:	Ontario ▼			
Region:	Vaughan (Woodbridge) ▼			
Weather Station Location:	Open flat terrain, grass ▼			
Anemometer height (m):	10			
Local Shielding				
Building Site:	Suburban, forest ▼			
Walls:	Heavy ▼			
Flue:	Heavy ▼			
Highest Ceiling Height (m):	6.71			
Building Configuration				
Type:	Detached ▼			
Number of Stories:	Two ▼			
Foundation:	Full ▼			
House Volume (m ³):	1371.9			
Air Leakage/Ventilation				
Air Tightness Type:	Present (1961-) (ACH=3.57) ▼			
Custom BDT Data:	ELA @ 10 Pa. ▼ 716.42 cm ² 3.57 ACH @ 50 Pa			
Mechanical Ventilation (L/s):	Total Supply:		Total Exhaust:	
	0		0	
Flue Size				
Flue #:	#1	#2	#3	#4
Diameter (mm):	0	0	0	0
Natural Infiltration Rates				
Heating Air Change Rate (ACH/H):			0.322	
Cooling Air Change Rate (ACH/H):			0.098	

Residential Foundation Thermal Load Calculator


Supplemental tool for CAN/CSA-F280

Weather Station Description		
Province:	Ontario	▼
Region:	Vaughan (Woodbridge)	▼
Site Description		
Soil Conductivity:	Normal conductivity: dry sand, loam, clay	▼
Water Table:	Normal (7-10 m, 23-33 Ft)	▼
Foundation Dimensions		
Floor Length (m):	19.8	 Insulation Configuration
Floor Width (m):	10.4	
Exposed Perimeter (m):	0	
Wall Height (m):	2.7	
Depth Below Grade (m):	1.8	
Window Area (m ²):	1.7	
Door Area (m ²):	1.9	
Radiant Slab		
Heated Fraction of the Slab:	0	
Fluid Temperature (°C):	33	
Design Months		
Heating Month	1	
Foundation Loads		
Heating Load (Watts):	2485	

60.4

2.6 161.38

161.18

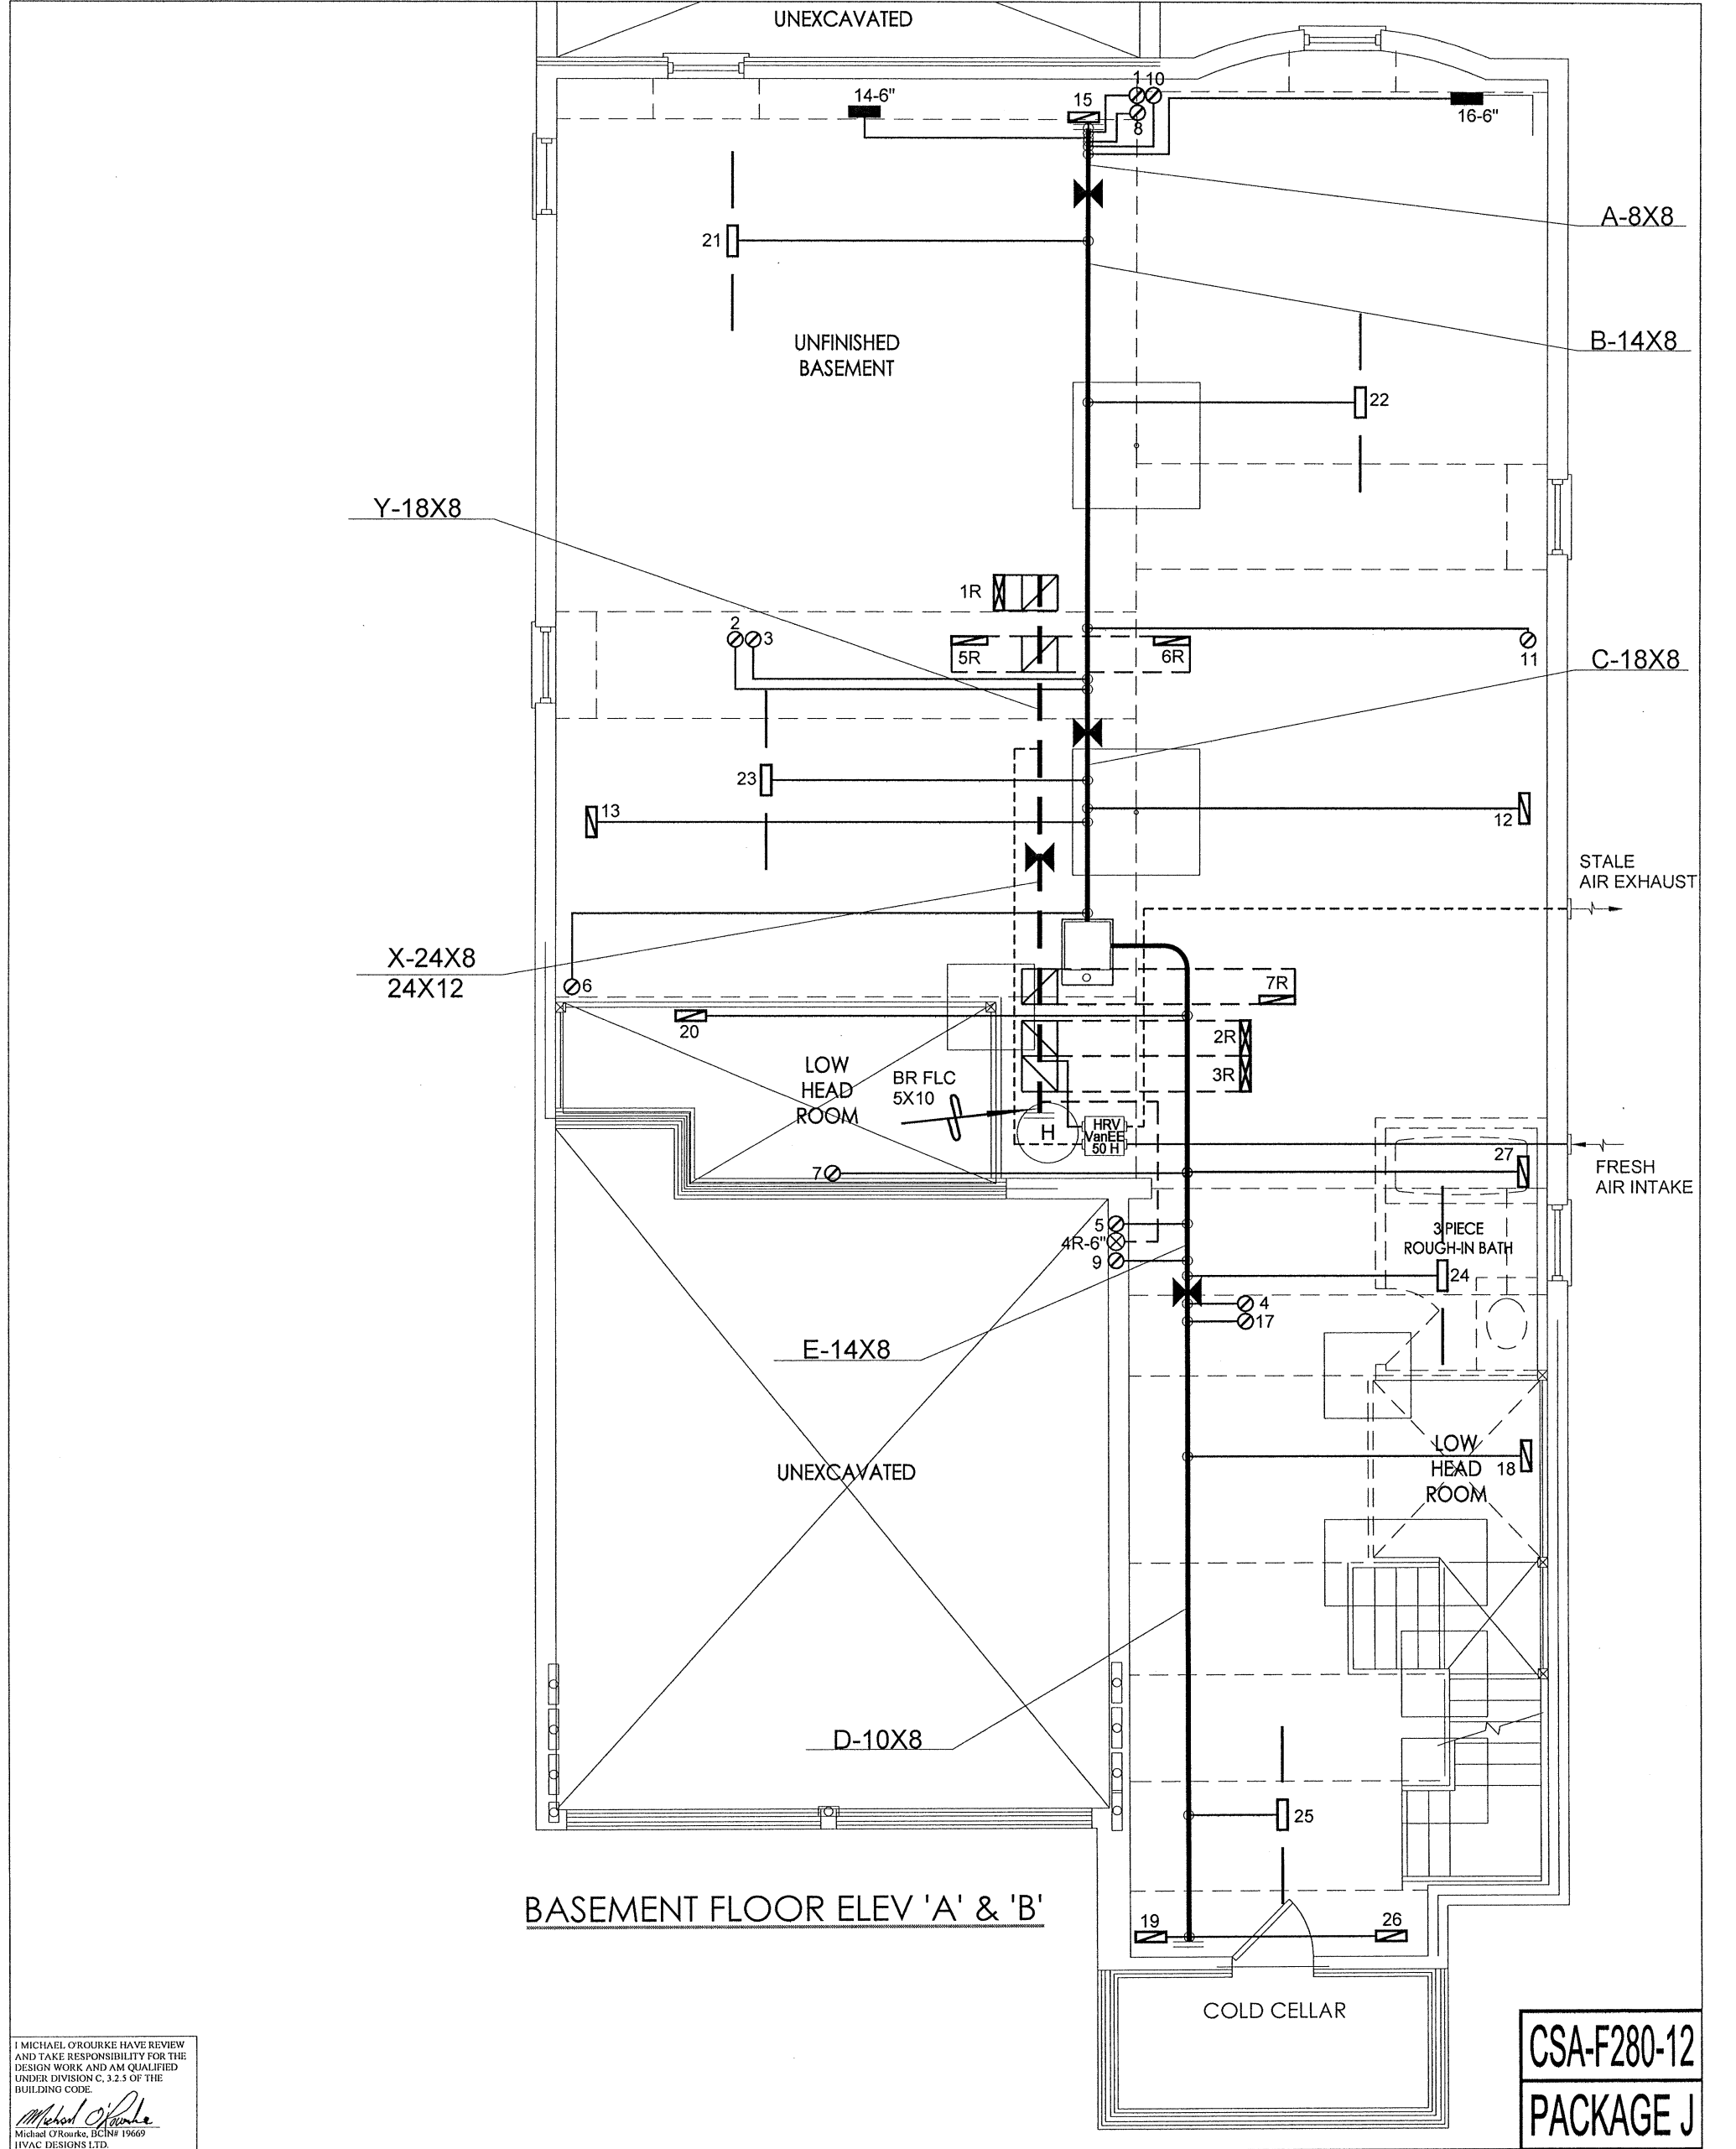

I MICHAEL O'ROURKE HAVE REVIEW
AND TAKE RESPONSIBILITY FOR THE
DESIGN WORK AND AM QUALIFIED
UNDER DIVISION C. 3.2.3 OF THE
BUILDING CODE.


Michael O'Rourke
Michael O'Rourke, DCIN# 19669
HVAC DESIGNS LTD.

CSA-F280-12
PACKAGE J

HVAC LEGEND								3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.		
	FLOOR SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.		
	FLOOR SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave - Unit 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services	HEAT LOSS 66455 BTU/H UNIT DATA		# OF RUNS S/A R/A FANS			Sheet Title BASEMENT HEATING LAYOUT			
Project Name KLEINBURG GLEN VAUGHAN, ONTARIO			MAKE LENNOX		3RD FLOOR	S/A	R/A			FANS	
			MODEL EL195UH090XE48C		2ND FLOOR	12	4			4	
			INPUT 88 MBTU/H		1ST FLOOR	10	3	2			
			OUTPUT 84 MBTU/H		BASEMENT	5	1	0			
42-5		3552 sqft		COOLING 3.5 TONS		ALL S/A DIFFUSERS 4 "x10" UNLESS NOTED OTHERWISE ON LAYOUT. ALL S/A RUNS 5'Ø UNLESS NOTED OTHERWISE ON LAYOUT. UNDERCUT DOORS 1" min. FOR R/A			Date	JAN/2016	
				FAN SPEED 1255 cfm @ 0.5" w.c.					Scale	3/16" = 1'-0"	
									BCIN# 19669		
							LO#	66891			

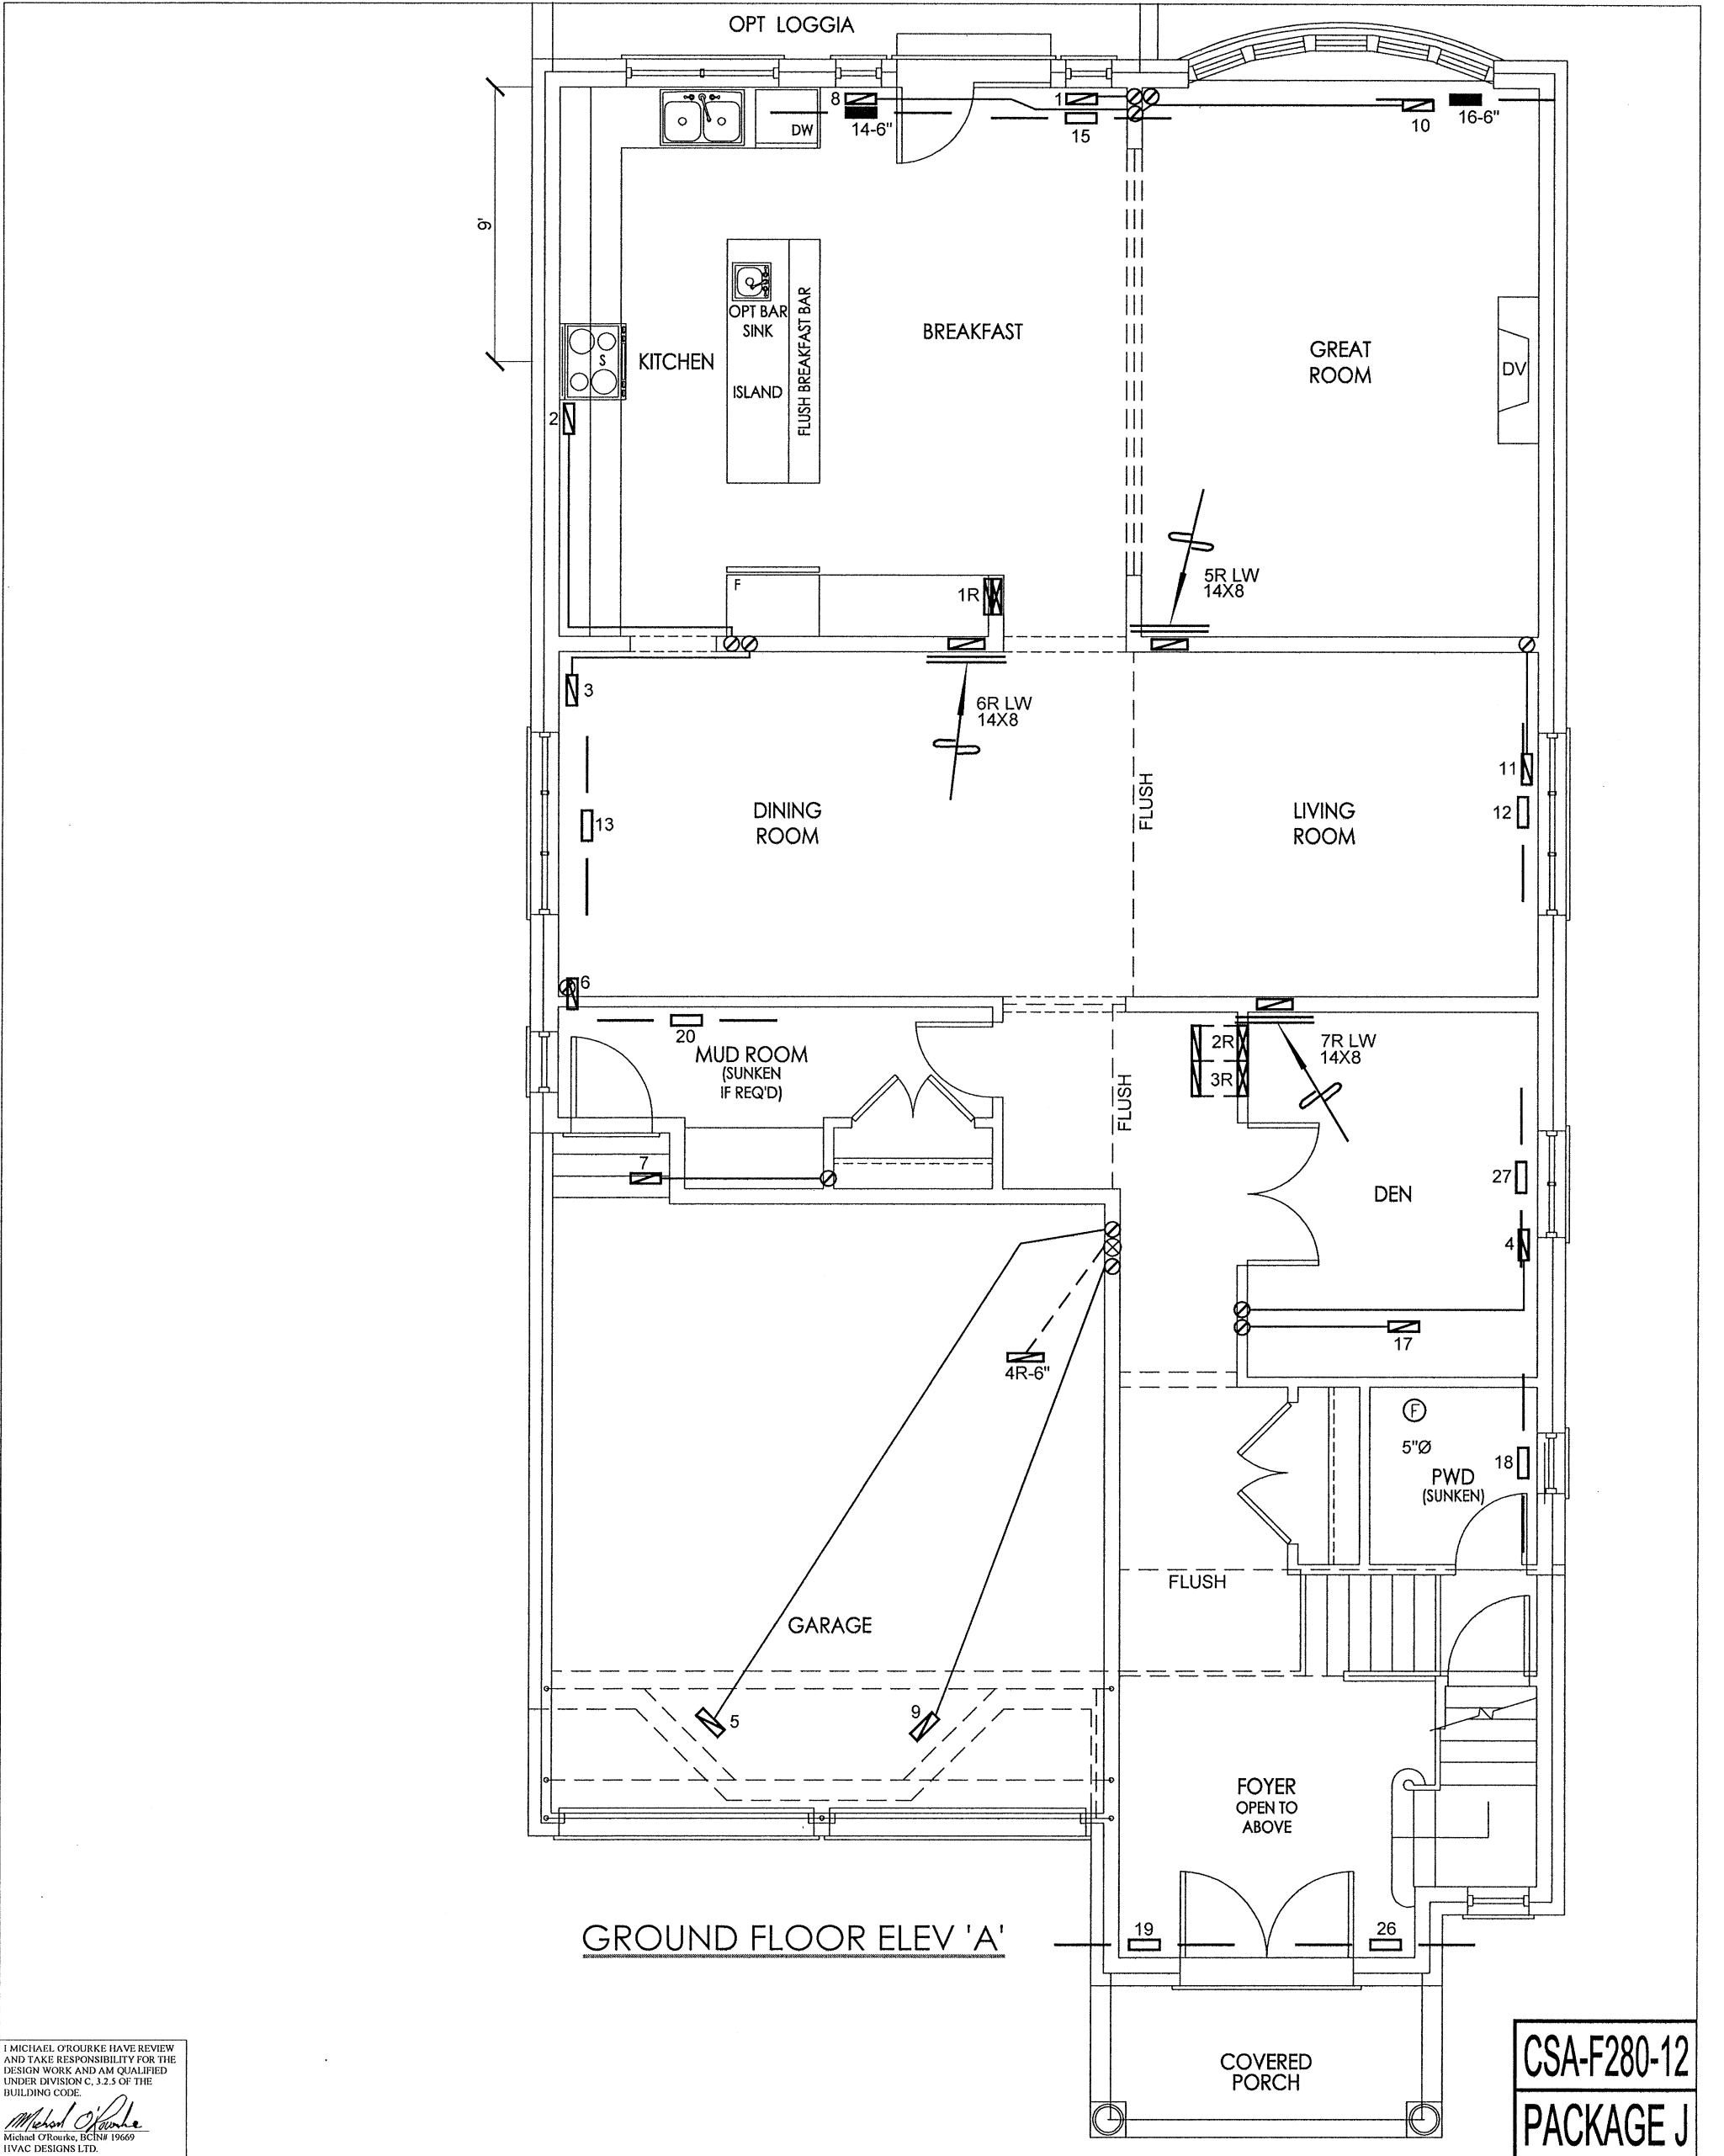

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.3 OF THE BUILDING CODE.


Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

CSA-F280-12
PACKAGE J

HVAC LEGEND								3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.		
	FLOOR SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.		
	FLOOR SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave - Unit 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Sheet Title	
GOLD PARK HOMES			FIRST FLOOR HEATING LAYOUT	
Project Name			Date	JAN/2016
KLEINBURG GLEN VAUGHAN, ONTARIO			Scale	3/16" = 1'-0"
42-5			BCIN# 19669	
3552 sqft			LO#	66891

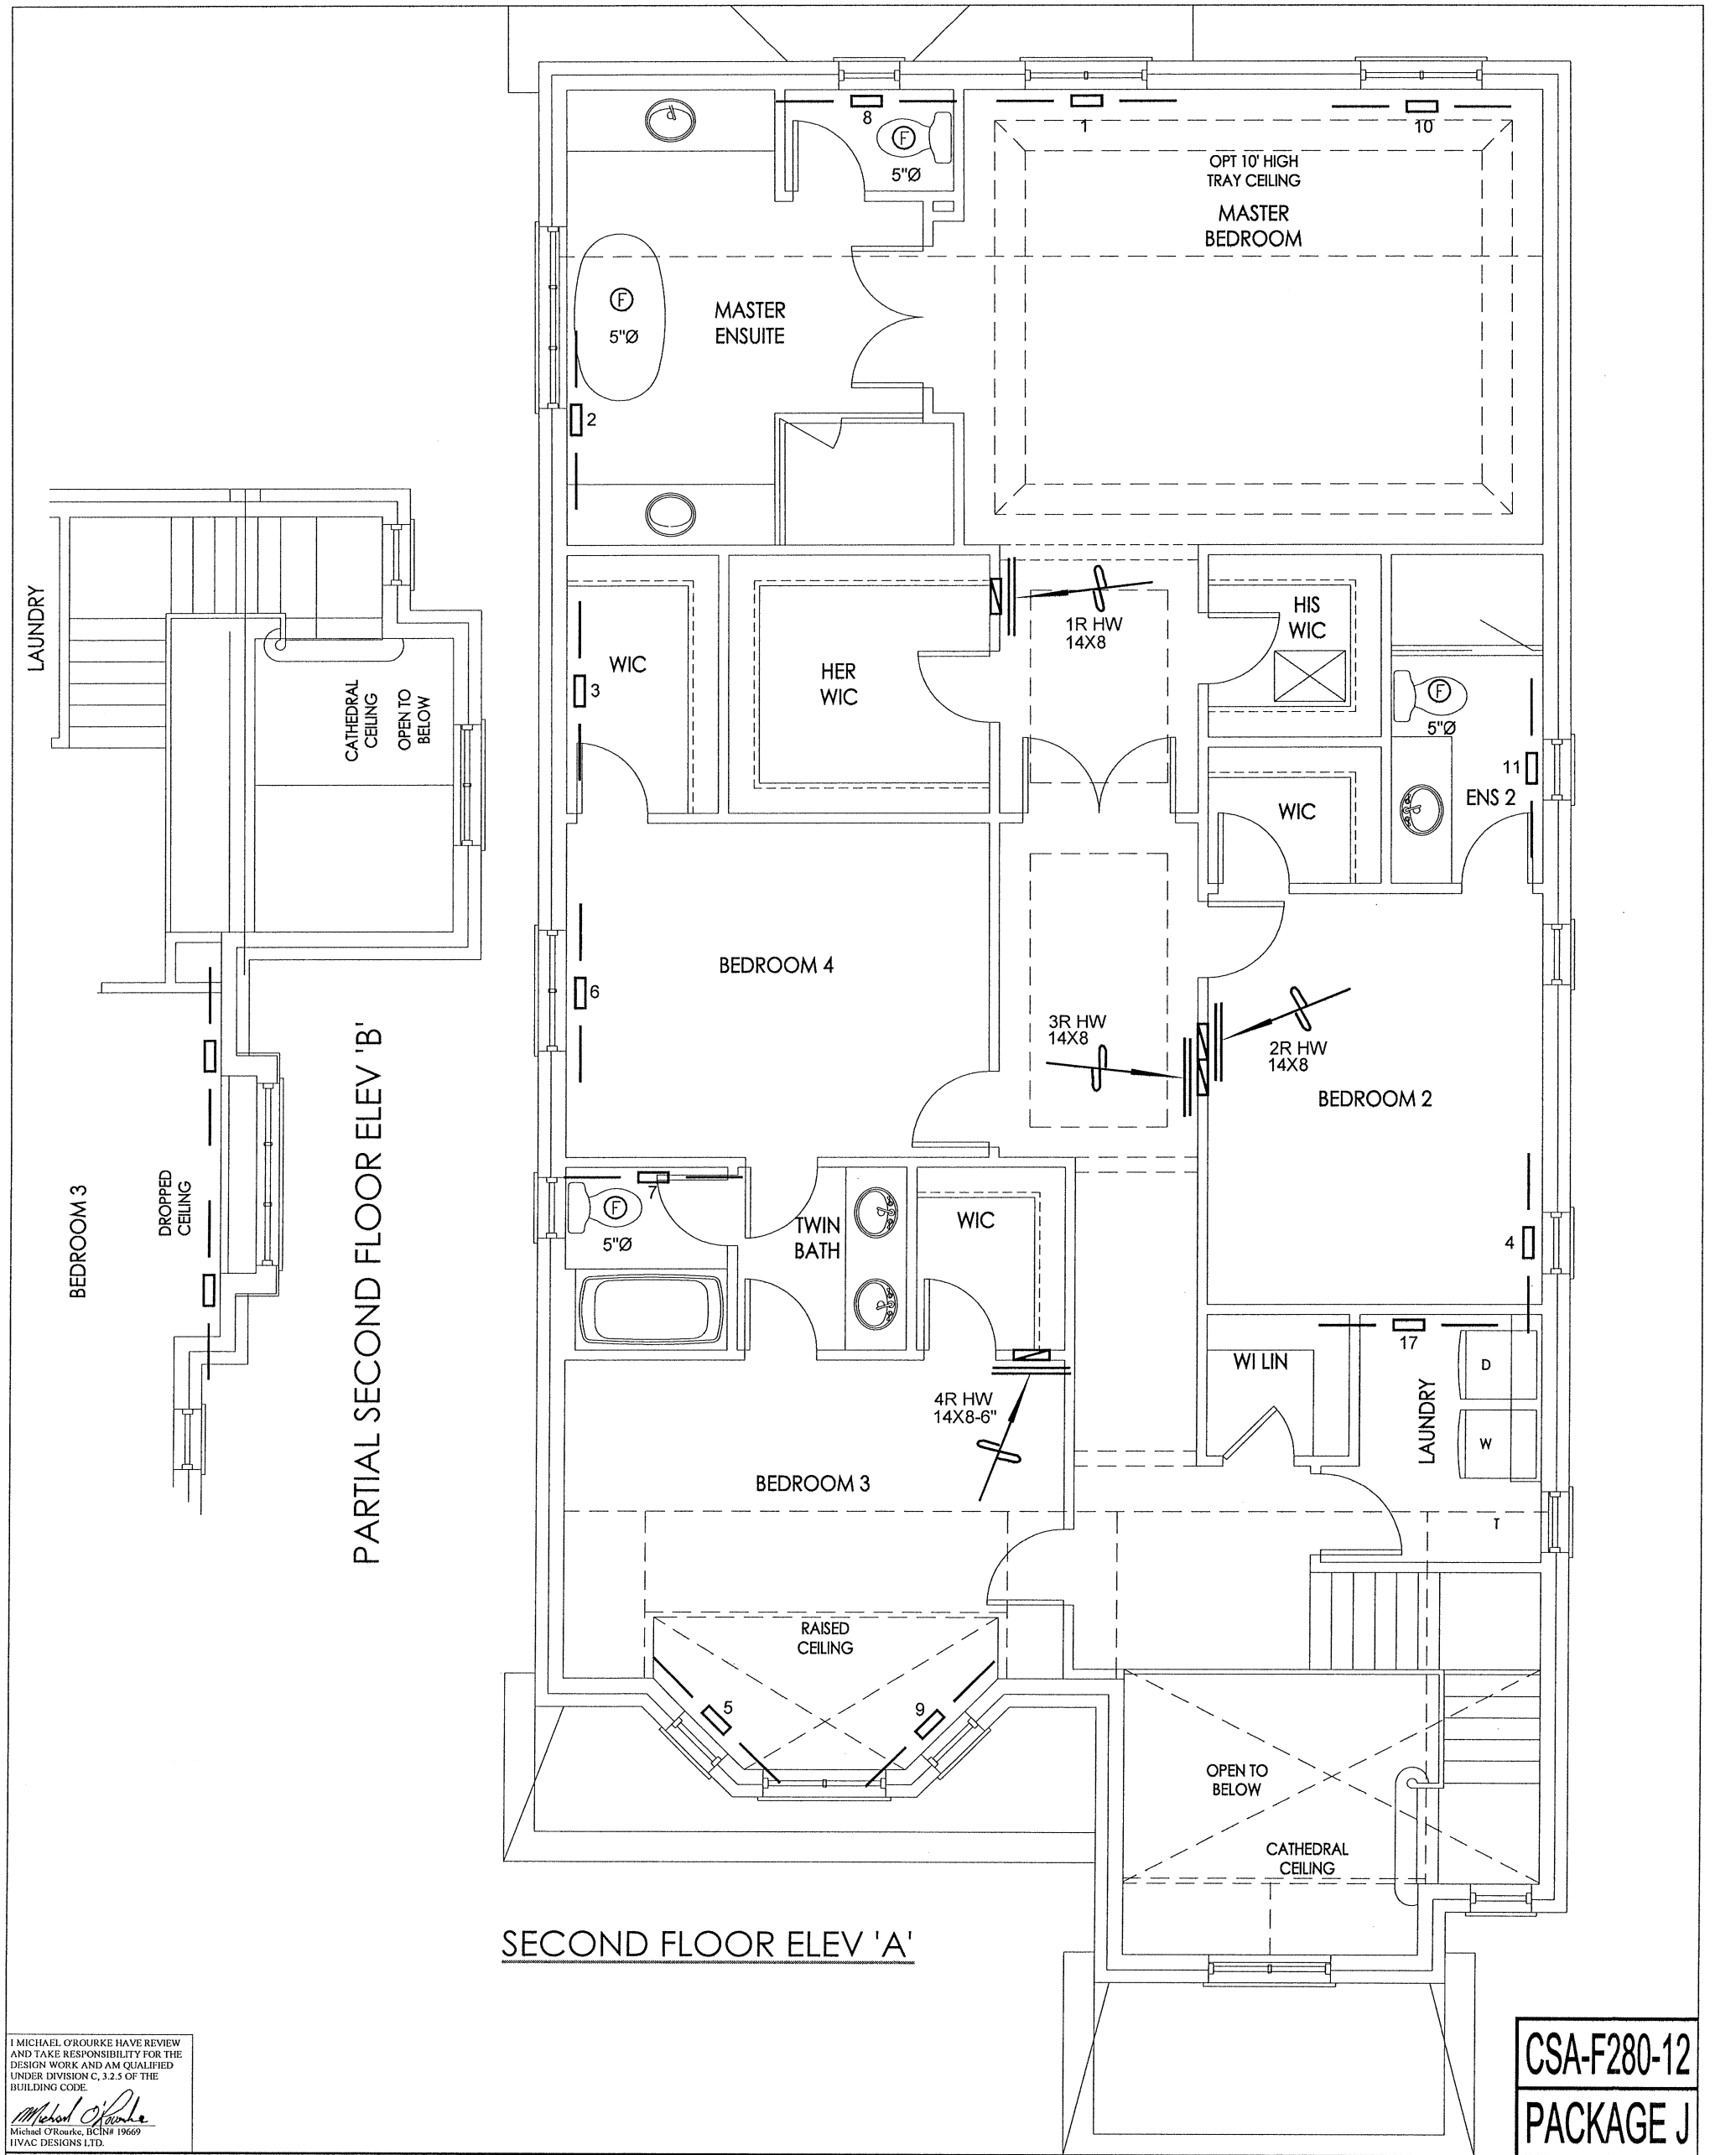

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

HVAC LEGEND								3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.		
	FLOOR SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.		
	FLOOR SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave - Unit 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Sheet Title	
GOLD PARK HOMES			SECOND FLOOR HEATING LAYOUT	
Project Name			Date	JAN/2016
KLEINBURG GLEN VAUGHAN, ONTARIO			Scale	3/16" = 1'-0"
42-5			BCIN# 19669	
3552 sqft			LO#	66891