EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES -

2,00

STRAIGHT POLISH

Kitchen Master Ensuite WE BEVEL

HALF BULLNOSE

FULL BULLNOSE


DOUBLE OFFE

APR 0 6 2021

Eastmore Lot 122 Ph (M)

A aquabrass

ALT

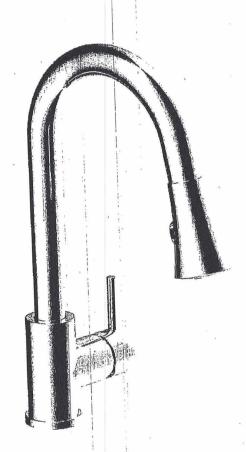

40777 - Cantina Kitchen Faucet with Pull Down Spray

Kitchen Eastmore Lot 122

BLANCC

Sink Specifications

Colour

SKU

refined brushed finish

401234

Design and planning tips

- Min cabinet size: 8 in (840 mm)
- Bowl Depth: 8 in (205.0 mm)

Sink template, Installation instructions and clips, 3 1/2" (90 mm) stainless steel strainer, Limited Lifetime

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Optional Accessories


GRID HORIZON 2.0/U2

CapFlow

406406

517666





Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/fr-canada/service/how-to-videos/



BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5

Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided details, refer to installation instructions provided with the product. specifications.

Kitchen Eastmore Lot 122



211/2" RECTANGULAR UNDERMOUNT SINK

contrac



Undermount Sink

Product Specs:

- · Vitreous china
- · Front overflow hole
- · Template and mounting hardware supplied

Overall Dimensions (W x D x H):

(OD): 545mm(211/2") x 355mm(14") x 190mm(71/2")

(ID): 485mm(19") x 295mm(11%") x 140mm(51/2")

Compliance Certifications:

Meets or exceeds the following:

- · IAPMO cUPC
- · ASME A112.19.2 / CSA B45.1-2008


Shipping:

Cube

1.64

GW

25 lbs

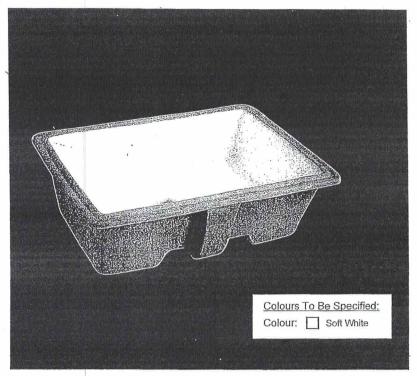

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.




Dimensions shown for location of supplies and "P" trap are suggested.




(51/2")

190mm

(71/2")

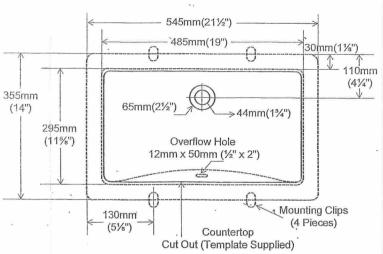



√12mm (1/2") .

LOLAND

211/4" RECTANGULAR DROP-IN SINK

□ 4410BST 4440BST ☐ 4480BST

Single Hole

4" Center 8" Center STD. Faucet

PRODUCT SPECS

- Fine fireclay
- Front overflow hole
- Single hole, 4" or 8" faucet center
- Template supplied
- Faucet not included

DIMENSIONS

540mm W x 460mm D x 180mm H 211/4" W x 181/6" D x 71/6" H

COMPLIANCE CERTIFICATIONS

Meets or exceeds the following:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1
- ANSI A117.1 ADA Guideline
- NBC and OBC Section 3.8 barrier free design and CSA B651 Standard


Cube 1.97


SHIPPING


21 lbs GW

LOT# 122 Eastmore Ensuite 2

Single Hole, 102mm (4"), 204mm (8")






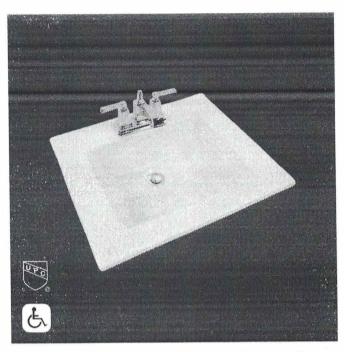



NOTES: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard All2.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Products are designed to comply ADA/ANSI A117.1 Standard and OBC barrier-free requirements. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the

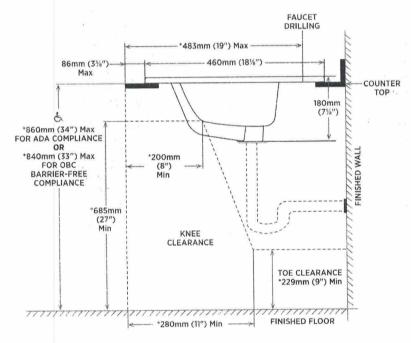

NOTE: * Starred measurements comply with ADA and OBC barrier free accessibility requirements.