



Cabinet dimensions - Combi. ovens



Combi Ovens Installed In Cabinet (Standard)

- 01 Dimensions provide minimum reveals, (except electrical supply location 'e')
02 Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc.
when door is open.

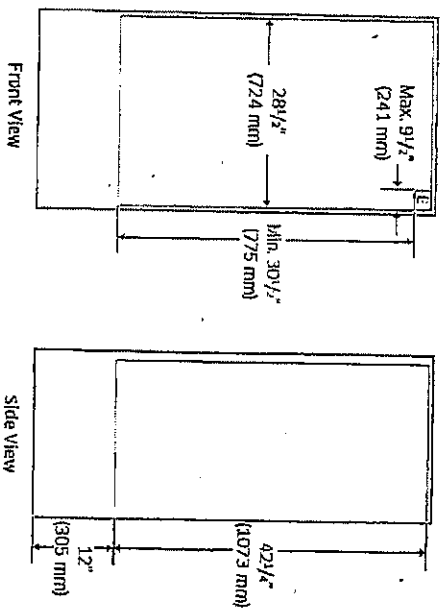

Combi Ovens installed in Cabinet (Flush)



- 01 Dimensions provide minimum reveals, (except electrical supply location) 02 Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open.

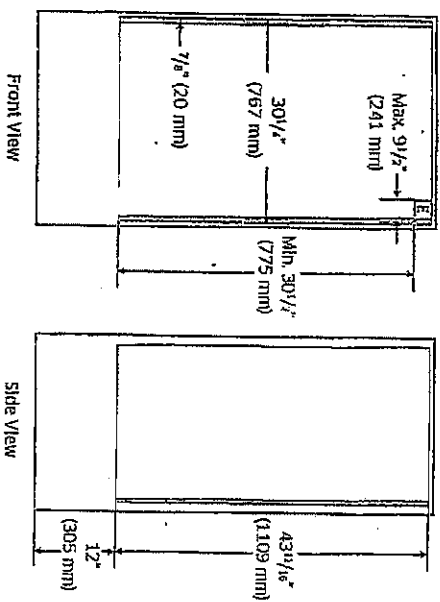

JUL 21 2021
Lot 29 Ph1
Millwood

IMPROVEMENT:

If installing a range hood or microwave hood combination above the cooktop, follow the range hood or microwave hood combination installation instructions for dimensions and clearance above the cooktop surface.

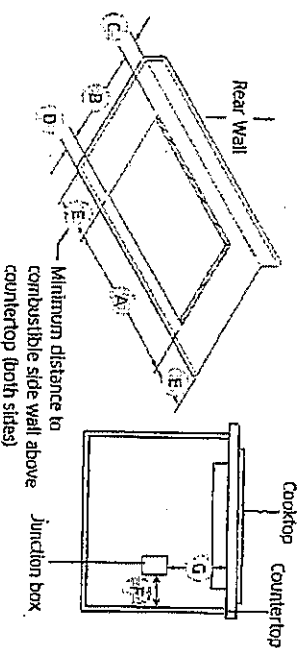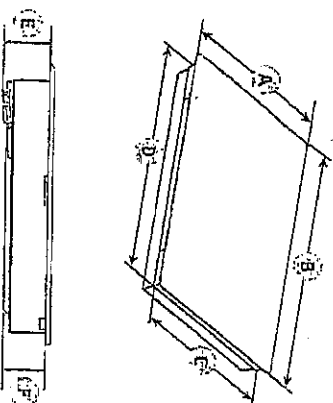

	Cabinet	30" (mm)	36" (mm)
A	Frame Depth	21 1/4" (540)	21 1/4" (540)
B	Frame width	30" (762)	36 5/8" (914)
C	Case Depth	19 1/2" (494.6)	19" (481.6)
D	Case Width	28 3/4" (720)	32 3/4" (826.6)
E	Conduit Case Height	4" (101)	4" (101)
F	Case Height	31 1/8" (805)	31 1/8" (80.5)


	N230 ¹⁰⁰⁰	N235 ¹⁰⁰⁰
A	281/2" - 281/16" (724 mm - 728 mm)	331/16" - 33" (850 mm - 864 mm)
B	191/16" - 191/2" (497.4 mm - 499.4 mm)	191/2" - 191/16" (495.6 mm - 487.6 mm)
C	Min 1 1/2" (28 mm). Between cutout and the wall behind the cockpit	
D	Min 1 1/2" (38 mm). From front edge of cutout and front edge of counter-top	
E	Min 1" (26 mm). Distance nearest left and right side combustible surface above cockpit.	
F	Junction box or outlet 10" (254 mm) maximum from right-hand side of cabinet	
G	Junction box or outlet 15" (381 mm) minimum from bottom of counter-top	

Installation requirements

JUL 21 2021


Lot 29 Pn
Millwood

Single Oven Under counter



02. Refer installation manual of OVEN.

	Size
A	Min. 39" (9.5 cm)
B	4" (10.1 cm)
C	Min. 28 1/4" / Max. 28 3/4" (Min. 72.4 cm / Max. 72.7 cm)
D	Min. 1' / Max. 1 1/4" (Min. 2.5 cm / Max. 3.2 cm)
E	Min. 27 1/4" / Max. 27 3/4" (Min. 69.2 cm / Max. 69.5 cm)
F	24" (61 cm)
G	Min. 27" (Min. 55.9 cm)
H	Max. 9 1/2" (Max. 24.1 cm) - Junction Box



Make sure the wall coverings, countertop and cabinets around the "crocktop" can withstand heat (up to 194 °F) generated by cooktop.

NOTE

If cabinet has a drawer, a minimum 127 mm (5") depth clearance from the top of Countertop to top of the drawer (or other obstruction) in base cabinet is required.

IMPORTANT:

The junction box must be located where it will allow considerable slack in the conduit for serviceability.

English

JUL 21 2021

Lot 29 PM
Hillwood

Location requirements

IMPORTANT: Observe all governing codes and ordinances.

- Cabinet opening dimensions that are shown must be used.
- Given dimensions provide minimum clearance with oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the oven.
- Grounded electrical supply is required. See "Electrical connection" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.



NOTE

For under counter installation, it is recommended that the junction box be located in the adjacent right or left cabinet. If you are installing the junction box on rear wall behind oven, it is recommended that the junction box be recessed and located in the upper right of the cabinet.

- Oven support surface must be solid, level and flush with bottom of cabinet cutout.
- Floor must be able to support a Combi. oven weight of 287 lb (130 kg).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194 °F (90 °C).

Product dimensions - Combi. ovens

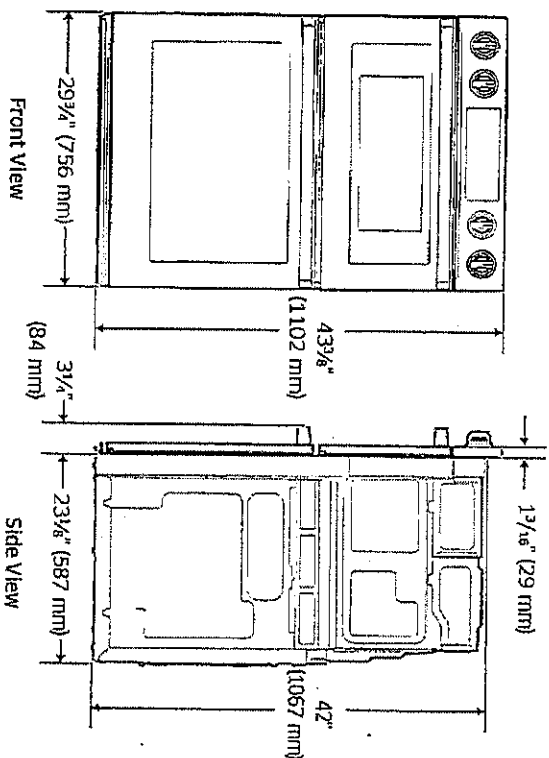

Preparation

JUL 21 2021

English 5

Cpt 29
Millswood
[Signature]