


INSTALLATION INSTRUCTIONS

PREPARING THE INSTALLATION LOCATION

IMPORTANT INSTALLATION INFORMATION

- All electric cooktops run off a single phase, three-wire or four-wire cable, 240/208 volt, 60 hertz, AC-only electrical supply with ground.
- Minimum distance between cooktop and overhead cabinetry is 30" (762 mm).
- Make sure the cabinets and wall coverings around the cooktop can withstand the temperatures (up to 93°C [200°F]) generated by the cooktop.

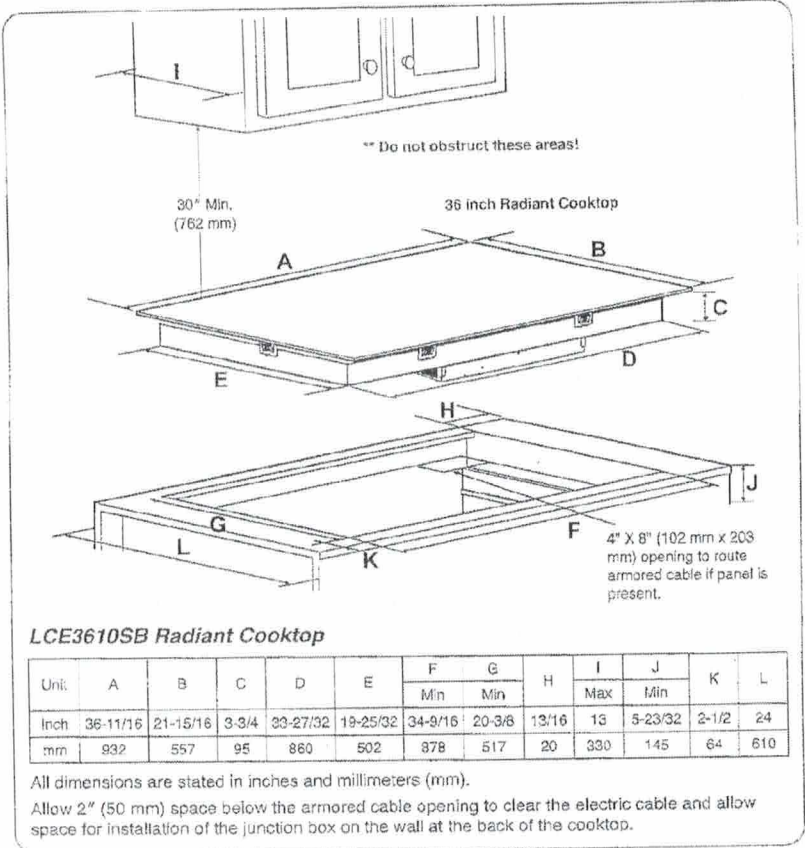

JUL 18 2022

Sutton
Lot 5C

DT PS

RF30BB6200QLAA

SAMSUNG


BESPOKE French Door Refrigerator with AutoFill Water Pitcher
30.1 cu. ft.

Installation Specifications


- 1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions.
- 3. Allow 11 3/8" of clearance on hinge side of refrigerator when installing next to a wall where door may make contact.
- 4. Allow 2" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
- 5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and to be able to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at samsung.com.



Dimensions

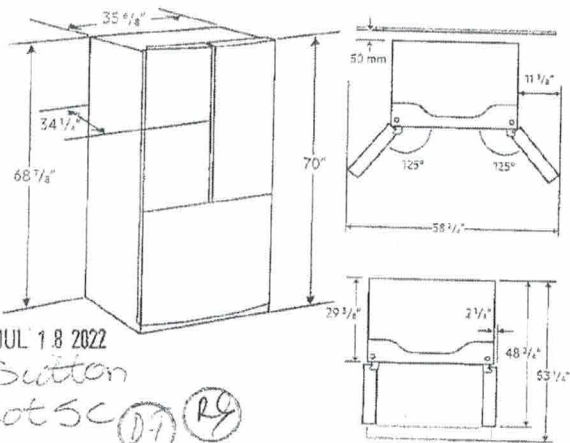

Total Capacity: 30.1 cu. ft.

Refrigerator: 21.1 cu. ft.

- 4 Tempered Glass Spill-Proof Shelves
- 2 Clear Drawers including Crisper+
- 8 Door Bins
 - Right: 1 Gallon Bin, 3 Regular Bins
 - Left: 1 Gallon Bin, 3 Regular Bins
- LED Lighting

Freezer: 9 cu. ft.

- Dual Ice Maker in Freezer (Cubed Ice or Ice Bites)
 - 2 Ice Buckets with Cover and 1 Scoop
- 2 Boxes
- LED Lighting

Accessories

Water Filter: HAF-QIN

Volt/Amps	115V / 60Hz / 3.5A
Power Cord Length	2 meters

Warranty

- One (1) Year Parts and Labour on Refrigerator
- Ten (10) Years Parts on Digital Inverter Compressor

Product Dimensions & Weight (WxHxD)

- Dimensions (WxHxD with hinges, handles and doors): 35 5/8" x 70" x 34 1/4"
- Dimensions (WxHxD without hinges and door): 35 5/8" x 68 7/8" x 29 1/2"
- Dimensions (WxHxD with hinge and door, no handle): 35 5/8" x 70" x 34 1/4"
- Weight: 313.1 lbs (142 kg)


Shipping Dimensions & Weight (WxHxD)

- Dimensions: 38 1/4" x 76 1/4" x 36 1/4"
- Weight: 337 lbs (153 kg)

Style	Model #	UPC
Pre-Built Stainless		
Steel Panels	RF30BB6200QLAA	887276624396
Without Panels	RE30BB6200APAA	887276624389

Actual colour may vary. Design, specifications and colour availability are subject to change without notice. Non-metric weights and measurements are approximate.
© 2022 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

Under-Counter Installation

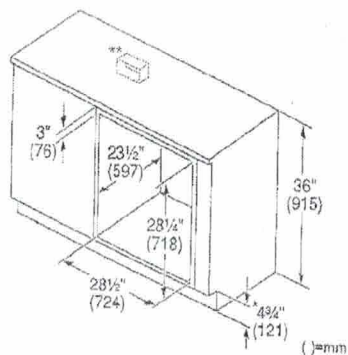


* Includes 3/4" (19 mm) base plate.
**For single ovens installed under a cabinet, the junction box should be located to the right or left of the unit within range of the power cord.

Dimensions for Combination Oven Units

The cabinet base must be flat and capable of supporting the weight of the combination oven up to 429 lbs (195 kg).


Combination Oven Appliance Dimensions

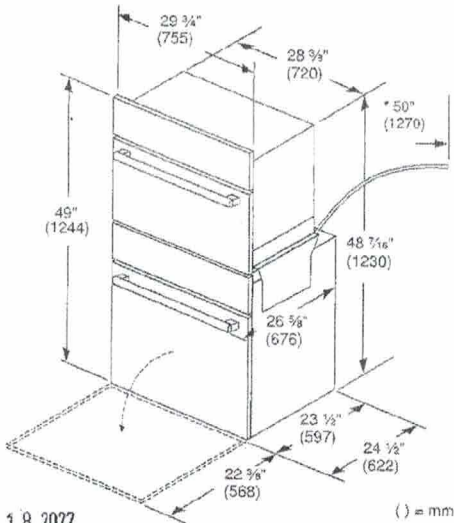

JUL 18 2022

Sutton
Lot 5C (11) (29)

Combination Oven Traditional Installation

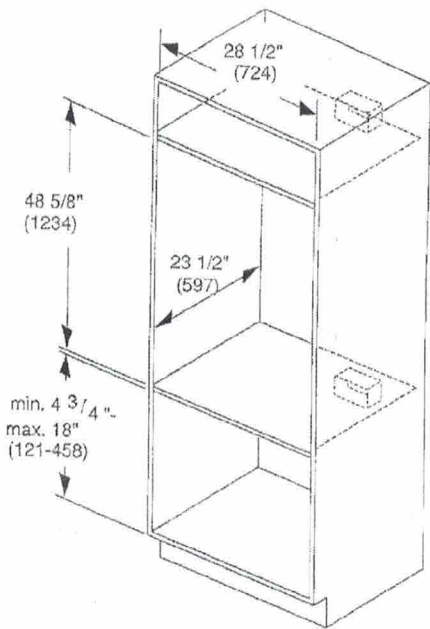

Note: Junction box may be installed above, below, to the left or to the right of the unit within reach of the power cord.

Appliance and Cabinet Cutout Dimensions

It is good practice, when an oven is installed at the end of a cabinet run, adjacent to a perpendicular wall, or cabinet door, to allow at least 1/4" (6.4 mm) space between the side of the oven and the wall/door.

For oven support, install 2x4s extending front to back flush with the bottom and the sides of the opening. The supporting base must be well secured to the floor/cabinet and level.

Junction boxes can be located anywhere within reach of the oven's power cable.


The cabinet base must be flat and capable of supporting the weight of the combination oven up to 429 lbs. (195 kg).

Dimensions for Single Oven Units


The cabinet base must be flat and capable of supporting a weight of at least 232 lbs (105 kg).

Under oven dimensions are provided as a general guideline and may be adjusted as needed based on a particular application. Consult a design professional for optimizing personal preferences.

Single Oven Appliance Dimensions

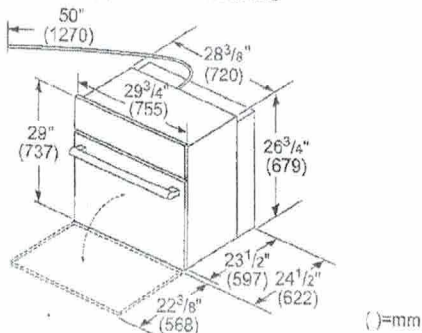

Single Oven Wall Mount Installation

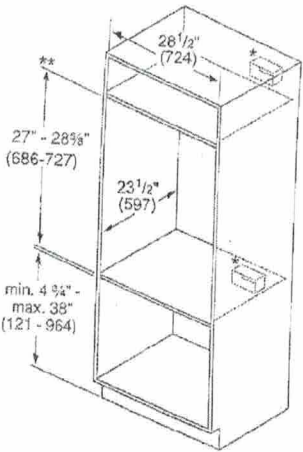


*For single ovens installed into a wall cabinet, the junction box may be located above, beneath, left or right of the unit within reach of the power cord.

**For oven installation in a wall cabinet, the control panel overlap is a minimum 3/8" (10mm) to max. 2" (51mm).


Single Oven Flush Mount Installation

Flush installation requires two side cleats to be attached inside the cabinet frame, recessed from the front.

Top View

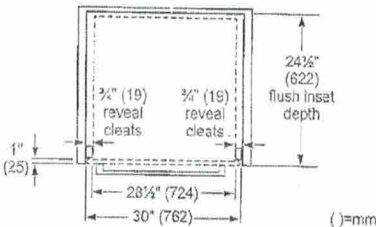

Side View

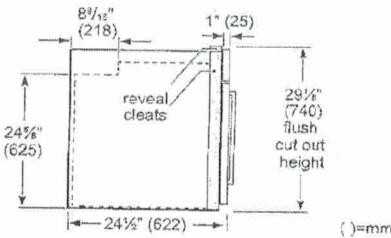

JUL 18 2022


Sutton
Lot 5C

D7

P9


INSTALLATION INSTRUCTIONS

DIMENSIONS AND CLEARANCES

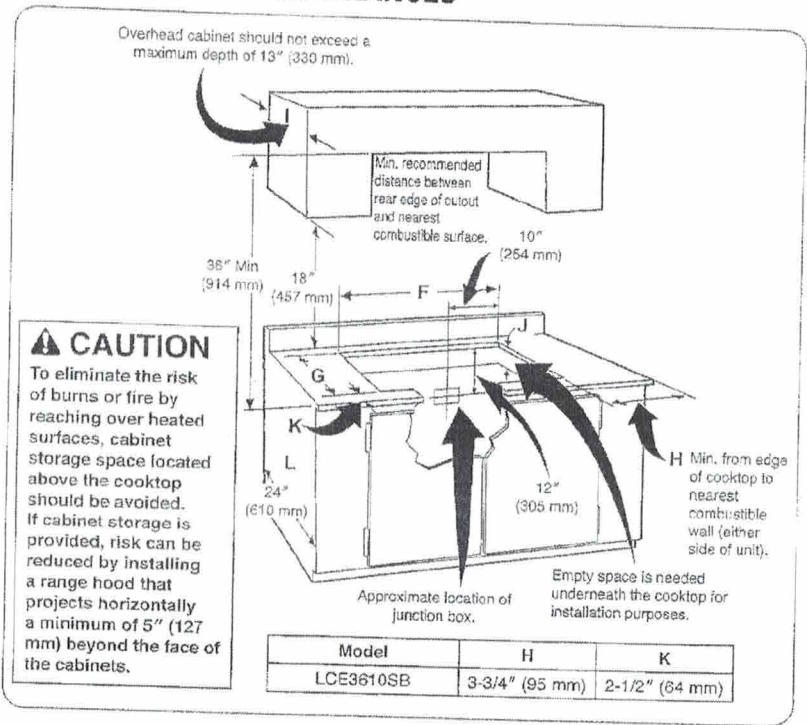

CAUTION
It is very important to keep 2 3/4" (70 mm) distance between the cooktop and the oven.

Recommend space cooktop and oven



JUL 18 2022

Sutton
Lot 5C

(D-1) (R-6)

Wine & Beverage Kettigeraw

Door Handle Design	external
Door Swing Orientation	dual door
Number of Doors	2
Door Material	tempered glass
Door Material Details	tinted double pane
Door Color/Finish	stainless steel
Door Opening Degree to Slide out Shelves	>100°
Shelves	
Adjustable Shelves to different heights	No
Number of Shelves	5 full shelves + 1 half shelf in the left zone; 3 wire shelf + 1 wire basket in the right zone
Shelve Material	glass, iron
Shelves slide out degree	75%
Full shelve size (Width x Depth x Height)	8.8x17.5x1.0inches
Half shelve size (Width x Depth x Height)	8.8x12.8x1.0inches
Wire shelve size (Width x Depth x Height)	8.6x17.1x1.2inches
Wire basket size (Width x Depth x Height)	7.5x12.2x5.5inches
Certifications Listings&Approvals	
ETL Listed	Yes
ISO 9001 Certified	Yes
Unit Dimension and Weight	
Overall Height - Top to Bottom	33.9 inches
Overall Width - Side to Side	23.4 inches
Overall Depth - Front to Back	25.3 inches
Depth -Excluding Handles	23.6 inches
Interior Height - Top to Bottom	27.6 inches
Interior Width - Side to Side	19.3 inches
Interior Depth - Front to Back	19.9 inches
Door Height - Top to Bottom	29.9 inches
Door Width - Side to Side	11.6 inches
Door Depth - Front to Back	1.1 inches
Depth With Door Open at 90 Degrees	47.8 inches
Cutout Width - Side to Side	24.2 inches
Cutout Depth - Front to Back	24.8 inches
Cutout Height - Top to Bottom	34.3 inches
Overall Product Weight Net Weight	100.3 lbs
Shipping Weight with Panel	121 lbs
Shipping Height - Top to Bottom with Panel	40.7 inches
Shipping Width - Side to Side	25.7 inches
Shipping Depth - Front to Back	27.2 inches
Installation and Usage	
Installation Required	No

JUL 18 2022

Sutton
Lot 3C

DT

RP