



My Store: **Rexdale** Closed • Opens 7 a.m.

Rental Credit Services For the Pro Order Status Customer Support Gift Cards Français

Q

Account / Sign In Cart

Shop by Department Shop by Room Ideas & How-to Home Services Warehouse Value & Specials Weekly Flyer

Get the perfect 'everything' gift. [Shop Gift Cards](#)

GE 30-inch W Gas Cooktop with 4-Burners Including Power Burners in Stainless Steel

Model # JGP3030SLSS | Store SKU # 1001090077

★★★★ (775) [Write a Review](#) [Q&A \(56\)](#)

\$1,194.00 / each

OR

As low as \$99.50 / month\* for 12 months with our consumer credit card. Advertisement not available in Quebec.

[\\*Details](#) [Apply Now](#)

Delivery Charges Apply

Choose Your Options

Colour: **Stainless Steel**




Delivery & Installation

Enter your postal code for availability:

A1A 1A1

Submit

Add To Cart

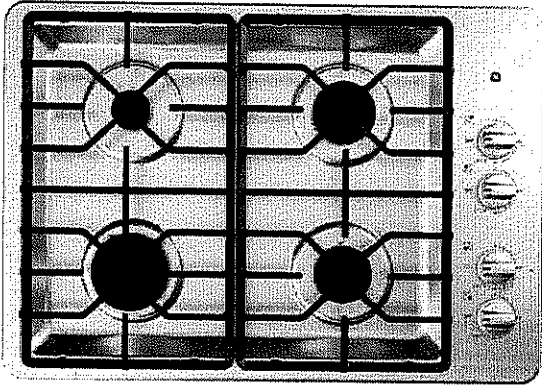

Price and availability may vary by store, and between online and in-store. [Click here for details.](#)



P.P.  
Lot 31

# JGP3030DL/SL

## GE® 30" Built-In Gas Cooktop with Dishwasher-Safe Grates

### DIMENSIONS AND INSTALLATION INFORMATION

**AGA REQUIREMENT:** All gas cooktop models require 7/16" free area below cooktop height to combustible material. Requires 18" minimum from countertop to adjacent overhead cabinets.



**NOTE:** If installing with a GE Profile™ Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

**ELECTRICAL RATING:** 120V, 60Hz, 5A

### INSTALLATION WITH SINGLE WALL OVEN INFORMATION:


30" Gas Cooktops are approved for use over select GE 27" and 30" Wall Ovens and Warming Drawers. 30" and 36" Gas cooktops are approved for use over select 30" Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data.

**INSTALLATION INFORMATION:** Before installing, consult installation instructions, packed with product, for current dimensional data.

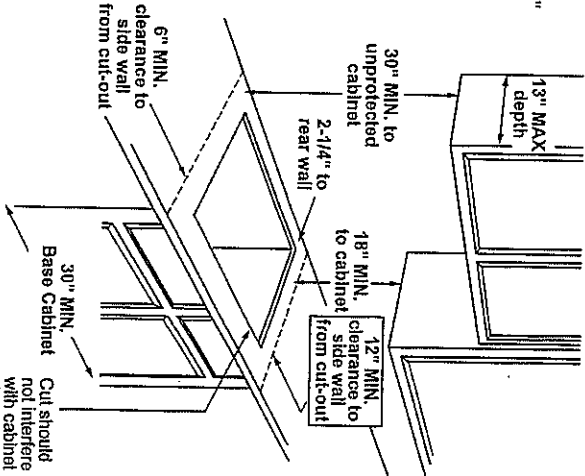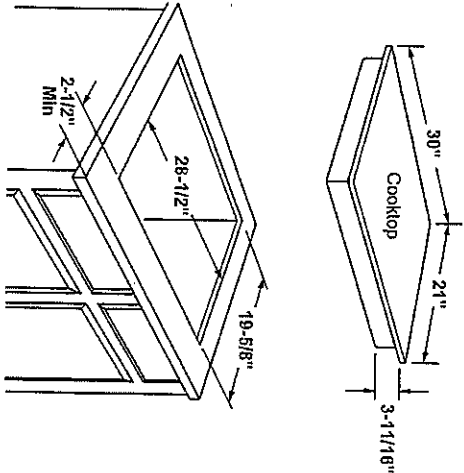

Dimension and installation information are shown in inches.  
\*Allow 5-3/4" depth at rear for electrical and gas connections

### INSTALLATION ABOVE A WALL OVEN

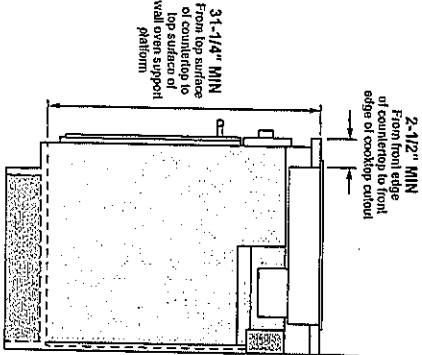

Port Perry  
Lot 31



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.





My Store: Rexdale | Closed - Opens 7 a.m. ▾

Rental Credit Services For the Pro Order Status Customer Support Gift Cards Français

Q

Account / Sign In ▾ | Cart

Shop by Department ▾ Shop by Room Ideas & How-to Home Services Warehouse Value & Specials Weekly Flyer

Get the perfect 'everything' gift. [Shop Gift Cards](#)

Samsung 30-inch 5.1 cu.ft. Single Electric Wall Oven with Wi-Fi in Stainless Steel


Model # NV51T5512SS | Store SKU # 1001561012

★★★★★ (2) [Write a Review](#) [Q&A \(1\)](#)

\$1,745.00 / each

Save \$150.00 (8%) Was \$1,895.00

OR

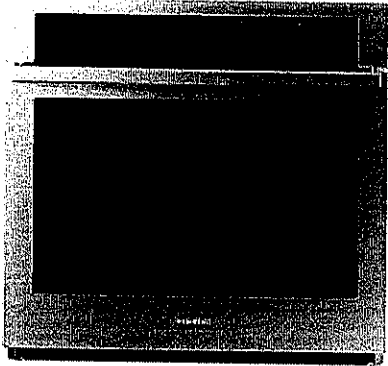

As low as \$145.42 / month\* for 12 months with our consumer credit card. Advertisement not available in Quebec.

[Details](#) ⓘ [Apply Now](#) ↗

Delivery Charges Apply

Delivery & Installation

Enter your postal code for availability:


A1A 1A1

Submit

Add To Cart



Price and availability may vary by store, and between online and In-store. [Click here for details.](#)



P:P  
Lot 31

Location requirements

IMPORTANT: Observe all governing codes and ordinances.

- Cabinet opening dimensions that are shown must be used.
- Recessed installation area must provide complete enclosure around the recessed portion of the oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.


NOTE

For under counter installation, it is recommended that the junction box be located in the adjacent right or left cabinet. If you are installing the junction box on rear wall behind oven, it is recommended that the junction box be recessed and located in the upper Right of the cabinet.

- Oven support surface must be solid, level and flush with bottom of cabinet cutout.
  - Floor must be able to support a single oven weight of 199 lb (90 Kg).
  - Floor must be able to support a double oven weight of 331 lb (150 Kg).
- IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194 °F (90 °C).

Lot 31 P.P

Product dimensions

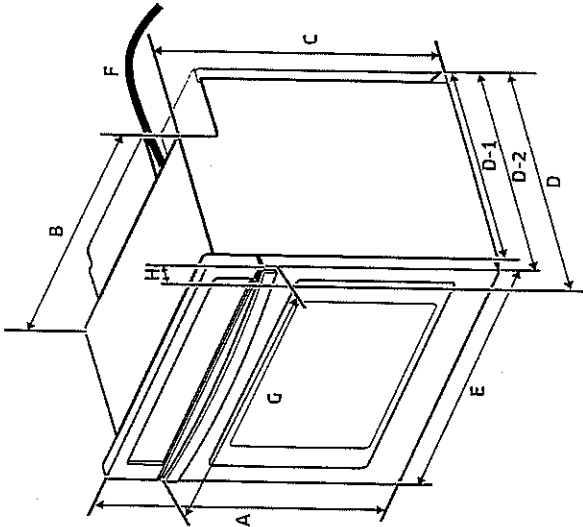

Preparation


| DIMENSION |                             |
|-----------|-----------------------------|
| A         | 28 13/16" (73.1 cm)         |
| B         | 28 1/2" (72.4 cm)           |
| C         | 27 3/16" (69.1 cm)          |
| D         | 26 5/8" (67.6 cm)           |
| D-1       | 23 1/8" (58.7 cm)           |
| D-2       | 24 3/8" (62.0 cm)           |
| E         | 29 3/4" (75.6 cm)           |
| F         | 47 1/4" (120 cm)            |
| G         | 28 9/16" (72.5 cm)          |
| H         | 2 1/4" (5.7 cm)             |
|           | Overall height              |
|           | Recessed width              |
|           | Recessed height             |
|           | Overall depth (with Handle) |
|           | Recessed depth              |
|           | Overall depth               |
|           | Overall width (Door width)  |
|           | Conduit length              |
|           | Handle width                |
|           | Handle depth                |

# Preparation

## Cabinet dimensions

### Under counter


- 01 Gas or Electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of approved cooktop models.
- 02 Gas and Electrical Connections for Gas Cooktop Must be Located in an Adjacent Accessible Location to the Right.

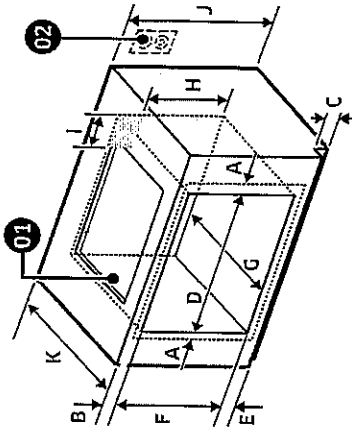

| DIMENSION |                                                              |
|-----------|--------------------------------------------------------------|
| A         | Min. 11/16" (1.75 cm) - Overlap of Over Side Edges of Cutout |
| B         | Min. 4 1/8" (10.5 cm)                                        |
| C         | 3 5/8" (9.1 cm)                                              |
| D         | Min. 28 1/2" / Max. 28 5/8" (Min. 72.4 cm / Max. 72.7 cm)    |
| E         | Min. 1" / Max. 1 1/4" (Min. 2.5 cm / Max. 3.2 cm)            |
| F         | Min. 27 1/4" / Max. 27 3/8" (Min. 69.2 cm / Max. 69.5 cm)    |
| G         | Min. 23 1/2" (Min. 59.7 cm)                                  |
| H         | Min 22" (Min 55.9 cm)                                        |
| I         | Max. 9 1/2" (Max. 24.1 cm) - Junction Box                    |
| J         | 36 3/8" (92.3 cm) - Counter top Height                       |
| K         | 25" (63.5 cm)                                                |

### Wall Mount

- 01 Junction Box
- 02 Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open

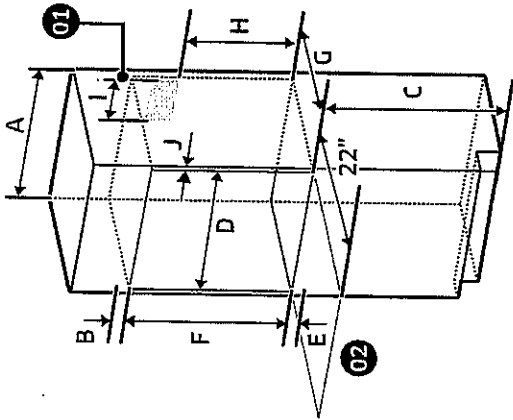

| DIMENSION |                                                           |
|-----------|-----------------------------------------------------------|
| A         | 30" (76.2 cm)                                             |
| B         | Min. 1 3/8" (3.5 cm)                                      |
| C         | Min. 31" (Min 78.7 cm)                                    |
| D         | Min. 28 1/2" / Max. 28 5/8" (Min. 72.4 cm / Max. 72.7 cm) |
| E         | Min. 1" / Max. 1 1/4" (Min. 2.5 cm / Max. 3.2 cm)         |
| F         | Min. 27 1/4" / Max. 27 3/8" (Min. 69.2 / Max. 69.5 cm)    |
| G         | Min. 23 1/2" (Min. 59.7 cm)                               |
| H         | Min. 22" (Min. 55.9 cm)                                   |
| I         | Max. 9 1/2" (Max. 24.1 cm) - Junction Box                 |
| J         | Min. 11/16" (1.75 cm) - Wooden cabinet thickness          |

Lot 31 P.P