




36" 4-Door Flex Refrigerator with Beverage Center™ and Family Hub™

From \$150.00/mo for 24 mos or \$3,599.99

Features Spec Review Support Compare

How to Measure

* All specifications provided herein may be different from the actual specifications.

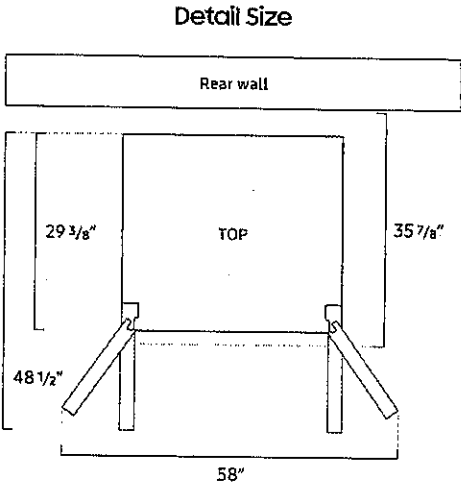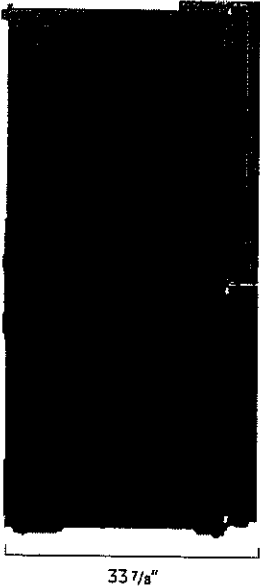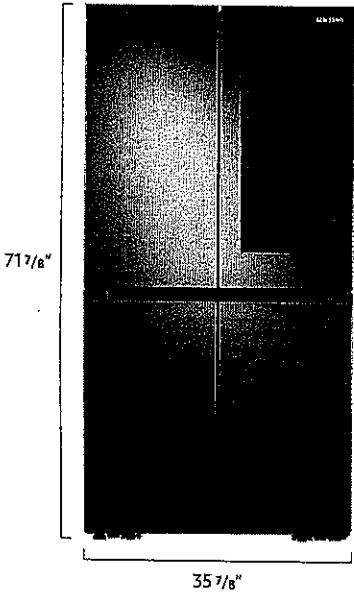

Port Perry
Lot 69

LED Interior Light
Yes

3:03



Find a product...



CONTACT US ▼



LOCATIONS ▼

Lower Prices Than Online - Visit In Store, Call or
Chat* [Info >>](#)



Earn/redeem PC Optimum™ points at Milton & Newmarket, ON,
Richmond, BC, and Red Deer, AB locations in Real Canadian
Superstore!

**BUNDLE & SAVE UP TO 25% OFF* - Chat + In
Store Only**

Home > Wall Ovens > Speed Ovens > Samsung

SAMSUNG

Authorized Dealer

Samsung NQ70M7770DG
NQ70M7770DG/AA

Samsung NQ70M7770DG - NQ70M7770DG/AA Speed Oven, 30" Exterior
Width, Convection, One Compartment Self Clean, 7.0 cu. ft. Capacity,...

Expand

In Stock (Same/Next Day Delivery)




Lot 69 Port
Perry

In-home Service

Buy Now, Pay Later

Free Delivery & Haul Away

Extra year warranty

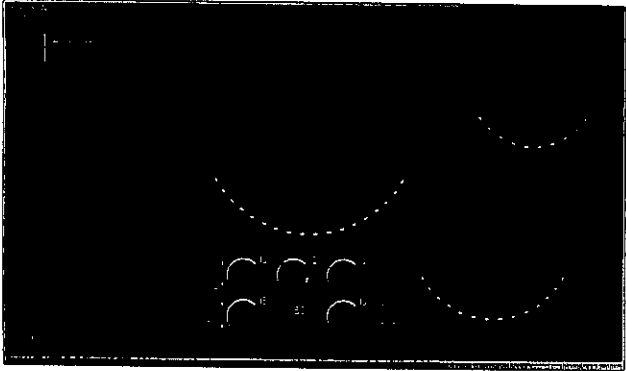

0% FINANCING

♡

36" 5-Element Smart Induction Cooktop with Flex Zone & Virtual Flame Technology™

NZS6K780UG/AA

4.1 (204)

- Save up to 25% on Built-In Home Appliances. Offer valid until January 31, 2024. [Learn More](#)
- Easy, intuitive control
- Precise power & easy cleaning
- Flexibly cook multiple dishes together

Choose your colour

Colour: Black



Add Extended Warranty to your included 1-year manufacturer's warranty.

[Learn more](#)

Samsung Extended Warranty provides enhanced protection for your Samsung products

Extended Warranty - 1 year	\$149.99
Extended Warranty - 2 years	\$149.99
Extended Warranty - 3 years	

Feedback

Images (12)



Port Perry
Lot 69

36" cook top

Installation requirements

Location requirements

IMPORTANT: Observe all governing codes and ordinances.

- Cabinet opening dimensions that are shown must be used. Recessed installation area must provide complete enclosure around the recessed portion of the cooktop.
- Grounded electrical supply is required. See "Electrical Requirements" section.


NOTE

It is recommended to install the junction box on right side of the cabinet.

If installing the junction box near the left side, make sure the junction box does not interfere with the cooktop (by concealing the junction box inside the wall).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This cooktop has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194 °F (90 °C).

Product dimensions

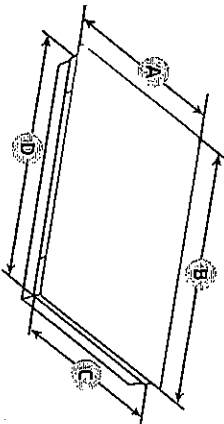


	Cabinet	30" (mm)	36" (mm)
A	Frame Depth	21 1/4" (540)	21 1/4" (540)
B	Frame Width	30" (762)	36" (914.4)
C	Case Depth	19 1/2" (494.6)	19" (481.6)
D	Case Width	28 3/8" (720)	33 3/4" (856.6)
E	Conduit Case Height	4" (101)	4" (101)
F	Case Height	3 1/8" (80.5)	3 1/8" (80.5)

Port Perry
lot 109


36" cooktop

IMPORTANT:
If installing a range hood or microwave hood combination above the cooktop, follow the range hood or microwave hood combination installation instructions for dimensions and clearance above the cooktop surface.

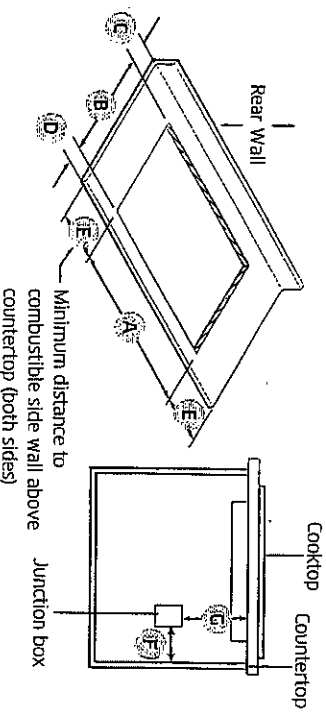

	NZ30K (30")	NZ36K (36")
A	28 1/2" - 28 1/2" (724 mm - 728 mm)	33 7/8" - 34" (860 mm - 864 mm)
B	19 1/8" - 19 1/8" (497.4 mm - 499.4 mm)	19 1/8" - 19 1/8" (485.6 mm - 487.6 mm)
C	Min 1 1/8" (28 mm). Between cutout and the wall behind the cooktop	
D	Min 1 1/2" (38 mm). From front edge of cutout and front edge of countertop	
E	Min 1" (25 mm). Distance nearest left and right side combustible surface above cooktop.	
F	Junction box or outlet 10" (254 mm) maximum from right-hand side of cabinet	
G	Junction box or outlet 15" (381 mm) minimum from bottom of countertop	

Single Oven Under counter



- 01 See built-in oven installation for complete installation instructions. See label on top of approved built-in oven models.
- 02 Refer Installation Manual of OVEN.

	Size
A	Min. 3 1/4" (9.5 cm)
B	4" (10.1 cm)
C	Min. 28 1/2" / Max. 28 5/8" (Min. 72.4 cm / Max. 72.7 cm)
D	Min. 1" / Max. 1 1/4" (Min. 2.5 cm / Max. 3.2 cm)
E	Min. 27 1/4" / Max. 27 7/8" (Min. 69.2 cm / Max. 69.5 cm)
F	2 1/4" (6.1 cm)
G	Min. 22" (Min 55.9 cm)
H	Max. 9 1/2" (Max. 24.1 cm) - Junction Box

Installation requirements


Port Perry
lot 69

Preparation

Cabinet dimensions - Combi. ovens

Combi Ovens Installed In Cabinet

- 01 Junction Box
- 02 Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open

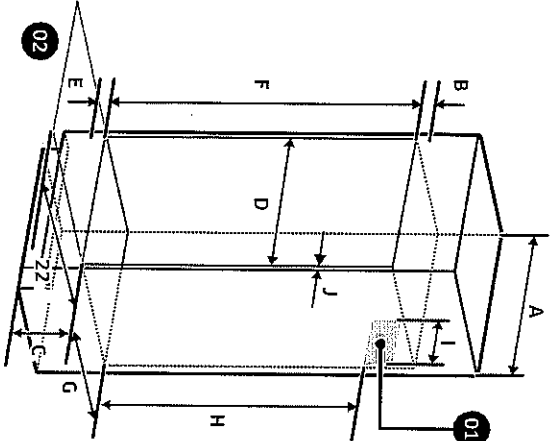

Cabinet	DIMENSION
A	30" (76.2 cm)
B	Min. 13/16" (3.0 cm)
C	12" (30.5 cm)
D	Min. 28 1/2" / Max. 28 5/8" (Min. 72.4 cm / Max. 72.7 cm)
E	Min. 1" / Max. 1 1/4" (Min. 2.5 cm / Max. 3.2 cm)
F	42 1/4" (107.2 cm)

Cabinet	DIMENSION
G	Min. 23 1/2" (Min. 59.7 cm)
H	Min 30 1/2" (Min 755 mm)
I	Max. 9 1/2" (Max. 24.1 cm) - Junction Box
J	Min. 1 1/16" (1.75 cm) - Wooden cabinet thickness

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded-metal permanent wiring system. Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.

1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575


Lot 69 Port Perry



Electrical Connection

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided in this manual.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located below the control panel on combi ovens. See the following illustrations.



Combi. oven
A. Model/serial/rating plate

- A circuit breaker is recommended.
- Use the chart below to determine the minimum recommended dedicated circuit protection.

KW Rating (240 V)	KW Rating (208 V)	Recommended Circuit Size (Dedicated)
≤4.8 KW	≤4.1 KW	20 Amp
4.9 KW - 7.5 KW	4.3 KW - 6.2 KW	30 Amp
7.3 KW - 9.6 KW	6.3 KW - 8.3 KW	40 Amp
9.7 KW - 12.0 KW	8.4 KW - 10.4 KW	50 Amp

- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Electrical Connection" section.



- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 1. Connect a section of solid copper wire to the ends of the flexible conduit leads.

2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.
- Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models NQ70M6650D, and NQ70M7770D refer to the following table.

Model	240 VAC	208 VAC
	KW	KW
NQ70M6650D	8.2	6.2
NQ70M7770D	9.5	7.2


Preparation

Lot 609 Port Perry




Specifications

Air Flow Volume: 550 CFM
Electrical Connection: 120V/60Hz
Power Consumption: 300 Watts
Current: 2.5 Amps
Fan Speed: 1599 RPM
Finishes: Stainless Steel, Matte Black
Duct: 6" Round
Dimensions: Width: 29 3/4"/35 3/4"
Height: 40 3/8"
Depth: 19 3/4"
Noise Level: Min. 2 Sones
Max. 6 Sones

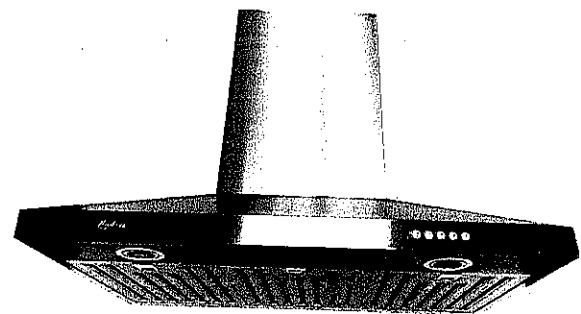

Stainless Steel

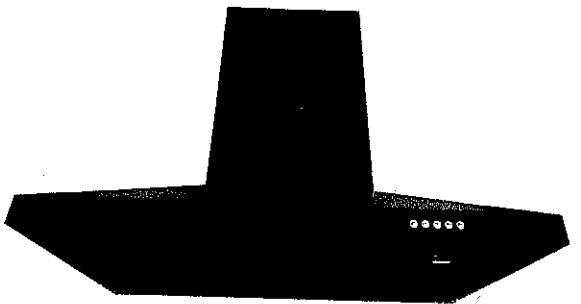

Matte Black



Ordering Model Chart

Model	Colour	Size	Filter	CFM
SCB51630	Stainless Steel	30"	Baffle	550
SCB51636	Stainless Steel	36"	Baffle	550
SCB51630MB	Matte Black	30"	Baffle	550
SCB51636MB	Matte Black	36"	Baffle	550

Notes



Port Perry
Lot 69