



Dimensions and Clearances

Provide enough clearance between the cooktop and adjacent combustible surfaces. These dimensions must be met for safe use of your cooktop. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements.

The cooktop must be placed with at least 2 3/4" of clearance to the back wall.

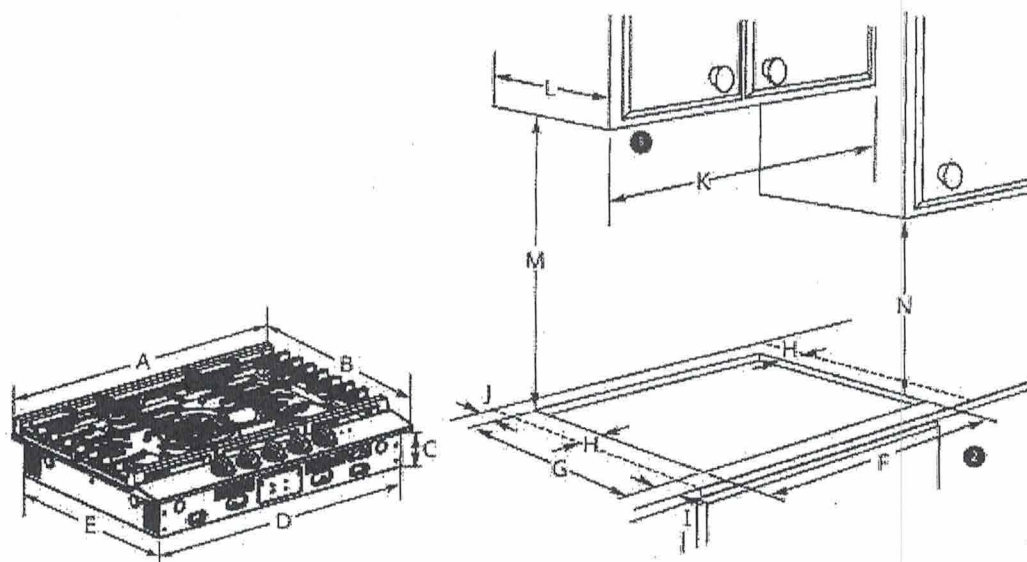

- ① Make sure wall coverings, countertop and cabinets around cooktop can withstand the heat (up to 200 °F) generated by the cooktop
- ② To ensure accuracy, it is best to make a template when cutting the opening in the counter



- ① Recommended gas supply location
- ② From cutout center line
- ③ 1" min. from back wall


Port Perry
Lot 94

	Dimension/Clearance	30" Cooktop	36" Cooktop
A	Width of upper plate	30"	36"
B	Depth of upper plate	21 11/16"	
C	Height of cooktop base	3 3/4"	
D	Width of cooktop base	28 1/4"	33 5/8"
E	Depth of cooktop base	19 3/8"	
F	Width of cutout	28 1/2"	33 15/16"
G	Depth of cutout	19 11/16"	
H	Distance from cutout to side wall on the left of unit. / Distance from cutout to side wall on the right of the unit.	≥11 13/16"	
I	Distance from front edge of cutout to front edge of countertop	≥1 5/8"	
J	Distance between cutout and the wall behind the cooktop	≥2 3/4"	
K	Width of unprotected overhead cabinets	≥30"	≥36"
L	Depth of unprotected overhead cabinets	≤13"	
M	Clearance from countertop to unprotected overhead surface	≥30"	
N	Clearance from countertop to nearest cabinet on either side of unit	≥18"	


Installing the Cooktop

Installing the Cooktop Unit


- 1 Locate the electrical outlet and gas shut-off valve beneath the cabinet. Never reuse old flexible connectors. Install a manual shut-off valve ② in the gas line in an easily accessible location outside the cooktop. Be sure you know how and where to shut off the gas supply to the cooktop. Install the electrical outlet 12" ① below the countertop.



- 2 Carefully lower the cooktop into the countertop cutout, making sure not to trap any wires.



- 3 Remove the retainer brackets from the literature package.




- 4 Install the retainer brackets ① to the bottom of the cooktop unit ②, then snug the screws ③ against the bottom of the countertop ④ as shown.

36" Cooktop

Port Perry
Lot 94

FRIGIDAIRE GALLERY

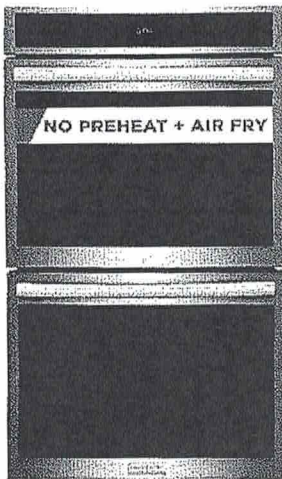

30" Double Electric Wall Oven with Total Convection

Double Wall Oven

Available Products: GCWD3067AD, GCWD3067AF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 08/22

Product Specifications

Cooking Controls

Air Fry	Yes
Air Sous Vide	Yes
Bake	Yes
Bake Time	Yes
Bread Proof	Yes
Broil	Yes
Cancel	Yes
Child Lock	Yes
Clear Off	Yes
Clock	Yes
Convection Bake	Yes
Convection Roast	Yes
Cook Time	Yes
Dehydrate	Yes
Delay Clean	Yes
Delay Start	Yes
Fast Preheat	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Light	Yes
My Favorite	Yes
Off	Yes
Oven Light	Yes
Perfect Turkey	Yes
Preheat	Yes
Probe	Yes
Quick Preheat	Yes
Self Clean	Yes
Set Clock	Yes
Slow Cook	Yes
Start	Yes
Start Time	Yes
Steam Bake	Yes
Steam Clean	Yes
Steam Roast	Yes
Stop	Yes
Temperature Display	Yes
Timed Bake	Yes
Timer On / Off	Yes
User Preferences	Yes

Cooking Controls Function

Change between Continuous Bake Setting or 12-Hour	Yes
Energy Saving Feature	Yes
Delayed Bake	Yes
Program Fahrenheit or Celsius	Yes
Silent Control Panel	Yes
Timed Cooking	Yes

Controls

Control Lock	Yes
Sabbath Mode	Yes

Dimensions and Volume

Height	50 3/4"
Width	29 7/8"
Depth	25 3/16"
Depth With Door 90° Open	48 3/16"
Depth With Handle	27 6/10"
Lower Oven Interior Height	18 1/8"
Lower Oven Interior Width	25 2/10"
Lower Oven Interior Depth	19 7/8"
Upper Oven Interior Height	18 1/8"
Upper Oven Interior Width	25 2/10"
Upper Oven Interior Depth	19 7/8"
Maximum Cutout Height	50 1/4"
Maximum Cutout Width	29"
Minimum Cutout Height	48 7/8"
Minimum Cutout Width	28 1/2"
Oven Lower Capacity	5.3 Cu. Ft.
Oven Upper Capacity	5.3 Cu. Ft.
Total Capacity	10.6 Cu. Ft.

Installation

Power Supply Connection Location	Top Left
----------------------------------	----------


Safety Certifications and Approvals

CSA Listed	Yes
UL Listed	Yes
RoHS	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive • Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Port Perry
Lot 94

Installation Diagram

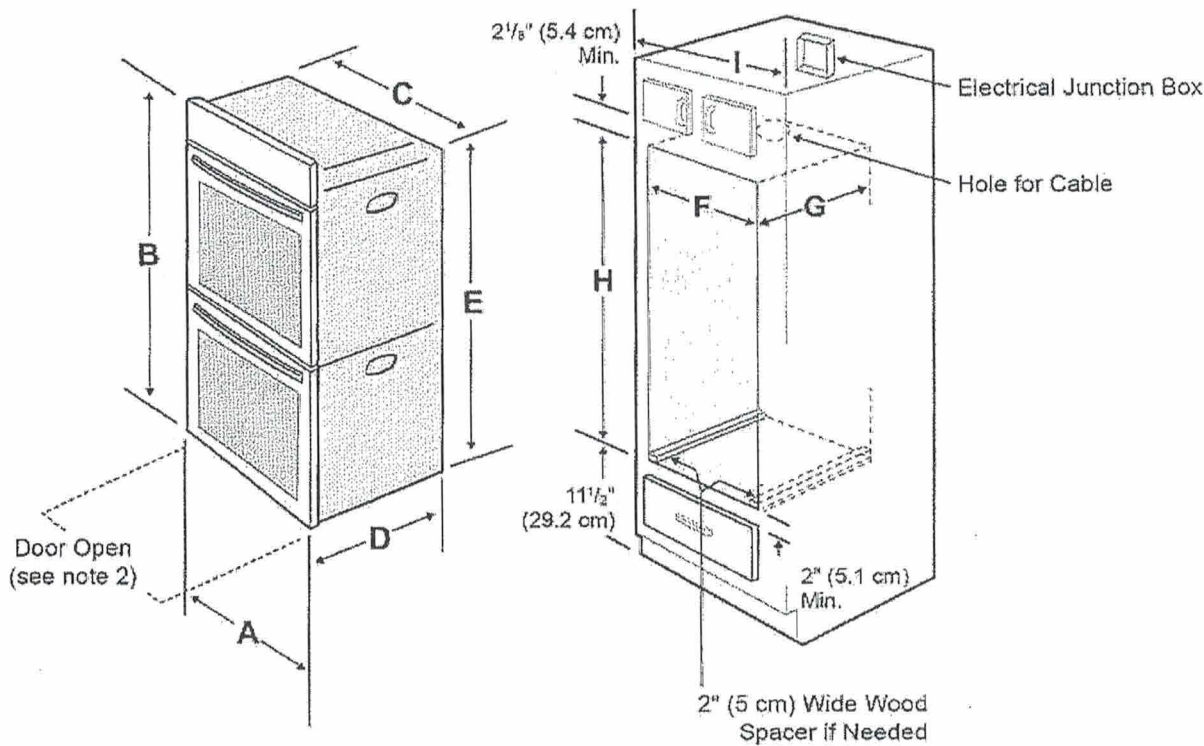

- NOTES:
- 1. Allow at least 23" (58.4 cm) clearance in front of oven for door depth when it is open.
 - 2. Dimension G (cutout depth) is critical to the proper installation of the built-in oven. If the oven trim does not butt against the cabinet, or if noise is heard on convection models, verify dimension G to assure it is according to the required dimension.
 - 3. For a cutout height greater than the maximum (H), add one 2" (5 cm) wide wood shim of appropriate height to each side of the opening under the appliance side rails. A trim kit may be purchased through a dealer, service, or on the brand website.

PRODUCT DIMENSIONS					
A	B	C	D		E
29 ⁷ / ₈ (75.9 cm)	50 ³ / ₄ (128.9 cm)	28 ⁷ / ₁₆ (72.2 cm)	25 ³ / ₁₆ (63.9 cm)		48 ⁷ / ₈ (124.1 cm)
CUTOUT DIMENSIONS AND CABINET WIDTH					
F		G	H: Standard Height (**Others, see note 3)		I
Min.	Max.	Min.	Min.	Max.	
28 ¹ / ₂ (72.4 cm)	29 (73.7 cm)	23 ¹ / ₂ (59.7 cm)	48 ⁷ / ₈ (124.1 cm)	50 ¹ / ₄ (127.6 cm)	30 ¹ / ₈ (76.5 cm) Min

Port Perry
Lot 94

My Warehouse
📍 Ajax
Open until 8:30 PM

Delivery Location
📦 L1S 3X9



[Lists](#) / [Buy Again](#)

[Home](#) / [Appliances](#) / [Refrigerators](#)

[Share](#)

LG 36 in 31 cu ft. Stainless Steel French Door Refrigerator with Four Types of Ice

Item 1715565 | Model LRYXS3106S
★★★★★ 4.8 (8) [Write a review](#)

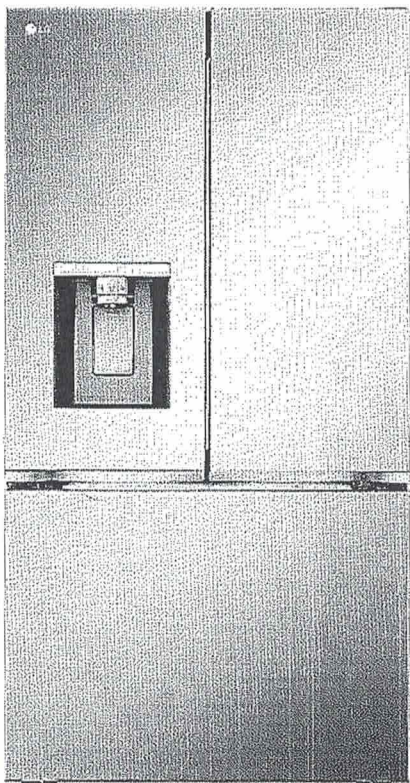

+3

Price

Included in Price*



Delivery & Installation -

[Learn More](#)

Port Perry
Lot 94

Feedback

Key Spec

Volume Total (cu.ft)

30.7

Packing Dimension (WxHxD, inch)

37 7/8" x 72 3/8" x 36 3/8"

Energy Consumption (kWh/Year)

755

ENERGY CONSUMPTION GRADE

ENERGY STAR

Compressor Type

Smart Inverter Compressor (BLDC)

InstaView

No

Door-in-Door

No

ThinQ (Wi-Fi)

Yes

Finish (Door)

Stainless Steel

See All Specs

Port Perry
Lot 94